
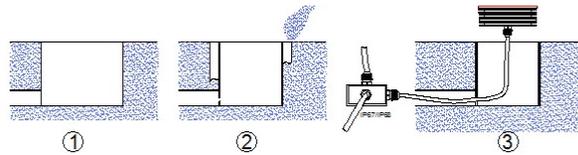
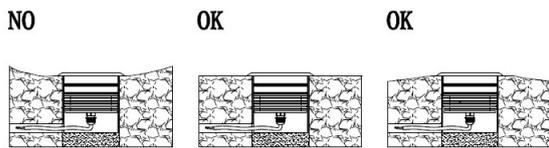
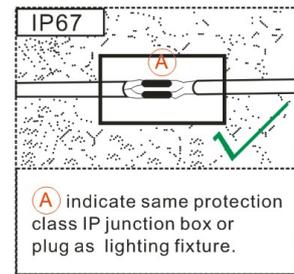
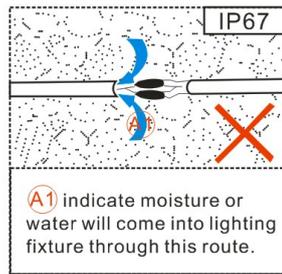


User Manual
Exterior Underground Lighting

Please read user manual before commencing installation and keep it for future reference.

■WARNING.

- 1.The safety of this lighting fixture is guaranteed only if you comply with these instructions.
- 2.Don't connect these lighting fixtures to the mains supply directly, and please use [the specific proper driver with specific input voltage.](#)
3. [The driver must be electronic switching power supply with constant voltage output,must not be magnetic transformer.](#)
4. Please disconnect the power before repair,installation or replacement.
5. Please use the lights in the proper application places as to avoid the lights be broken or glass be broken.
6. Do not locate fixtures in low areas where water will collect.
- 7.Please provide proper drainage (sand,gravel) for sleeve so that fixtures will not be immersed in water.
- 8.If any questions on this instruction,please consult a professional qualified technicians.

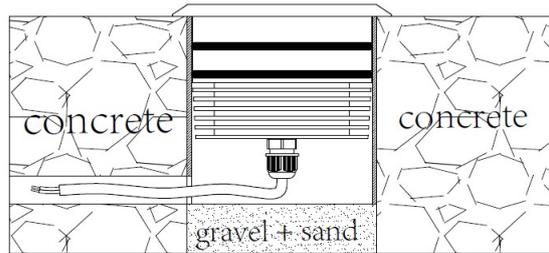

■Instructions of installation.

- 1.Ensure mains supply is switched off during the whole installation period.
Dug a hole according to the dimension of the mounting sleeve.
 - 2.Place the mounting sleeve in the desired position with underneath a layer of gravel. This to obtain a good drainage of the inground light,then fix it with the concrete.
- Please also make the tube for the lighting fixtures' wires to be connected with the power cable.
- 3.Use the IP67 or IP68 waterproof connector to connect the cables of the fixture and the cables of specific driver in parallel circuit.
 4. Push the fixture into the mounting box,and fix the trim on the sleeve with the screws provided.
 - 5.Ensure everything is installed very well,and then turn on the power for the illumination application.

■Specifications.

Input: DC24V
IP rating: IP67
Class: III



The non-professionals can not disassemble or repair the fixture. We keep the right to refuse the replacement or repairing of the fixtures that have been disassembled or repaired personally.