


LABLE STICKER



FOUR MAJOR GUARANTEES

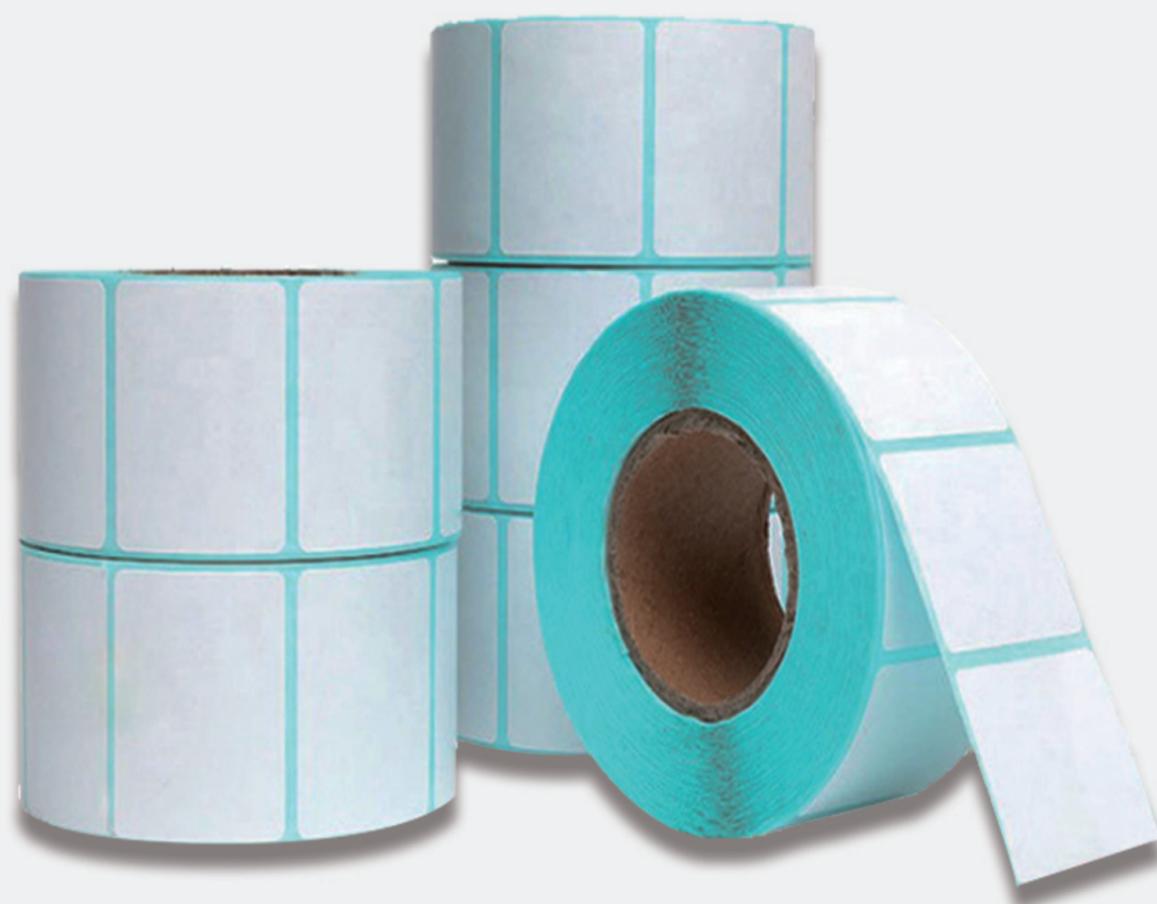

HOT MELT:

Surface substrate:

Smooth glossy white coated paper with polished surface, especially suitable for full plate printing.

Basic weight: 80g/m²±10% ISO536

Thickness: 0.084 mm±10% ISO534

Adhesive:

A universal permanent rubber based adhesive.

Base paper:

White cowhide backing paper coated with plastic on one side. Whether it is die-cutting on flat or circular pressing equipment, it has excellent strength

Basic weight: 95g/m²±10% ISO536

Thickness: 0.102mm±10% ISO534

Typical viscosity value (N/25mm):

Initial viscosity (st,st) - FTM 9:14.0

20 minutes 90° peel adhesion (st,st) - FTM 2:8.0

24 hour 90° peel adhesion (st,st) - FTM 2:10.0

Minimum labeling temperature: 10°C

24 hours after labeling, operating temperature range: -15 °C~+65 °C

WATER BASED:

Surface substrate:

Smooth glossy white coated paper with polished surface, especially suitable for full plate printing.

Basic weight: 80g/m²±10% ISO536

Thickness: 0.084 mm±10% ISO534

Adhesive:

A universal permanent acrylic latex.

Base paper:

White cowhide backing paper coated with plastic on one side. Whether it is die-cutting on flat or circular pressing equipment, it has excellent strength

Basic weight: 95g/m²±10% ISO536

Thickness: 0.102mm±10% ISO534

Typical viscosity value (N/25mm):

Initial viscosity (st,st) - FTM 9:11.0 or tear

20 minutes 90° peel adhesion (st,st) - FTM2:75 or tear

24 hour 90° peel adhesion (st,st) - FTM2:8.5 or tear

Minimum labeling temperature: 10°C

24 hours after labeling, operating temperature range: -50 °C~+90 °C

PARTIAL SPECIFICATIONS

For more details, please consult customer service




30x20mm



40x30mm




40x50mm

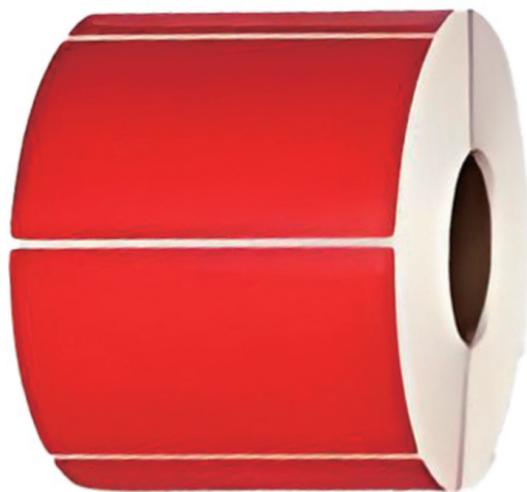


40x80mm



50x30mm

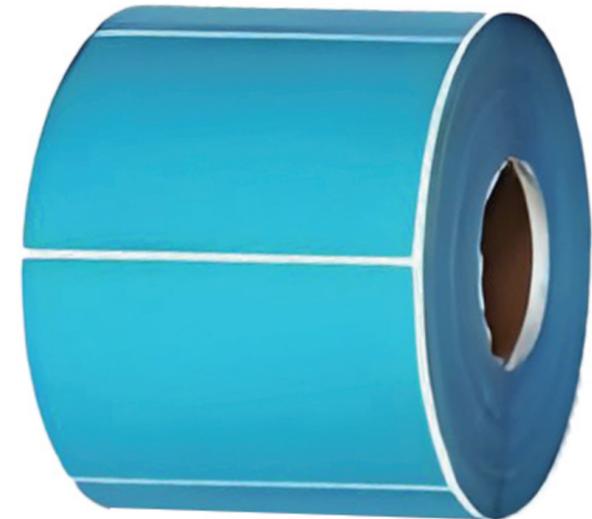

60x40mm

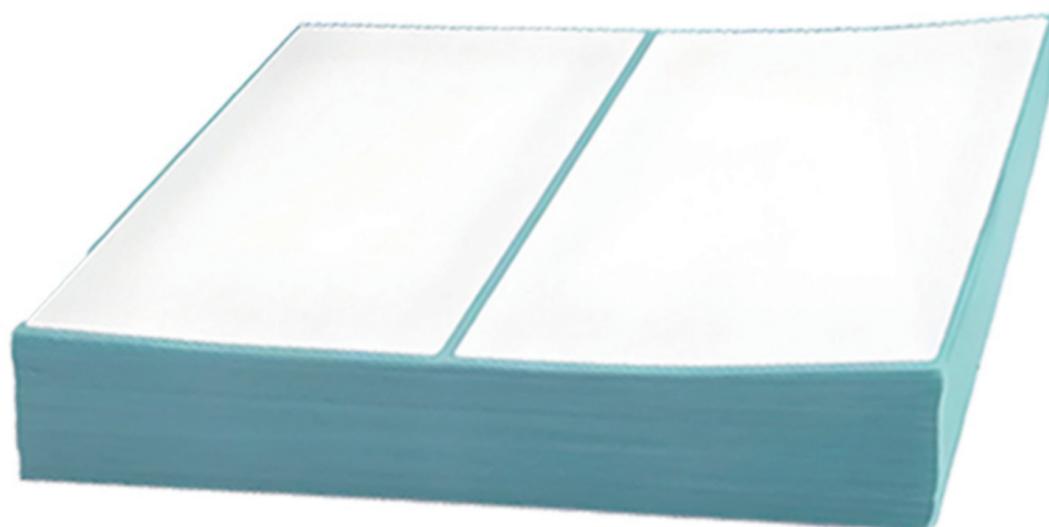

100x100mm



Support
customization

WHY CHOOSE US

OUR ADVANTAGES




THREE PROOF MATERIAL

Waterproof, oil resistant, scratch resistant

GOOD ADHESION

High quality glue is better suited to fit objects firmly without overflowing glue

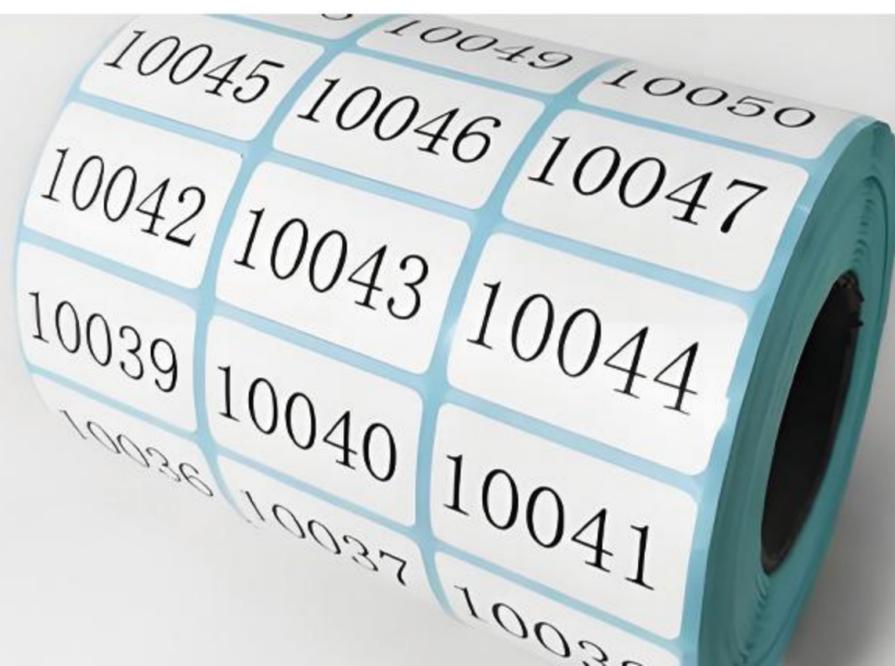

TPRINT CLEARLY

High quality surface material with clear printing and long retention time

DECORATION

美味鲜果切

新鲜

新鲜!
小小惊喜
满满惊喜
荔枝

LOGISTICS

APPLICATION
SCENARIOS

SUPERMARKET

WAREHOUSE



PARTIAL APPLICABLE EQUIPMENT

SUITABLE FOR A VARIETY
OF DIFFERENT DEVICES



STRONG PRODUCTION CAPACITY

SHORT SHIPPING CYCLE



CARGO TRANSPORT

SHORT PRODUCTION CYCLE AND FAST DELIVERY SPEED



How to choose the appropriate label paper?

Usage scenario:Wet environment: Choose PET or PVC waterproof label paper;

High temperature environment: choose heat-resistant polyester label paper;

Printing method: Thermal printer: equipped with thermal label paper;

Laser/inkjet printer: choose copperplate paper or specialty paper;

What printing methods are supported?

Back printing: print LOGO, slogans, etc. to enhance brand image;

UV printing: bright colors, suitable for labels, bills, etc.

What is the minimum order quantity?

W5000 rolls (small batch trials can be negotiated for the first cooperation).

How long does it take to ship?

7-20 days after receiving the deposit (7-10 days for regular orders, 15-20 days for customization/large orders).

What are the logistics methods?

SF Express / Deppon / DHL / sea transportation / air transportation, recommend the best solution according to your needs.

How long is the warranty period?

Under normal storage conditions (10-30°C, humidity 40%-60%), the warranty period is 12 months.



Tel:+86 15237307546

Email:alexwangpaper@vip.163.com

Wel:www.caspergpaper.com www.caspergggroup.com

Add:1#Chuangye road,Muye District,Xinxiang City,Henan Province,China

CASPERG PAPER INDUSTRIAL CO., LTD

CASPERG IMPORT AND EXPORT CO., LTD