


# WATER BALL VALVES

## Data sheet

### ZL-4130





Aenor




## Description

- ∞ Low flow resistance;
- ∞ Excellent pressure resistance;
- ∞ Rapid opening and close;
- ∞ Compact structure and small volume.


## Performance

- ∞ Applicable medium: cold water hot water
- ∞ Working pressure:  $\leq 1.6\text{mpa}$
- ∞ Operating temperature:  $0\sim 100^{\circ}\text{C}$
- ∞ Thread standard: ISO228-1

## Materials

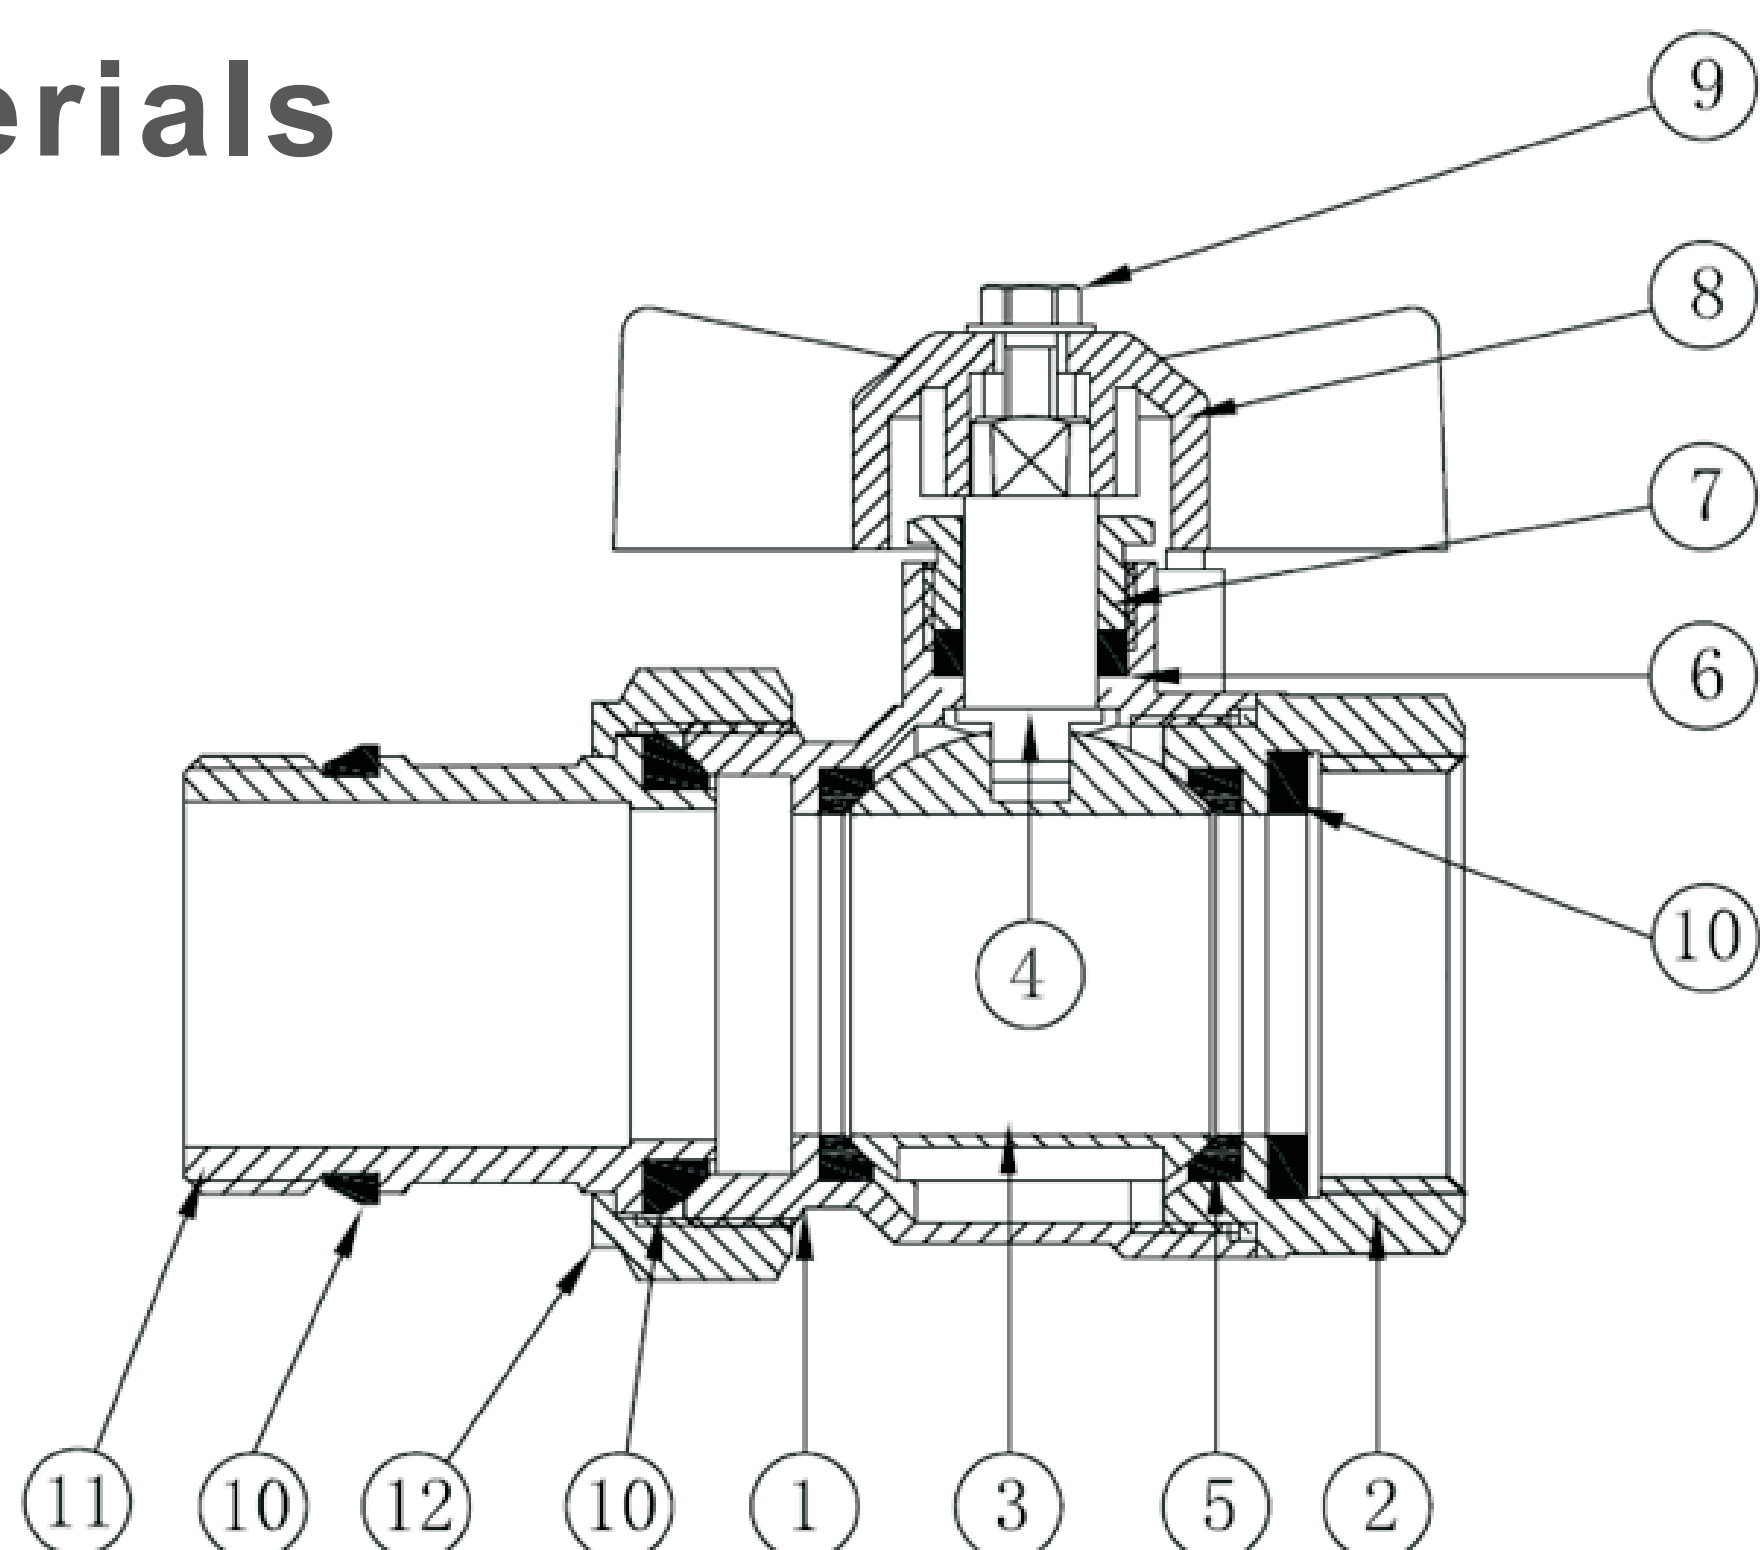

| No. | Components           | Material |
|-----|----------------------|----------|
| 1   | Valve Body           | Brass    |
| 2   | Bonnet               | Brass    |
| 3   | Valve Ball           | Brass    |
| 4   | Valve Stem           | Brass    |
| 5   | Plastic spring       | PTFE     |
| 6   | Packing              | PTFE     |
| 7   | Gland Nut            | Brass    |
| 8   | Handle               | AL       |
| 9   | Lock Nut             | Q235     |
| 10  | Seals                | EPDM     |
| 11  | Straight union joint | Brass    |
| 12  | hexagon nut          | Brass    |

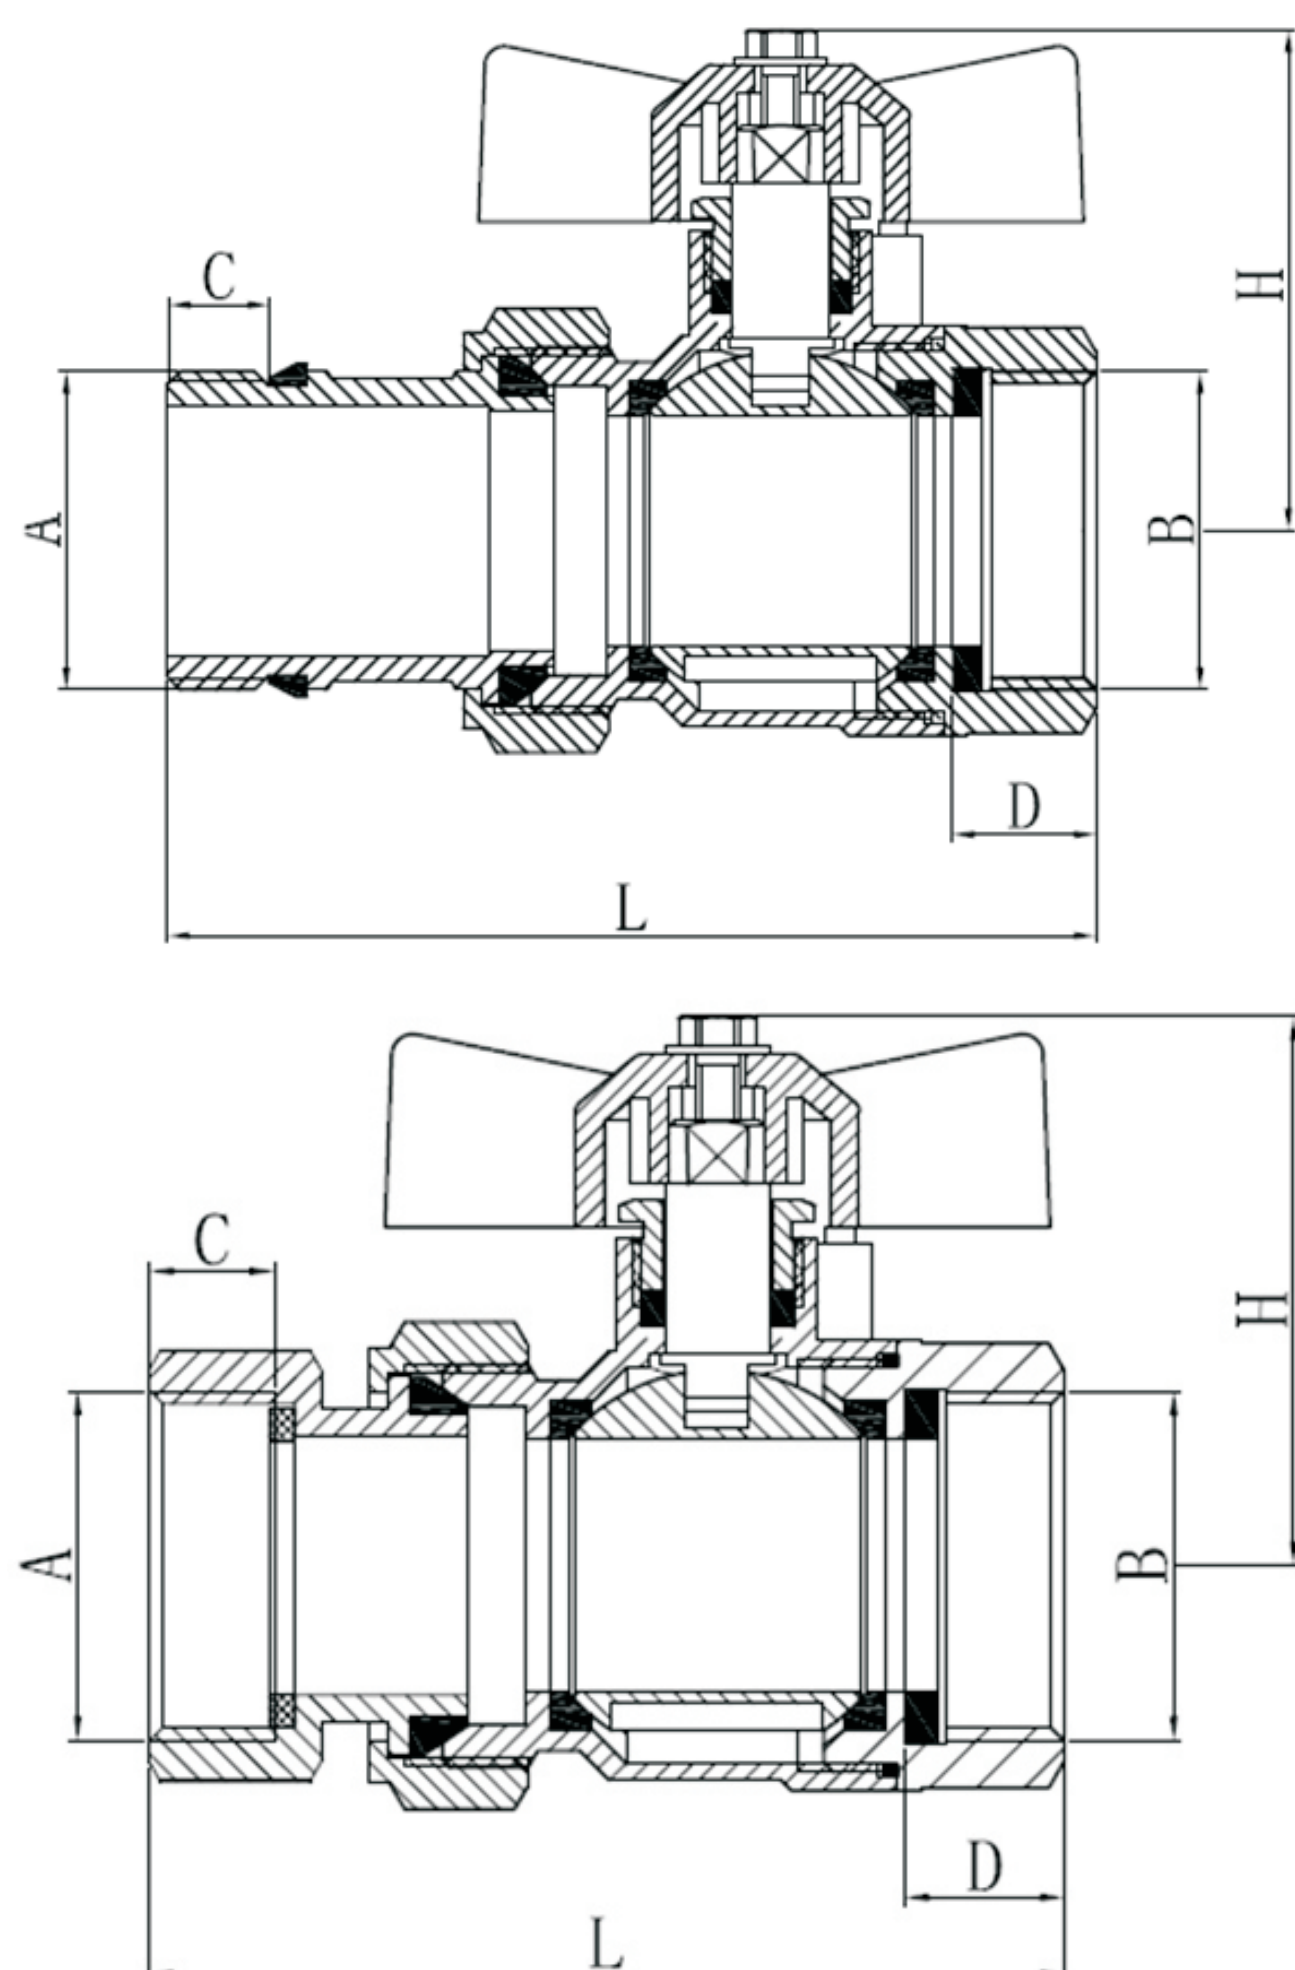

| Code     | A      | B      | C    | D  | L    | H  |
|----------|--------|--------|------|----|------|----|
| ZI413015 | 1/2" M | 1/2" F | 9.5  | 11 | 70   | 42 |
| ZL413020 | 3/4" M | 3/4" F | 10   | 12 | 78   | 47 |
| ZL413025 | 1" M   | 1" F   | 10.5 | 15 | 96.5 | 52 |

| Code      | A    | B    | C    | D  | L    | H  |
|-----------|------|------|------|----|------|----|
| ZL4130C25 | 1" F | 1" F | 12.5 | 15 | 86.5 | 52 |