

FEIBOER

**Stainless Steel Butterfly Cable Grip
Specification**

A01

Stainless Steel Cable Fixing Clamp – A01

High tensile strength · 201/304 optional · Corrosion resistant for outdoor & coastal use

Product Overview

The product is made of high hardness stainless steel such as 201 & 304. It consists of three parts: the bottom groove, the middle stainless steel gasket, and the top pressing hook. Formed by high-speed precision punch with progressive abrasive tools. A01 is suitable for butterfly optical cable fixation, with stable tension and durable performance. Different materials adapt to various acid/alkali field environments. 201 stainless steel for general use; 304 recommended for coastal or acidic conditions for stronger corrosion resistance and longer service life.



Available Models

Model	Size (mm)	Material	Weight	Breaking Load	Cable Diameter	Warranty
A01	200 x 23 x 17	SS201 / SS304	42 g	1.2 KN	2 x 8 mm	10 years

Key Features

- * **High tensile strength & stability**
Engineered for reliable cable fixing, withstands outdoor mechanical stress.
- * **Material options: 201 & 304 stainless steel**
201 for general use; 304 recommended for coastal or acidic environments.
- * **Strong corrosion, acid & alkali resistance**
Suitable for harsh field conditions, prolongs service life.
- * **Specially designed metal gasket**
Provides better cable grip and prevents slipping.

Technical Specifications – A01

Parameter	Value
Overall Size (L x W x H)	200 x 23 x 17 mm
Material	SS201 / SS304
Weight	42 g
Breaking Load	1.2 KN
Cable Diameter Range	2 x 8 mm
Gasket Thickness	0.5 mm
Warranty	10 years

Packaging Details

Carton size: 40 x 30 x 22 cm | **Carton weight:** 25 kg | **Qty per carton:** 500 pcs | **Inner pack:** 10 pcs per small bag


Dimensional Drawings – A01

A01 Main Body

Length: 215 mm
Width: 22 mm
Height: 18 mm
Hole dia: $\Phi 2$ mm

Shim (Gasket)

Length: 86.2 mm
Width: 18 mm
Thickness: 0.5 mm

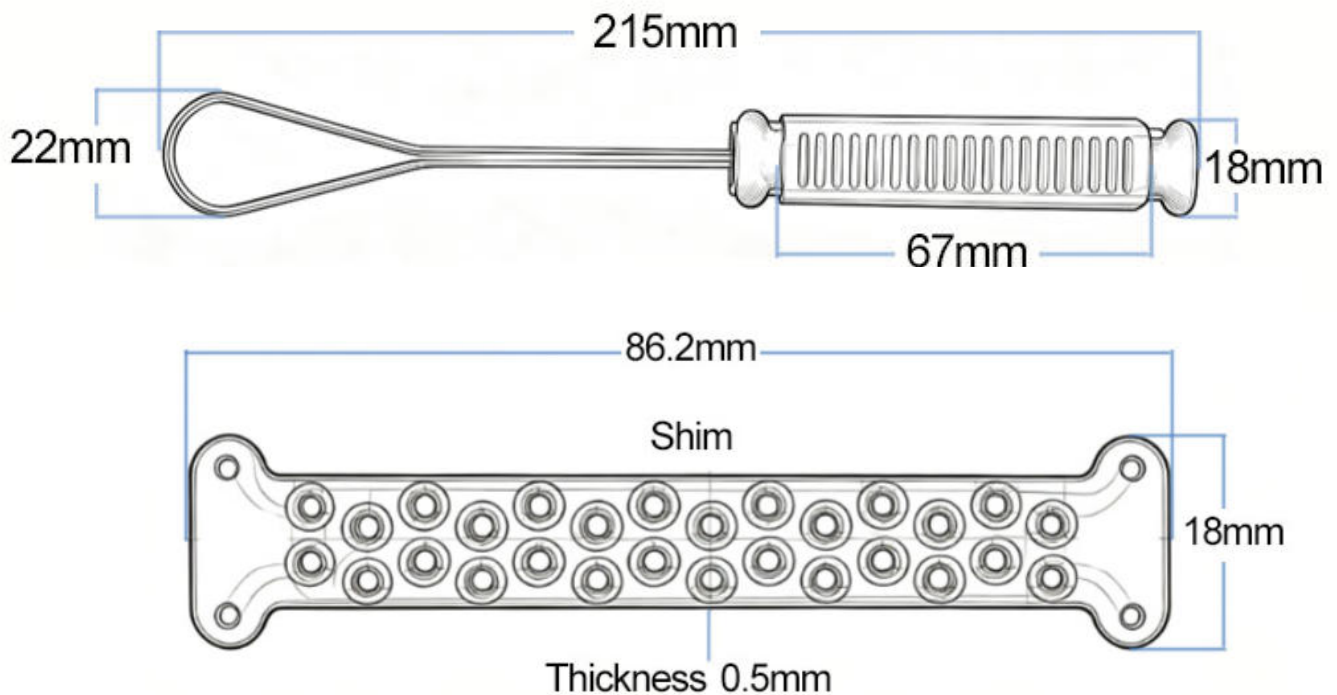

Applications

Butterfly optical cable fixing

Outdoor telecommunication poles

Coastal & acidic environments

Aerial cable suspension

Industrial cable management

Hunan Feibo Guangtong Communication Equipment Co., Ltd.

Tel: +86-15074910002 | Email: info@feiboer.com.cn | Web: feiboer.com.cn

FEIBOER

**Stainless Steel Butterfly Cable Grip
Specification**

A02

Stainless Steel Cable Fixing Clamp – A02

High tensile strength · 201/304 optional · Corrosion resistant for outdoor & coastal use

Product Overview

The product is made of high hardness stainless steel such as 201, 410 & 304. It consists of three parts: the bottom groove, the middle stainless steel gasket, and the top pressing hook. Formed by high-speed precision punch with progressive abrasive tools. A02 is suitable for butterfly optical cable fixation, with stable tension and durable performance. Different materials adapt to various acid/alkali field environments. 201 stainless steel for general use; 304 recommended for coastal or acidic conditions for stronger corrosion resistance and longer service life.



Available Models

Model	Size (mm)	Material	Weight	Breaking Load	Cable Diameter	Warranty
A02	201 x 24 x 20	SS201 / SS304	48 g	1.2 KN	2 - 8 mm	10 years

Key Features

- * **High tensile strength & stability**
Engineered for reliable cable fixing, withstands outdoor mechanical stress.
- * **Material options: 201, 410 & 304 stainless steel**
201/410 for general use; 304 recommended for coastal or acidic environments.
- * **Strong corrosion, acid & alkali resistance**
Suitable for harsh field conditions, prolongs service life.
- * **Specially designed metal gasket**
Provides better cable grip and prevents slipping.

Technical Specifications – A02

Parameter	Value
Overall Size (L x W x H)	201 x 24 x 20 mm
Material	SS201 / SS304 (410 optional)
Weight	48 g
Breaking Load	1.2 KN
Cable Diameter Range	2 - 8 mm
Gasket Thickness	0.5 mm
Warranty	10 years

Packaging Details

Carton size: 40 x 30 x 22 cm | **Carton weight:** 25 kg | **Qty per carton:** 500 pcs | **Inner pack:** 10 pcs per small bag


Dimensional Drawings – A02

A02 Main Body

Length: 210 mm
Width: 23.6 mm
Height: 18 mm
Hole dia: Phi 2.5 mm

Shim

Length: 86.2 mm
Width: 18 mm
Thickness: 0.5 mm

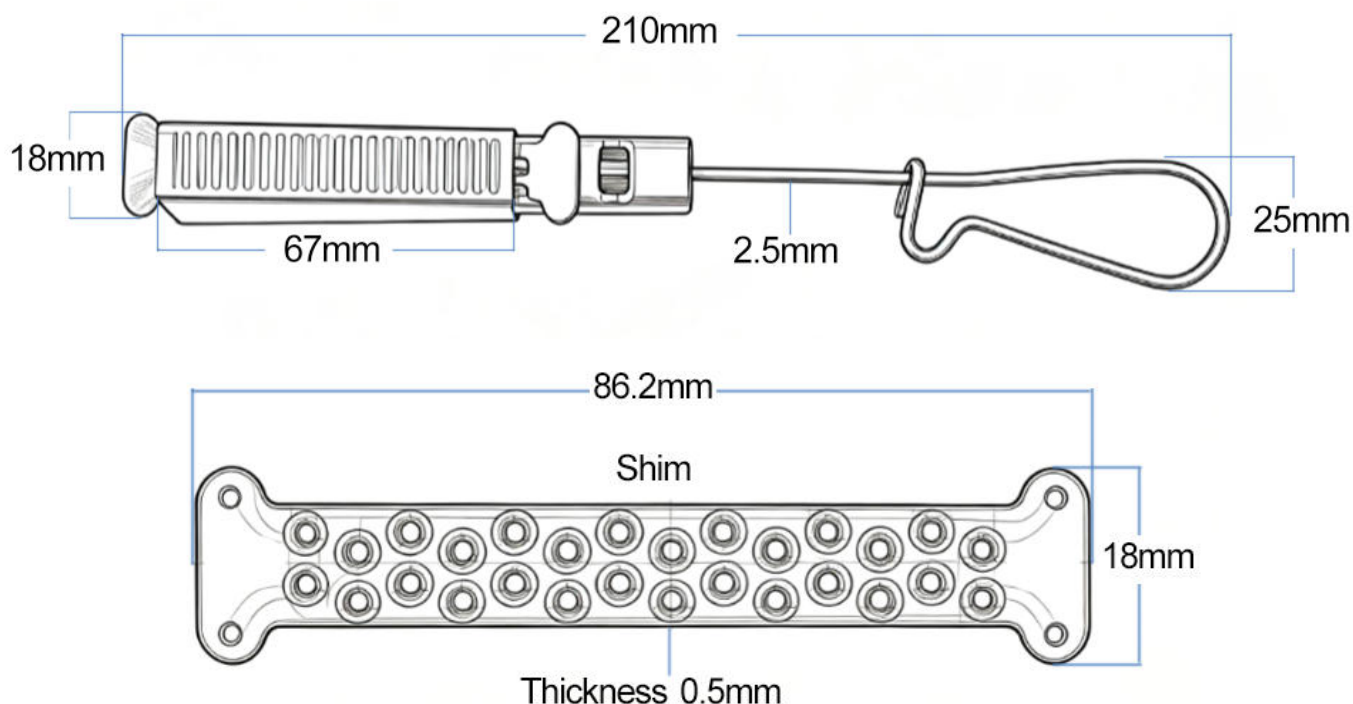

Applications

Butterfly optical cable fixing

Outdoor telecommunication poles

Coastal & acidic environments

Aerial cable suspension

Industrial cable management

Hunan Feibo Guangtong Communication Equipment Co., Ltd.

Tel: +86-15074910002 | Email: info@feiboer.com.cn | Web: feiboer.com.cn

FEIBOER

**Stainless Steel Cable Fixing Clamp
Specification**

A03

Stainless Steel Cable Fixing Clamp – A03

High tensile strength · 201/304 optional · Corrosion resistant for outdoor & coastal use

Product Overview

The product is made of high hardness stainless steel such as 201 & 304. It consists of three parts: the bottom groove, the middle stainless steel gasket, and the top pressing hook. Formed by high-speed precision punch with progressive abrasive tools. A03 is suitable for butterfly optical cable fixation, with stable tension and durable performance. Different materials adapt to various acid/alkali field environments. 201 stainless steel for general use; 304 recommended for coastal or acidic conditions for stronger corrosion resistance and longer service life.



Available Models

Model	Size (mm)	Material	Weight	Breaking Load	Cable Diameter	Warranty
A03	210 x 24 x 20	SS201 / SS304	49 g	1.2 KN	5 - 8 mm	10 years

Key Features

- * **High tensile strength & stability**
Engineered for reliable cable fixing, withstands outdoor mechanical stress.
- * **Material options: 201 & 304 stainless steel**
201 for general use; 304 recommended for coastal or acidic environments.
- * **Strong corrosion, acid & alkali resistance**
Suitable for harsh field conditions, prolongs service life.
- * **Specially designed metal gasket**
Provides better cable grip and prevents slipping.

Technical Specifications – A03


Parameter	Value
Overall Size (L x W x H)	210 x 24 x 20 mm
Material	SS201 / SS304
Weight	49 g
Breaking Load	1.2 KN
Cable Diameter Range	5 - 8 mm
Gasket Thickness	0.5 mm
Warranty	10 years

Packaging Details

Carton size: 40 x 30 x 22 cm | **Carton weight:** 25 kg | **Qty per carton:** 500 pcs | **Inner pack:** 10 pcs per small bag

Dimensional Drawings – A03

XS-A03 Main Body Length: 210 mm Width: 25 mm Height: 18 mm Hole dia: Phi 2.5 mm	Shim (Gasket) Length: 86.2 mm Width: 18 mm Thickness: 0.5 mm
--	--

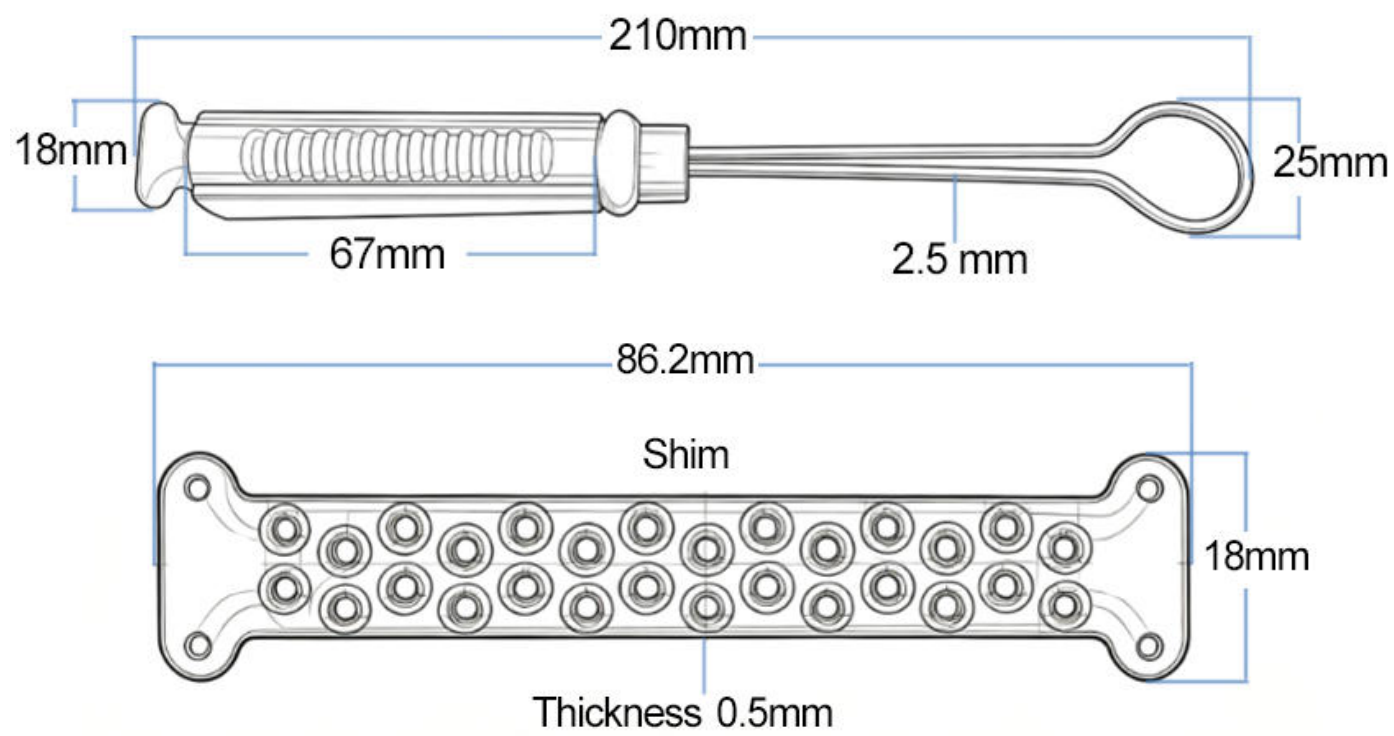

Applications

Butterfly optical cable fixing

Outdoor telecommunication poles

Coastal & acidic environments

Aerial cable suspension

Industrial cable management

Hunan Feibo Guangtong Communication Equipment Co., Ltd.

Tel: +86-15074910002 | Email: info@feiboer.com.cn | Web: feiboer.com.cn

FEIBOER

**Stainless Steel Cable Fixing Clamp
Specification**

A04

Stainless Steel Cable Fixing Clamp – A04

High tensile strength · 201/304 optional · Corrosion resistant for outdoor & coastal use

Product Overview

The product is made of high hardness stainless steel such as 201, 410 & 304. It consists of three parts: the bottom groove, the middle stainless steel gasket, and the top pressing hook. Formed by high-speed precision punch with progressive abrasive tools. A04 is suitable for butterfly optical cable fixation, with stable tension and durable performance. Different materials adapt to various acid/alkali field environments. 201 stainless steel for general use; 304 recommended for coastal or acidic conditions for stronger corrosion resistance and longer service life.



Available Models

Model	Size (mm)	Material	Weight	Breaking Load	Cable Diameter	Warranty
A04	210 x 24 x 17	SS201 / SS304	47 g	1.2 KN	2 - 8 mm	10 years

Key Features

- * **High tensile strength & stability**
Engineered for reliable cable fixing, withstands outdoor mechanical stress.
- * **Material options: 201, 410 & 304 stainless steel**
201/410 for general use; 304 recommended for coastal or acidic environments.
- * **Strong corrosion, acid & alkali resistance**
Suitable for harsh field conditions, prolongs service life.
- * **Specially designed metal gasket**
Provides better cable grip and prevents slipping.

Technical Specifications – A04

Parameter	Value
Overall Size (L x W x H)	210 x 24 x 17 mm
Material	SS201 / SS304 (410 optional)
Weight	47 g
Breaking Load	1.2 KN
Cable Diameter Range	2 - 8 mm
Gasket Thickness	0.5 mm
Warranty	10 years

Packaging Details

Carton size: 40 x 30 x 22 cm | **Carton weight:** 25 kg | **Qty per carton:** 500 pcs | **Inner pack:** 10 pcs per small bag


Dimensional Drawings – A04

A04 Main Body

Length: 210 mm
Width: 25 mm
Height: 18 mm
Hole dia: Phi 2.5 mm

Shim (Gasket)

Length: 86.2 mm
Width: 18 mm
Thickness: 0.5 mm

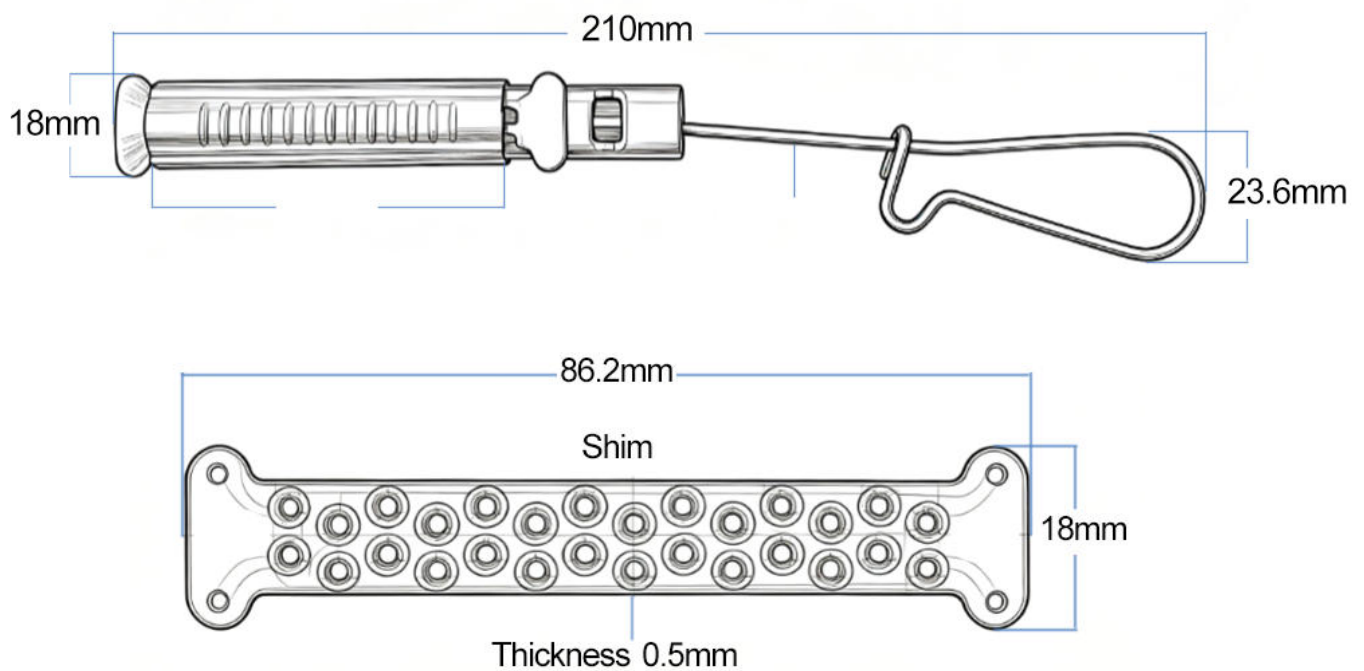

Applications

Butterfly optical cable fixing

Outdoor telecommunication poles

Coastal & acidic environments

Aerial cable suspension

Industrial cable management

Hunan Feibo Guangtong Communication Equipment Co., Ltd.

Tel: +86-15074910002 | Email: info@feiboer.com.cn | Web: feiboer.com.cn

FEIBOER

**Polyamide Cable Clamp
Specification**

A05

Polyamide Cable Clamp – A05

UV resistant · High strength · Corrosion resistant · Maintenance-free

Product Overview

Polyamide clamp is a type of plastic cable clamp, made from high-quality UV resistant thermoplastic processed by injection molding technology. Widely used to support telephone cable or butterfly introduction optical cable at span clamps, drive hooks and various drop attachments. The clamp consists of three parts: a shell, a shim and a wedge. The working load on the support wire is effectively reduced by the insulated drop wire clamp. Characterized by good corrosion resistance, excellent insulating property, and long service life.



Available Models

Model	Size (mm)	Material	Weight	Breaking Load	Cable Diameter	Warranty
A05	230 x 20 x 18	SS201/304	37 g	1.0 KN	2 - 8 mm	10 years

Key Features

- * **Good anti-corrosion performance**
Resists corrosion from environmental factors, suitable for outdoor use.
- * **High strength & wear resistant**
Engineered for durability and long-term performance under mechanical stress.
- * **Maintenance-free & easy installation**
No regular maintenance required; simple and quick to install or remove.
- * **Serrated shim increases cable adhesion**
Provides secure grip on cables; dimpled shims protect cable jacket from damage.

Technical Specifications – A05

Parameter	Value
Overall Size (L x W x H)	230 x 20 x 18 mm
Material	SS201/304
Weight	37 g
Breaking Load	1.0 KN
Cable Diameter Range	2 - 8 mm
Shim Thickness	1.1 mm / 2.4 mm
Warranty	10 years

Packaging Details

Carton size: 40 x 30 x 30 cm | **Carton weight:** 15 kg | **Qty per carton:** 400 pcs | **Inner pack:** 10 pcs per small bag


Dimensional Drawings – A05

A05 Main Body

Length: 230 mm
Width: 18.5 mm
Height: 21 mm
Mounting span: 67 mm

Shim (Gasket)

Length: 86.8 mm
Width: 16.5 mm
Thickness: 1.1 mm

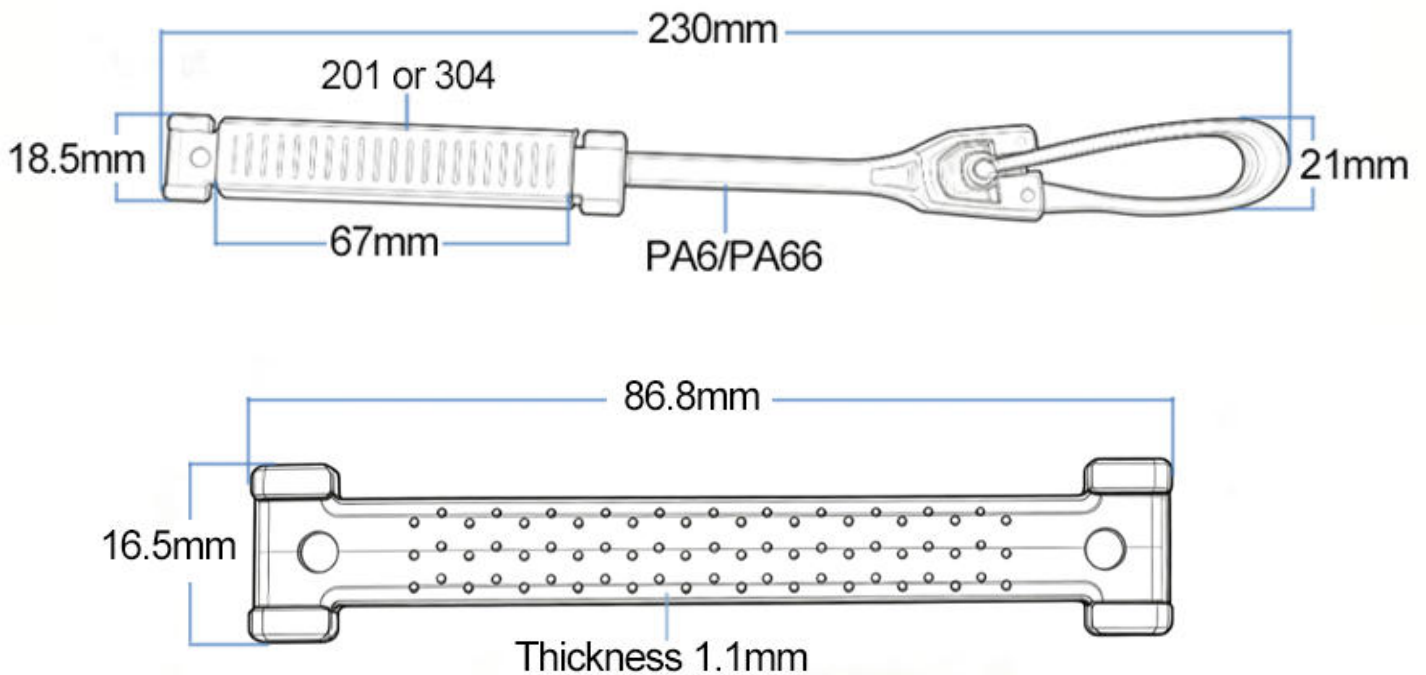

Applications

Butterfly optical cable fixing

Telephone cable support

Span clamps & drive hooks

Drop wire attachments

Outdoor telecommunication poles

Hunan Feibo Guangtong Communication Equipment Co., Ltd.

Tel: +86-15074910002 | Email: info@feiboer.com.cn | Web: feiboer.com.cn



Hybrid Cable Clamp Specification

A06

Hybrid Cable Clamp – A06

Nylon + Stainless Steel · Corrosion resistant · High strength · Removable design

Product Overview

A06 is a hybrid FTTH cable clamp designed for butterfly shaped fiber optic cables. The main body consists of a bottom and gasket made of PA6 or PA66 nylon material, combined with a hook made of stainless steel 201 or 304. This detachable design combines the hanging strength of stainless steel with the friction protection of plastic on the fiber optic cable. Features include good corrosion resistance, excellent insulation performance, and long service life.



Available Models

Model	Size (mm)	Material	Weight	Breaking Load	Cable Diameter	Warranty
A06	200 x 27 x 27	SS201/304 + PA6/PA66	35 g	0.8 KN	2 - 8 mm	10 years

Key Features

- * **Good anti-corrosion performance**
Resists corrosion from environmental factors, suitable for outdoor use.
- * **High strength & wear resistant**
Stainless steel hook provides excellent hanging strength; nylon body offers durability.
- * **Maintenance-free & easy installation**
No regular maintenance required; simple and quick to install or remove.
- * **Serrated shim increases cable adhesion**
Provides secure grip on cables; dimpled shims protect cable jacket from damage.
- * **Removable detachable design**
Allows for easy reconfiguration and maintenance.

Technical Specifications – A06

Parameter	Value
Overall Size (L x W x H)	200 x 27 x 27 mm
Material	SS201/304 + PA6 / PA66
Weight	35 g
Breaking Load	0.8 KN
Cable Diameter Range	2 - 8 mm
Shim Thickness	1.1 mm / 2.4 mm
Warranty	10 years

Packaging Details

Carton size: 40 x 30 x 30 cm | **Carton weight:** 11 kg | **Qty per carton:** 300 pcs | **Inner pack:** 10 pcs per small bag


Dimensional Drawings – A06

A06 Main Body

Length: 200 mm
Width: 27.2 mm
Height: 23 mm
Hole dia: Φ 2 mm
Mounting span: 52 mm

Shim (Gasket)

Length: 86.8 mm
Width: 16.5 mm
Thickness: 1.1 mm / 2.4 mm

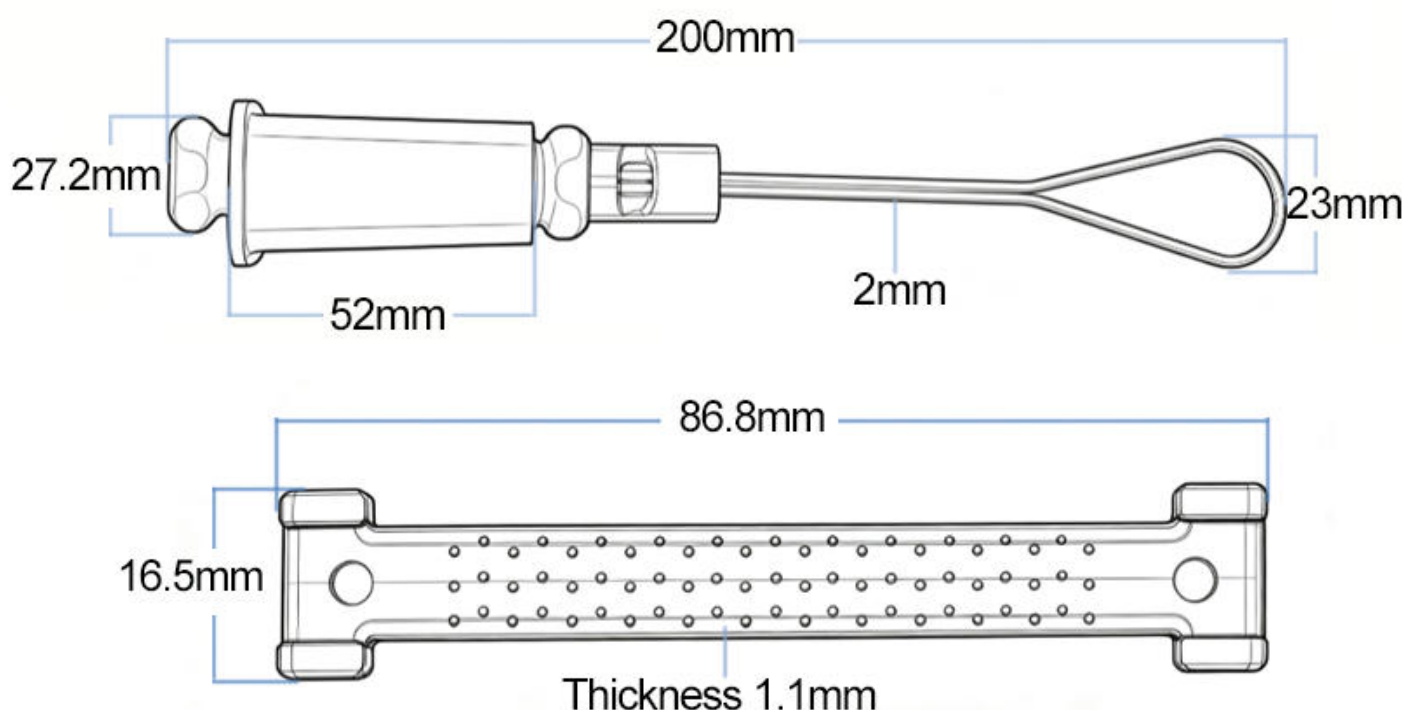

Applications

Butterfly optical cable fixing

FTTH drop cable installation

Outdoor telecommunication poles

Aerial cable suspension

Span clamps & drop attachments

Hunan Feibo Guangtong Communication Equipment Co., Ltd.

Tel: +86-15074910002 | Email: info@feiboer.com.cn | Web: feiboer.com.cn



Hybrid Cable Clamp Specification

A07

Hybrid Cable Clamp – A07

Nylon + Stainless Steel · Corrosion resistant · High strength · Removable design

Product Overview

A07 is a hybrid FTTH cable clamp designed for butterfly shaped fiber optic cables. The main body consists of a bottom and gasket made of PA6 or PA66 nylon material, combined with a hook made of stainless steel 201 or 304. This detachable design combines the hanging strength of stainless steel with the friction protection of plastic on the fiber optic cable. Features include good corrosion resistance, excellent insulation performance, and long service life.



Available Models

Model	Size (mm)	Material	Weight	Breaking Load	Cable Diameter	Warranty
A07	200 x 27 x 27	SS201/304 + PA6/PA66	38 g	0.8 KN	2 - 8 mm	10 years

Key Features

- * **Good anti-corrosion performance**
Resists corrosion from environmental factors, suitable for outdoor use.
- * **High strength & wear resistant**
Stainless steel hook provides excellent hanging strength; nylon body offers durability.
- * **Maintenance-free & easy installation**
No regular maintenance required; simple and quick to install or remove.
- * **Serrated shim increases cable adhesion**
Provides secure grip on cables; dimpled shims protect cable jacket from damage.
- * **Removable detachable design**
Allows for easy reconfiguration and maintenance.

Technical Specifications – A07

Parameter	Value
Overall Size (L x W x H)	200 x 27 x 27 mm
Material	SS201/304 + PA6 / PA66
Weight	38 g
Breaking Load	0.8 KN
Cable Diameter Range	2 - 8 mm
Shim Thickness	1.1 mm / 2.4 mm
Warranty	10 years

Packaging Details

Carton size: 40 x 30 x 30 cm | **Carton weight:** 12 kg | **Qty per carton:** 300 pcs | **Inner pack:** 10 pcs per small bag


Dimensional Drawings – A07

A07 Main Body

Length: 200 mm
Width: 27.2 mm
Height: 23.5 mm
Hole dia: Phi 2.5 mm
Mounting span: 52 mm

Shim (Gasket)

Length: 86.8 mm
Width: 16.5 mm
Thickness: 1.1 mm / 2.4 mm

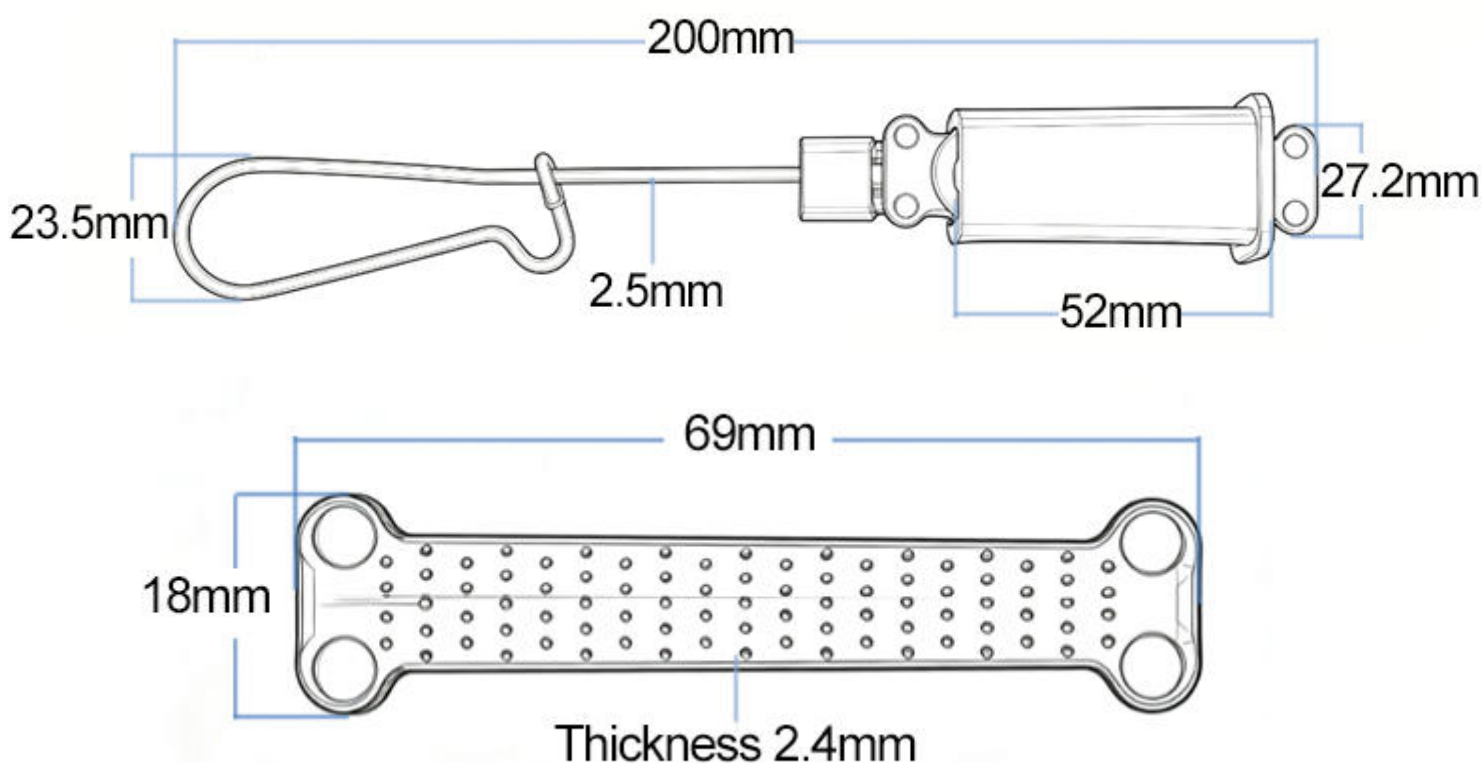

Applications

Butterfly optical cable fixing

FTTH drop cable installation

Outdoor telecommunication poles

Aerial cable suspension

Span clamps & drop attachments

Hunan Feibo Guangtong Communication Equipment Co., Ltd.

Tel: +86-15074910002 | Email: info@feiboer.com.cn | Web: feiboer.com.cn