Foshan Dalle Technology Co., Ltd. Food Dehydrator Product Catalog On2/

Dalle

iof 1



Contents

01	Company Profile	01-02
02	Certification	03-06
03	Food Dehydrator	07-24
04	Solar Dehydrator	25
05	Freeze Dryer	26-27
06	Auto Juicer	28-31

Company Profile

Dalle Factory was founded in 2016, Located in Zhongshan city, China, We have been professional food dehydrator and slicer manufacturer for more than 6 years.

Covering an area of total 5000 square meters and with more than 80 workers, possessing powerful R&D, production and sales team. Our factory is equipped with large laser cutting machines, bending machines, hydraulic machines, and also independent laboratory, one-stop production from accessories to finished products and provide more benefit to customers.

Our production are strictly in accordance with ISO9001 quality management system. All our products are certified with 3C, CE, CB, ROHS and ETL and export to Europe, Southeast Asia, Australia, Africa and USA.

We always believe that the innovation is the foundation of the enterprise development.

Hence we will devote to researching and producing more utility models of household & commercial appliances all the time, bringing more innovative life to global consumers.

(CB RoHS LFGB (T)

Contact Us

TEL: +86-0757-29292044 E-mail: info@fsdalle.com


Certification



What can food dehydrator do?



Multiple Application

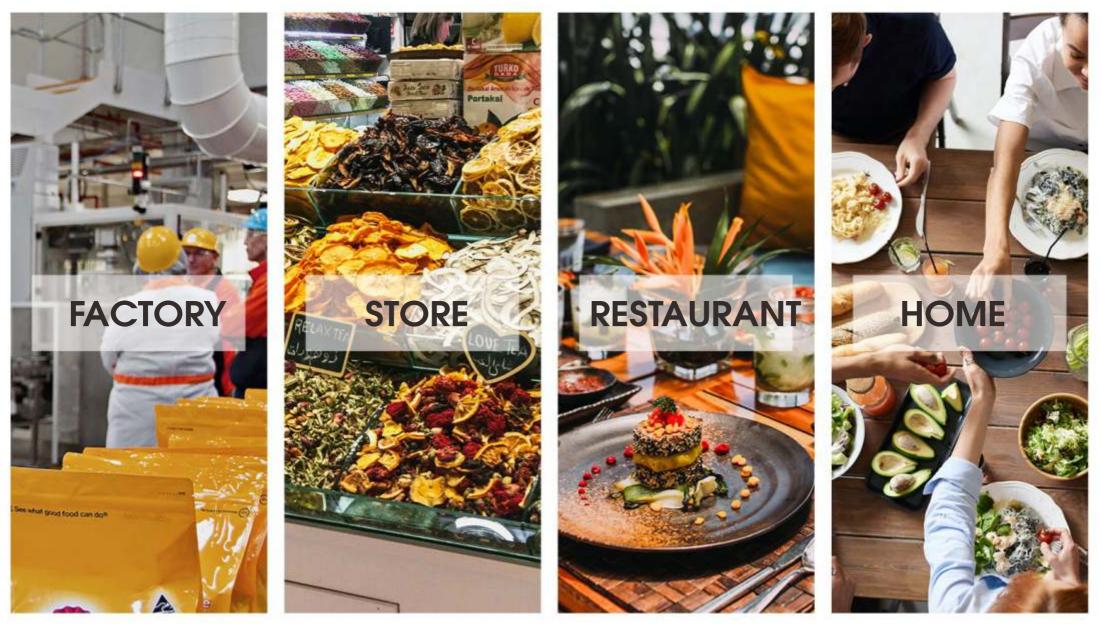

Why choose Dalle Food Dehydrator?













DL-05B



HOUSEHOLD FOOD DEHYDRATOR				
Power: 300W	Voltage: 220-240V/50Hz/60Hz 110V/60Hz			
Temperature: 30-80°C	Product Size: 29*27*22CM			
Time Ranges: 0-99 hours	Drying Tray Size: 26*17CM			
Noise Level: 45-50dB	Control: Mechanical control			
Mechanical control with digital display With additional 1pc crumb tray Galvanized sheet roof, liner, crumb tray Q235 grilled net SUS304 wind cover				
G.W. :3.4KG	Package Size: 35*31*30.5CM			
Container Loading	20GP 952pcs			
Lodding	40HQ 1904pcs			



HOUSEHOLD FOOD DEHYDRATOR			
Power: 300W	Voltage: 220-240V/50Hz/60Hz 110V/60Hz		
Temperature: 30-80°C	Product Size: 29*27*22CM		
Time Range: 0-99 hours	Drying Tray Size: 26*17CM		
Noise Level: 45-50dB	Control: Digital Control		
Pigital control With additional 1pc crumb tray Galvanized sheet roof, liner, crumb tray Q235 grilled net SUS304 wind cover			
G.W.: 3.4KG	Package Size: 35*31*30.5CM		
Container Loading	20GP 952pcs		
	40HQ 1904pcs		





	HOUSEHOLD FOOD DEHYDRATOR				
	Power: 350W	Voltage: 220-240V/50Hz/60Hz 110V/60Hz			
	Temperature: 35-70°C	Product Size: 28*28*30CM			
	Time Range: 0-48 hours	Drying Tray Size: 28cm diameter(roundtray)			
	Noise Level: 45-50dB	Control: Digital Control			
	Features: • BPA free he				
	G.W.: 2.5KG	Package Size: 28.5*28.5*30CM			
	Container Loading	20GP 1152pcs			
		40HQ 2736pcs			



21 CAP4

	HOUSEHOLD FOOD DEHYDRATOR		
Power: 35	50W	Voltage: 220-240V/50Hz/60Hz 110V/60Hz	
Temperat	ure: 35-70°C	Product Size: 29*21*24CM	
Time Ran	ige: 0-48 hours	Drying Tray Size: 29*21CM	
Noise Lev	vel: 45-50dB	Control: Mechanical control	
Features	BPA free hea		
G.W. : 2.	5KG	Package Size: 33.5*24.5*29.5CM	
Containe	r Loading	20GP 960pcs	

40HQ

2440pcs

DL-05D

DL-05F

 2_{KG}

CAPACITY

5 LAYERS

HOUSEHOLD FOOD DEHYDRATOR			
Power: 350W	Voltage: 220-240V/50Hz/60Hz 110V/60Hz		
Temperature: 35-70°C	Product Size: 34*26*20CM		
Time Range: 0-48 hours	Drying Tray Size: 34*26CM		
Noise Level: 45-50dB	Control: Digital Control		
S removable stackable food trays BPA free healthy material Fan for even heat distribution Easy to use Easy to clean			
G.W.: 3.2KG Package Size: 64*40*52CM			
Container Loading	20GP 800pcs		
	40HQ 2120pcs		



DL-05G

HOUSEHOLD FOOD DEHYDRATOR			
Power: 350W	Voltage: 220-240V/50Hz/60Hz 110V/60Hz		
Temperature: 35-70°C	Product Size: 34*26*20CM		
Time Range: 0-48 hours	Drying Tray Size: 34*26CM		
Noise Level: 45-50dB	Control: Mechanical control		
 Features: 5 removable stackable food trays BPA free healthy material Fan for even heat distribution Easy to use Easy to clean 			
G.W.: 3.1KG Package Size: 64*40*52CM			
Container Loading	20GP 800pcs		
	40HQ 2120pcs		



DL-05E

HOUSEHOLD FOOD DEHYDRATOR			
Power: 350W		Voltage: 220-24	40V/50Hz/60Hz 110V/60Hz
Temperature:	35-70℃	Product Size: 2	28*28*30CM
Time Range:	0-48 hours	Drying Tray Size:	33cm diameter(roundtray)
Noise Level:	45-50dB	Control: Digita	I Control
 5 removable stackable food trays BPA free healthy material Fan for even heat distribution Easy to use Easy to clean 			ys
G.W.: 3.4K0	3	Package Size:	74*37*60.5CM
Container Lo	ading	20GP	640pcs
Containor Loading		40HQ	1600pcs



HOUSEHOLD FOOD DEHYDRATOR Power: 350W Voltage: 220-240V/50Hz/60Hz 110V/60Hz Temperature: 35-70℃ Product Size: 34*26*20CM Time Range: 0-48 hours Drying Tray Size: 34*26CM Control: Mechanical control Noise Level: 45-50dB S removable stackable food trays
 BPA free healthy material Fan for even heat distribution Easy to use Easy to clean Package Size: 64*40*52CM G.W.: 3.1KG 20GP 800pcs Container Loading

40HQ

2120pcs

DL-05H

SS-06J

2kg capacity

6

AYERS

HOUSEHOLD FOOD DEHYDRATOR				
Power: 500W	Voltage:220-240V~50Hz/60Hz 110V~60Hz			
Temperature: 30-75℃	Product Size: 40*25.3*31.8CM			
Time Range: 0-24 hours	Drying Tray Size: 25.5*23CM			
Noise Level: 45-50dB	Control: Mechanical Control			
Mechanical Control With edged trays With additional 1pc crumb tray SUS304 trays SUS201 housing and liner Aluminum Handle				
G.W. : 6.5KG	Package Size: 45.5*30.8*37.3CM			
Container Loading	20GP 520pcs			
	40HQ 1250pcs			



SS-08J

-

5кд

SS-10J

Power: 500W		Voltage:220-240V~50Hz/60Hz 110V~60Hz		
Temperature:	30-75℃	Product Size: 40*25.3*31.8CM		
Time Range: 0-24 hours		Drying Tray Size: 25.5*23CM		
Noise Level:	45-50dB	Control: Mechanical Control		
Features:	Mechanical Control With adged trays With additional 1pc crumb tray SUS304 trays SUS201 housing and liner Aluminum Handle			
G.W. : 7.2KG		Package Size	Package Size: 45.5*30.8*37.3CM	
Container Loading		20GP	520pcs	
		40HQ	1250pcs	

HOUSEHOLD FOOD DEHYDRATOR

HOUSEHOLD FOOD DEHYDRATOR			
Power:800W		Voltage:220-240V~50Hz/60Hz 110V~60Hz	
Temperature: 30-	75℃	Product Size: 44.4*30.3*37.8CM	
Time Range: 0-2	4 hours	Drying Tray Size: 30*28CM	
Noise Level: 45-	50dB	Control: Mecha	inical Control
· W · W Features: · SI · SI	Mechanical Control With edged trays With additional 1pc crumb tray SUS304 trays SUS201 housing and liner Aluminum Handle		
G.W. : 8.8KG		Package Size:	49.9*35.8*49.3CM
Container Loading		20GP	310pcs
		40HQ	760pcs





HOUSEHOLD FOOD DEHYDRATOR			
Power:800W	Voltage:220-240V~50Hz/60Hz 110V~60Hz		
Temperature: 30-75℃	Product Size: 44.4*30.3*37.8CM		

iomporataro.	30-73 C	FIDUUCI 5128. 44.4 50.5 57.6010		
Time Range:	0-24 hours	Drying Tray Size: 30*28CM		
Noise Level:	45-50dB	Control: Mechanical Control		
Features:	Mechanical Control With additional 1pc crumb tray With additional 1pc crumb tray SUS304 trays SUS201 housing and liner Aluminum Handle			
G.W. : 9.2KG		Package Size:	49.9*35.8*49.3CM	
Container Loading		20GP	310pcs	
		40HQ	760pcs	

SS-12J

SS-20J



COMMERCIAL FOOD DEHYDRATOR					
Power: 2000W	Voltage: 220-240V~50Hz/60Hz 110V~60				
Temperature: 40-90°C	Product Size: 52*50*82CM				
Time Range: 0-48 hours	Drying Tray Size: 40*38CM				
Noise Level: 50-55dB	Control: Mechanical Control				
Mechanical c 3 fans in the Features: With addition SUS304 tray SUS201 hou Aluminum Hz	compartment al 1pc crumb tray s sing and liner				
G.W.: 28KG	Package Size: 59*57*89CM				
Container Loading	20GP 85pcs				
	40HQ 220pcs				





SS-12JB

		LINAS	1917	16 LAYE
	scale and state		1	
	Section of the local division of the local d	-		
Ξ	The second se	-		
-	-	-		16 CAPAC
-	No. of Concession, Name	-		
H	Distantion of the local distance	-	C	CAPAC
-	Inter And Address of the	-	14	
Ĩ.,	All desidents	-	- 0.19	
-	State Street Street Street	-		
	A REAL PROPERTY.			100
				F
100		1. A		

SS-16J

Sec	0.00	and the second s		1
	0.000			
COLUMN TWO IS NOT				
Contractor of the				L .
and the second second	-			
A COLUMN TWO IS NOT				
and the second second				
and show the same		100		
And in case of the local division of the loc				
Statement Statement	-	100		
Statement of the local division of the local		-		Ι.
And in case of the local division of the loc		12.01		
States and States				
COLUMN AND IN COLUMN				
ALC: NO.	-			C
and the second division of the second divisio	and the second second			
and the second division of				``
States States				
-				
- Chinese	100 million (1997)			
-				
All of the local division in the	and the second se			
VOLUME IN	A DOM NOT			
1000 C			ACAULT.	
			- 17	
terre invit		100	-	
0	0 0 4 1			
S	S-24J			

2		
RS	Power: 1000V	V
	Temperature:	40-90℃
KG CITY	Time Range:	0-48 hours
	Noise Level:	50-55dB
	Features:	Mechanical of With addition SUS304 tray SUS201 hou Aluminum Ha
	G.W.: 20KG	

KG CITY

COMMERCIAL FOOD DEHYDRATOR

Power: 1000W		Voltage: 220-240V~50Hz/60Hz 110V~60H		
Temperature:	40-90°C	2*50*56CM		
Time Range:	0-48 hours	hours Drying Tray Size: 40*38CM		
Noise Level:	50-55dB	anical Control		
Features:	Mechanical control With additional 1pc crumb tray SUS304 trays SUS201 housing and liner Aluminum Handle			
G.W.: 20KG		Package Size:	59*57*63CM	
Container Loading		20GP	110pcs	
		40HO	300pcs	

COMMERCIAL FOOD DEHYDRATOR					
Power: 1500W	/	Voltage: 220-24	0V~50Hz/60Hz 110V~60Hz		
Temperature:	40-90 ℃	Product Size: 5	2*50*70CM		
Time Range:	0-48 hours	Drying Tray Size: 40*38CM			
Noise Level:	50-55dB	Control: Mecha	inical Control		
Features:	Mechanical control 2 fans in the compartment urres: With additional 1pc crumb tray SUS304 trays SUS201 housing and liner Auminum Handle				
G.W.: 25KG	G.W.: 25KG Package Size: 59*57*77CM				
Container Loading		20GP	100pcs		
	5	40HQ	250pcs		

COMMERCIAL FOOD DEHYDRATOR					
Power: 2000W		Voltage: 220-24	40V~50Hz/60Hz 110V~60Hz		
Temperature:	40-90℃	Product Size:	52*50*82CM		
Time Range:	0-48 hours	Drying Tray Si	ze: 40*38CM		
Noise Level:	50-55dB	Control: Mech	anical Control		
Features:	Mechanical control 3 fans in the compartment es: With additional 1pc crumb tray SUS304 trays SUS304 trays SUS201 housing and liner Aluminum Handle				
G.W.: 30.5KG		Package Size:	59*57*89CM		
Containen Loodinn	ading	20GP	85pcs		
Container Loading		40HQ	220pcs		





32 LAYERS

32kg capacity

40 LAYERS

40kg capacity

SS-32J


	COMMERCIAL FOOD DEHYDRATOR					
	Power: 3000W		Voltage: 220-240V~50Hz/60Hz			
	Temperature:	40-90℃	Product Size: 52*50*150CM			
	Time Range: 0-48 hours		Drying Tray Size: 40*38CM			
	Noise Level:	50-55dB	Control: Me	chanical Control		
Mechanical control 2 independent compartments 2 fans for each compartment With additional 2pcs crumb trays With ad wheels SUIS304 trays SUIS201 housing and liner Abriminum Handle						
	G.W.: 68KG		Package Siz	te: 62*60*170CM		
	Container Loading		20GP	40pcs		
			40HQ	100pcs		



COMMERCIAL FOOD DEHYDRATOR				
Power: 4000W	Voltage: 220-240V~50Hz/60Hz			
Temperature: 40-90 °C	Product Size: 52*50*165CM			
Time Range: 0-48 hours	Drying Tray Size: 40*38CM			
Noise Level: 50-55dB	Control: Mechanical Control			
Mechanical con 2 independent 3 fans for each With additional With additional With 4 wheels SUS304 trays SUS201 housin Aluminum Hanc	compartments compartment 2pcs crumb trays ig and liner			
G.W.: 85KG	Package Size: 62*60*185CM			
Container Loading	20GP 35pcs			
	40HQ 95pcs			



48 LAYERS 48kg CAPACITY	COMMERCIAL FOOD DEHYDRATOR				
	Power: 4000V	V	Voltage: 220-24	40V~50Hz/60Hz	
	Temperature:	40-90℃	Product Size: 5	2*50*165CM	
	Time Range:	0-48 hours	Drying Tray Siz	e: 40*38CM	
	Noise Level:	50-55dB	Control: Mech	anical Control	
	Features:	Mechanical con 2 independent of 3 fans for each With additional With 4 wheels SUS304 trays SUS201 housin Aluminum Hance	compartments compartment 2pcs crumb trays g and liner		
	G.W.: 89KG		Package Size:	62*60*185CM	
	Container Loa	adina	20GP	35pcs	
	Container Lodding		40HQ	95pcs	

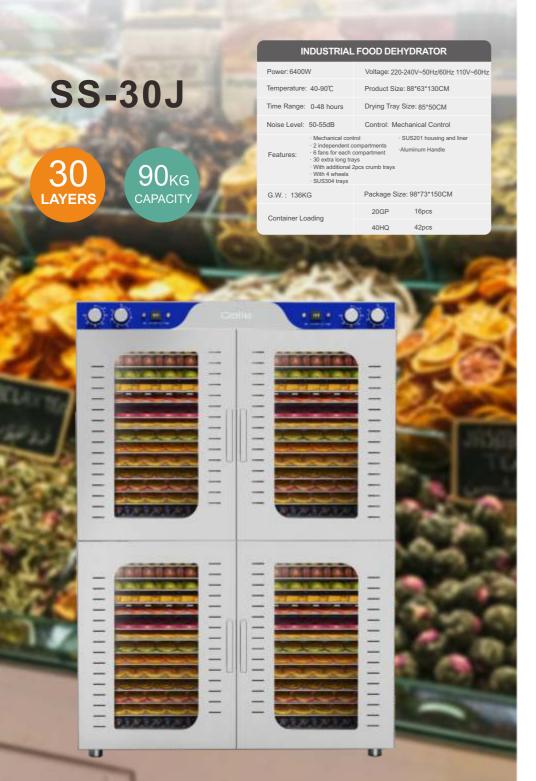



S

_ _ _ _ _ _ _ _ _ _ _

1 C at.

A. 42.101

	Container Loading	20GP 16pcs
SS-64J		40HQ 42pcs
80	INDUSTRIAL	FOOD DEHYDRATOR
LAYERS	Power: 6400W	Voltage: 220-240V~50Hz/60Hz
	Temperature: 40-90℃	Product Size: 85*52*181CM
80кд	Time Range: 0-48 hours	Drying Tray Size: 40*38CM
CAPACITY	Noise Level: 50-55dB	Control: Mechanical Control
	Mechanical co 4 independent 3 fans for each With additional With additional SUS304 trays SUS201 housi Aluminum Han	compartments compartment 2pcs crumb trays 1g and liner
a	G.W.: 138KG	Package Size: 95*62*200CM
	Container Loading	20GP 16pcs
SS-80J	2 cm 2 couding	40HQ 42pcs

64

64kg

96 AYER

96KG

Power: 6000W

Features:

G.W.: 110KG

Temperature: 40-90℃

Time Range: 0-48 hours

Noise Level: 50-55dB

Mechanical control

Wechanical control
 4 independent compartments
 2 fans for each compartment
 With additional 2pcs crumb trays
 With 4 wheels

SUS304 trays
 SUS201 housing and liner
 Aluminum Handle

	IN	IDUSTRIAL	FOOD DEF	IYDRATOR	
	Power: 6400V	V	Voltage: 220)-240V~50Hz/60H	łz
	Temperature:	40-90℃	Product Size	e: 85*52*181CM	
	Time Range:	0-48 hours	Drying Tray	Size: 40*38CM	
	Noise Level:	50-55dB	Control: Me	chanical Control	
	Features:	Mechanical con 4 independent o 3 fans for each With additional With 4 wheels SUS304 trays SUS201 housin Aluminum Hance	compartments compartment 2pcs crumb trays		
	G.W.: 138K0	3	Package Siz	e: 95*62*200CN	1
	Container Loading		20GP	16pcs	
	Container Eur		40HQ	42pcs	

INDUSTRIAL FOOD DEHYDRATOR

Voltage: 220-240V~50Hz/60Hz

Product Size: 85*52*166CM

Drying Tray Size: 40*38CM

Control: Mechanical Control

Package Size: 96*62*186CM



11	NDUSTRIAL	FOOD DEH	IYDRATOR	
Power: 7600	N	Voltage: 220	-240V~50Hz/60H	z
Temperature	40-90 ℃	Product Size	e: 85*52*181CM	
Time Range:	0-48 hours	Drying Tray	Size: 40*38CM	
Noise Level:	50-55dB	Control: Me	chanical Control	
Features:	 Mechanical cor 4 independent 3 fans for each With additional With additional With 4 wheels SUS304 trays SUS201 housin Aluminum Hano 	compartments compartment 2pcs crumb trays		
G.W.: 145K	G	Package Siz	e: 95*62*200CM	
Container Lo	ading	20GP	16pcs	
oontainor 20	dding	40HQ	42pcs	

SS-06A



HOUSEHOLD FOOD DEHYDRATOR			
Power: 700W	Voltage: 220-240V/50Hz/60Hz110V/60H		
Temperature: 35-85℃	Product Size: 35*45*32CM		
Time Range: 0-24 hours	Drying Tray Size: 28*30CM		
Noise Level: 45-50dB	Control: Digital Control		
Double layer housing With an inner LED light With additional 1pc crumb tray SUS304 trays SUS201 housing and galvanized liner Plastic handle with SS decorative plate			
G.W. :10.5KG	Package Size:51*38.5*35CM		
Container Loading	20GP 358pcs		
	40HQ 870pcs		



Power: 700W Voltage: 220-240V/50Hz/60Hz110V/60Hz Temperature: 35-85°C Product Size: 35*45*32CM Time Range: 0-24 hours Drying Tray Size: 28*30CM		
Time Range: 0-24 hours Drying Tray Size: 28*30CM		
Noise Level: 45-50dB Control: Digital Control		
Double layer housing With an inner LED light With additional 1pc crumb tray SUS304 trays SUS201 housing and galvanized liner Plastic handle with SS decorative plate		
G.W. :10.8KG Package Size: 51*38.5*35CM		
Container Loading 20GP 358pcs		
40HQ 870pcs		





HOUSEHOLD	FOOD DEHYDRATOR
Power: 700W	Voltage: 220-240V/50Hz/60Hz110V/60Hz
Temperature: 35-85℃	Product Size: 35*45*32CM
Time Range: 0-24 hours	Drying Tray Size: 28*30CM
Noise Level: 45-50dB	Control: Digital Control
 SUS304 tray SUS201 hou 	r UV light al 1pc crumb tray
G.W. :10.5KG	Package Size: 51*38.5*35CM
Container Loading	20GP 358pcs
Container Loading	40HQ 870pcs



	HOUSEHOLD FOOD DEHYDRATOR			DRATOR	
	Power: 700W		Voltage: 220-24	40V/50Hz/60Hz110V/60Hz	<u>,</u>
	Temperature: 35-85 °	5	Product Size: 3	35*45*32CM	
	Time Range: 0-24 ho	urs	Drying Tray Siz	ze: 28*30CM	
	Noise Level: 45-50dB	3	Control: Digita	I Control	
	Features: • Two d • With a • SUS3 • SUS2	ispláy b idditiona 04 trays 01 hous	al 1pc crumb tray	d liner	
	G.W. :10.8KG		Package Size:	51*38.5*35CM	
	Container Loading		20GP	358pcs	
			40HQ	870pcs	

SS-08C





SS-06F

- - - -

Avers Double Housing	Pe Te Ti
4кд сарасіту	Fe
Denu	G

SS-08F

	Double layer housing Large display screer Features: Preset dehydrating r With an inner LED lig With additional 1pc o	n · SL nenu · Hio ght	S304 trays S201 housing and galvanized len Handle	l liner
	G.W. :9KG	Package	Size: 41*50*32CM	
	Container Loading	20GP	400pcs	
	, i i i i i i i i i i i i i i i i i i i	40HQ	1000pcs	
	HOUSEHOLD	FOOD DI	EHYDRATOR	
)	HOUSEHOLD Power: 500W	_	EHYDRATOR 20-240V~50Hz/60Hz 110V~	-60Hz
)		Voltage:2		-60Hz
)	Power: 500W	Voltage:2: Product S	20-240V~50Hz/60Hz 110V~	-60Hz
)	Power: 500W Temperature: 30-85℃	Voltage:2: Product S Drying Tra	20-240V~50Hz/60Hz 110V~ ize: 34.5*39.5*22.5CM	-60Hz

HOUSEHOLD FOOD DEHYDRATOR

Voltage:220-240V~50Hz/60Hz 110V~60Hz

Product Size: 34.5*39.5*22.5CM

Drying Tray Size: 28*30CM

Control: Digital Control

Power: 500W

Temperature: 30-85℃

Time Range: 0-24 hours

Noise Level: 50-55dB

Noise Level: 50-55dB	Control: Digital Control
Double layer housin Large display screer Features: · Preset dehydrating r With an inner LED li With additional 1pc o	n · SUS201 housing and galvanized liner menu · Hiden Handle ght
G.W. :9KG	Package Size: 41*50*32CM
Container Loading	20GP 400pcs
	40HQ 1000pcs

• ## :: #### •		12 LAYER
		LAYER
		6ка сараси
200	-	

HOUSEHOLD FOOD DEHYDRATOR			
Power: 800W	Voltage:220-240V~50Hz/60Hz 110V~60Hz		
Temperature: 30-85℃	Product Size: 34.5*39.5*41CM		
Time Range: 0-24 hours	Drying Tray Size: 28*30CM		
Noise Level: 50-55dB	Control: Digital Control		
Double layer housin, Large display screer Features: Preset dehydrating r With an inner LED li With additional 1pc o	h SUS201 housing and galvanized liner nenu Hiden Handle ght		
G.W. :13KG	Package Size: 42*47*48CM		
Container Loading	20GP 260pcs		
5	40HO 670pcs		

	HOUSEHOLD FOOD DEHYDRATOR		HOUSEHO	DLD FOOD DEHYDRATOR	
	Power: 800W Voltage:220-240V~50Hz/60Hz 110V~60Hz		Power: 800W	Voltage:220-240V~50Hz/60Hz 110V~60Hz	
	Temperature: 30-85°C Product Size: 38. 8*43*41CM	00 400	Temperature: 30-85℃	Product Size: 33.8*43*41CM	
SS-10A	Time Range: 0-24 hours Drying Tray Size: 28*30CM	SS-10D	Time Range: 0-24 hours	Drying Tray Size: 28*30CM	
	Noise Level: 50-55dB Control: Digital Control		Noise Level: 50-55dB	Control: Digital Control	
10 LAYERS DOUBLE 5KG HOUSING CAPACITY	Double layer housing SUS201 housing and galvanized liner Large display screen Features: Preset dehydrating menu With an inner LED light With additional 1pc crumb tray SUS304 trays	DOUBLE HOUSING 5KG CAPACITY	Features: · With additi · SUS304 tr	ner LED light onal 1pc crumb tray ays ousing and galvanized liner	
	G.W. :13KG Package Size: 41*50*48CM		G.W. :13KG	Package Size: 41*50*48CM	
	Container Loading 20GP 260pcs		Container Loading	20GP 260pcs	
	40HQ 670pcs			40HQ 670pcs	
					2111
		Delig			
	Contraction of the second s				15



State and

-

-





HOUSEHOLD	FOOD DEHYDRATOR
Power: 500W	Voltage: 220-240V/50Hz/60Hz110V/60Hz
Temperature: 30-90°C	Product Size: 35*40*29CM
Time Range: 0-24 hours	Drying Tray Size: 28*30CM
Noise Level: 45-50dB	Control: Digital Control
Doublelayert With an inne With additior Features: SUS201 hou Aluminum Ha	r LED light ial 1pc crumb tray s sing and liner
G.W. :8.8KG	Package Size: 45*39.5*33CM
Container Loading	20GP 436pcs
Container Eddding	40HQ 1013pcs

6

JBLE ISING

Экg



SS-12H

Temperature: 30-90°C Product Size: 47*57*55CM Time Range: 0-24 hours Drying Tray Size: 40*38CM Noise Level: 50-55dB Control: Digital Control Peatures: • Double layer housing • With an inner LED light • With an inner LED light • With additional 1pc crumb tray • SUS304 trays • SUS201 housing and liner • Aluminum Handle G.W. :22.5KG Package Size: 62.5*52.5*60.5CM Container Loading 20GP 137pcs	HOUSEHOLD FOOD DEHYDRATOR				
Time Range: 0-24 hours Drying Tray Size: 40*38CM Noise Level: 50-55dB Control: Digital Control • Double layer housing • With an inner LED light • Features: • With additional 1pc crumb tray • SUS304 trays • SUS201 housing and liner • Aluminum Handle G.W. :22.5KG Package Size: 62.5*52.5*60.5CM Container Loading 20GP 137pcs	Power: 1000W	Voltage: 220-240V/50Hz/60Hz110V/60Hz			
Noise Level: 50-55dB Control: Digital Control Features: • Double layer housing • With an inner LED light • Digital Control Features: • With additional 1 pc crumb tray • SUS304 trays • SUS201 housing and liner • Aluminum Handle • SUS201 housing and liner G.W. :22.5KG Package Size: 62.5*52.5*60.5CM Container Loading 20GP 137pcs	Temperature: 30-90°C	Product Size: 47*57*55CM			
• Double layer housing • With an inner LED light • With additional 1pc crumb tray • SUS304 trays • SUS201 housing and liner • Aluminum Handle G.W. :22.5KG Package Size: 62.5*52.5*60.5CM Container Loading 20GP 137pcs	Time Range: 0-24 hours	Drying Tray Size: 40*38CM			
• With an inner LED light Features: • With additional 1pc crumb tray • SUS304 trays • SUS201 housing and liner • Aluminum Handle G.W. :22.5KG Package Size: 62.5*52.5*60.5CM Container Loading 20GP	Noise Level: 50-55dB	Control: Digital Control			
20GP 137pcs	With an inne Features: With additior SUS304 tray SUS201 hou	r LED light nal 1pc crumb tray /s ising and liner			
Container Loading	G.W. :22.5KG	Package Size: 62.5*52.5*60.5CM			
	Container Loading	20GP 137pcs			
40HQ 345pcs		40HQ 345pcs			

-	-		
	-		
	-		
		5	
-	-		
-			
- 29	122 0		
- 0000	-		
_ 0000			
W	12		
	T		

COMMERCIAL FOOD DEHYDRATOR			
Power: 1500W	Voltage: 220-240V/50Hz/60Hz110V/60Hz		
Temperature: 30-90°C	Product Size: 47*57*76CM		
Time Range: 0-24 hours	Drying Tray Size: 40*38CM		
Noise Level: 50-55dB	Control: Digital Control		
2 fans in the compartment Double layer housing with an inner LED light With a difficult if pc crumb tray With 4 wheels SUSS04 trays SUSS04 trays SUSS04 trays			
G.W. :26.5KG	Package Size:62.5*52.5*72.5CM		
Container Loading	20GP 102pcs		
, i i i i i i i i i i i i i i i i i i i	40HQ 256pcs		



COMMERCIA	L FOOD DI	HYDRATOR	
wer: 2000W	Voltage: 22	0-240V/50Hz/60Hz 110V	/60Hz
mperature: 30-90°C	Product Si	ze: 47*57*88CM	
ne Range: 0-24 hours	Drying Tray	y Size: 40*38CM	
ise Level: 50-55dB	Control: D	igital Control	
 3 fans in the c Double layer h With an inner With additiona With additiona With 4 wheels SUS304 trays SUS201 hous Aluminum Har 	nousing LED light al 1pc crumb tray		
W. :31KG	Package S	ize: 62.5*52.5*87.5CM	
ontainer Loading	20GP	76pcs	
	40HQ	200pcs	

and sales	0 0 0	an + - 6		
1. C. A. P.	-			121
1200	-			41
a star	-			
			A R	
WHE	-			
	_	Ξ	-	
	_	_		
		=		
	-	Ŧ	t	



с	OMMERCIA	L FOOD DEH	IYDRATOR
Power: 2000V	/	Voltage: 220-24	40V/50Hz/60Hz 110V/60Hz
Temperature:	30-90°C	Product Size: 4	17*57*88CM
Time Range:	0-24 hours	Drying Tray Siz	ze: 40*38CM
Noise Level:	50-55dB	Control: Digita	I Control
Features:	 3 fans in the corr Double layer hou With an inner LE With additional 1 With 4 wheels SUS304 trays SUS201 housing Aluminum Handl 	sing D light pc crumb tray and liner	
G.W. :32.5K	G	Package Size	e: 62.5*52.5*87.5CM
Container Loa	adina	20GP	76pcs
2 2 million Edg		40HQ	200pcs



Power: 3000W	Voltage: 220-2	
		240V/50Hz/60Hz
Temperature: 30-90°C	Product Size:	47*57*138CM
Time Range: 0-24 hours	Drying Tray Si	ze:40*38CM
Noise Level: 50-55dB	Control: Digita	al Control
 2 independent comp. 2 fans for each com Double layer housin With an inner LED ii With a ditional 2pos With 4 wheels SUS201 housing an Aluminum Handle 	partment Ig ight s crumb trays	
G.W. :70KG	Package Size:	66*53.5*147CM
Container Loading	20GP	62pcs
	40HQ	151pcs



SS-80H

DOUBLE

HOUSING

80кс

80

LAYERS

	INDUSTRIAL	FOOD DEHYDRATOR
	Power:6000W	Voltage: 220-240V/50Hz/60Hz
	Temperature: 30-90°C	Product Size: 94*54*168CM
	Time Range: 0-24 hours	Drying Tray Size: 40*38CM
	Noise Level: 50-55dB	Control: Digital Control
 4 independent 3 fans for each Double layer hc With an inner Li With additional With 4 dditional SUS304 trays SUS201 housin Auring Market 		compartment using ED light 4pcs crumb trays ig and liner
	G.W. :167KG	Package Size: 66*101*178.6CM
	Container Loading	20GP 16pcs
	gaing	40HQ 42pcs

111 23	3	:11 m i		
			THEFT THE TRANSPORTED FOR THE TARGET STATEMENT AND THE TARGET STATEMENT	
			111111	
			11111111	
IIIIIIIIIIII			11111	



80

DOUBL

96

DOUBLE

96kg



IN	IDUSTRIAL	FOOD DE	HYDRATOR
Power: 6000V	V	Voltage: 22	20-240V/50Hz/60Hz
Temperature:	30-90°C	Product Siz	ze: 94*54*168CM
Time Range:	0-24 hours	Drying Tray	/ Size: 40*38CM
Noise Level:	50-55dB	Control: Di	gital Control
Features:	4 indegradent compartments 3 fans for asch compartment 5 dans for asch compartment With an inner LED light With a dimicra LED light With a dimicra LED light With 4 dimicra less SUS304 farys SUS304 farys		
G.W. :167KG		Package S	ze: 66*101*178.6CM
Container Lo	ading	20GP	16pcs
Containor Eo		40HQ	42pcs



IN	DUSTRIAL	FOOD DE	IYDRATOR	
Power: 7600V	V	Voltage: 22	0-240V/50Hz/60Hz	
Temperature:	30-90°C	Product Size	e: 94*54*168CM	
Time Range:	0-24 hours	Drying Tray	Size: 40*38CM	
Noise Level:	50-55dB	Control: Dig	ital Control	
Features:	4 independent 3 fans for each Double layer ho with an inner LL With additional With 4 wheels SUS304 trays SUS201 housin Aluminum Hanc	compartment using ED light 4pcs crumb trays g and liner		
G.W. :170KG		Package Siz	e: 66*101*178.6Cl	M
Container Lo	adina	20GP	16pcs	
	0	40HQ	42pcs	



HOUSEHOLD FOOD DEHYDRATOR		
Power: 500W	Voltage: 220-240V/50Hz/60Hz110V/60	
Temperature: 30-90°C	Product Size: 33*31*27CM	
Time Range: 0-24 hours	Drying Tray Size: 28*20CM	
Noise Level: 45-50dB	Control: Digital Control	
With an inner LED light With additional 1pc crumb tray SUS304 trays SUS201 housing and liner Aluminum Handle		
G.W. :5.8KG	Package Size: 37.4*35.2*31CM	
Container Loading	20GP 635pcs	
Ū	40HQ 1545pcs	



HOUSEHOLD FOOD DEHYDRATOR				
Power: 1200W	Voltage: 220-240V/50Hz/60Hz110V/60Hz			
Temperature: 30-90°C	Product Size: 47*45*48CM			
Time Range: 0-24 hours	Drying Tray Size: 38*28.5CM			
Noise Level: 50-55dB	Control: Digital Control			
Features: · With additi · SUS304 tr	ousing and liner			
G.W. :12KG	Package Size: 51*49.5*51.5CM			
Container Loading	20GP 200pcs			
	40HQ 485pcs			



HOUSEHOLD FOOD DEHYDRATOR			
Power: 500W		Voltage: 220-24	40V/50Hz/60Hz110V/60Hz
Temperature: 30-	90°C	Product Size: 3	33*31*36CM
Time Range: 0-2	4 hours	Drying Tray Siz	ze: 28*20CM
Noise Level: 45-50dB		Control: Digita	I Control
Features: · SUS304 tr		nal 1pc crumb tra ys using and liner	ау
G.W. :7.2KG		Package Size:	37.4*35.2*39.5CM
Container Loading		20GP	490pcs
		40HO	1190pcs



COMMERCIAL FOOD DEHYDRATOR		
Power: 1500W	Voltage: 220-240V/50Hz/60Hz110V/60Hz	
Temperature: 30-90°C	Product Size: 46.5*40*58CM	
Time Range: 0-24 hours	Drying Tray Size: 38*28.5CM	
Noise Level: 50-55dB	Control: Digital Control	
2 fans in the compartment Double layer housing Features: With an umer L2D layer With a umer L2D layer With 4 wheels With 4 wheels SUS304 traps SUS304 traps SUS304 traps		
G.W. : 21KG	Package Size: 51*45*63CM	
Container Loading	20GP 180pcs 40HQ 460pcs	



HOUSEHOLD FOOD DEHYDRATOR		
Power: 1000W	Voltage: 220-240V/50Hz/60Hz110V/60H	
Temperature: 30-90°C	Product Size: 47*45*48CM	
Time Range: 0-24 hours	Drying Tray Size: 38*28.5CM	
Noise Level: 45-50dB	Control: Digital Control	
Features: · With addit · SUS304 to	ousing and liner	
G.W. :11.6KG	Package Size: 51*49.5*51.5CM	
Container Loading	20GP 200pcs	
	40HQ 485pcs	



COMMERCIAL FOOD DEHYDRATOR			
Voltage: 220-240V/50Hz/60Hz 110V/60Hz			
Product Size: 42*57*80CM			
Drying Tray Size: 40*38CM			
Control: Digital Control			
ompartment ousing LED light I fpc crumb tray ing and liner Indie			
Package Size: 47*62*85CM			
20GP 104pcs 40HQ 270pcs			



	HOUSEHOLD FOOD DEHYDRATOR			
	Power: 400W	Voltage: 22	0-240V/50Hz/60Hz ^	110V/60
	Temperature: 30-90°C	Product Siz	e: 30*30*24CM	
	Time Range: 0-24 hours	Drying Tray	Size: 28*20CM	
	Noise Level: 45-50dB	Control: Dig	gital Control	
	With additio Features: SUS304 tra SUS201 ho Aluminum h	using	ay	
	G.W. :5 KG	Package Si	ze: 36*37*28CM	
	Container Loading	20GP	500pcs	
Container Loading		40HQ	1300pcs	



HOUSEHOLD FOOD DEHYDRATOR

Power: 1000W	Voltage: 220-240V/50Hz/60Hz 110V/60Hz	
Temperature: 30-90°C	Product Size: 41*47*45cm	
Time Range: 0-24 hours	Drying Tray Size: 39*28CM	
Noise Level: 50-55dB	Control: Digital Control	
Features: · SUS304 trays · SUS201 hous	 With additional 1pc crumb tray SUS304 trays SUS201 housing Aluminum handle 	
G.W. :13KG	Package Size: 54*47*48CM	
Container Loading	20GP 210pcs	
0	40HQ 550pcs	



HOUSEHOLD FOOD DEHYDRATOR		
Power: 400W	Voltage: 220-240V/50Hz/60Hz 110V/60H;	
Temperature: 30-90℃	Product Size: 30*36*36CM	
Time Range: 0-24 hours	Drying Tray Size: 28*20CM	
Noise Level: 45-50dB	Control: Digital Control	
With additional 1pc crumb tray Features: SUS304 trays SUS201 housing Aluminum handle		
G.W. :7.4KG	Package Size: 41.5*36.5*38.5CM	
Casteiner Looding	20GP 440pcs	
Container Loading	40HQ 1160pcs	



Power: 400W Voltage:	Voltage: 220-240V/50Hz/60Hz 110V/60Hz	
Temperature: 30-90°C Product	Product Size: 32*40*25CM	
Time Range: 0-24 hours Drying Tr	Drying Tray Size: 30*28CM	
Noise Level: 45-50dB Control:	Digital Control	
Integrated design With additional 1pc crumi SUS304 trays SUS201 housing and line Aluminum handle		
G.W. :7.5KG Package	Size:45*36.5*28.5CM	
20GP 20GP	597pcs	
40HQ	1450pcs	



HOUSEHOLD FOOD DEHYDRATOR				
Power: 1000W	Voltage: 220-240V/50Hz/60Hz 110V/60Hz			
Temperature: 30-90°C	Product Size: 41*47*45CM			
Time Range: 0-24 hours	Drying Tray Size: 39*28CM			
Noise Level: 45-50dB	Control: Digital Control			
With addition Features: SUS304 tray SUS201 hou Aluminum ha	ising			
G.W. :12.5KG	Package Size: 54*47*48CM			
Container Loading	20GP 210pcs			
5	40HQ 550pcs			



HOUSEHOLD	FOOD DEHYDRATOR
Power: 500W	Voltage: 220-240V/50Hz/60Hz110V/60Hz
Temperature: 30-90°C	Product Size: 32*36*36CM
Time Range: 0-24 hours	Drying Tray Size: 28*20CM
Noise Level: 45-50dB	Control: Digital Control
 Integrated de With addition SUS304 tray SUS201 hou Aluminum ha 	nal 1pc crumb tray rs ising and liner
G.W. :8.6KG	Package Size: 45*36.5*36CM
Container Londing	20GP 440pcs

40HQ

1160pcs

Container Loading



HOUSEHOLD FOOD DEHYDRATOR					
Power: 1000W		Voltage: 220-240V/50Hz/60Hz110V/6			
Temperature:	30-90°C	Product Size: 42*43*45CM			
Time Range:	0-24 hours	Drying Tray	Size: 38*28CM		
Noise Level:	45-50dB	Control: Dig	gital Control		
Features:	Integrated design With additional 1pc crumb tray SUS304 trays SUS201 housing and liner Aluminum handle				
G.W. :13.6K0	6	Package Si	ze: 47*48.5*56CN	1	
Container Loading		20GP	190pcs		
		40HQ	384pcs		



HOUSEHOLD FOOD DEHYDRATOR				
Power: 1000W	Voltage: 220-240V/50Hz 110V/60Hz			
Temperature: 30-90°C	Product Size: 42*43*52CM			
Time Range: 0-24 hours	Drying Tray Size: 38*28CM			
Noise Level: 45-50dB	Control: Digital Control			
Features: • With addition • SUS304 tray • SUS201 hou	Integrated design With additional 1pc crumb tray SUS304 trays SUS201 housing and liner Aluminum handle			
G.W. :16KG	Package Size: 47*48*57CM			
Container Loading	20GP 190pcs			
	40HQ 384pcs			



COMMERCIAL FOOD DEHYDRATOR				
Power: 1500W	Voltage: 220-240V/50Hz/60Hz 110V/60Hz			
Temperature: 30-90°C	Product Size: 43*54*67CM			
Time Range: 0-24 hours	Drying Tray Size: 40*38CM			
Noise Level: 45-50dB	Control: Digital Control			
Features: Features: - Integrated de · With additior - SUS304 tray - SUS201 hou - Aluminum ha	al 1pc crumb tray s sing and liner			
G.W. :24KG	Package Size: 48*59*72CM			
Container Loading	20GP 100pcs			
Container Ebading	40HQ 270pcs			



COMMERCIAL FOOD DEHYDRATOR				
Power:2000W	Voltage: 22	20-240V/50Hz/60Hz 110	V/60Hz	
Temperature: 30-90°C	Product Si	ze: 43*54*82CM		
Time Range: 0-24 hours	Drying Tray Size: 40*38CM			
Noise Level: 45-50dB	Control: D	igital Control		
Features: • With addition • SUS304 tray • SUS201 hou	 Integrated design With additional 1pc crumb tray SUS304 trays SUS204 trays SUS204 housing and liner Aluminum handle 			
G.W. :31KG	Package S	ize:48*59*87CM		
Container Loading	20GP	100pcs		
Container Educing	40HQ	260pcs		



.



HOUSEHOLD FOOD DEHYDRATOR				
Power: 1000W		Voltage: 220-2	240V/50Hz/60Hz 110V/60Hz	
Temperature: 30-90°C		Product Size:	47*57*57CM	
Time Range: 0-24 ho	ours	Drying Tray Si	ize: 40*38CM	
Noise Level: 50-55dE	3	Control: Digita	al Control	
Double layer housing With additional 1pc crumbtray Features: SUS304 trays SUS201 housing and liner Aluminum handle				
G.W. :26.5KG	G.W. :26.5KG Package Size: 64*53*66CM			
Container Loading		20GP	110pcs	
5		40HQ	300pcs	



	COMMERCIAL FOOD DEHYDRATOR				
	Power: 1500	W	Voltage: 220-24	0V/50Hz/60Hz 110V/60ł	
	Temperature:	30-90°C	Product Size: 4	7*57*69CM	
	Time Range:	0-24 hours	Drying Tray Siz	e: 40*38CM	
	Noise Level:	50-55dB	Control: Digital	Control	
)	Features:	Double layer housing With additional 1pc crumb tray SUS304 trays SUS201 housing and liner Aluminum handle			
	G.W. :32.5K0	3	Package Size:	64*53*83CM	
	Container Lo	ading	20GP	102pcs	
			40HQ	256pcs	



36	COMMERCIA	L FOOD DEHYDRATOR
YERS	Power: 2400W	Voltage: 220-240V/50Hz/60Hz 110V/60Hz
	Temperature: 30-90°C	Product Size: 46*53*136CM
	Time Range: 0-24 hours	Drying Tray Size: 40*38CM
USING	Noise Level: 50-55dB	Control: Digital Control
86kg Pacity	 3 independent 1 fan for each e Double layer h With additional With additional SUS304 trays SUS201 housir Aluminum hance 	compartment using 3pcs crumb trays 1g and liner
	G.W. :70KG	Package Size: 67*56*155CM
	Container Loading	20GP 44pcs
	Container Loading	40HQ 110pcs



LT-102

20	COMMERCIAL FOOD DEHYDRATOR			
AYERS	Power: 2000W	Voltage: 220-240V/50Hz/60Hz 110V/60Hz		
	Temperature: 30-90°C	Product Size: 47*55*97CM		
OUBLE	Time Range: 0-24 hours	Drying Tray Size: 40*38CM		
IOUSING	Noise Level: 50-55dB	Control: Digital Control		
20kg apacity	 2 independent 1 fan for each Double layer h With additiona SUS304 trays SUS201 housi Aluminum har 	compartment iousing 12 pcs crumb trays ing and liner		
	G.W. :43KG	Package Size:66*54*97CM		
	Container Loading	20GP 76pcs		
	oontainor Loading	40HQ 200pcs		



32

D



30	COMMERCIAL FOOD DEHYDRATOR				
AYERS	Power: 2400W		Voltage: 220-	240V/50Hz/60Hz	110V/60Hz
	Temperature:	30-90°C	Product Size:	46*53*136CM	
OUBLE	Time Range:	0-24 hours	Drying Tray S	ize: 40*38CM	
OUSING	Noise Level:	50-55dB	Control: Digital Control		
30kg	Features:	 3 independent 1 fan for each o Double layer ho With additional With 4 wheels SUS304 trays SUS201 housir Aluminum hanc 	compartment ousing 3pcs crumb trays ng and liner		
	G.W. :68KG		Package Size	e:67*56*155CM	
	Container Loa	adina	20GP	44pcs	
	Container Loading		40HQ	110pcs	



$\gamma\gamma$

romporatoro.
Time Range:
Noise Level:
Features:
G.W. :77.5K0
Container Lo

COMMERCIAL FOOD DEHYDRATOR			
Power: 3000W	Voltage: 220-240V/50Hz/60Hz		
Temperature: 30-90°C	Product Size: 93*55*80CM		
Time Range: 0-24 hours	Drying Tray Size: 40*38CM		
Noise Level: 50-55dB	Control: Digital Control		
 2 independent (2 fan for each o Double layer ho With additional With additional With 4 wheels SUS304 trays SUS301 housin Aluminum hance 	compartment ousing 2pcs crumb trays 1g and liner		
G.W. :77.5KG Package Size: 108*68*96CM			
Container Loading	20GP 44pcs		
	40HQ 110pcs		



16

DOUBLE HOUSING

16кд сарасіту

29		COMMERCI	AL FOOD DEHYDRATOR	
ноо	ks	Power: 1500W	Voltage: 220V50Hz	
		Temperature: 30-90°C	Product Size: 44.5*59.5*75.5CM	
	RY	Time Range: 0-24 hours	Hook Qty: 29	
		Noise Level: 50-55dB	Control: Digital Control	
		 Large Cap: Rotary Dry Low Noise Convenien Clear Obse 	ing t Operation	
		G.W. :23.5KG	Package Size: 66*50.5*86.5CM	
y		Container Loading	20GP 90pcs	
LT-237			40HQ 230pcs	



58	COMMERCIAI	- FOOD DEHYDRATOR	
HOOKS	Power: 3200W	Voltage: 220V50Hz	
	Temperature: 30-90℃	Product Size: 44.5*59.5*172CM	
OTARY	Time Range: 0-24 hours	Hook Qty: 58	
	Noise Level: 50-55dB	Control: Digital Control	
60kg Capacity	2 Compartme Large Capacit Features: Rotary Drying Low Noise Convenient O Clear Observa	y peration	
	G.W. : 68KG	Package Size: 68*50*183CM	
	Container Loading	20GP 42pcs	
		40HQ 106pcs	




COMMERCIA	L FOOD DEHYDRATOR
Power: 1500W	Voltage: 220V50Hz
Temperature: 30-90℃	Product Size: 56.7*52.1*111CM
Time Range: 0-24 hours	Hook Qty: 29
Noise Level: 50-55dB	Control: Digital Control
Closed Drying Large Capaci Rotary Drying Low Noise Convenient C Clear Observ.	peration
G.W. : 50KG	Package Size:66*59*123CM
Container Loading	20GP 56pcs
	40HQ 139pcs



COMMERCIAL FOOD DEHYDRATOR					
Power: 2200W	Voltage: 220V50Hz				
Temperature: 30-90°C	Product Size: 69*82*96CM				
Time Range: 0-24 hours	Hook Qty: 61				
Noise Level: 50-55dB	Control: Digital Control				
Smoking Function Large Capacity Features: Rotary Drying Low Noise Convenient Operation Olera Observation					
G.W. : 88KG	Package Size: 92*77*108CM				
Container Loading	20GP 35pcs				
2	40HQ 87pcs				



20	COMMERCIAL FOOD DEHYDRATOR			
YERS	Power: 2000W	Voltage: 220-240V/50Hz/60Hz 110V/60Hz		
	Temperature: 30-90°C	Product Size: 44.5*59.5*95CM		
TARY	Time Range: 0-24 hours	Drying Tray Sizediameter 37.5CM (Round tra		
	Noise Level: 50-55dB	Control: Digital Control		
5kg PACITY	Features: • With 4 wh • SUS304 tr	ays ousing and liner		
	G.W. :33KG	Package Size:67*53*98CM		
	Container Loading	20GP 80pcs		
		40HQ 192pcs		

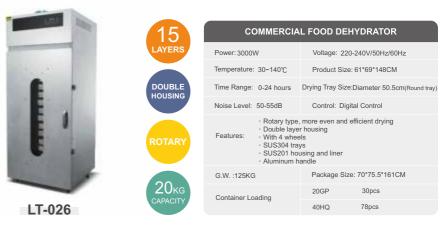



1110

STREETS NO.

LT-195

IN	IDUSTRIAL	FOOD DEHY	DRATOR
Power:4500V	V	Voltage: 220-2	40V/50Hz/60Hz
Temperature:	30-90°C	Product Size: 1	41*55*94CM
Time Range:	0-24 hours	Drying Tray Siz	e: 40*38CM
Noise Level:	50-55dB	Control: Digital	Control
S independent compartments 2 fan for each compartment Double layer housing With a dditional 3pcs crumb trays With 4 wheels SUSS01 trays SUSS01 trays SUSS01 trays			
G.W. :115KG		Package Size:	147*65*107CM
Container Londing		20GP	16pcs
Container LO	uung	40HQ	42pcs
Container Lo	ading		

INDUSTRIAL FOOD DEHYDRATOR

2 independent compartments
 6 fans for each compartment
 With additional 2pcs crumb trays
 With 4 wheels

20GP

40HQ

SUS304 trays
 SUS201 housing and liner
 Aluminum handle

Voltage: 220-240V/50Hz/60Hz

Product Size: 88*67*169CM

Drying Tray Size: 85*50CM

Package Size: 97*84*186CM

16pcs

42pcs

Control: Digital Control

Power: 7000W

Features:

G.W. :160KG

Container Loading

Temperature: 30-90°C

Time Range: 0-24 hours

Noise Level: 50-55dB

28

80kg



INDUSTRIAL	FOOD DEHYDRATOR
Power: 6000W	Voltage: 220-240V/50Hz/60Hz
Temperature: 30-90°C	Product Size: 94*54*168CM
Time Range: 0-24 hours	Drying Tray Size: 40*38CM
Noise Level: 50-55dB	Control: Digital Control
Features: • 2 fans for • With addit • With 4 wh • SUS304 t	rays nousing and liner
G.W. :135KG	Package Size:102*67*182CM
Container Loading	20GP 16pcs
oontainoi zoading	40HQ 42pcs



80

LAYER

80кс



LX-02

650pcs

1590pcs

40HQ





Solar Dehydrator

		INDUSTRIAL	FOOD DEHYDRATOR
S	D-01	Power: 800W	Voltage:220-240V~50Hz/60Hz 110V~60Hz
		Temperature: 60-80°C	Product Size: 105*51.2*90CM
		Fan Power: 12V/6W/3000r/s	Drying Tray Size: 46*42CM
		Noise Level: 45-50decibels	Control: Mechanical Control
6 LAYERS	SOLAR ENERGY 8KG CAPACITY	Features: · Daytime dryin	nd electric power dual sources g by sun, Night drying by electricity /3 electric power consumption
		G.W. : 43KG	Package Size: 117*65*38CM
		Container Loading	20GP 120pcs
		Container Eddaling	40HQ 310pcs
At i	1883-		

SD-02



INDUSTRIAL	FOOD DEHYDRATOR
Power: 2000W	Voltage:220-240V~50Hz/60Hz 110V~60Hz
Temperature: 35-85°C	Product Size: 89*63.1*51CM
Fan Power: 12V/6W/3000r/s	Drying Tray Size: 85*50CM
Noise Level: 50-55dB	Control: Mechanical Control
Features: Daytime of	ver and electric power dual sources frying by sun, Night drying by electricity to 2/3 electric power consumption els
G.W. : 50KG	Package Size: 97*70*58CM
Container Loading	20GP 65pcs
	40HQ 165pcs




Freeze Dryer



Lyophilizer(freeze dryer) executes a water removal process typically used to preserve perishable materials, to extend shelf life or make things more convenient for transport.

Lyophilizer works by freezing the material, then



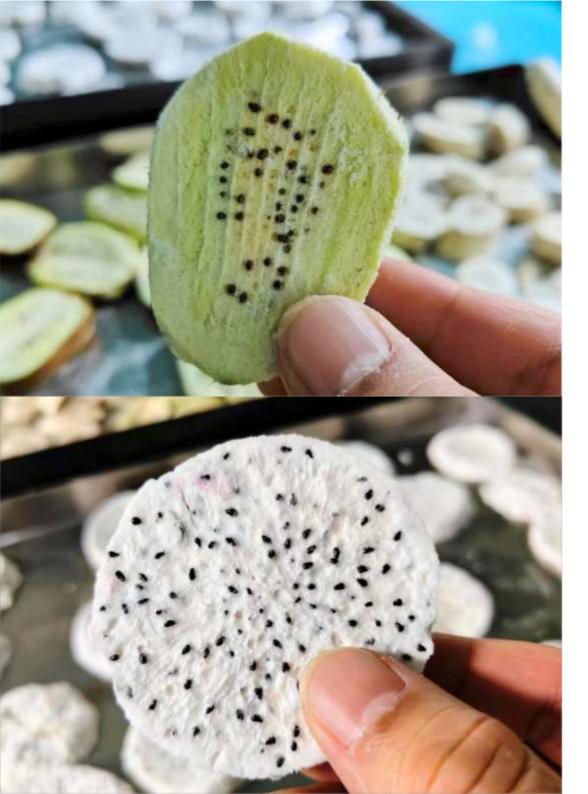



4 LAYERS

4KG CAPACITY

6kg capaci

Power: 1500W

Features:

G.W. :70KG

Drying Area: 0.4 m²

Noise Level: 50-55dB

DFD-04



	Container Loading		20GP	80pcs	
			40HQ	200pcs	
		COMMERC	IAL FREEZ	ZE DRYER	
RS	Power: 2000V	N	Voltage: 22	0-240V~50Hz/60Hz 110	√~60Hz
	Drying Area:	0.6m²	Product Siz	ze: 48*63*73CM	
;	Noise Level:	50-55dB	Control: Di	gital Control	
TY	Features:	Advanced D Intelligent Te Real Time Te	, ,	play	

	Noise Level:	50-55dB	Control: Digital	Control
	Features:	 Advanced Drying Tech Intelligent Temp Control Real Time Temperature Display Convenient Operation 		
	G.W. :80KG	Clear Obser	vation Package Size:	54*73*103CM
	Container Loading		20GP	60pcs
			40HQ	150pcs

COMMERCIAL FREEZE DRYER

 Advanced Drying Tech Intelligent Temp Control

• Real Time Temperature Display Convenient Operation

20GP

Clear Observation
 Package Size: 54*65*90CM

Voltage: 220-240V~50Hz/60Hz 110V~60Hz

80pcs

Product Size: 44*55*68CM

Control: Digital Control



DFD-10

6	COMMERCIAL FREEZE DRYER			
LAYERS	Power: 2200W		Voltage: 220-	240V~50Hz/60Hz 110V~60Hz
10kg capacity	Drying Area:	1.0m²	Product Size	: 54*70*80CM
	Noise Level:	50-55dB	Control: Digi	ital Control
	Features:	 Advanced Drying Tech Intelligent Temp Control Real Time Temperature Display Convenient Operation 		
	G.W. :90KG	Clear Obser		e: 64*80*110CM
	Container Loading		20GP	40pcs
			40HQ	110pcs

Auto Juicer





	0	CITI	RUS .	11110	CER
AUI	0		100.		

Power: 50W				
Voltage: 120V-220V, 50/60Hz				
Product Size: 190*159*287MM				
Package Size: 177*177*284	MM			
• 10 seconds for Features: • 85% Juice yie • Portable desig	 Hands free auto juicer & Easy operation 10 seconds for one juicer 85% Juice yield Portable design All detachable parts for easy cleaning 			
N.W. : 1.83KG	G.W. : 1.98KG	3		
Container Loading	20GP	3000pcs		
Ū	40HQ	7550pcs		

Detachable Components







DJ-002



AUTO CITRUS JUICER

AUTO CITRUS JUICER

· Hands free auto juicer & Easy operation · 10 seconds for one juicer

· All detachable parts for easy cleaning

G.W.: 1.98KG 20GP

40HQ

3000pcs

7550pcs

3850pcs

8840pcs

_ _ _ _ _ _ _ _ _ _

Voltage:	DC 7.4V
----------	---------

Power: 45W

Power: 50W

N.W. : 1.83KG

Container Loading

Voltage: 120V-220V, 50/60Hz Product Size: 190*159*287MM Package Size: 177*177*284MM

Features: . 85% Juice yield · Portable design

Product Size: 136*120*238MM

ackage Size: 163*163*270MM					
eatures:	Wireless and Very easy to v Juicing at one	e design, fashion of simplicity rechargeable wash and clean e press, effortless y with more than 60 times juicing			
1.W. : 0.82K	G	G.W. : 1.1KG			

20GP Container Loading 40HQ



AUTO CITRUS JUICER						
Power: 50W						
Voltage: 120V-220V, 50/60Hz						
	Product Size: 180*220*310MM					
	Package Size: 185*185*3	30MM				
	Features: · 12 second · All detacha · Comes with	Hands free auto juicer & Easy operation 12 seconds for one juicer All detachable parts for easy cleaning Comes with a removable universal filter Brushed S/S metal housing				
	N.W. : 2.2KG	G	G.W. : 2.6K0	÷		
Container Loading		2	0GP	2250pcs		
		4	10HQ	5650pcs		

AJ-001

_ _ _

Commercial Citrus Juicer CCJ-001

AUTO CITRUS JUICER

Control: Manual Control

Product Size: 35*20*50CM

Package Size: 38*48*55CM

Features:	ty for commercial usage arts for easy cleaning el body	
N.W. : 10KG	G.W. : 12KG	

Container Loading 20GP 280pcs 40HQ 660pcs



More Than 50 Dehydrator Models For Your Option



Foshan Dalle Technology Co.,Ltd

Room 701, Block 1, Guangyi Industrial Park, 9th Xingnan Road, Ronggui, Shunde District, Foshan City, Guangdong, China. Email:info@fsdalle.com Web: www.fsdalle.com