


KAB-A

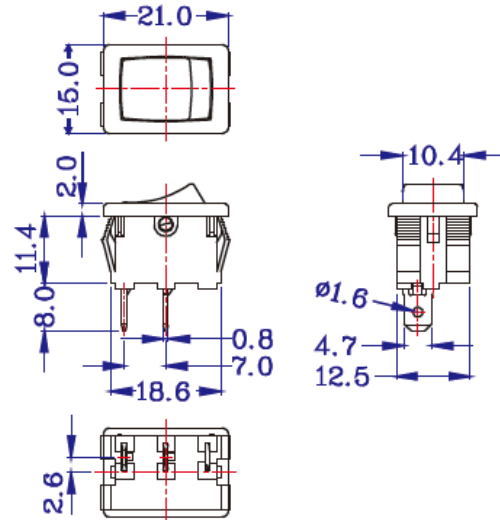


(Rating) 10A 250VAC 16A 125VAC
 1/2HP 125/250VAC
 10(6)A 250VAC 1E4
 6(4)A 250VAC 5E4

(Material) Plastic Key-Press Plastic Base
 (Function) ON-OFF

KAB-2B



长脚 LONG TERMINAL		
短脚 SHORT TERMINAL		

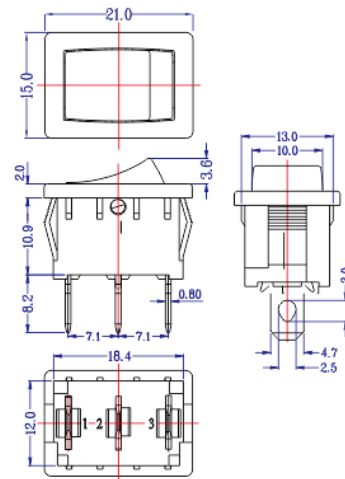


(Rating): 10A 250VAC 16A 125VAC
 1/2HP 125/250VAC
 10(6)A 250VAC 1E4
 6(4)A 250VAC 5E4

(Material) Plastic Key-Press / Plastic Base
 (Function) ON-ON / (ON)-ON / ON-(ON)

RK-01L




J
 Rating J8A 250VAC / 16A 125VAC
 Material JLS±M Plastic Base
 Function JON-OFF (W/ Neon lamp)

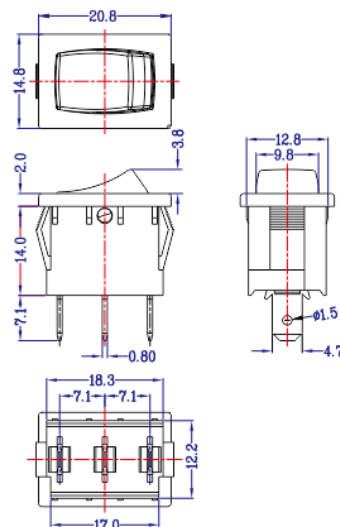


RK-02A



Rating J3A 250VAC / 6A 125VAC
 Material JLS±M Plastic Base
 Function JON-OFF-ON (1P2T)

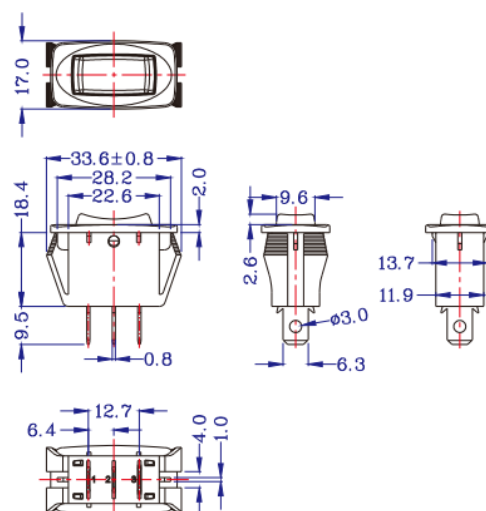


RK-02B

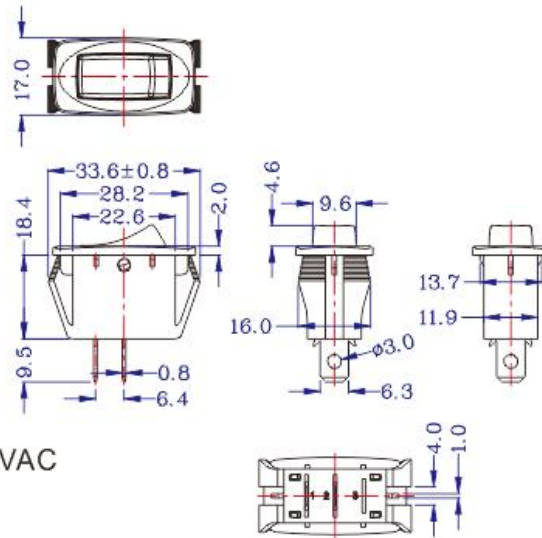

№öRating J3A 250VAC / 6A 125VAC
 IЦMaterial JЛS±M Plastic Base
 Function JON-OFF

RK-02B

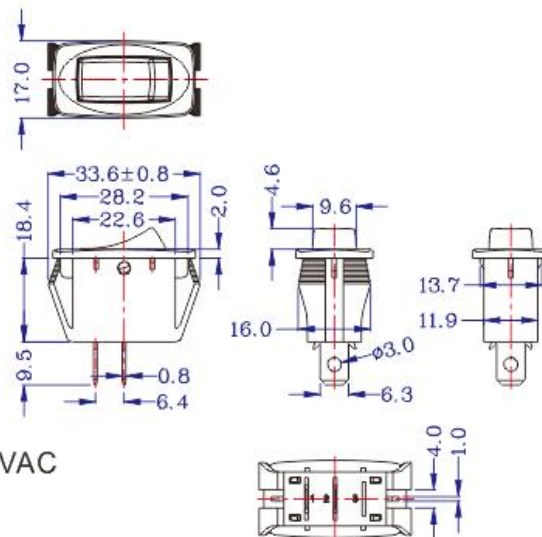


№öRating J3A 250VAC / 6A 125VAC
 IЦMaterial JЛS±M Plastic Base
 Function JON-OFF

RK-03




Rating J10A 250VAC 16A 125VAC
 1/2HP 250VAC 1/4HP 125VAC
 16(4)A 250VAC T105/55
 Material J Plastic Key-Press / Plastic Base
 Function JON-OFF(W/LIGHT)

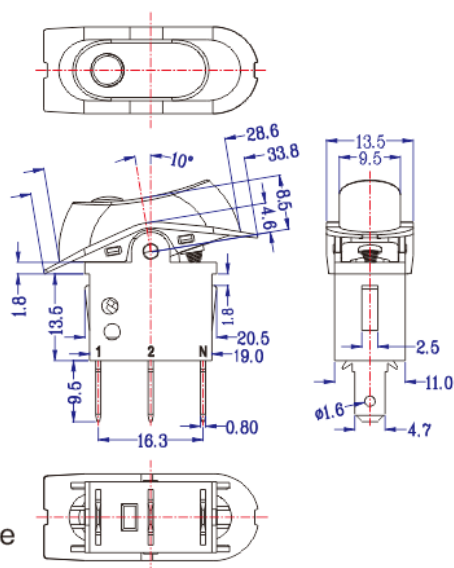

RK-04




Rating J12A 125VAC / 250VAC
 12(4)A 250VAC T105/55
 Material J Plastic Base
 Function JON-OFF(2P1T)(1P1T)

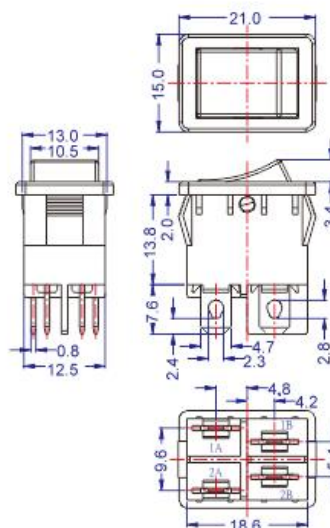


RK-07



Rating J10A 250VAC / 16A 125VAC
 16(3)A 250VAC T105/55
 Material J Plastic Base
 Function JOFF.L-1.L1+2

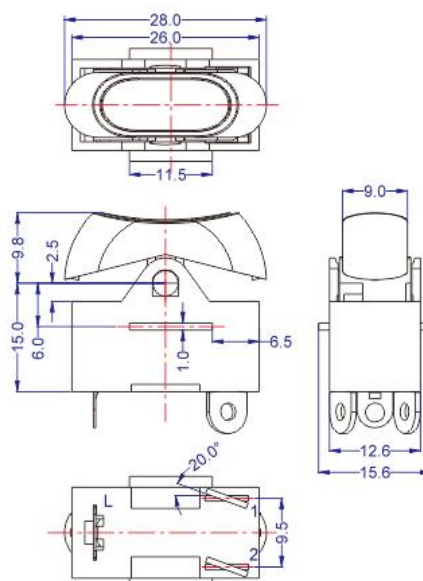

RK-09

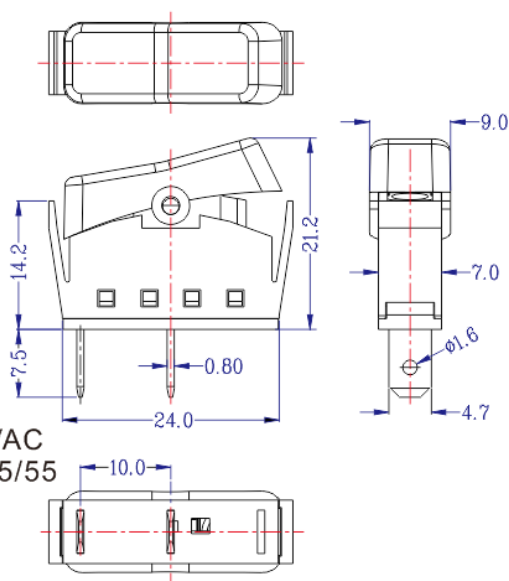

Rating J10A 250VAC / 16A 125VAC
10(3)A 250VAC T125/55
Material JLS±M Plastic Base
Function JON-OFF



ZE-235-2L II(防水)

Water Proof



Suggested panel hole size

Panel thickness	X
0.75~1.25	30.1
1.25~2.0	30.3
2.0~3.0	30.6

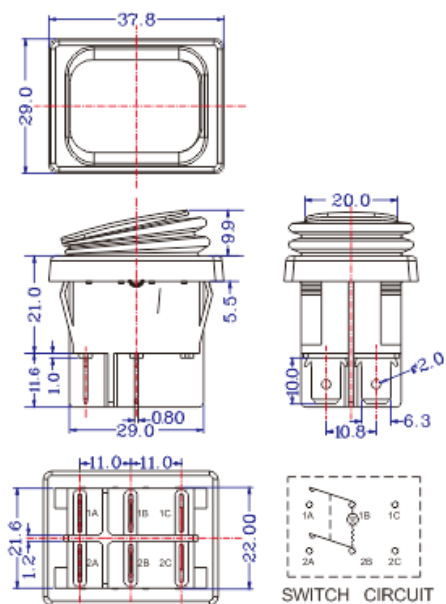







Rating J8A 250VAC / 16A 125VAC
5A 125VL / 16(8)A 250VAC
Material JLS±M (Plastic Base)
Function JON-OFF (2P1T) (rDμW/lamp))
Function JON-OFF (2P1T)

ZE-235-2 II





Suggested Panel Hole Size

Panel thickness	X
0.75~1.25	30.1
1.25~2.0	30.3
2.0~3.0	30.6



Rating J8A 250VAC / 16A 125VAC / 5A 125VL
16(8)A 250VAC
Material JLS±M Plastic Base
Function JON-OFF / (ON)-OFF / ON-(OFF)
(2P1T)(1P1T)

ZE-235-2

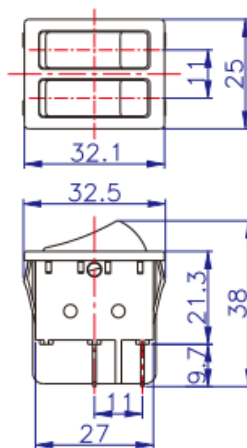

Rating J8A 250VAC / 16A 125VAC
5A 125VL / 16(8) 250VAC
Material JLS±M Plastic Base
Function JON-OFF(2P1T)







ZE-235-2L II(防水)

Water Proof






Suggested panel hole size

Panel thickness	X
0.75~1.25	30.1
1.25~2.0	30.3
2.0~3.0	30.6



Rating J8A 250VAC / 16A 125VAC
5A 125VL / 16(8)A 250VAC
Material JLS±M (Plastic Base)
№Д JON-OFF (2P1T) (гДμW/lamp))
Function JON-OFF (2P1T)




ZE-205A



Rating J10A 250VAC / 15A 125VAC / 6A 125VL
Material JLS±M
№Д JZE-205A iON / ZE-205B iOFF

Rating J10A 250VAC / 15A 125VAC / 6A 125VL
Material J Plastic Key-press / Plastic Base
Function JZE-205A Normally ON / ZE-205B Normally OFF


ZE-205



Rating J10A 250VAC / 15A 125VAC / 6A 125VL
Material JLS±M
№Д JON-OFF

Rating J10A 250VAC / 15A 125VAC / 6A 125VL
Material J Plastic Key-press Plastic Base
Function JON-OFF


ZE-201B (With Neon Light)

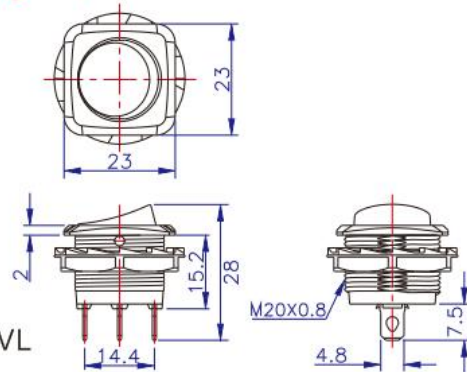

Rating J5A 250VAC / 10A 125VAC / 3A 125VL
Material J Plastic Key-press / Plastic Base
Function J ON-OFF (with Neon Light)

Rating J5A 250VAC / 10A 125VAC / 3A 125VL
Material J Plastic Key-press / Plastic Base
Function J ON-OFF (with Neon Light)

ZE-201A

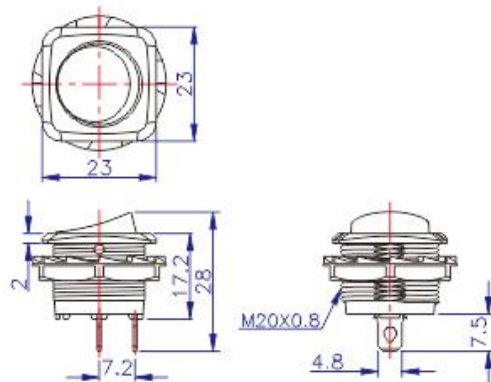


Rating J5A 250VAC / 10A 125VAC / 3A 125VL
Material J Plastic Key-press / Plastic Base
Function J ON-OFF

Rating J5A 250VAC / 10A 125VAC / 3A 125VL
Material J Plastic Key-press / Plastic Base
Function J ON-OFF

ZE-200-2



№J6A 250VAC / 10A 125VAC
5A 125VL / 3A 14VT / 6(1)A 250VAC
ИЦЛС°j ЛS±M
№ДJON-OFF (ijs)

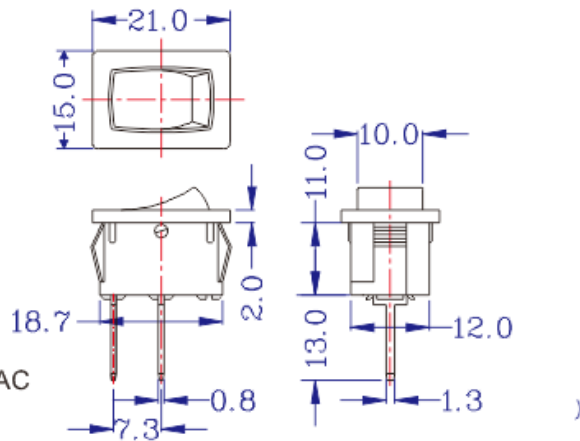


Rating J6A 250VAC / 10A 125VAC / 5A 125VL / 3A 14VT / 6(1)A 250VAC
Material J Plastic Key-press Plastic Base
Function JON-OFF (Long Thin Terminal)

RK-12



№J10A 250VAC / 16A 125VAC
Rating 16(6)A 250VAC T125/55 1E4
ИЦЛS±M
№ДJON-OFF(1P1T)
Material J Plastic Base
Function JON-OFF(1P1T)

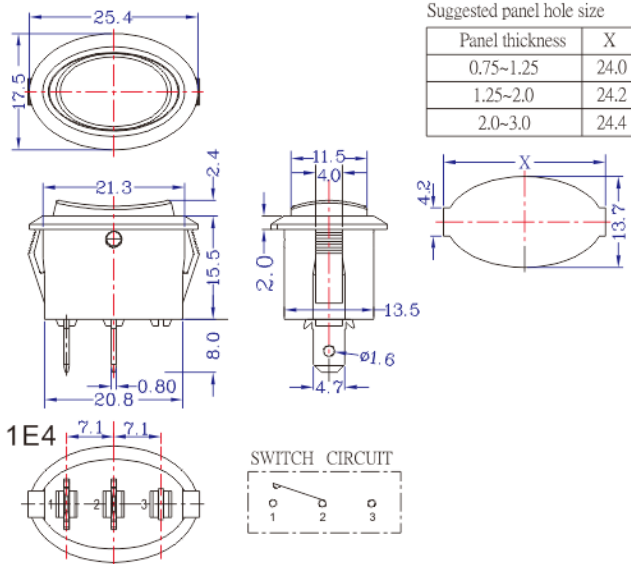


RK-10C



№J20A 12V (Pending)
ИЦЛS°j ЛS±M
№ДJ ON-OFF-(ON)


(Rating): 20A 12V (Pending)
Material J Plastic Key-Press/ Plastic Base
Function: ON-OFF-(ON)

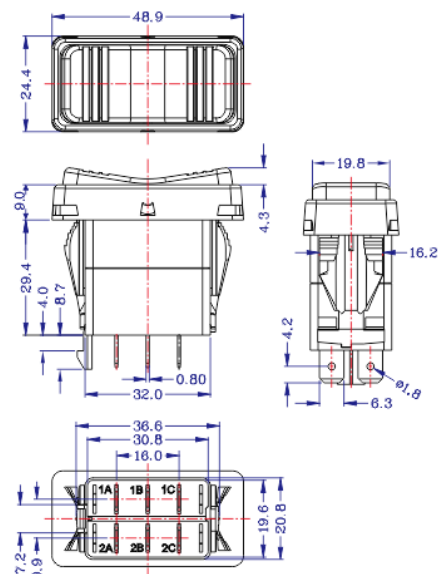

RK-10A



 (Rating) J20A 12V (Pending)
 1ЦJЛS°j ЛS±M
 Material JPlatic Key-Press/ Plastic Base
 №ДJ 1A 1B 1C
 Function J (ON) ON OFF
 2A 2B 2C
 ON OFF OFF


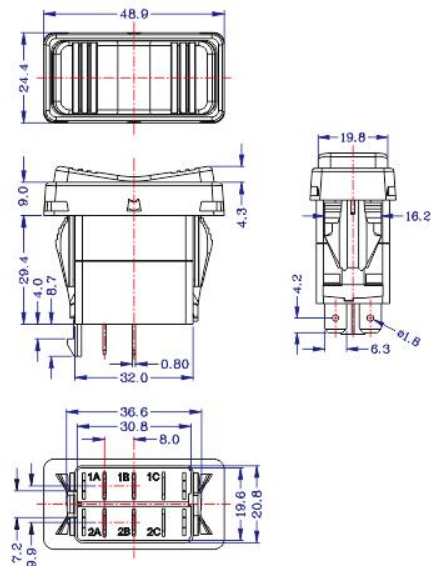


ZE-235-2L II



Suggested Panel Hole Size

Panel thickness	X
0.75~1.25	30.1
1.25~2.0	30.3
2.0~3.0	30.6

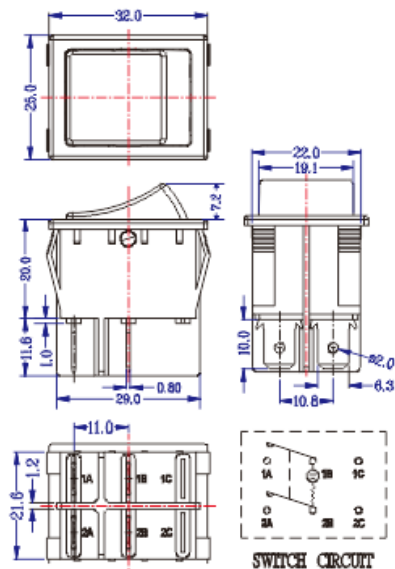

Rating J8A 250VAC / 16A 125VAC
5A 125VL / 16(8)A 250VAC
Material JLS±M Plastic Base
Function JON-OFF (2P1T)(1P1T)(rДμW/lamp)

