



Focusing on driving safety for large vehicles/video surveillance



SHENZHEN ZIYANGXING
TECHNOLOGY CO., LTD.



CONTENTS

Company Profile	01~02
Wired monitor&camera series	03~14
Wireless camera system series	15~24
WIFI APP series	25~25
Car monitor series	26~45
Baby monitor series	46~47
Car camera series	48~48
LCD Driver &Camera module series	49~52

Company Profile

Shenzhen Ziyangxing Technology Co.Ltd.

was founded in 2009 We are a high-tech enterprise who specializes in researching, developing, manufacturing and sales of various display systems product.

Through over 10 years development, we are able to supply comprehensive display system, such as car MDVR,dash cam,2.4G digital wireless camera system,etc. At present,it has 6 sets of SMT machines and 4 assembly lines and other advanced equipments to guarantee production capacity.

Also it has successfully passed ISO9001:2015、 ATF16949:2016、 E-Mark、 CE、 ROHS and other related quality management system certification and strict and effective implementation.

Now we already built hundreds sales channels in China.Meanwhile,we successfully had saled the goods to many overseas markets, such as Southeast,Asia,USA,Europe, Middle East,etc. Because of our flexible sales strategy, we are willing to accept all kinds of orders including OEM and ODM, what's more, we warmly welcome every customer to visit our factory from all over the world.

Factory Photos



Business Qualifications



1. Wired Monitor & Camera Series

Product name: 7Inch Camera Set

Features: Vehicle industrial-grade appearance design;
High-brightness LCD with energy-saving and long life;
AHD wide angle camera

Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage of monitor	DC12V-DC35V
Input signal	1080P/720P/CVBS
Display mode	Single screen, supports 2CH switching display
Image effects	Starlight full color/high definition with night vision
Image flip	Support
Reverse trigger	Support
Guide line	Support
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Power consumption	500mA
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation connetor: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable
Voltage of camera	DC12V
Angle of camera	115°
Waterproof level of camera	IP67
Appearance of camera	Various appearances available

Model: ZY-K701



Dimensions



Key Description

- 1 Menu
- 2 Channel switching
- 3 Decrease
- 4 OK
- 5 Increase
- 6 ON/OFF
- 7 Infrared reception

Product name: 7Inch 2CH Split Monitor Set

Features: Vehicle industrial-grade appearance design;
High-brightness LCD with energy-saving and long life;
AHD wide angle camera;
Split screen

Model: ZY-K702

Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage of monitor	DC12V-DC35V
Input signal	AHD1080P/720P
Display mode	Single screen/2 split screen
Image effects	Starlight full color/high definition with night vision
Mirror function	Support
Reverse trigger	Support
Mirror function	Optional
Touch function	Optional
Guide line	On/off, adjustable
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Power consumption	Less than 1A
Storage function	Max support 128G
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation conneter: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable
Voltage of camera	DC12V
Angle of camera	115°
Waterproof level of camera	IP67
Appearance of camera	Various appearances available
Voice control	Optional, supports Chinese
Parking monitoring	Optional, on/off



Dimensions



Key Description

- 1 Menu
- 2 Channel switching
- 3 Decrease
- 4 OK
- 5 Increase
- 6 ON/OFF
- 7 Infrared reception

Product name: 7Inch 4CH Quad Monitor Set

Features: Vehicle industrial-grade appearance design;
High-brightness LCD with energy-saving and long life;
AHD wide angle camera;
Quad screen

Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage of monitor	DC12V-DC35V
Input signal	AHD1080P/720P
Display mode	Single screen/2 Split screen/ 4 Quad screen
Image effects	Starlight full color/high definition with night vision
Mirror function	Support
Trigger function	3CH triggering
Multimedia function	Optional
Touch function	Optional
Guide line	On/off, adjustable
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Power consumption	Less than 2A
Storage function	Max support 256G
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation connetor: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable
Voltage of camera	DC12V
Angle of camera	115°
Waterproof level of camera	IP67
Appearance of camera	Various appearances available
Voice control	Optional, supports Chinese
Parking monitoring	Optional, on/off

Model: ZY-K704



Dimensions



Key Description

- ① Menu
- ② Channel switching
- ③ Decrease
- ④ OK
- ⑤ Increase
- ⑥ ON/OFF
- ⑦ Infrared reception

Product name: 7Inch 2CH Split Monitor Set with BSD

Features: Vehicle industrial-grade appearance design;
High-brightness LCD with energy-saving and long life;
AHD wide angle camera;
Split screen with BSD function

Model: ZY-K702BSD

Parameters

Item	Parameters
Algorithm	Yes
Screen Resolution	1024*600
Voltage of monitor	DC12V-DC35V
Input signal	AHD1080P/720P
Display mode	Single screen/2 split screen
Image effects	Starlight full color/high definition with night vision
Image flipping	Support
Reverse trigger	Support
Multimedia function	Optional
Touch function	Optional
Guide line	Adjustable
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Power consumption	Less than 1A
Storage function	Max support 128G
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation conneter: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable
Voltage of camera	DC12V
Angle of camera	115°
Waterproof level of camera	IP67
Waterproof level of camera	Various appearances available
Waterproof level of Alarm	IP67
Alarm language	Chinese or English or Other languages can be customized
Alarm voice content	Customizable
Voice control	Optional, supports Chinese
Parking monitoring	Optional, on/off



Dimensions



Key Description

- ① Menu
- ② Channel switching
- ③ Decrease
- ④ OK
- ⑤ Increase
- ⑥ ON/OFF
- ⑦ Infrared reception

Product name: 7Inch 4CH Quad Monitor Set with BSD

Features: Vehicle industrial-grade appearance design;
High-brightness LCD with energy-saving and long life;
AHD wide angle camera;
Quad screen with BSD function

Parameters

Item	Parameters
Algorithm	Yes
Screen Resolution	1024*600
Voltage of monitor	DC12V-DC35V
Input signal	AHD1080P/720P
Display mode	Single screen/2 Split screen/ 4 Quad screen
Image effects	Starlight full color/high definition with night vision
Mirror function	Support
Reverse trigger	Support 3CH triggering
Multimedia function	Optional
Touch function	Optional
Guide line	On/off, adjustable
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Power consumption	Less than 1A
Storage function	Max support 256G
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation conneter: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable
Voltage of camera	DC12V
Angle of camera	115°
Waterproof level of camera	IP67
Waterproof level of camera	Various appearances available
Waterproof level of Alarm	IP67
Alarm language	Chinese or English or Other languages can be customized
Alarm voice content	Customizable
Voice control	Optional, supports Chinese
Parking monitoring	Optional, on/off

Model: ZY-K704BSD



Dimensions



Key Description

- 1 Menu
- 2 Channel switching
- 3 Decrease
- 4 OK
- 5 Increase
- 6 ON/OFF
- 7 Infrared reception

Product name: 10Inch 4CH Quad Monitor Set

Features: Vehicle industrial-grade appearance design;
High-brightness LCD with energy-saving and long life;
AHD wide angle camera;
Quad screen


Model: ZY-K1014

Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage of monitor	DC12V-DC35V
Input signal	AHD1080P/720P
Display mode	Single screen/2 Split screen/ 4 Quad screen
Image effects	Starlight full color/high definition with night vision
Mirror function	Support
Trigger function	3CH triggering
Multimedia function	Optional
Touch function	Optional
Guide line	On/off, adjustable
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Power consumption	Less than 2A
Storage function	Max support 256G
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation conneter: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable
Voltage of camera	DC12V
Angle of camera	115°
Waterproof level of camera	IP67
Appearance of camera	Various appearances available
Voice control	Optional, supports Chinese
Parking monitoring	Optional, on/off



Dimensions

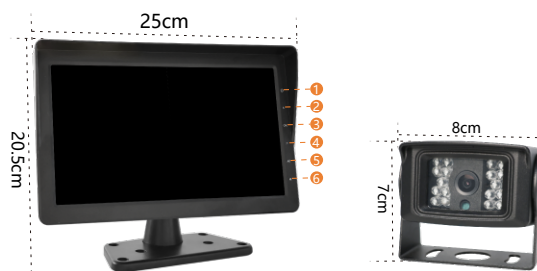

Key Description

- | | | |
|------------|---------------------|--------|
| 1 ON/OFF | 2 Increase | 3 OK |
| 4 Decrease | 5 Channel switching | 6 Menu |

Product name: 10Inch 4CH Quad Monitor Set with BSD

Features: Vehicle industrial-grade appearance design;
High-brightness LCD with energy-saving and long life;
AHD wide angle camera;
Quad screen with BSD function


Parameters

Item	Parameters
Algorithm	Yes
Screen Resolution	1024*600
Voltage of monitor	DC12V-DC35V
Input signal	AHD1080P/720P
Display mode	Single screen/2 Split screen/ 4 Quad screen
Image effects	Starlight full color/high definition with night vision
Mirror function	Support
Reverse trigger	Support 3CH triggering
Multimedia function	Optional
Touch function	Optional
Warning area	Adjustable
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Power consumption	Less than 2A
Storage function	Max support 256G
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation connetor: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable
Voltage of camera	DC12V
Angle of camera	115°
Waterproof level of camera	IP67
Appearance of camera	Various appearances available
Waterproof level of Alarm	IP67
Alarm language	Chinese or English or Other languagescan be customized
Alarm voice content	Customizable

Model: ZY-K1014BSD



Dimensions

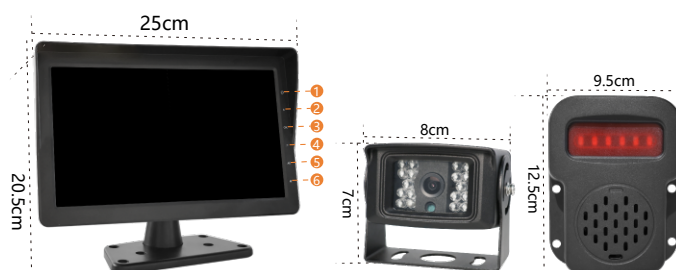

Key Description

- 1 ON/OFF
- 2 Increase
- 3 OK
- 4 Decrease
- 5 Channel switching
- 6 Menu

Product name: 10Inch 4CH Quad Monitor Set

Features: Vehicle industrial-grade appearance design;
High-brightness LCD with energy-saving and long life;
AHD wide angle camera;
Quad screen


Model: ZY-K1015

Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage of monitor	DC12V-DC35V
Input signal	AHD1080P/720P
Display mode	Single screen/2 Split screen/ 4 Quad screen
Image effects	Starlight full color/high definition with night vision
Mirror function	Support
Trigger function	3CH triggering
Multimedia function	Optional
Touch function	Optional
Guide line	Adjustable
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Power consumption	Less than 2A
Storage function	Max support 256G
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation conneter: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable
Voltage of camera	DC12V
Angle of camera	115°
Waterproof level of camera	IP67
Appearance of camera	Various appearances available
Voice control	Optional, supports Chinese
Parking monitoring	Optional, on/off



Dimensions

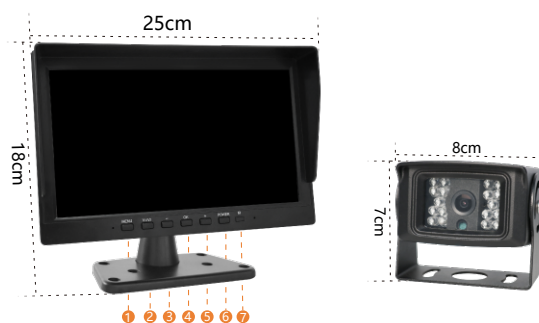

Key Description

- ① Menu
- ② Channel switching
- ③ Decrease
- ④ OK
- ⑤ Increase
- ⑥ ON/OFF
- ⑦ Infrared reception

Product name: 10Inch 4CH Quad Monitor Set with BSD

Features: Vehicle industrial-grade appearance design;
High-brightness LCD with energy-saving and long life;
AHD wide angle camera;
Quad screen with BSD function


Model: ZY-K1015BSD

Parameters

Item	Parameters
Algorithm	Yes
Screen Resolution	1024*600
Voltage of monitor	DC12V-DC35V
Input signal	AHD1080P/720P
Display mode	Single screen/2 Split screen/4 Quad screen
Image effects	Starlight full color/high definition with night vision
Mirror function	Support
Reverse trigger	Support 3CH triggering
Multimedia function	Optional
Touch function	Optional
Warning area	Adjustable
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Power consumption	Less than 2A
Storage function	Max support 256G
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation connetor: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable
Voltage of camera	DC12V
Angle of camera	115°
Waterproof level of camera	IP67
Appearance of camera	Various appearances available
Waterproof level of Alarm	IP67
Alarm language	Chinese or English or Other languages can be customized
Alarm voice content	Customizable



Dimensions

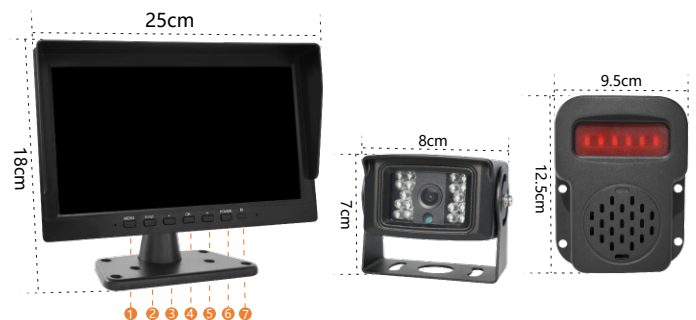

Key Description

- 1 ON/OFF
- 2 Channel switching
- 3 Decrease
- 4 OK
- 5 Increase
- 6 ON/OFF
- 7 Infrared reception

Product name: 10.36Inch Electronic Mirror Set

Features: High-brightness LCD with energy-saving and long life;
Touch function, Wide Angle AHD Camera


Model: ZY-K1036

Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage of monitor	DC12V-DC35V
Input signal	1080P/720P
Display mode	Single screen/2 Split screen
Image display ratio	1:1/3:7/4:6
Loop recording	5 minutes/10 minutes
Blind spot warning calibration	Can be set
Sensitivity	Can be set
Mirror function	Support
Voice control	Support Chinese voice control
Audio	Support recording and playback
Alarm	Support
Parking monitoring	Support
Touch function	Support
LOGO	Customizable
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Power consumption	Less than 2A
Storage function	Max support 256G
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation connetor: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Touch
Voltage of camera	DC12V
The angle of camera	Down 110°/ Back 150°
Waterproof level of camera	IP67
Appearance of camera	Various appearances available



Dimensions

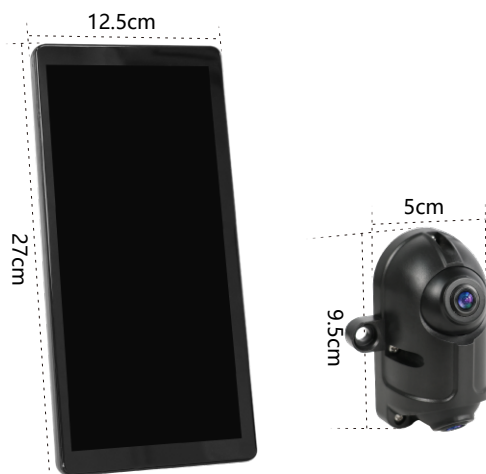

Product name: 10.36Inch Electronic Mirror Set

Features: High-brightness LCD with energy-saving and long life;
Touch function, Wide Angle AHD Camera


Model: ZY-K1034

Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage of monitor	DC12V-DC35V
Input signal	1080P/720P
Display mode	Single screen/2 Split screen
Image display ratio	1:1/3:7/4:6
Loop recording	5 minutes/10 minutes
Blind spot warning calibration	Can be set
Sensitivity	Can be set
Mirror function	Support
Voice control	Support Chinese voice control
Audio	Support recording and playback
Alarm	Support
Parking monitoring	Support
Touch function	Support
LOGO	Customizable
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Power consumption	Less than 2A
Storage function	Max support 256G
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation connetor: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Touch
Voltage of camera	DC12V
The angle of camera	Down 110°/ Back 150°
Waterproof level of camera	IP67
Appearance of camera	Various appearances available



Dimensions

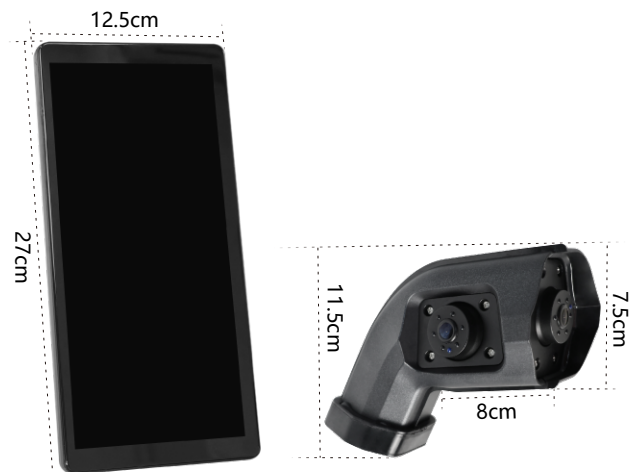

2. Wireless Camera System Series

Product name: 7Inch Wireless Solar Camera System

Features: High-brightness IPS LCD with energy-saving and long life; RF2.4G digital wireless transmission, strong anti-interference ability and long transmission distance; Strong magnetic camera easy to install;

Parameters

Item	Parameters
Transmission	RF2.4G digital wireless
Screen Resolution	1024*600
Voltage of monitor	DC12V-DC35V
Input signal	AHD1080P/720P
Display mode	Single screen/2 Split screen/4 Quad screen
Flip	Support
Guide line	On/off, adjustable
Mirror function	On/off
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Loop recording	Support
Storage function	Max support 128G
Transmission distance	450 meters (in the open area)
Language	Chinese, English, Italian, Spanish, German, Japanese, Russian, French, etc.
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable
Image enlargement	Support
Angle of camera	135°
Waterproof level of camera	IP67
Camera built-in battery	10000mA
Accessories	Power bank/ solar panel

Model: ZY-W713



Dimensions



Key Description

- | | | |
|------------|--------|---------------------|
| 1 ON/OFF | 2 OK | 3 Channel switching |
| 4 Decrease | 5 Menu | 6 Increase |

Product name: 7Inch Digital Wireless Camera System

Model: ZY-W706

Features: High-brightness IPS LCD with energy-saving and long life; RF2.4G digital wireless transmission, strong anti-interference ability and long transmission distance;

Parameters

Item	Parameters
Transmission	RF2.4G digital wireless
Screen Resolution	1024*600
Voltage of monitor	DC12V-DC35V
Input signal	AHD1080P/720P
Display mode	Single screen/2 Split screen/4 Quad screen
Flip	Support
Guide line	On/off, adjustable
Mirror function	On/off
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Loop recording	Support
Storage function	Max support 128G
Transmission distance	450 meters (in the open area)
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable
Image enlargement	Support
Angle of camera	135°
Waterproof level of camera	IP67
Accessories	Power bank/ solar panel



Dimensions



Key Description

- | | | |
|------------|--------|---------------------|
| ① ON/OFF | ② OK | ③ Channel switching |
| ④ Decrease | ⑤ Menu | ⑥ Increase |

Product name: 7Inch Digital Wireless Camera System

Features: Vehicle industrial-grade appearance design;
High-brightness IPS LCD with energy-saving and long life;
RF2.4G digital wireless transmission, strong
anti-interference ability and long transmission distance;

Parameters

Item	Parameters
Transmission	RF2.4G digital wireless
Screen Resolution	1024*600
Voltage	TYPE-C 5V
Input signal	AHD1080P/720P
Display mode	Single screen/2 split screen
Screensaver	Close, 30s/60s/120s
Guide line	On/off
Flip	On/off
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Loop recording	Support
Storage function	Max support 128G
Transmission distance	450 meters (in the open area)
Language	Chinese, English
Protection level	More than IK07
Operating mode	Touch Screen
LOGO	Customizable
Angle of camera	135°
Waterproof level of camera	IP67
Accessories	Power bank/ solar panel

Monitor Parameters

Power interface Typy-c
Monitor with front camera

Model: ZY-W788



Dimensions



Product name: 7Inch Digital Wireless Camera System

Features: Vehicle industrial-grade appearance design;
High-brightness IPS LCD with energy-saving and long life;
RF2.4G digital wireless transmission, strong
anti-interference ability and long transmission distance;

Parameters

Item	Parameters
Transmission	RF2.4G digital wireless
Screen Resolution	1024*600
Voltage of monitor	DC12V-DC35V
Input signal	AHD1080P/720P
Display mode	Single screen/2 Split screen/ 4 Quad screen
Flip	Support
Guide line	On/off, adjustable
Mirror function	On/off
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Loop recording	Support
Storage function	Max support 128G
Transmission distance	450 meters (in the open area)
Language	Chinese, English, Italian, Spanish, German, Japanese, Russian, French, etc.
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable
Angle of camera	135°
Waterproof level of camera	IP67
Accessories	Power bank/ solar panel
Image enlargement	Support

Model: ZY-W722



Dimensions



Key Description

- 1 ON/OFF
- 2 Increase
- 3 Decrease
- 4 Menu
- 5 OK
- 6 Channel switching

Product name: 7Inch Digital Wireless Camera System

Features: Vehicle industrial-grade appearance design;
High-brightness IPS LCD with energy-saving and long life;
RF2.4G digital wireless transmission, strong anti-interference ability and long transmission distance;

Parameters

Item	Parameters
Transmission	RF2.4G digital wireless
Screen Resolution	1024*600
Voltage of monitor	DC12V-DC35V
Input signal	AHD1080P/720P
Display mode	Single screen/2 Split screen/ 4 Quad screen
Flip	Support
Guide line	On/off, adjustable
Mirror function	On/off
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Loop recording	Support
Storage function	Max support 128G
Transmission distance	450 meters (in the open area)
Language	Chinese, English, Italian, Spanish, German, Japanese, Russian, French, etc.
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable
Angle of camera	135°
Waterproof level of camera	IP67
Accessories	Power bank/ solar panel
Image enlargement	Support

Model: ZY-W726



Dimensions



Key Description

- ① OK
- ② Channel switching
- ③ Decrease
- ④ Menu
- ⑤ Increase
- ⑥ ON/OFF

Product name: 10.1Inch Digital Wireless Camera System

Features: Vehicle industrial-grade appearance design;
High-brightness IPS LCD with energy-saving and long life;
RF2.4G digital wireless transmission, strong
anti-interference ability and long transmission distance;

Parameters

Item	Parameters
Transmission	RF2.4G digital wireless
Screen Resolution	1024*600
Voltage of monitor	DC12V-DC35V
Input signal	AHD1080P/720P
Display mode	Single screen/2 Split screen/ 4 Quad screen
Flip	Support
Guide line	On/off, adjustable
Mirror function	On/off
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Loop recording	Support
Storage function	Max support 128G
Transmission distance	450 meters (in the open area)
Language	Chinese, English, Italian, Spanish, German, Japanese, Russian, French, etc.
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable
Angle of camera	135°
Waterproof level of camera	IP67
Accessories	Power bank/ solar panel
Image enlargement	Support

Model: ZY-W108



Dimensions



Key Description

- 1 OK
- 2 Channel switching
- 3 Decrease
- 4 Menu
- 5 Increase
- 6 ON/OFF

Product name: 10.1 Inch Digital Wireless Camera System

Model: ZY-W1006

Features: Vehicle industrial-grade appearance design;
High-brightness IPS LCD with energy-saving and long life;
RF2.4G digital wireless transmission, strong
anti-interference ability and long transmission distance;

Parameters

Item	Parameters
Transmission	RF2.4G digital wireless
Screen Resolution	1024*600
Voltage of monitor	DC12V-DC35V
Input signal	AHD1080P/720P
Display mode	Single screen/2 Split screen/ 4 Quad screen
Flip	Support
Guide line	On/off, adjustable
Mirror function	On/off
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Loop recording	Support
Storage function	Max support 128G
Transmission distance	450 meters (in the open area)
Language	Chinese, English, Italian, Spanish, German, Japanese, Russian, French, etc.
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable
Angle of camera	135°
Waterproof level of camera	IP67
Accessories	Power bank/ solar panel
Image enlargement	Support



Dimensions



Key Description

- | | | |
|------------|--------|---------------------|
| ① ON/OFF | ② OK | ③ Channel switching |
| ④ Decrease | ⑤ Menu | ⑥ Increase |

Product name: 7Inch Wireless Forklift Camera System

Model: ZY-WF739

Features: Vehicle industrial-grade appearance design;
High-brightness IPS LCD with energy-saving and long life;
RF2.4G digital wireless transmission, strong anti-interference ability and long transmission distance;

Parameters

Item	Parameters
Transmission	RF2.4G digital wireless
Screen Resolution	1024*600
Voltage of monitor	DC12V-DC35V
Input signal	AHD1080P/720P
Display mode	Single screen/2 Split screen/4 Quad screen
Flip	Support
Guide line	On/off, adjustable
Mirror function	On/off
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Loop recording	Support
Storage function	Max support 128G
Transmission distance	400 meters (in the open area)
Language	Chinese, English, Italian, Spanish, German, Japanese, Russian, French, etc.
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable
Angle of camera	60°
Waterproof level of camera	IP67
Accessories	Power bank
Image enlargement	Support



Dimensions



Key Description

- | | | |
|------------|--------|---------------------|
| 1 ON/OFF | 2 OK | 3 Channel switching |
| 4 Decrease | 5 Menu | 6 Increase |

Product name: 7Inch Digital Wireless Camera System

Features: Vehicle industrial-grade appearance design;
High-brightness LCD with energy-saving and long life;
RF2.4G digital wireless transmission, strong
anti-interference ability and long transmission distance;

Parameters

Item	Parameters
Transmission	RF2.4G digital wireless
Screen Resolution	1024*600
Voltage of monitor	DC12V-DC35V
Input signal	AHD1080P/720P
Display mode	Single screen/2 Split screen/ 4 Quad screen
Flip	Support
Guide line	On/off, adjustable
Mirror function	On/off
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Loop recording	Support
Storage function	Max support 128G
Transmission distance	450 meters (in the open area)
Language	Chinese, English, Italian, Spanish, German, Japanese, Russian, French, etc.
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable
Angle of camera	135°
Waterproof level of camera	IP67
Accessories	Power bank/ solar panel
Image enlargement	Support

Model: ZY-W741



Dimensions



Key Description

- 1 ON/OFF
- 2 Increase
- 3 Decrease
- 4 Channel switching
- 5 Menu
- 6 OK
- 7 Guide line ON/OFF

3. WIFI APP Series

Model: ZY-WA31

Product name: WIFI APP Solar Magnetic Camera

Features: Support Android and Apple ;
 Strong magnet;
 Built-in battery with solar panel

Parameters

Item	Parameters
1、	2.4G WIFI transmission, 3DB antenna
2、	Support Android and Apple phones
3、	Support 850 infrared night vision
4、	Waterproof grade IP68
5、	Transmission distance: 50M
6、	View Angle: 140 degrees
7、	Voltage: DC5V
8、	Battery capacity: 10000mA
Accessories	Power bank



Dimensions



4. Car Monitor Series

Product name: 7Inch Monitor

Features: Vehicle industrial-grade appearance design; High-brightness LCD with energy-saving and long life;

Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage	DC12V-DC35V
Input signal	AHD1080P/720P CVBS
Display mode	Support 2CH,AV1/AV2
Flip	Support
Guide line	On/off
Mirror function	On/off
Trigger	Support
Power consumption	500mA
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation connetor: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable

Model: ZY-M706



Dimensions



Key Description

- ① Channel switching
- ② OK
- ③ Menu
- ④ Decrease
- ⑤ Increase
- ⑥ ON/OFF

Model: ZY-M706VGA

Product name: 7Inch Multi-interface Monitor

Features: Vehicle industrial-grade appearance design;
High-brightness IPS LCD with energy-saving and long life;
HDMI/VGA/AV multiple signal input interface



Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage of monitor	DC12V-DC35V
Input signal	HDMI/VGA/AV
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Power consumption	Less than 1A
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Protection level	More than IK07
Operating mode	Button/remote control

Dimensions



Key Description

- | | | |
|---------------------|--------------|-------------|
| ① Channel switching | ② OK | ③ Menu |
| ④ Decrease | ⑤ Increase | ⑥ ON/OFF |
| ⑦ AV input | ⑧ HDMI input | ⑨ VGA input |

Product name: 7Inch AHD Monitor

Features: Vehicle industrial-grade appearance design;
High-brightness IPS LCD with energy-saving and long life;
U-shaped bracket;
Removable sunshade

Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage	DC12V-DC35V
Input signal	AHD1080P/720P CVBS
Display mode	Support 2CH,AV1/AV2
Flip	Support
Guide line	On/off
Mirror function	On/off
Trigger	Support
Power consumption	500mA
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation connetor: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable

Model: ZY-M708



Dimensions



Key Description

- | | | |
|------------|--------|---------------------|
| 1 ON/OFF | 2 OK | 3 Channel switching |
| 4 Decrease | 5 Menu | 6 Increase |

Product name: 7Inch Split Monitor

Features: Vehicle industrial-grade appearance design;
High-brightness IPS LCD with energy-saving and long life;
U-shaped bracket; Removable sunshade;
Split screen

Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage	DC12V-DC35V
Input signal	AHD 1080P/720P CVBS (Optional)
Display mode	Single screen/2 split screen
Flip	Support
Guide line	On/off, adjustable
Mirror function	On/off
Trigger	Support
Power consumption	500mA
Loop recording	Support
Multimedia function	Optional
Storage function	Optional,Max support 128G
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation connetor: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable

Model: ZY-M708B



Dimensions



Key Description

- | | | |
|------------|--------|---------------------|
| 1 ON/OFF | 2 OK | 3 Channel switching |
| 4 Decrease | 5 Menu | 6 Increase |

Product name: 7Inch Quad Monitor

Features: Vehicle industrial-grade appearance design;
High-brightness IPS LCD with energy-saving and long life;
U-shaped bracket;
Removable sunshade;
Quad screen

Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage	DC12V-DC35V
Input signal	AHD 1080P/720P CVBS (Optional)
Display mode	Single screen/2 Split screen/ 4 Quad screen
Flip	Support
Guide line	On/off
Mirror function	On/off
Trigger	Support 3CH triggering
Storage function	Optional (Max support 256G)
Power consumption	700mA
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation connetor: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable

Model: ZY-M708D



Dimensions



Key Description

- | | | |
|------------|--------|---------------------|
| 1 ON/OFF | 2 OK | 3 Channel switching |
| 4 Decrease | 5 Menu | 6 Increase |

Product name: 7Inch AHD Monitor

Features: Vehicle industrial-grade appearance design;
High-brightness LCD with energy-saving and long life;

Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage	DC12V-DC35V
Input signal	AHD1080P/720P CVBS
Display mode	Support 2CH,AV1/AV2
Flip	Support
Guide line	On/off
Mirror function	On/off
Trigger	Support
Power consumption	500mA
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation connector: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	customizable
Play function	Optional
License plate setting	Optional

Model: ZY-M709



Dimensions



Key Description

- ① Menu
- ② Channel switching
- ③ Decrease
- ④ OK
- ⑤ Increase
- ⑥ ON/OFF
- ⑦ Infrared reception

Product name: 7Inch Split Monitor

Features: Vehicle industrial-grade appearance design;
High-brightness LCD with energy-saving and long life;
Spilt screen

Parameters

Item	Parameters
Screen Resolution	1024*600
Trigger	DC12V-DC35V
Input signal	AHD 1080P/720P CVBS (Optional)
Display mode	Single screen/2 split screen
Flip	Support
Guide line	On/off
Mirror function	On/off
Trigger	Support
Power consumption	500mA
Loop recording	Support
Multimedia function	Optional
Storage function	Optional, Max support 128G
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Operating mode	Button/Infrared remote control
LOGO	Customizable

Model: ZY-M709B



Dimensions



Key Description

- ① Menu
- ② Channel switching
- ③ Decrease
- ④ OK
- ⑤ Increase
- ⑥ ON/OFF
- ⑦ Infrared reception

Product name: 7Inch Quad Monitor

Features: Vehicle industrial-grade appearance design;
High-brightness IPS LCD with energy-saving and long life;
U-shaped bracket;
Removable sunshade;
Quad screen

Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage	DC12V-DC35V
Input signal	AHD 1080P/720P CVBS (Optional)
Display mode	Single screen/2 Split screen/4 Quad screen
Flip	Support
Guide line	On/off
Mirror function	On/off
Trigger	Support 3CH triggering
Storage function	Optional (Max support 256G)
Power consumption	700mA
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation connetor: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable

Model: ZY-M709D



Dimensions



Key Description

- ① Menu
- ② Channel switching
- ③ Decrease
- ④ OK
- ⑤ Increase
- ⑥ ON/OFF
- ⑦ Infrared reception

Model: ZY-M709F

Product name: 7Inch Quad Screen AV Monitor

Features: Vehicle industrial-grade appearance design;
 High-brightness IPS LCD with energy-saving and long life;
 U-shaped bracket;
 Removable sunshade;
 Quad screen with 4CH Analog signal input

● **Parameters**

Item	Parameters
Screen Resolution	1024*600
Voltage	DC12V-DC35V
Input signal	CVBS
Display mode	Single screen/2 Split screen/ 4 Quad screen
Flip	Support
Guide line	On/off
Mirror function	On/off
Trigger	Support
Power consumption	400mA
Operating temperature	-20°C-70°C
Storage function	-30°C-80°C
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Operating mode	Button/Infrared remote control
LOGO	Customizable



Dimensions



Key Description

- ① Menu
- ② Channel switching
- ③ Decrease
- ④ OK
- ⑤ Increase
- ⑥ ON/OFF
- ⑦ Infrared reception

Product name: 9Inch AHD Monitor

Features: Vehicle industrial-grade appearance design;
High-brightness LCD with energy-saving and long life;

Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage	DC12V-DC35V
Input signal	AHD1080P/720P CVBS
Display mode	Support 2CH,AV1/AV2
Flip	Support
Guide line	On/off
Mirror function	On/off
Trigger	Support
Power consumption	500mA
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation connetor: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable

Model: ZY-M913



Dimensions



Key Description

- ① OK
- ② Channel switching
- ③ Decrease
- ④ Menu
- ⑤ Increase
- ⑥ ON/OFF

Product name: 9Inch Split Monitor

Features: Vehicle industrial-grade appearance design;
High-brightness LCD with energy-saving and long life;
Spilt screen

Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage	DC12V-DC35V
Input signal	AHD 1080P/720P CVBS (Optional)
Display mode	Single screen/2 split screen
Flip	Support
Guide line	On/off
Mirror function	On/off
Trigger	Support
Power consumption	500mA
Loop recording	Support
Multimedia function	Optional
Storage temperature	Optional, Max support 128G
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Operating mode	Button/Infrared remote control
LOGO	Customizable

Model: ZY-M913B



Dimensions



Key Description

- | | | |
|--------|---------------------|------------|
| ① OK | ② Channel switching | ③ Decrease |
| ④ Menu | ⑤ Increase | ⑥ ON/OFF |

Product name: 9Inch Quad Monitor

Model: ZY-M913D

Features: Vehicle industrial-grade appearance design;
High-brightness IPS LCD with energy-saving and long life;
Quad screen

Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage	DC12V-DC35V
Input signal	AHD 1080P/720P CVBS (Optional)
Display mode	Single screen/2 Split screen/4 Quad screen
Flip	Support
Guide line	On/off
Mirror function	On/off
Trigger	Support 3CH triggering
Storage function	Optional (Max support 128G)
Power consumption	700mA
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation connetor: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable



Dimensions



Key Description

- ① OK
- ② Channel switching
- ③ Decrease
- ④ Menu
- ⑤ Increase
- ⑥ ON/OFF

Product name: 10.1Inch AHD Monitor

Features: Vehicle industrial-grade appearance design;
High-brightness LCD with energy-saving and long life;

Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage	DC12V-DC35V
Input signal	AHD1080P/720P CVBS
Display mode	Support 2CH,AV1/AV2
Flip	Support
Guide line	On/off
Mirror function	On/off
Trigger	Support
Power consumption	500mA
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation connetor: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable

Model: ZY-M1001



Dimensions



Key Description

- ① ON/OFF
- ② Increase
- ③ OK
- ④ Decrease
- ⑤ Channel switching
- ⑥ Menu

Product name: 10.1 Inch Split Monitor

Features: Vehicle industrial-grade appearance design;
High-brightness LCD with energy-saving and long life;
Spilt screen

Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage	DC12V-DC35V
Input signal	AHD 1080P/720P CVBS (Optional)
Display mode	Single screen/2 split screen
Flip	Support
Guide line	On/off
Mirror function	On/off
Trigger	Support
Power consumption	500mA
Loop recording	Support
Multimedia function	Optional
Storage function	Optional,Max support 256G
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation connetor: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable

Model: ZY-M1001B



Dimensions



Key Description

- ① ON/OFF
- ② Increase
- ③ OK
- ④ Decrease
- ⑤ Channel switching
- ⑥ Menu

Product name: 10.1Inch Quad Monitor

Features: Vehicle industrial-grade appearance design;
High-brightness LCD with energy-saving and long life;
Quad screen

Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage	DC12V-DC35V
Input signal	AHD 1080P/720P CVBS (Optional)
Display mode	Single screen/2 Split screen/4 Quad screen
Flip	Support
Guide line	On/off
Mirror function	On/off
Reverse trigger	Support 3CH triggering
Storage function	Optional (Max support 128G)
Power consumption	700mA
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation connetor: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable

Model: ZY-M1001D



Dimensions



Key Description

- ① ON/OFF
- ② Increase
- ③ OK
- ④ Decrease
- ⑤ Channel switching
- ⑥ Menu

Product name: 10.1Inch 3CH AHD Monitor

Model: ZY-M1001-3CH

Features: Vehicle industrial-grade appearance design;
High-brightness IPS LCD with energy-saving and long life;
U-shaped bracket;
Removable sunshade;
3CH AHD or analog signal input

Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage	DC12V-DC35V
Input signal	AHD1080P/720P CVBS
Display mode	Support 3CH,AV1/AV2/AV3
Flip	Support
Guide line	On/off
Mirror function	On/off
Trigger	Support 2CH triggering
Power consumption	500mA
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation connetor: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable



Dimensions



Key Description

- 1 ON/OFF
- 2 OK
- 3 Channel switching
- 4 Decrease
- 5 Menu
- 6 Increase

Product name: 10.1Inch AHD Monitor

Features: Vehicle industrial-grade appearance design;
High-brightness LCD with energy-saving and long life;


Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage	DC12V-DC35V
Input signal	AHD1080P/720P CVBS
Display mode	Support 2CH,AV1/AV2
Flip	Support
Guide line	On/off
Mirror function	On/off
Trigger	Support
Power consumption	500mA
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation connetor: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable

Model: ZY-M1019



Dimensions

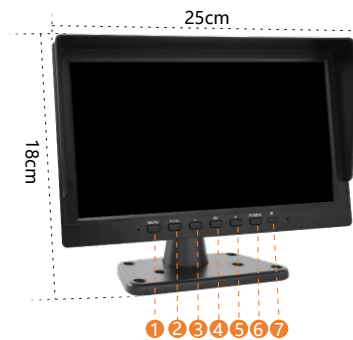

Key Description

- ① Menu
- ② Channel switching
- ③ Decrease
- ④ OK
- ⑤ Increase
- ⑥ ON/OFF
- ⑦ Infrared reception

Product name: 10.1Inch Split Monitor

Features: Vehicle industrial-grade appearance design;
High-brightness LCD with energy-saving and long life;
Spilt screen


Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage	DC12V-DC35V
Input signal	AHD 1080P/720P CVBS (Optional)
Display mode	Single screen/2 split screen
Flip	Support
Guide line	On/off
Mirror function	On/off
Trigger	Support
Power consumption	500mA
Loop recording	Support
Multimedia function	Optional
Storage function	Optional, Max support 128G
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable

Model: ZY-M1019B



Dimensions

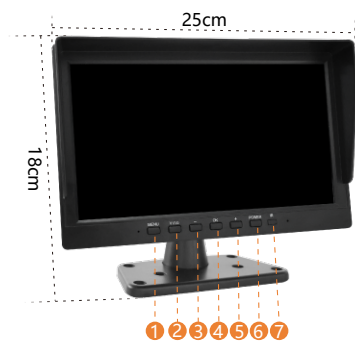

Key Description

- ① Menu
- ② Channel switching
- ③ Decrease
- ④ OK
- ⑤ Increase
- ⑥ ON/OFF
- ⑦ Infrared reception

Product name: 10.1Inch Quad Monitor

Features: Vehicle industrial-grade appearance design;
High-brightness LCD with energy-saving and long life;
Quad screen


Parameters

Item	Parameters
Screen Resolution	1024*600
Voltage	DC12V-DC35V
Input signal	AHD 1080P/720P CVBS (Optional)
Display mode	Single screen/2 Split screen/4 Quad screen
Flip	Support
Guide line	On/off
Mirror function	On/off
Trigger	Support 3CH triggering
Storage function	Optional (Max support 256G)
Power consumption	700mA
Operating temperature	-20°C-70°C
Storage temperature	-30°C-80°C
Language	Chinese, English, Korean, Japanese, Russian, French, etc.
Interface	4pin aviation connetor: 1-power; 2-ground; 3-NC; 4-video (corresponding to aviation interface numbers)
Protection level	More than IK07
Operating mode	Button/Infrared remote control
LOGO	Customizable

Model: ZY-M1019D



Dimensions

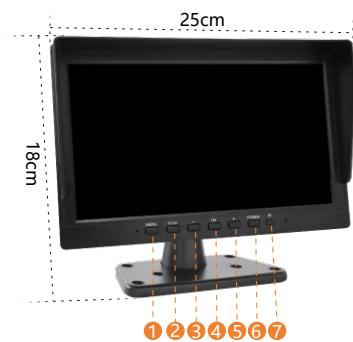

Key Description

- ① Menu
- ② Channel switching
- ③ Decrease
- ④ OK
- ⑤ Increase
- ⑥ ON/OFF
- ⑦ Remote Control Reception

5. Baby Monitor Series

Product name: 5inch Baby Monitor In Car

Features: Good image;
Bracket or suction cup optional with sunshade

● Parameters

Item	Parameters
Screen size	5inch
Voltage	DC12-24V
Resolution of LCD	480*272
Camera resolution	600TVL
Camera angle	100°(H) 150°(D)
Waterproof level	IP67
Night vision	6LED

Model: ZY-MB505



尺寸图



Product name: 4.3inch Baby Monitor In Car

Features: Clear image;
Foldable case; Wideinput voltage

● **Parameters**

Item	Parameters
Screen size	4.3inch
Voltage	DC12-24V
Resolution of LCD	480*272
Camera resolution	600TVL
Camera angle	100°(H) 150°(D)
Waterproof level	IP67
Night vision	6LED

Model: ZY-MB4306



Dimensions



Product name: 4.3inch Baby Monitor In Car

Features: Good image;
Bracket or suction cup optional with sunshade

● **Parameters**

Item	Parameters
Screen size	4.3inch
Voltage	DC12-24V
Resolution of LCD	480*272
Camera resolution	600TVL
Camera angle	100°(H) 150°(D)
Waterproof level	IP67
Night vision	6LED

Model: ZY-MB4308



Dimensions



6. Car Camera Series



ZY-C847



ZY-C814



ZY-C808



ZY-C827B



ZY-C862



ZY-C886



ZY-C849W



ZY-C506



ZY-C861



ZY-C840AI



ZY-C782



ZY-C783



ZY-C813



ZY-C816




ZY-C831




ZY-C831


7. Camera Module Series

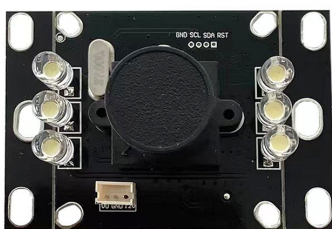ZY-P741


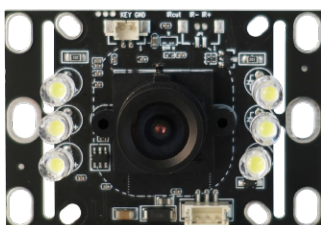
Power: DC12V	Singal input: CVBS
Signal System: PAL/NTSC	Resolution: 700TVL
Lens: 2.8mm/3.6mm	

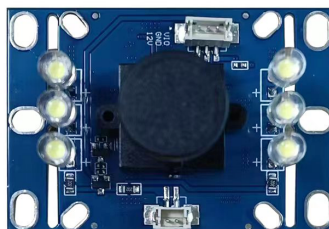ZY-P742


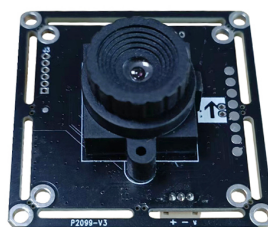
Power: DC12V	Singal input: CVBS
Signal System: PAL/NTSC	Resolution: 700TVL
Lens: 2.8mm/3.6mm	

ZY-P749



Power: DC12V	Singal input: CVBS
Signal System: PAL/NTSC	Resolution: 700TVL
Lens: 2.8mm/3.6mm	

ZY-D768



Power: DC12V	Singal input: CVBS
Signal System: PAL/NTSC	Resolution: 1000TVL
Lens: 2.8mm/3.6mm	

ZY-P2099



Power: DC12V	Singal input: CVBS
Signal System: PAL/NTSC	Resolution: 1000TVL
Lens: 2.8mm/3.6mm	

ZY-P5899



Power: DC12V	Singal input: CVBS
Signal System: PAL/NTSC	Resolution: 1000TVL
Lens: 2.8mm/3.6mm	

ZY-PD53


Power: DC12V	Singal input: CVBS
Signal System: PAL/NTSC	Resolution: 1000TVL
Lens: 2.8mm/3.6mm	

ZY-PU200


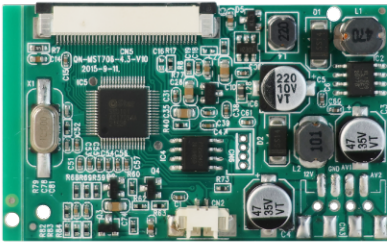
Power: 5V	Singal input: 200万
Optional: LED,Audio	

ZY-PU500


Power: 5V	Singal input: 500万
Optional: LED,Audio	


AV Series

ZY-D4D101




Power: DC12-24V	Resolution : 800*480/ 480*272
Interface: 40Pin RGB	Input signal: 2CH AV
Feature: Reverse priority	

ZY-D7D101

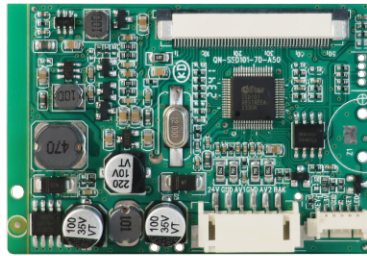


Power: DC12-35V	Resolution : 1024*600/ 800*480
Interface: 50pin RGB	Input signal: 2CH AV+1CH triggering

ZY-D7D101-VOUT

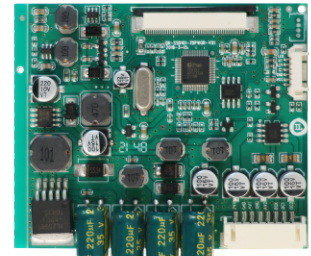


Power: DC12-35V	Resolution : 1024*600/ 800*480
Interface: 50pin RGB	Input signal: 2CH AV+1CH triggering
Feature: 2CH Power output	

ZY-D7D40

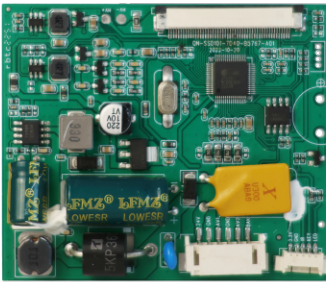

Power: DC12-35V	Resolution : 1024*600/ 800*480
Interface: 50pin RGB	Input signal: 2CH AV+1CH triggering
Feature: Strong anti-interference	


ZY-DY5A

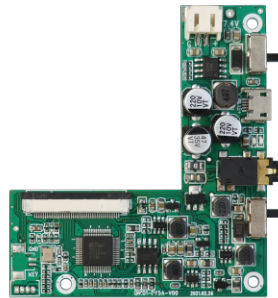

Battery: 3.7V/7.4V	Resolution : 800*480/ 480*272
Interface: 40Pin RGB	Input signal: CVBS
Feature: Adjustable voltage; Guide line	


AHD Series

ZY-D141

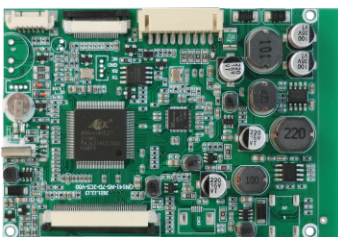


Power: DC12-35V	Resolution : 1024*600
Interface: 50Pin RGB	Input signal: AHD720P, AHD1080P、CVBS
Feature: Storage function, 2CH	

ZY-D4860

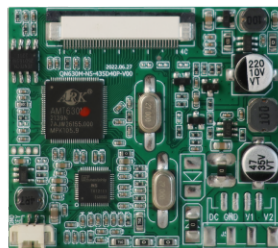


Power: DC12-24V	Resolution : 800*480
Interface: 40Pin RGB	Input signal: AHD720P, AHD1080P

ZY-D7860

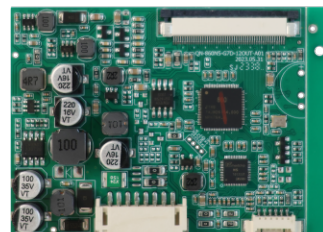

Power: DC12-35V	Resolution : 1024*600
Interface: 50Pin RGB	Input signal: AHD720P, AHD1080P


ZY-D630M

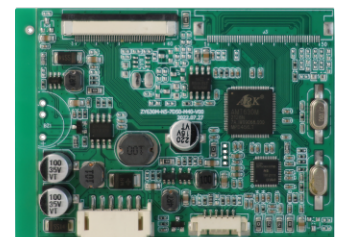

Power: DC12-35V	Resolution : 1024*600
Interface: 50Pin RGB, 40Pin MIPI	Input signal: AHD720P, AHD1080P
Feature: Storage function, 2CH	


VGA And Multiple Interfaces Series

ZY-D7DVGA

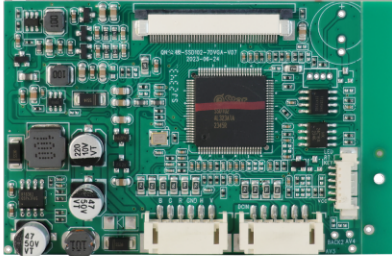


Power: DC12-35V	Resolution : 1024*600/ 800*480
Interface: 50pin RGB	Input signal: 1CH VGA, 2CH AV

ZY-DV53

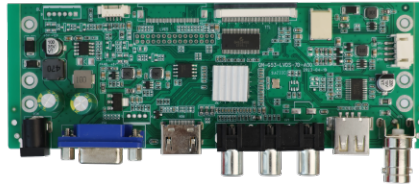


Power: DC12-35V	Resolution : 1024*600/ 1920*1080
Interface: RGB, LVDS	Input signal: HDMI, VGA, AV
Feature: Multimedia function	

ZY-D2660A

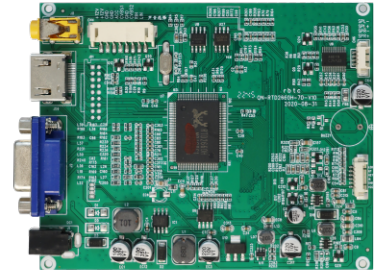


Power: DC12-35V	Resolution : 1024*600/ 1920*1080
Interface: 50pin RGB	Input signal: HDMI, VGA, AV

ZY-D2660B

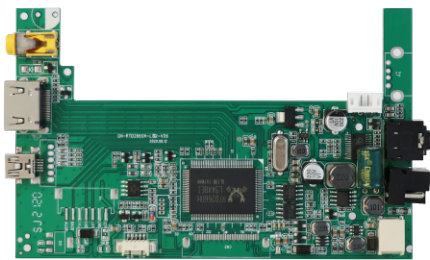


Power: DC12-35V	Resolution : 1024*600
Interface: 50pin RGB	Input signal: HDMI, VGA, AV

ZY-D2660C

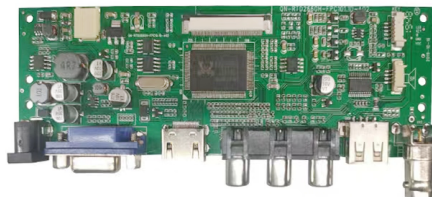

Power: DC12-35V	Resolution : 1024*600/ 1920*1080
Interface: RGB, LVDS	Input signal: HDMI, VGA, AV


ZY-DS206

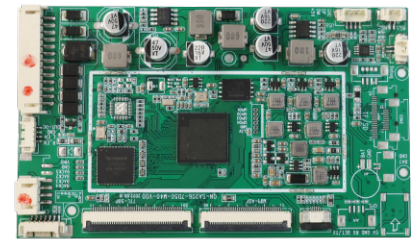

Power: DC12-35V	Interface: RGB, Mipi
Input signal: AHD720P, AHD1080P, CVBS	Feature: BSD with algorithm


Car mounted wireless series

ZY-D701A-RX

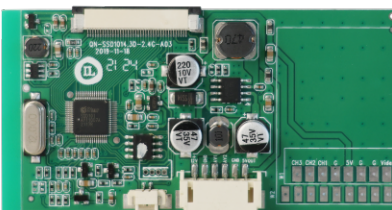


Power: DC12-35V	Resolution : 1024*600
Interface: 50pin RGB	Input signal: Simulation 2.4G

ZY-D701H-RX

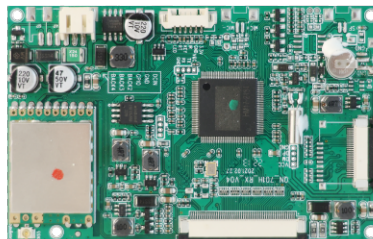

Power: DC12-35V	Resolution : 1024*600
Interface: 50pin RGB	Input signal: RF 2.4G Digital Wireless


ZY-DTX47

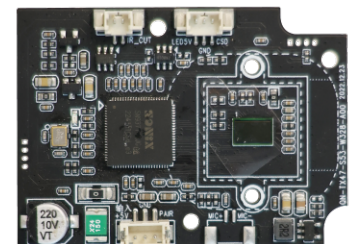

Power: DC12V	Resolution : 720P
Input signal: RF2.4G Digital Wireless	


The Doorbell Series

ZY-VM401

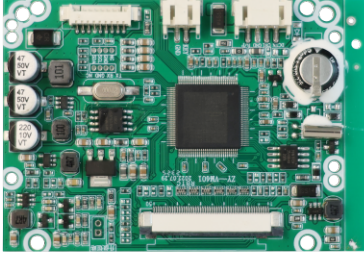


Power: DC12-25V	Input signal: CVBS
Signal System: PAL/NTSC	Feature: Taking photo and video
Interface: 4.3inch/7inch	

ZY-D401

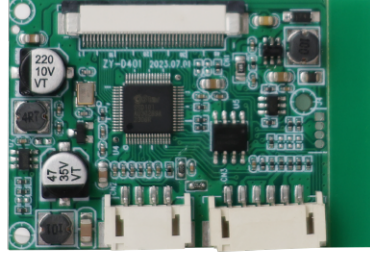


Interface: 4.3inch 40Pin RGB	Resolution : 480*272
Power: DC12-18V	Input signal: CVBS
Signal System: PAL/NTSC	

ZY-D035

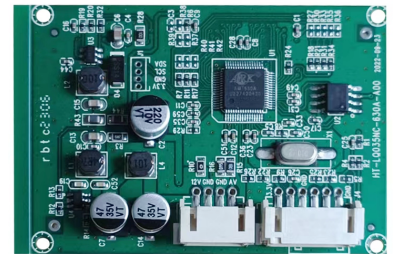


Interface: 3.5inch 52Pin RGB	Resolution : 640*480/ 320*240
Power: DC12-18V	Input signal: CVBS
Signal System: PAL/NTSC	

ZY-D701

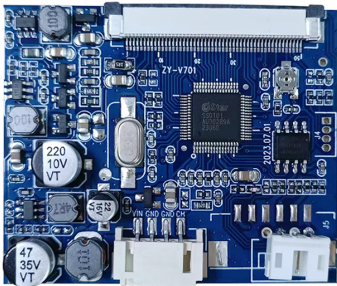


Interface: 7inch 50Pin RGB	Resolution : 800*480/ 1024*600
Power: DC12-18V	Input signal: CVBS
Signal System: PAL/NTSC	

ZY-D431

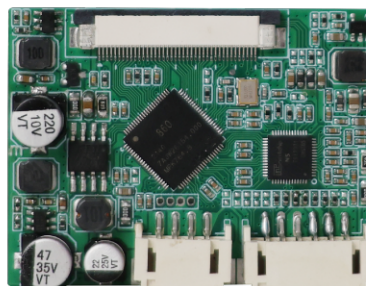


Interface: 4.3inch 40Pin RGB	Resolution : 800*480
Power: DC12-18V	Input signal: AHD/CVBS
Signal System: PAL/NTSC	

ZY-D731

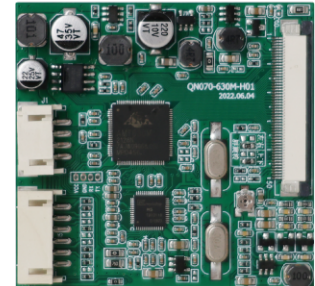

Interface: 7inch/10.1inch 50Pin RGB	Resolution : 1024*600
Power: DC12-18V	Input signal: AHD/CVBS
Signal System: PAL/NTSC	

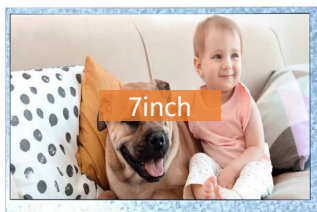



SHENZHEN ZIYANGXING TECHNOLOGY CO. , LTD.

Email:nicole@szyx-tech.com

Tel :0086 13662628966

<https://car-monitor.en.alibaba.com/>

Factory Add:5th floor, Building D, Block B,Baoying Industrial
Park,No.21st,Wulian Road,Longxi Community,Longgang Street,Shenzhen
City,Guangdong Province,China



WeChat



Whatsapp