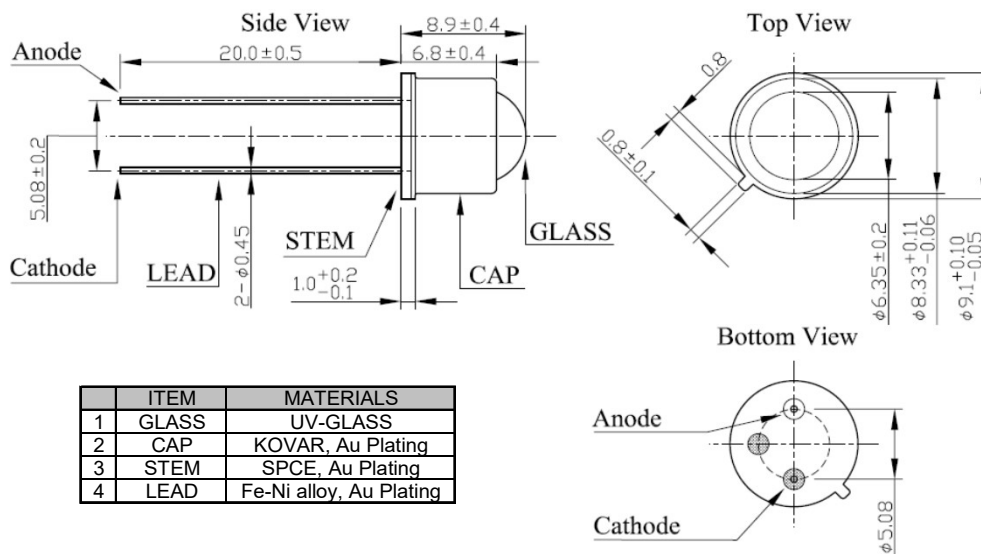


MODEL xFxVL-1H331 series**TO-39 Hemispherical Can Type****Mechanical Specifications and Materials (Unit: mm)****Product ID****310nm: UF1VL-1H331****325nm: UF3VL-1H331****340nm: UF4VL-1H331****Typical Optical-Electrical Characteristics (I_F=20mA, T_a=25°C)**

Item	Symbol	Unit	UF1VL	UF3VL	UF4VL
Peak Wavelength	(*) λ _p	nm	310±5	325±5	340±5
Radiant Flux	(**) P _o	mW	0.8	0.9	1.0
Full Width at Half Maximum	∠λ	nm	15	11	9
Forward Voltage	V _F	V	5	4.5	4.0
Viewing Half Angle	2θ _{1/2}	deg.	6	6	6

(*)Peak Wavelength Measurement tolerance is ±3nm.


(**)Radiant Flux Measurement tolerance is ±10%.

Specification and dimension are subject to change for improvement without notice.


Absolute Maximum Ratings

Item	Symbol	Unit	Ambient Temperature	
Forward Current	I _{Fmax}	mA	40	T _a =25°C
Operating Temperature	T _{OPR}	°C	-30 ~ +80	
Storage Temperature	T _{STG}	°C	-40 ~ +100	
Soldering Temperature	T _{SOL}	°C	350 (within 3sec)	Manual soldering process
			250 (within 5sec)	Flow soldering process


Forward Voltage vs Forward Current

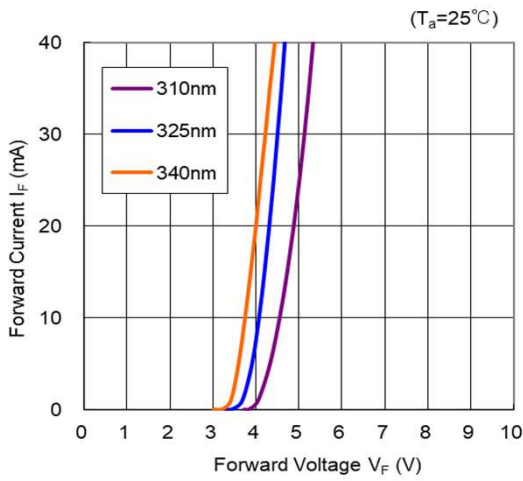


Forward Current vs Radiant Flux

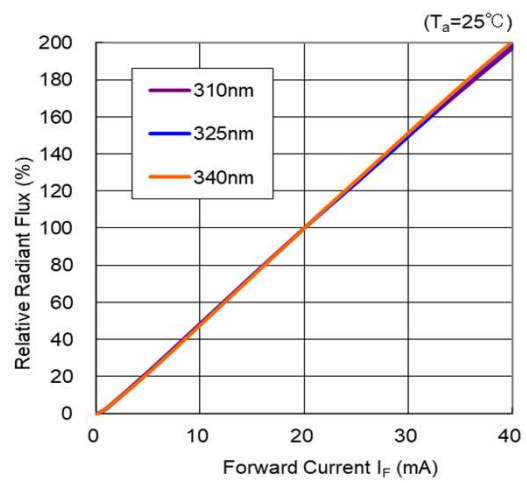


Spectrum

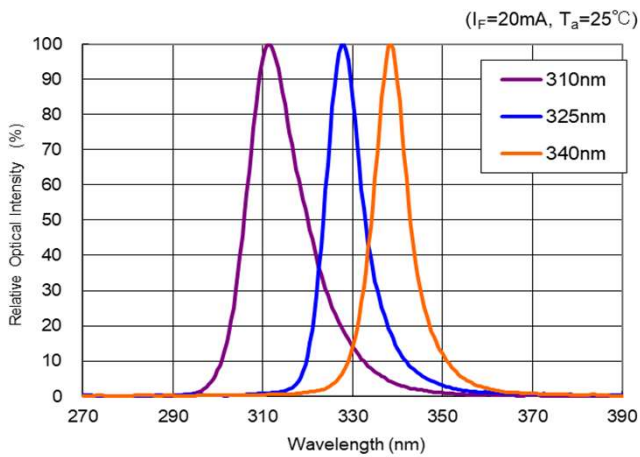

Radiation Pattern

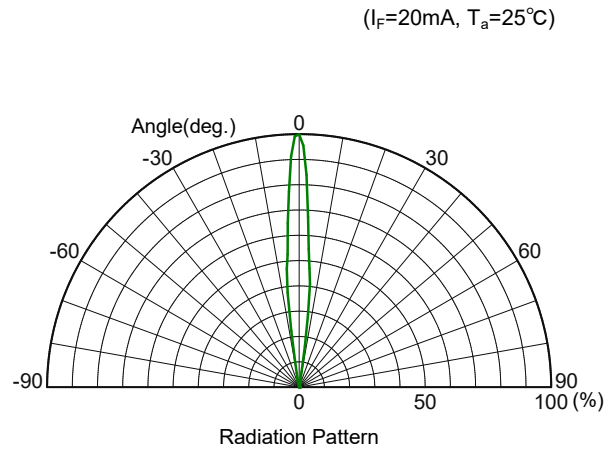

	<p>⚠ WARNING</p>
	<ul style="list-style-type: none"> • LEDs emit very strong UV radiation. • Do not look at the LED light with the naked eye or irradiate the skin. <li style="padding-left: 20px;">UV radiation can harm your eyes and skin. • To prevent UV radiation exposure, wear protective eyewear and protective equipment. • If LEDs are embedded in devices, please indicate warning labels against the UV light LED used. • Keep out of reach of children.