
NO: 0101 / 26.09



力帆&力本精密工业（中国）有限公司

PCB [Printed Ciuit Board] Connectors
印刷电路板连接器

In-saiL®

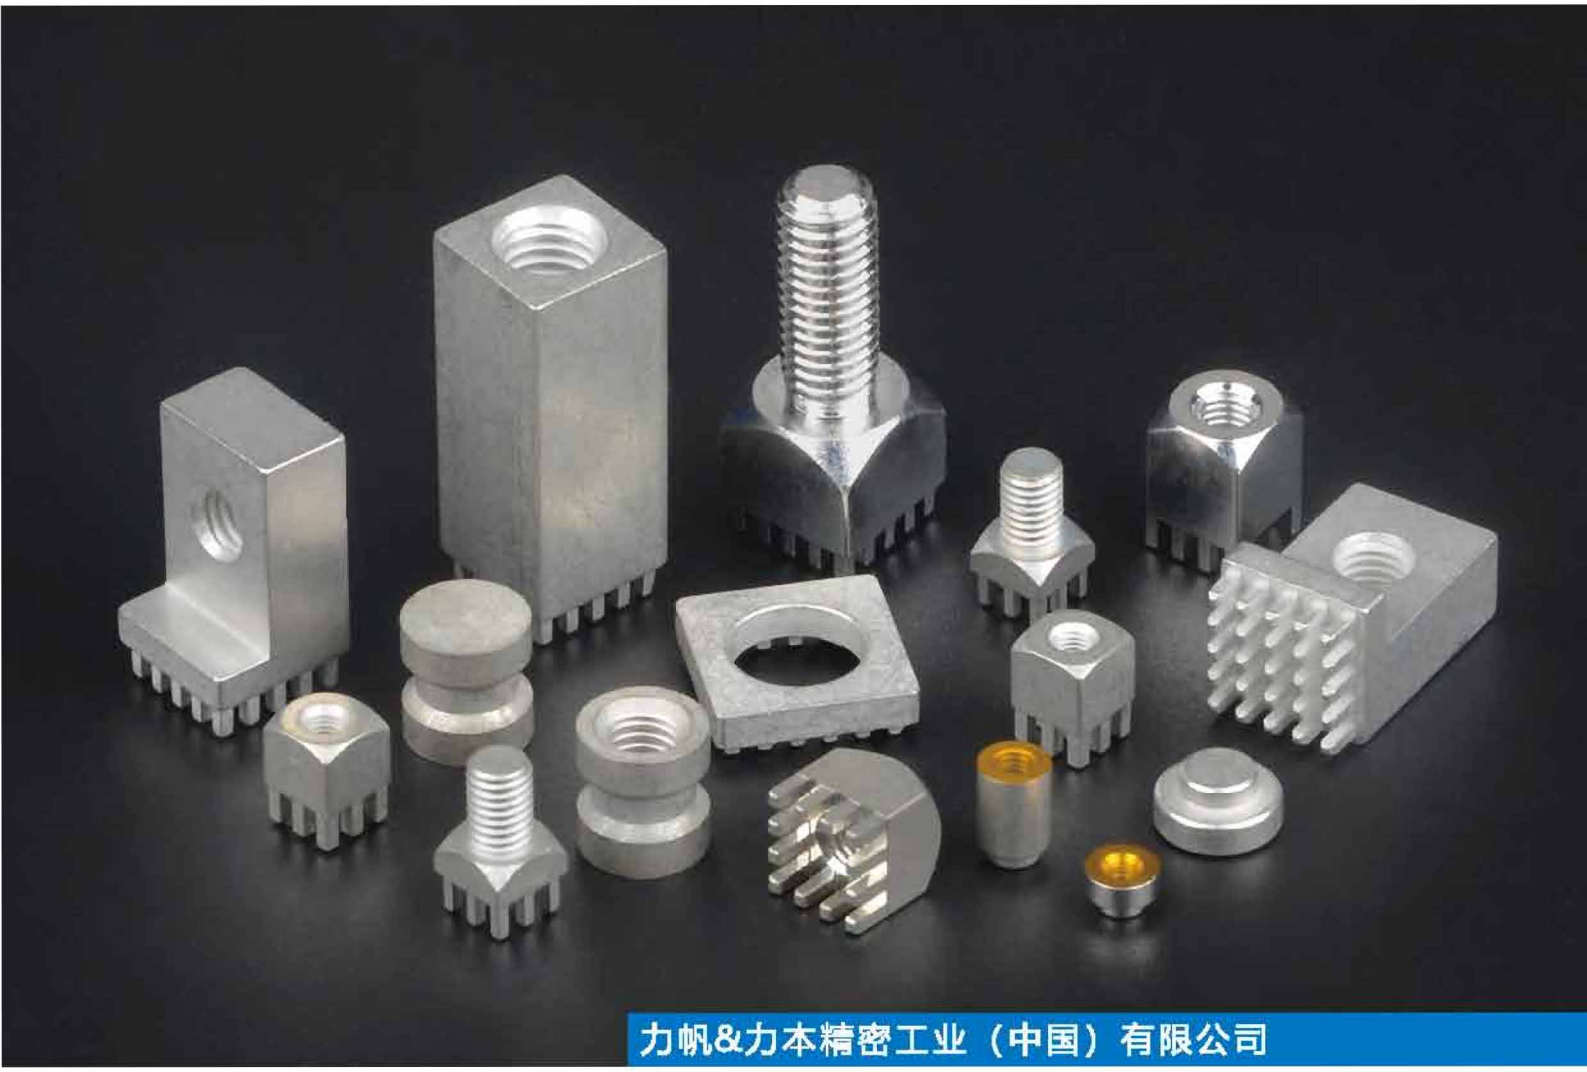

PROFILE
COMPANY 公司简介

力帆&力本（中国）运营中心

力帆&力本（中国）运营中心隸屬於力山企業集團。集團自1982年於臺灣成立以來、一直堅持向客戶快速、準確地提供緊固系統零件、自動化零件、電子五金件、模具配件、機械加工工具等各種高質量的工業零部件。集團多年來致力於研發創新，以核心技術為中心，包括：環保製程技術、精密模具技術、數控加工技術、粉末冶金技術等。集團不僅具完善的研發管理制度，更在智權管理上努力耕耘，積極地以提升華人之國際競爭力為己任，並在企業社會責任與節能、減排、綠化、循環等環境保護方面全力推動與奉獻；

力山企業集團成立33年來，已經建立起5個產品製造中心，分佈於臺灣，新加坡，墨西哥，江蘇和廣東。購置了大量的高精密製造設備，如數控車床，數控銑床，數控磨床，精密壓機和注塑機等3600餘套，具備系統的工業零件製造能力。也組建獨立運營中心3個（臺灣運營中心，新加坡運營中心和深圳運營中心），負責全球客戶的商務合作和技術支持。

力帆精密&力本五金，以力山企業集團為依託，將與注重品質和交期的客戶攜手共進、為全球製造工業的發展貢獻我們的智慧和力量。

1、各式組裝系統零件（緊固件，焊接件等）
2、精密金屬加工零件與工程塑膠組件
3、汽車，醫療，3C產品用之機械精密零組件
4、自動化用各種精密零組件
5、塑膠和衝壓模具用精密配件
6、各式機械加工工具和量具





In-saiL® & Leadum(China)Operation Center

In-saiL® & Leadum (China) Operation Center is part of Leasan Enterprise. Since its establishment in Taiwan in 1982, Leasan Enterprise Group has always insisted on quickly and accurately provide customers with various high-quality parts like fastening system parts, automation parts, electronic hardware, mold parts, and machining tools. The group has been committed to R&D and innovation for many years, focusing on core technologies, including environmental protection technology, precision molds technology, CNC machining technology, powder metallurgy technology. The group not only a sound R&D management system but also works actively to enhance the international competitiveness of the Chinese mission in the management and fully promotes corporate social responsibility and energy conservation, emission reduction, greening, recycling, and other environmental protection and dedication.

Leasan Enterprise Group was established 33 years ago, it has established 5 manufacturing centers, which there are located in Taiwan, Singapore, Mexico, Jiangsu, and Guangdong. The purchase of a large number of high-precision manufacturing equipment, such as CNC lathes, CNC milling machines, CNC grinders, precision presses, and injection molding machines are more than 3,600 sets, with a systematic industrial part manufacturing capabilities. 3 independent operation centers (Taiwan operation center, operation center in Singapore, and Shenzhen operation center) have also been established to be responsible for business cooperation and technical support for the global customers.

In-saiL® & Leadum Precision relying on Leasan Enterprise Group will work together with customers who focus on quality and delivery and contribute our wisdom and strength to the development of the global manufacturing industry.

1. All kinds of assembled parts system (fasteners, welding parts, etc.)
2. Precision metal machining parts and engineering plastic components and mechanical precision components
3. The automotive, medical, 3C products using
4. Automation of various precision components
5 .Plastic precision parts and stamping dies
6. Kinds of machining tools and gauges

Product Capability / 制造能力


01



02


03


04

- Auto-lathe turning:
  PE : Φ0.5–20mm Tol.±0.01mm
- CNC lathe turning:
  PE : Φ0.5–250mm Tol.±0.005mm
- CNC Milling:
  800X600mm (LxW), Tol.±0.01mm
- Grinding:
  Tol.±0.002mm
- Screw heading & rolling:
  Metric M0.8-M36
  Unified Imperial #0-2"
- Stamping:
  1200T max

- 自动车床加工：直径0.5–20mm
  公差 0.01mm
- 数控车床加工：直径0.5–250mm
  公差 0.005mm
- 数控铣削加工：800X600mm
  公差 ±0.01mm
- 外圆磨削加工：公差 ±0.002mm
- 螺丝加工：公制 M0.8–M36
  英制 #0–2"
- 冲压加工：1200 吨位内


05


06


07


08

01 Automatic Lathe / 自动车床
02 Ultraprecision Machining / 超精加工
03 CNC Lathe / 数控车床
04 CNC Machine / CNC 加工中心
05 Screw Machine / 螺丝机
06 Stamping Equipment / 冲压设备
07 Injection machine / 注塑机
08 Precision Grinding / 精密磨削

In-salL® & Leadum is your choice!

力帆&力本 值得信赖!

Product Capability / 制造能力









Superior product quality whilst protecting resoures as much as possible is a matter of course for us. After all, precision is our business.

We set up total management quality systems following ISO9001:2018, from the IQC to IPQC to OQC, we strictly execute customer quality requirement to achieve quality target.

In-sail®woned advanced quality control and inspection facilities, is capable to perform mechanical property, dimension & contour and corrosion-resistance test at the incoming, in-process, and outgoing stages.

高质量的产品和环境保护都是我们所要追求的目标，我们产品的高质量最多的体现于高精度。

力帆精密依照ISO9001：2018建立了完整的品质系统，从IQC到PQC再到OQC，严格管制，全员参与。严格遵照客户要求，达成品质目标。

力帆精密有先进的品质管控和检测设备，能够来料加工，制程和成品检查各阶段实施诸如机械性能检测，尺寸和轮廓检测及耐腐蚀验证等。









Types of machines

1. Pull Tester / 拉力计
2. Projector / 投影仪
3. Durometer / 硬度计
4. Coating Analyzer / 镀层分析仪
5. Automatic Optic Inspector / 全自动品检机
6. CMM / 三次元
7. Salt Spray Tester / 盐雾测试机
8. Automated Screw Threaded Inspection / 螺纹全检机

TABLES OF CONTENTS 目录

Part 1 Press-Fit element

	Press-Fit Technology	08	Overview of Press-Fit Technology	压装工艺概述
	PowerOne	10	Single-Piece Power Element	一体型
	PE01	12	Press-Fit with internal thread, two rows	通孔内螺纹，双排插脚型
	PE02	13	Press-Fit with internal blind-hole thread, two rows	盲孔内螺纹，双排插脚型
	PE03	14	Press-Fit with internal thread circumference	通孔内螺纹，四周插脚型
	PE04	16	Press-Fit with internal thread, full plain	盲孔内螺纹，平面插脚型
	PE05	17	Press-Fit with external thread, full plain	外螺纹，平面插脚型
	PE06	18	Press-Fit right angled, two rows	双排插脚直角型
	PE07	19	Press-Fit right angled, two rows (Chamfering)	双排插脚直角型（倒角处理）
	PE08	20	Press-Fit right angled, full plain	平面插脚直角型
	PE09	21	Press-Fit right angled, full plain (Chamfering)	平面插脚直角型（倒角处理）
	PE10	22	Press-Fit right angled, full plain (U-shape)	平面插脚直角型（U 型槽）
	PowerTwo	23	Two-Piece Power Element	双部件组合型
	PE11	25	Press-Fit two-part, ground element (Base-Part)	双部件，内孔双排插脚型（底座）
	PE12	26	Press-Fit two-part, ground element (Base-Part)	双部件，内孔平面插脚型（底座）
	PE13	27	Press-Fit two-part, Socket (Female Thread)	双部件，插座（圆头内螺纹）
	PE14	28	Press-Fit two-part, Socket (Female Thread)	双部件，插座（方头内螺纹）
	PE15	29	Press-Fit two-part, Socket (Female Though-Hole)	双部件，插座（圆头光孔）
	PE16	30	Press-Fit two-part, Socket (Female Though-Hole)	双部件，插座（方头光孔）
	PE17	31	Press-Fit two-part, Pin (Male Thread)	双部件，插针（圆头外螺纹）
	PE18	32	Press-Fit two-part, Pin (Male Thread)	双部件，插针（方头外螺纹）

TABLES OF CONTENTS 目录

Part 2 THR element

	THR Technology	33	Overview of Through-hole Reflow	通孔回流焊工艺概述
	PE19	34	THR with internal through-hole thread	通孔内螺纹
	PE20	35	THR with internal blind-hole thread	盲孔内螺纹
	PE21	36	THR with external thread	外螺纹

Part 3 SMD element

	PE22	38	SMT with external thread	外螺纹型
	PE23	39	SMT with external thread with Pin	带 Pin 针 外螺纹型
	PE24	40	SMT with internal blind-hole thread	盲孔内螺纹型
	PE25	41	SMT with internal blind-hole thread with Pin	带 Pin 针盲孔内螺纹型
	PE26	42	SMT with internal blind-hole thread (groove)	盲孔内螺纹型（带沟槽型）
	PE27	43	SMT with internal blind-hole thread with Pin (groove)	带 Pin 针盲孔内螺纹型（带沟槽）
	PE28	44	SMT with internal through-hole thread	通孔内螺纹型
	PE29	45	SMT with internal through-hole thread (groove)	通孔内螺纹型（带沟槽）
	PE30	46	SMT terminal right angled	直角型
	PE31	47	SMT with right angled with Pins	直角插脚型
	PE32	48	SMT with external thread	外螺纹型
	PE33	49	SMT with internal blind-hole thread	盲孔内螺纹型

TABLES OF CONTENTS 目录

	PE34	50	Support pillar, spacer, also suitable for fully automatic assembly	支撑柱，间隔柱，也可以用于全自动组装
	PE35	51	Conductive contact plate, also suitable for fully automatic assembly	触电导电方片，也可以用于全自动组装
	PE44	52	Tubular Cable Lugs，used for wire-to-terminal connection	线鼻子，用于电线和端子连接
	LSMTSO	53	SMT with Surface mounted nuts with or without threads or Support clamp column	表面安装带螺纹或者不带螺纹的螺母或支撑卡柱
	PE35-MJP	54	Busbar, used for electrical conduction, jumper connections, and heat dissipation.	汇流条，用于导电，跳线，散热
	PE35-SD	55	Busbar, used for electrical conduction, jumper connections, and heat dissipation.	汇流条，用于导电，跳线，散热
	PE35-PW	56	Busbar, used for electrical conduction, jumper connections, and heat dissipation.	汇流条，用于导电，跳线，散热
	PE35-OEM	57	Busbar, used for electrical conduction, jumper connections, and heat dissipation.	汇流条，用于导电，跳线，散热

Press-Fit Technology

1. As a solder free fastening technology, press-fit technology frequently offers an attractive alternative to simple soldering technology.


2. An effective electrical press-fit connection is created by pressing a pin into plated through hole of a circuit board and – as part of cold welding process – generating a gas-tight electrical connection.

3. The through-hole plating for a press-fit system is essentially made in the same way as the holes for accepting components for THT soldering. Thus there are no hanges required in the PCB manufacturing process.

4. One outstanding characteristic of the press-fit system compared to the soldering system is that it produces not only an electrical but also an extraordinarily strong mechanical connection between the inserted components and the PCB.

With regard to long-term reliability, the press-fit is convincing since it has the lowest FIT value (Failure in Time) of the overall system. It is to 30 times better than that of an SMT solder joint. A single solid press pin has a typical extraction force of 100N or approximately 70% of the insertion force. Therefore press-fit connections are predestined to provide not only electrical but also mechanical connection solutions for electrical components.

If after press insertion a solid press pin in a 2.4mm thick printed circuit board fits on each corner with more than 3 against the sleeve, the press connection zone has a lower electrical resistance than the brass pin itself and thus does not pose an electrical or thermal bottleneck. The connection surface angle is normally much greater, which provides a generous safety buffer for the electrical connection.

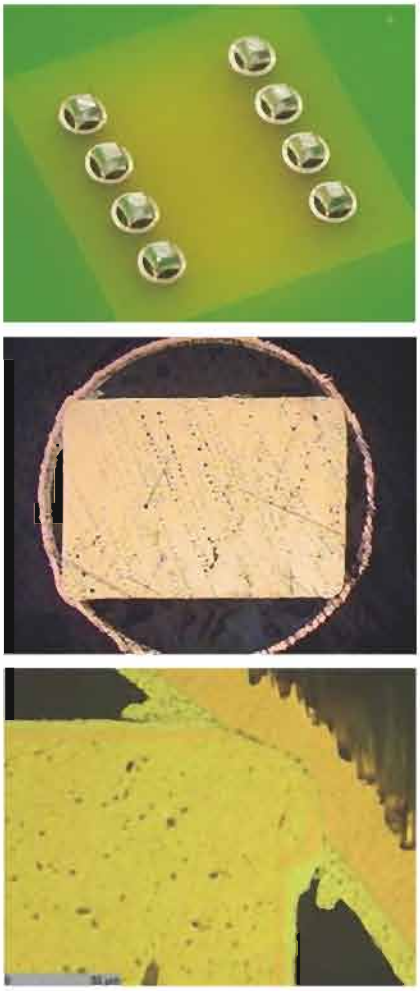

Continuous and extremely homogenous material transition between press pin and through-hole plating.

Notice

The processing of press-fit elements fits seamlessly into the production process and is thus very cost-effective. Multiple power elements can be fitted simultaneously using press-fit tools. Compared to soldering, the printed circuit boards are not subjected to thermal loads.

1.Other components should be spaced at least 4mm away from the press-fit hole.

2.The hole should be at least 3mm away from the edge.

3.No special tools are necessary for the pressing process. A simple lever press is usually sufficient.


4.The insertion force per pin should be at least 40N. Typically this force is around 150N/pin.

5.The press connection area must be supported during the pressing process.

6.The press stroke shoudl be 90° to the PCB. The pins should protrude slightly from the PCB after the pressing process.

7.If two-part press-fit elements are used, the base-part must always be fitted first to the PCB.

8.Press-in-process should be made after all soldering processes because of high heat absorption of power elements.

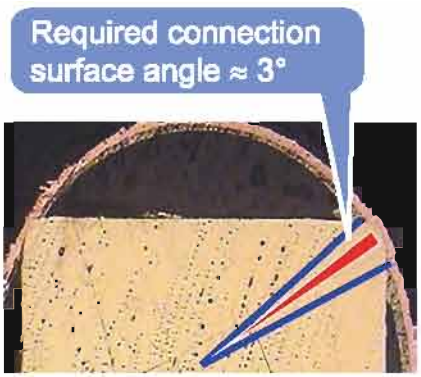

Advantages of the Press-Fit technology

1.Very high ampacity, ideally suited for high continuous and peak currents.

2.Press-fit connections show extremely high environmental stability.

3.Low-resistance connection means low self heating, hence less heat must be dissipated through the system.

4.No heat development on sensitive components and no thermal stress of the circuit board.

5.Extremely stable mechanical.

6.No problems with cold solder joints.

7.High mechanical retaining forces.

8.Double-sided mounting of circuit board is possible.

9.Much higher long-term reliability as for solder connections.


10.More secure than soldering and screw connections.

11.No changes in the production of circuit boards necessary.






Press-Fit element for currents of up to 300 A

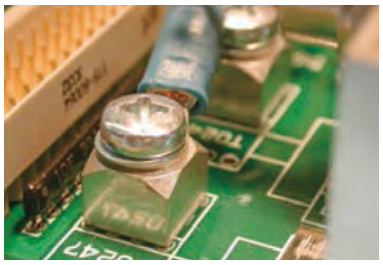

Press-Fit element for currents of up to 160 A

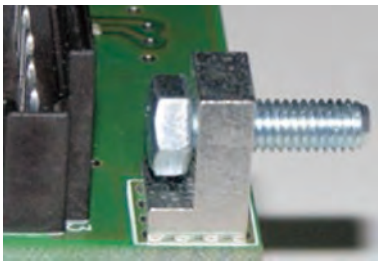


Angled power element for connecting the assembly with the housing




DC power connection up to 120 A




Double-sided mounting

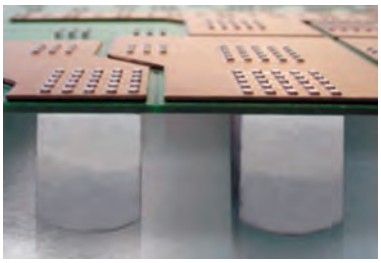

Press-fitting of power element: PCB with copper bar

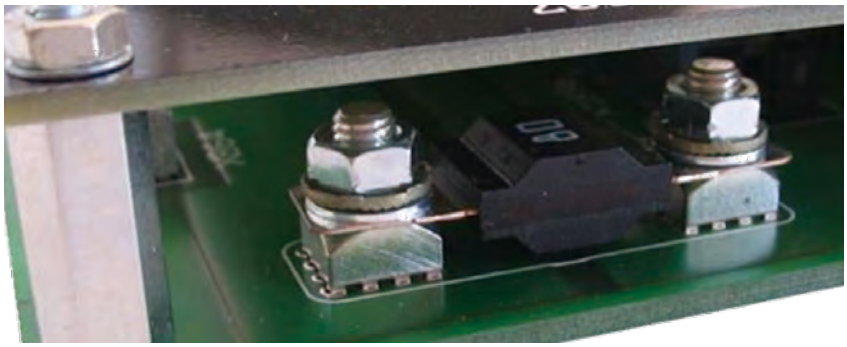

Option for fitting a fuse

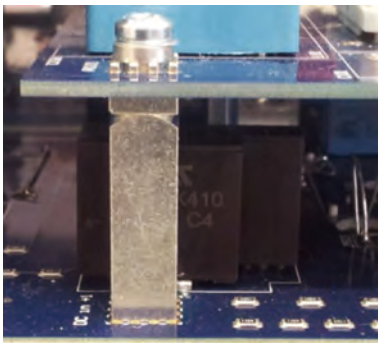

High current Board-to-Board connection



Single-piece Power Elements are used for the supply and distribution of high currents in connection with circuit board based systems. Depending on the pin arrangement and the layout, currents of up to 1,000A are possible. Meanwhile this product group has been successfully used in the field in thousands of various designs. The manufacturing method allows individual adaptions regarding design and dimensions. That is the reason why Power Elements perfectly qualify as connecting element for fuses, IGBTs, switches and cables to the circuit board or as contact element for board-to-board respectively board-to-case.

Technical Date	
Material	Brass
Surfaces	Tin-plated (standard) further surfaces such as nickel, silver, nickel / gold and others on demand

Dimensions	
Length x width	from 5 x 5 to 22 x 22 mm
Height	from 3 mm individually
Height above PCB	from 3 mm individually
Pin length	up to 7.5 mm (standard of 3.5 mm)

Circuit Board	
Base material	Fr4 (EP-GC-)
PCB thickness	from 1.5 mm
Drilling diameter	1.6 0/-0.03 mm
Final diameter HAL surface	1.45 ± 0.05 mm
chemical surface	1.475 ± 0.05 mm

Application Possibilities

- Board-to-board over 90° or packaging
- Wire-to-board screw connection of ring terminals
- Electro mechanics such as hinges and case mounting
- Spacers
- Retainers / fastenings of switches, fuses, IGBTs
- Any combination of all these and much more

Processing

In-saiL PowerOne Power Elements are pressed in into the circuit board. Soldering is not necessary. Therefore, the PCBs are not exposed to temperature stress. This processing step easily blends in to the processing chain and is highly cost efficient. With the aid of the corresponding Press Fit tools, several Power Elements can be pressed in simultaneously.

Processing Parameters	
Press-in force	min. 40 N per Pin
Extraction force	min. 30 N per Pin
Retention force	60 – 80 % of the press-in force
Press-in speed	100 – 250 mm /min
Holding forces according to IEC 352-5	


- For assembling prototypes, no special equipment is needed for pressing in,a simple toggle press is sufficient.
- The circuit board needs support during the pressing procedure.
- The pressing force must be executed in a 90° angle to the circuit board.
- After the pressing process the pins should stand out of the drilled hole (ca. 0.2- 0.5 mm).
- Plated through holes of the circuit board must be executed according to our indications.
- PowerOne high current terminal blocks and spacers are manufactured for pressing, soldering is not intended.

Empirical Press-Fit forces


Empirical Press-Fit forces in "N/per pin" for the massive pin	PCB Surface								
	Chemical Tin			ENIG			HAL		
	Ø1.425 mm	Ø1.475 mm	Ø1.525 mm	Ø1.425 mm	Ø1.475 mm	Ø1.525 mm	Ø1.40 mm	Ø1.45 mm	Ø1.50 mm
PCB Thickness in mm									
1.6	120-220	80-160	40-130	140-250	100-200	60-170	140-250	100-200	50-170
2.4	170-330	110-240	60-200	200-400	130-300	70-250	200-400	130-300	70-250
3.2	220-460	140-340	80-280	260-500	170-420	80-360	260-500	170-420	80-360

Circuit Board Design

Via Specication For Chemical Surfaces

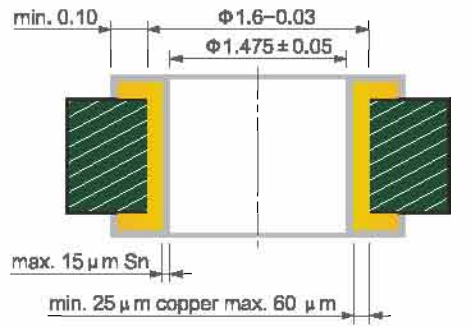

Via Specication For HAL (Hot Air Solder Leveling)

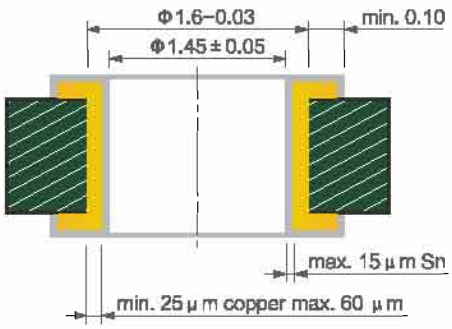

Torques


- Based on DIN EN 20898 T7 Part 25 (tightening torques);values for brass material (MS 63)
- Determined values (torgues). For these mechanical loads,destruction of the threaded shank occurs.The components must never be loaded up to these values.
- Determined values (torgues). For these mechanical loads， destruction of the press-fit pins occurs(approx.1 Nm/pin). The components must never be loaded with these values.


The maximum permissible torgue changes greatly with the material composition (alloy parts). Safety margins must also be taken into account for practical use.


For this reason, REDCUBE PRESS-FIT are only permitted to be loaded with the tightening torque values for brass material -(according to row 2 / table)!

Table for REDCUBE PRESS.FIT /Shank / Full Plain Pin-Plate

Thread dimension (metric)	M3	M4	M5	M6	M8	M10
Max. tightening torque (Nm)	0.5	1.2	2.2	3.9	9.0	17.0
Breaking torque (Nm)	1.5	4.0	6.0	10	32.5	32.5
Breaking torque pins (Nm)	9	16	16	25	25	36

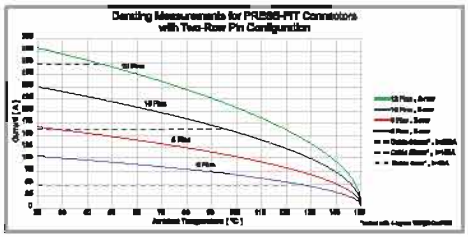

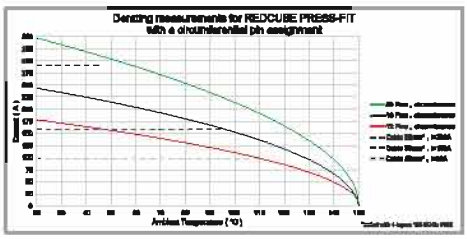

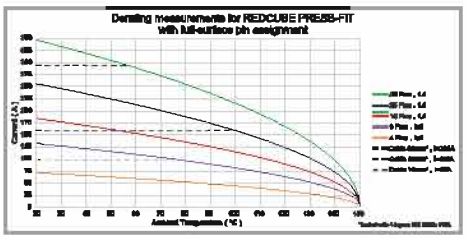

Current Carrying Capacity

The current carrying capacity of a Press Fit connection needs to be seen in the context of the overall system. The Press Fit zone has a very low electrical contact resistance of 100 - 200μΩ. The limiting factor the refore usually lies in the circuit board layout or in the connection of a feed line.

Reference values for a pre-dimensioning can be found under Technical Data on page 09.

Overview of PowerOne products

								
Customer Specific	through hole vertical (two-rows)	blind hole vertical (two-rows)	through hole vertical (cicumference)	blind hole vertical (full plain)	bolt	bracket through hole (two-rows)	bracket through hole (full plain)	U groove bracket (full plain)

Supplies

Based on your different requirements, we also provide some relevant products at the back of this brochure. For further inquiries, please contact our sales representative.

PE01




Features

- The cable and fuse can be fixed on PCB
- UNC thread or customer specific modifications on demand

特征

- 可将电缆线、保险丝固定在电路板上
- 可按客户需求提供 UNC 螺纹或进行定制

Drawings

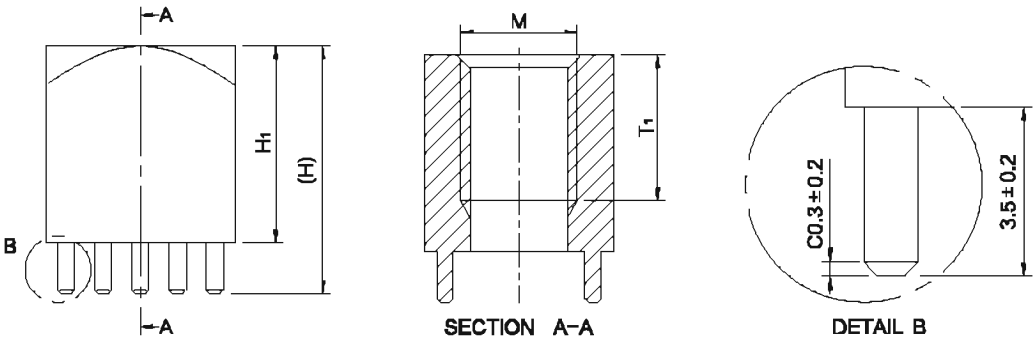


6 PINS | 8 PINS | 10 PINS

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Drill Hole Diameter	1.6mm
Final Hole Diameter	1.475mm/1.45mm
Heat Resistance	-55 °C up to +150 °C
Retaining Force	as per IEC 352-5

Drawing No.	M	T_1	H	H_1	L	Pins	I R (A)	Tightening Torque
LFPE0101	M3	5	9.5	6	7	6	100	0.5Nm
LFPE0102	M4	6	10.5	7	9	8	160	1.2Nm
LFPE0103	M5	6	10.5	7	9	8	160	2.2Nm
LFPE0104	M8	10	17	13.5	13	10	240	9Nm

Dimension in mm

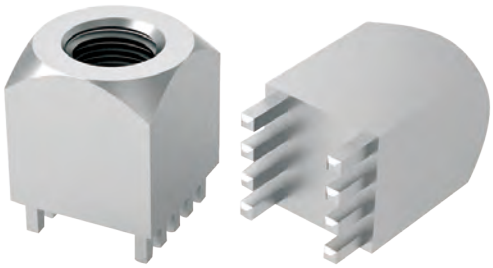

PE02


Features

- The cable and fuse can be fixed on PCB
- UNC thread or customer specific modifications on demand

特征

- 可将电缆线、保险丝固定在电路板上
- 可按客户需求提供 UNC 螺纹或进行定制

Drawings

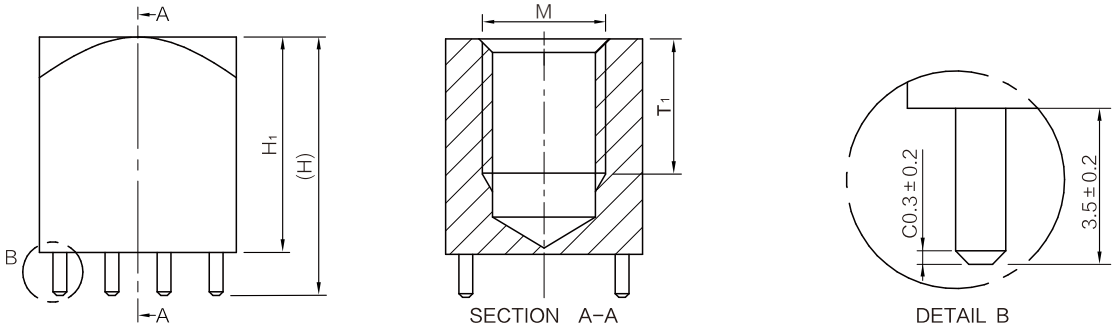


8 PINS | 10 PINS | 12 PINS

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Drill Hole Diameter	1.6mm
Final Hole Diameter	1.475mm/1.45mm
Heat Resistance	−55 °C up to +150 °C
Retaining Force	as per IEC 352-5

Drawing No.	M	T_1	H	H_1	L	Pins	I R (A)	Tigntening Torque
LFPE0201	M6	9	17	13.5	10	8	160	4Nm
LFPE0202	M8	10	17	13.5	13	10	240	9Nm
LFPE0203	M10	11	21	17.5	16	12	320	17Nm

Dimension in mm

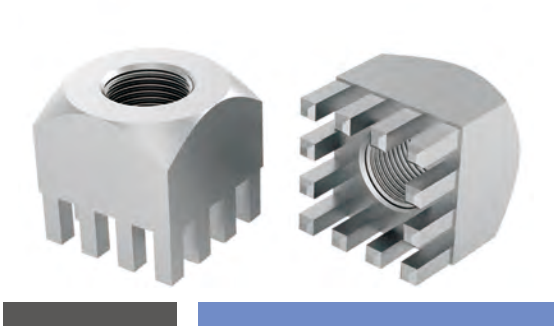

PE03

Features


- The cable and fuse can be fixed on PCB
- UNC thread or customer specific modifications on demand

特征

- 可将电缆线、保险丝固定在电路板上
- 可按客户需求提供 UNC 螺纹或进行定制

Drawings

Full thread type

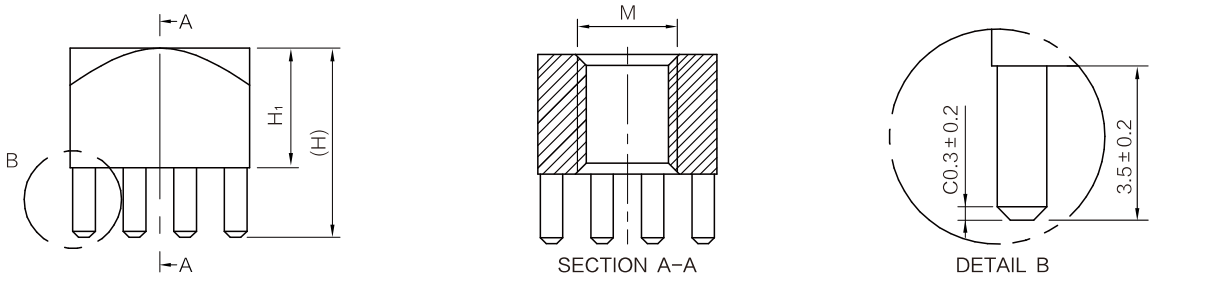

8 PINS | 12 PINS | 16 PINS | 20 PINS

Technical Data


PROPERTIES	
Material	Brass
Surface	Tin plated
Drill Hole Diameter	1.6mm
Final Hole Diameter	1.475mm/1.45mm
Heat Resistance	−55 °C up to +150 °C
Retaining Force	as per IEC 352-5


Drawing No.	M	H	H_1	L	Pins	I R (A)	Tigntening Torque
LFPE0301	M2.5	9.5	6	7	8	130	0.29Nm
LFPE0302	M4	9.5	6	9	12	175	1.2Nm
LFPE0303	M5	9.5	6	9	12	175	2.2Nm
LFPE0304	M6	17	13.5	13	16	240	3.9Nm
LFPE0305	M8	17	13.5	13	16	240	9Nm
LFPE0306	M8	17	13.5	16	20	350	9Nm
LFPE0307	M10	21	17.5	16	20	350	17Nm


Dimension in mm


Drawings

Non full thread










8 PINS

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Drill Hole Diameter	1.6mm
Final Hole Diameter	1.475mm/1.45mm
Heat Resistance	−55 °C up to +150 °C
Retaining Force	as per IEC 352-5

Drawing No.	M	H	H_1	T_1	L	Pins
LFPE0308	M2.5	9.5	6	5	7	8

Dimension in mm

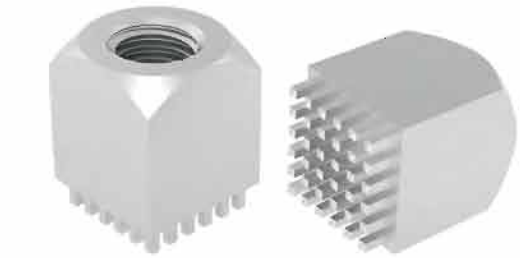

PE04


Features


- The cable and fuse can be fixed on PCB
- UNC thread or customer specific modifications on demand

特征


- 可将电缆线、保险丝固定在电路板上
- 可按客户需求提供 UNC 螺纹或进行定制

Drawings







SECTION A-A




DETAIL B




4 PINS




9 PINS



16 PINS



25 PINS




36 PINS

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Drill Hole Diameter	1.6mm
Final Hole Diameter	1.475mm/1.45mm
Heat Resistance	-55 °C up to +150 °C
Retaining Force	as per IEC 352-5

Drawing No.	M	T_1	H	H_1	L	Pins	I R (A)	Tigntening Torque
LFPE0401	M3	3.5	9.5	6	7	9	130	0.5Nm
LFPE0402	M3	4	10.5	7	5	4	70	0.5Nm
LFPE0403	M4	4	10.5	7	9	16	180	1.2Nm
LFPE0404	M5	4	10.5	7	9	16	180	2.2Nm
LFPE0405	M6	6	14	10.5	10	16	180	3.9Nm
LFPE0406	M8	8	17	13.5	13	25	250	9Nm
LFPE0407	M10	11	21	17.5	16	36	350	17Nm

Dimension in mm

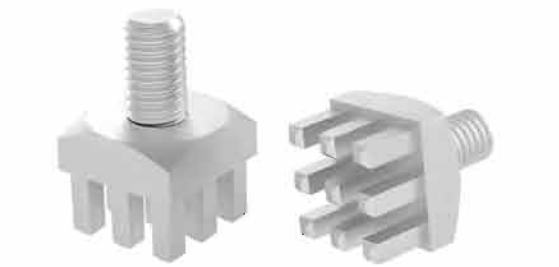

PE05


Features

- The cable and fuse can be fixed on PCB
- UNC thread or customer specific modifications on demand

特征

- 可将电缆线、保险丝固定在电路板上
- 可按客户需求提供 UNC 螺纹或进行定制

Drawings

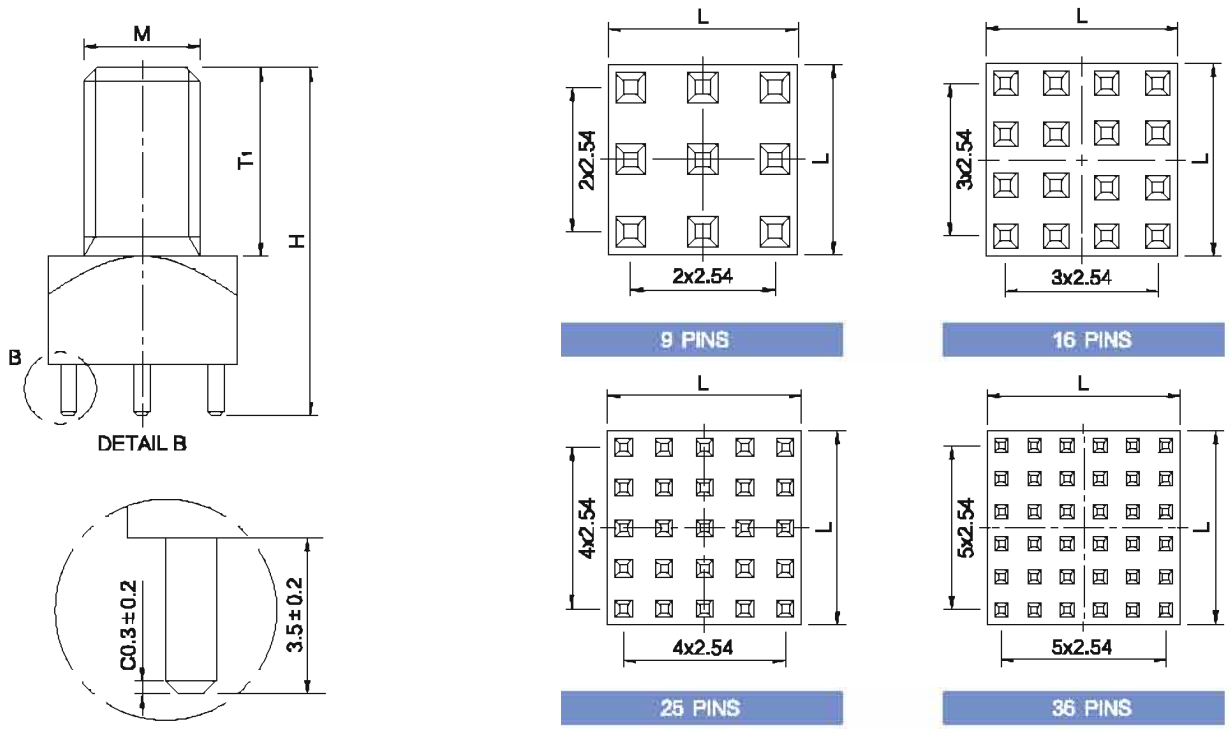


Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Drill Hole Diameter	1.6mm
Final Hole Diameter	1.475mm/1.45mm
Heat Resistance	−55 °C up to +150 °C
Retaining Force	as per IEC 352-5

Drawing No.	M	H	T_1	L	Pins	I R (A)	Tightening Torque
LFPE0501	M3	11	5	7	9	130	0.5Nm
LFPE0502	M4	12.5	6	7	9	130	1.2Nm
LFPE0503	M4	13	6	9	16	180	1.2Nm
LFPE0504	M5	15.5	8	7	9	130	2.2Nm
LFPE0505	M5	16	8	9	16	180	2.2Nm
LFPE0506	M6	19	10	13	25	250	3.9Nm
LFPE0507	M8	24	13	13	25	250	9Nm
LFPE0508	M10	27.5	16	16	36	350	17Nm
LFPE0509	M12	41.5	30	18	36	350	35Nm

Dimension in mm

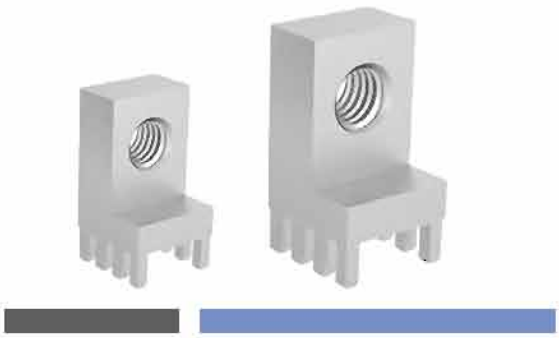

PE06


Features

- PCB connection for fixing cable lugs
- UNC thread or customer specific modifications on demand
- As a fixing element for assembly onto housing etc
  E.g. for the connection of high current relays

特征

- 可将电缆线固定在电路板上
- 可按客户需求提供 UNC 螺纹或进行定制
- 可作为固定元件将部件固定于外壳等。
  例如：可用于连接大电流继电器

Drawings

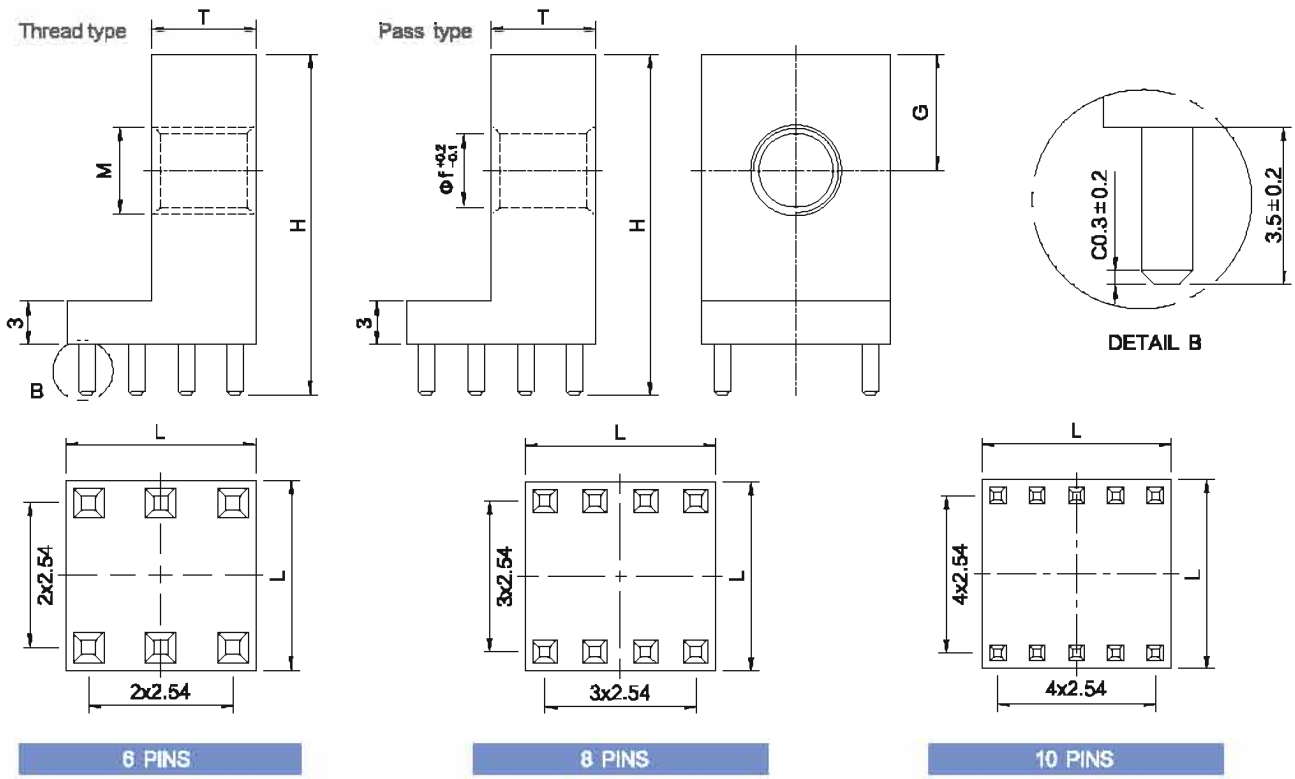

6 PINS | 8 PINS | 10 PINS

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Drill Hole Diameter	1.6mm
Final Hole Diameter	1.475mm/1.45mm
Heat Resistance	−55 °C up to +150 °C
Retaining Force	as per IEC 352-5

Drawing No.	M/Φf	H	T	G	L	Pins	I R (A)	Tigntening Torque
LFPE0601	M3	17.5	3.8	5	7	6	100	0.5Nm
LFPE0602	M4	17.5	5	5	9	8	160	1.2Nm
LFPE0603	M5	17.5	5	5	9	8	160	2.2Nm
LFPE0604	M6	23.5	8	8	13	10	240	3.9Nm
LFPE0605	M8	23.5	8	8	13	10	240	9Nm
LFPE0606	Φ3.2	17.5	3.8	5	7	6	100	-
LFPE0607	Φ4.2	17.5	5	5	9	8	160	-
LFPE0608	Φ5.2	17.5	5	5	9	8	160	-
LFPE0609	Φ6.2	23.5	8	8	13	10	240	-
LFPE0610	Φ8.2	23.5	8	8	13	10	240	-

Dimension in mm



PE07


Features

- PCB connection for fixing cable lugs
- UNC thread or customer specific modifications on demand
- As a fixing element for assembly onto housing etc
  E.g. for the connection of high current relays

特征

- 可将电缆线固定在电路板上
- 可按客户需求提供 UNC 螺纹或进行定制
- 可作为固定元件将部件固定于外壳等。
  例如：可用于连接大电流继电器

Drawings

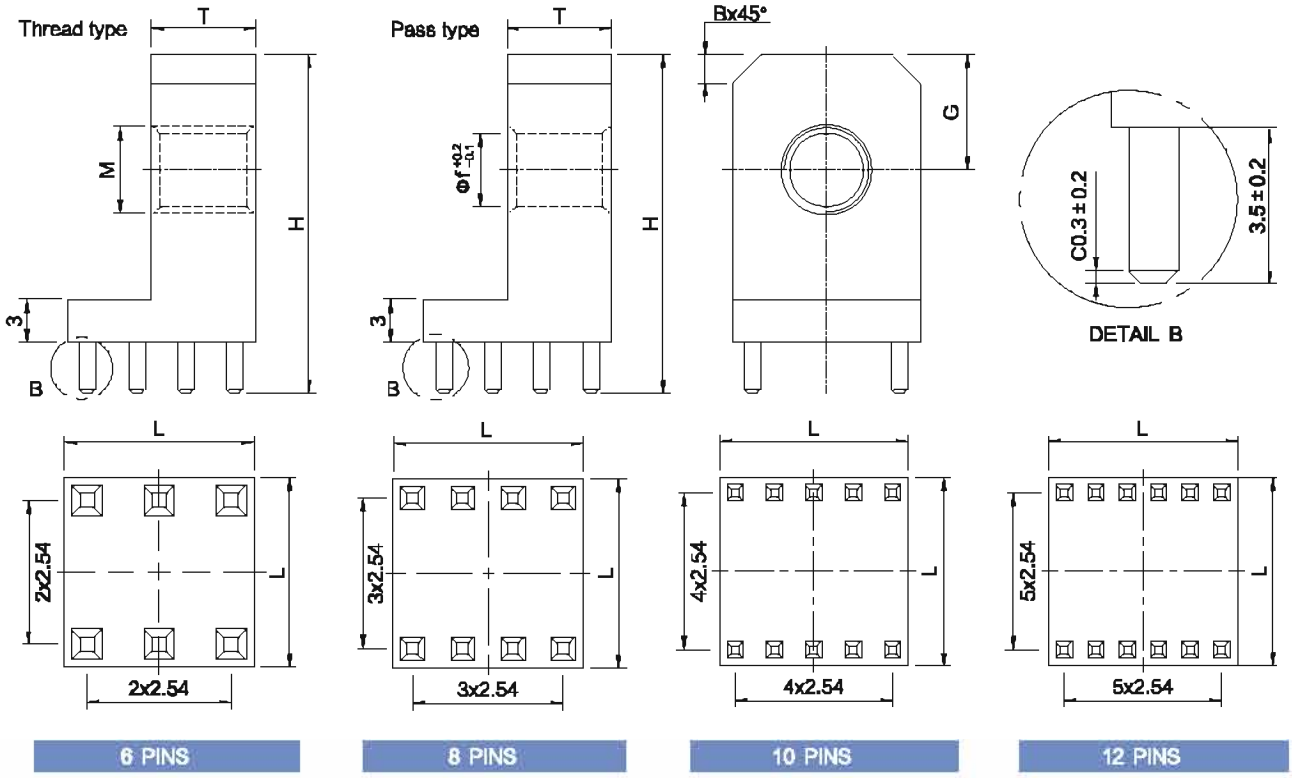

6 PINS | 8 PINS | 10 PINS | 12 PINS

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Drill Hole Diameter	1.6mm
Final Hole Diameter	1.475mm/1.45mm
Heat Resistance	−55 °C up to +150 °C
Retaining Force	as per IEC 352-5

Drawing No.	M/Φf	B	H	T	G	L	Pins
LFPE0701	M3	1	17.5	4	5	7	6
LFPE0702	M4	1.5	17.5	5	5	9	8
LFPE0703	M5	1.5	17.5	5	5	9	8
LFPE0704	M6	2	23.5	8	8	13	10
LFPE0705	M8	2	23.5	8	8	13	10
LFPE0706	M10	2.5	28.5	10	10	16	12
LFPE0707	Φ3.2	1	17.5	4	5	7	6
LFPE0708	Φ4.2	1.5	17.5	5	5	9	8
LFPE0709	Φ5.2	1.5	17.5	5	5	9	8
LFPE0710	Φ6.2	2	23.5	8	8	13	10
LFPE0711	Φ8.2	2	23.5	8	8	13	10
LFPE0712	Φ10.2	2.5	28.5	10	10	16	12

Dimension in mm



PE08


Features

- PCB connection for fixing cable lugs
- UNC thread or customer specific modifications on demand
- As a fixing element for assembly onto housing etc
  E.g. for the connection of high current relays

特征

- 可将电缆线固定在电路板上
- 可按客户需求提供 UNC 螺纹或进行定制
- 可作为固定元件将部件固定于外壳等。
  例如：可用于连接大电流继电器

Drawings

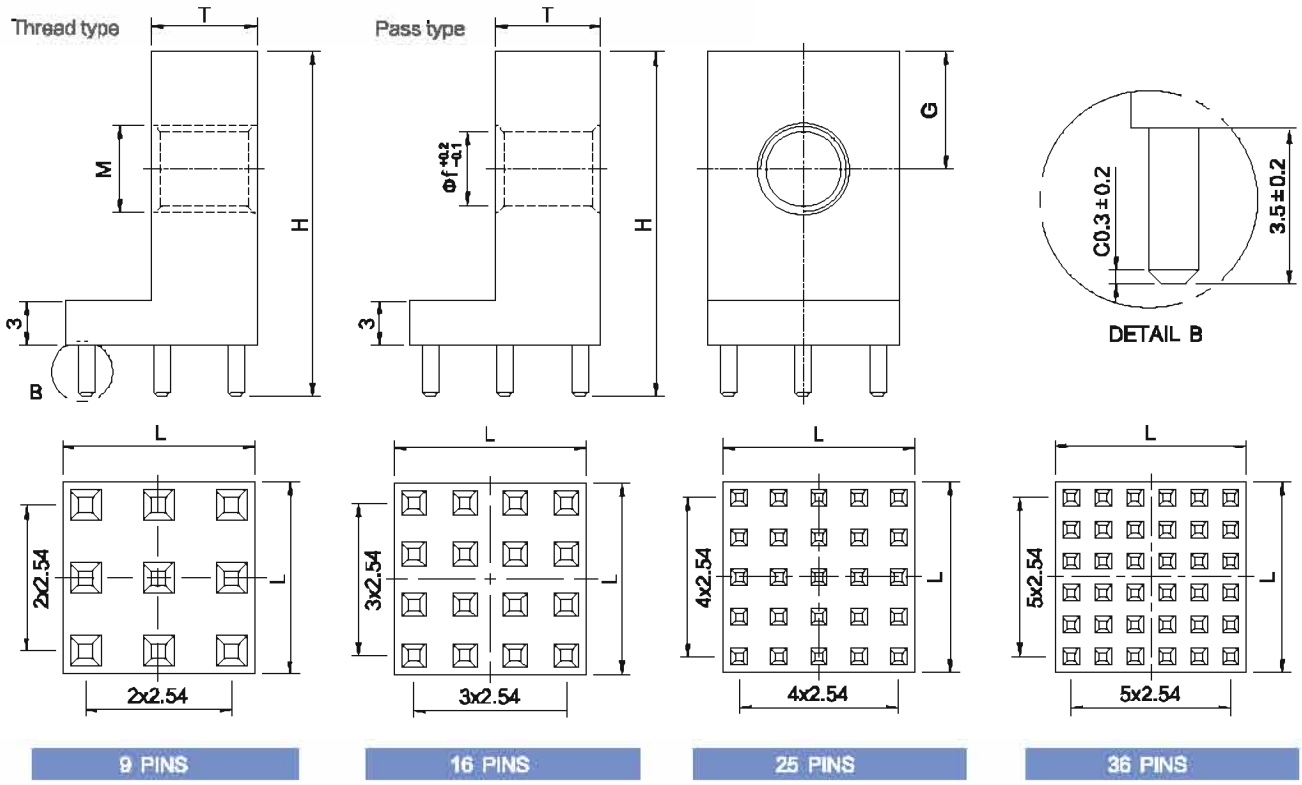

9 PINS | 16 PINS | 25 PINS | 36 PINS

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Drill Hole Diameter	1.6mm
Final Hole Diameter	1.475mm/1.45mm
Heat Resistance	−55 °C up to +150 °C
Retaining Force	as per IEC 352−5

Drawing No.	M/Φf	H	T	G	L	Pins	I R (A)	Tigntening Torque
LFPE0801	M3	17.5	4	5	7	9	130	0.5Nm
LFPE0802	M4	17.5	5	5	9	16	180	1.2Nm
LFPE0803	M5	17.5	5	5	9	16	180	2.2Nm
LFPE0804	M6	23.5	8	8	13	25	250	3.9Nm
LFPE0805	M8	23.5	8	8	13	25	250	9Nm
LFPE0806	M10	28.5	10	10	16	36	350	17Nm
LFPE0807	Φ3.2	17.5	4	5	7	9	130	-
LFPE0808	Φ4.2	17.5	5	5	9	16	180	-
LFPE0809	Φ5.2	17.5	5	5	9	16	180	-
LFPE0810	Φ6.2	23.5	8	8	13	25	250	-

Dimension in mm



PE09


Features

- PCB connection for fixing cable lugs
- UNC thread or customer specific modifications on demand
- As a fixing element for assembly onto housing etc
  E.g. for the connection of high current relays

特征

- 可将电缆线固定在电路板上
- 可按客户需求提供 UNC 螺纹或进行定制
- 可作为固定元件将部件固定于外壳等。
  例如：可用于连接大电流继电器

Drawings

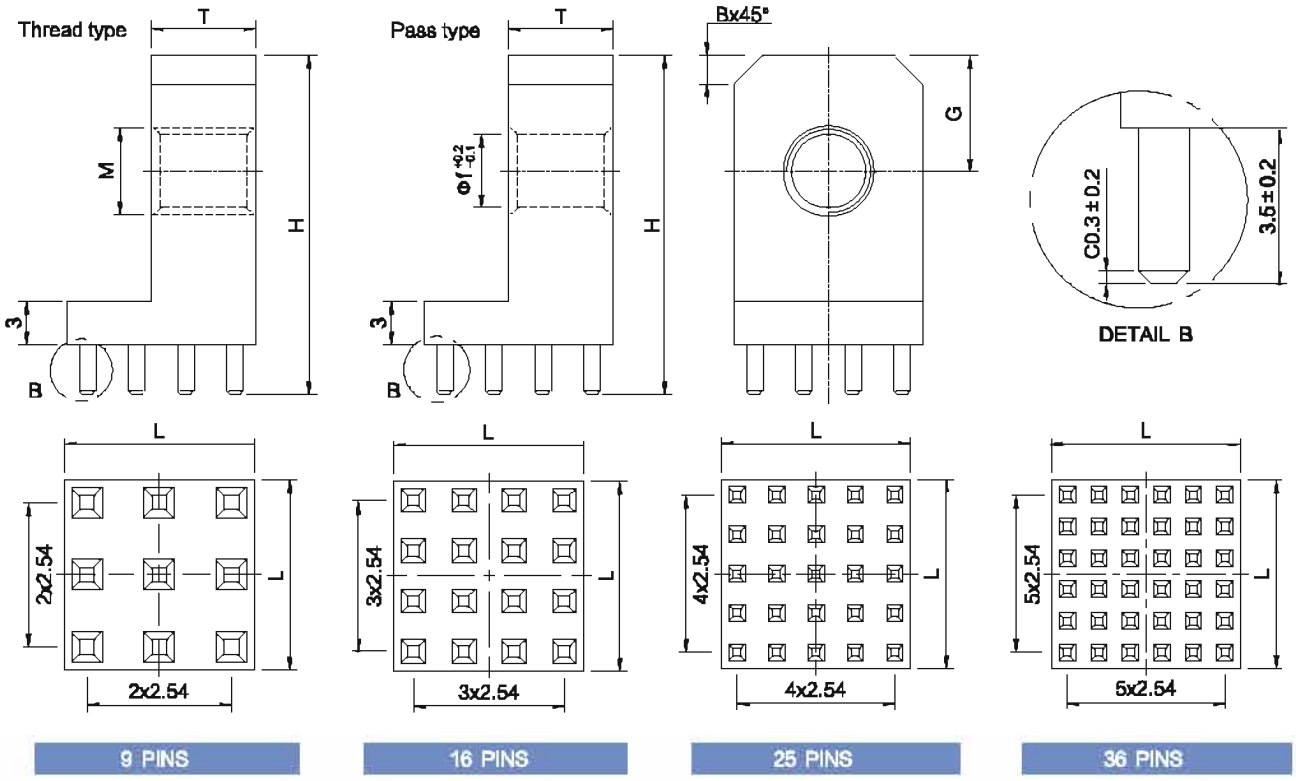


9 PINS | 16 PINS | 25 PINS | 36 PINS

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Drill Hole Diameter	1.6mm
Final Hole Diameter	1.475mm/1.45mm
Heat Resistance	−55 °C up to +150 °C
Retaining Force	as per IEC 352-5

Drawing No.	M/Φf	B	H	T	G	L	Pins
LFPE0901	M3	1	17.5	4	5	7	9
LFPE0902	M4	1.5	17.5	5	5	9	16
LFPE0903	M5	1.5	17.5	5	5	9	16
LFPE0904	M6	2	23.5	8	8	13	25
LFPE0905	M8	2	23.5	8	8	13	25
LFPE0906	M10	2.5	28.5	10	10	16	36
LFPE0907	Φ3.2	1	17.5	4	5	7	9
LFPE0908	Φ4.2	1.5	17.5	5	5	9	16
LFPE0909	Φ5.2	1.5	17.5	5	5	9	16
LFPE0910	Φ6.2	2	23.5	8	8	13	25
LFPE0911	Φ8.2	2	23.5	8	8	13	25
LFPE0912	Φ10.2	2.5	28.5	5	10	16	36
LFPE0913	Φ10.2	2.5	28.5	10	10	16	36

Dimension in mm

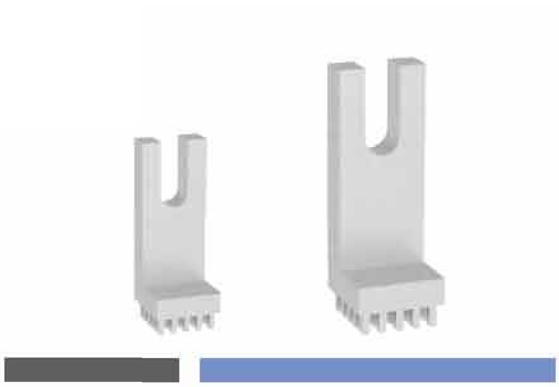

PE10


Features

- PCB connection for fixing cable lugs
- Due to the u-profile ensures a simple proces-sing of the mounting bolt, Compensation of greater height tolerances possible
- As a fixing element for assembly onto housing etc
  E.g. for the connection of high current relays

特征

- 可将电缆线固定在电路板上
- U 型设计使螺栓安装操作简单，可提供更大的高度公差
- 可作为固定元件将部件固定于外壳等。
  例如：可用于连接大电流继电器

Drawings

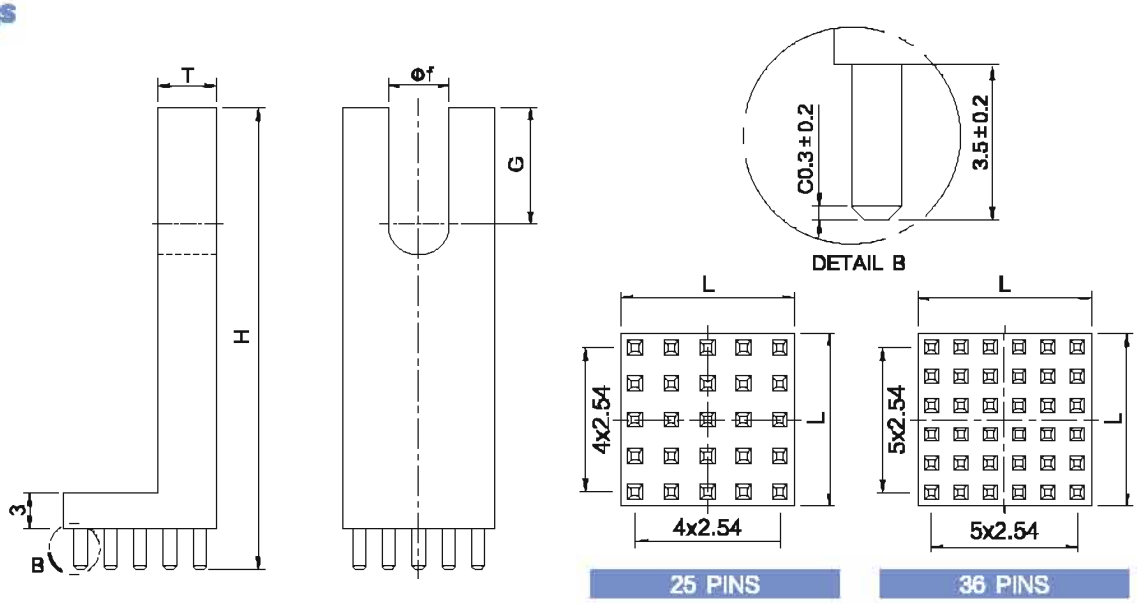


Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Drill Hole Diameter	1.6mm
Final Hole Diameter	1.475mm/1.45mm
Heat Resistance	−55 °C up to +150 °C
Retaining Force	as per IEC 352-5

Drawing No.	Φf	H	T	G	L	Pins
LFPE1001	Φ5.2	39.5	5	10	13	25
LFPE1002	Φ8.2	42.5	5	10	16	36
LFPE1003	Φ10.2	44.5	5	13	16	36

Dimension in mm

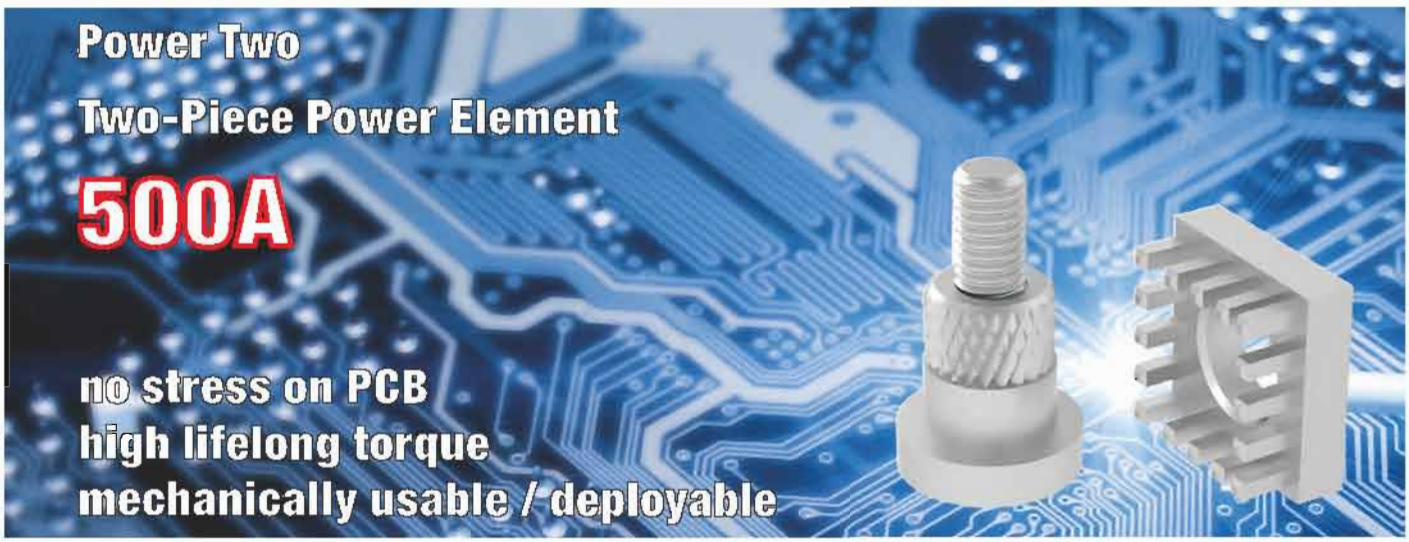

Two-piece Power Elements are a solution for through screw technologies on circuit boards. These high current terminal blocks and spacers enable a durable and reliable connection and mounting on the PCB without stressing it.


Depending on the pin arrangement and the layout, currents of up to 500A are possible. The assembly method allows individual adaptions regarding design and dimensions. That is the reason why Power Elements perfectly qualify as connecting elements for fuses, IGBTs, switches and cables and the circuit board or for board-to-board connections.

Application Possibilities

- Board-to-board stackable
- Wire-to-board screw connection of ring terminals
- Electro mechanics, through screw technology, spacers
- Retainers / fastenings of switches, fuses, IGBTs
- Any combination of all these and much more

Processing

In-saiL PowerTwo Power Elements are pressed in into the circuit board. Soldering is not necessary. Therefore, the PCBs are not exposed to temperature stress. This processing step easily blends in to the processing chain and is highly cost efficient. With the aid of the corresponding Press Fit tools, several Power Elements can be Press Fit simultaneously.

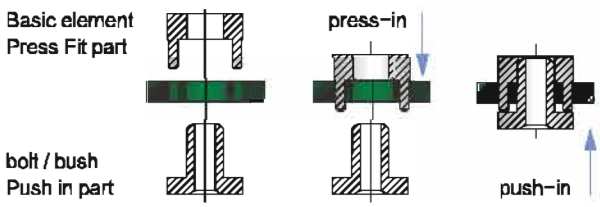

Technical Data	
Material	Brass
Surfaces	Tin-plated (standard)
	further surfaces such as nickel, silver, nickel / gold and others on demand

Dimensions	
Length x width	from 9 x 9 to 22 x 22 mm
Height	from 3mm individually
Height above PCB	from 3mm individually
Pin length	up to 7.5mm (standard of 3.5mm)

Circuit Board	
Base material	FR4 (EPGC202)
PCB thickness	from 1.5mm
Drilling diameter	1.6 0/-0.03 mm
Final diameter HAL surface	1.45 ±0.05mm
chemical surface	1.475 ±0.05mm


Processing Parameters	
Press-in force	min. 40N per Pin
Extraction force	min. 30 N per Pin
Retention force	60 – 80 % of the press-in force
Press-in speed	100 – 250mm /min
Holding forces according to IEC 352-5	

For assembling prototypes, no special equipment is needed for pressing in, a simple toggle press is sufficient


1. The circuit board needs support during the pressing procedure
2. The pressing force must be executed in a 90° angle to the circuit board
3. After the pressing process the pins should stand out of the drilled hole (ca. 0.2 – 0.5mm)
4. Plated through holes of the circuit board must be executed according to our indications
5. PowerTwo high current terminal blocks and spacers are manufactured for pressing, soldering is not intended.

Circuit Board Design

Via Specication For Chemical Surfaces

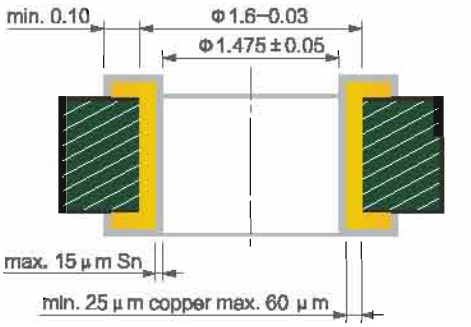


Via Specication For HAL (Hot Air Solder Leveling)

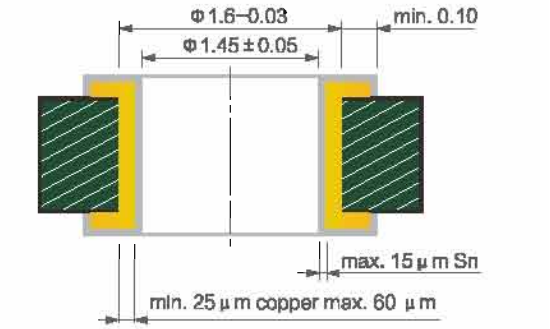


Torques

- Based on DIN EN 20898 T7 Part 25 (tightening torques);values for brass material (MS 63)
- Determined values (torgues). For these mechanical loads,destruction of the threaded shank occurs.The components must never be loaded up to these values.
- Determined values (torgues). For these mechanical loads， destruction of the press–fit pins occurs(approx.1 Nm/pin). The components must never be loaded with these values.
  The maximum permissible torgue changes greatly with the material composition (alloy parts). Safety margins must also be taken into account for practical use.
  For this reason, REDCUBE PRESS–FIT are only permitted to be loaded with the tightening torque values for brass material –(according to row 2 / table)!

Table for REDCUBE PRESS.FIT /Shank / Full Plain Pin–Plate						
Thread dimension (metric)	M3	M4	M5	M6	M8	M10
Max. tightening torque (Nm)	0.5	1.2	2.2	3.9	9.0	17.0
Breaking torque (Nm)	1.5	4.0	6.0	10	32.5	32.5
Breaking torque pins (Nm)	9	16	16	25	25	36

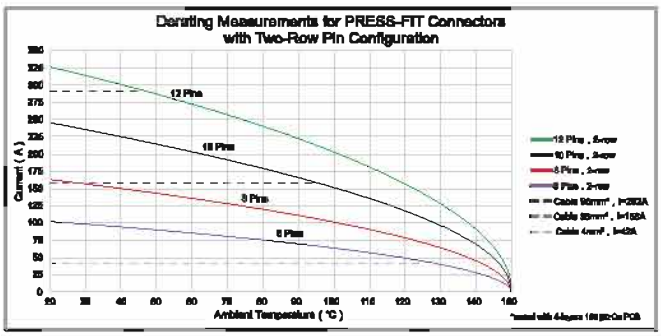

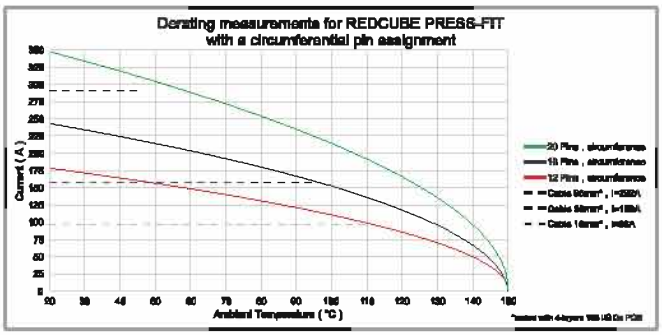

Current Carrying Capacity


The current carrying capacity of a Press Fit connection needs to be seen in the context of the overall system. The Press Fit zone has a very low electrical contact resistance of 100 – 200 µΩ The limiting factor the refore usually lies in the circuit board layout or in the connection of a feed line.
Reference values for a pre–dimensioning can be found under Technical Data on page 22.

Overview of PowerTwo products					
					
Customer Specific	basic element pins two–rowed	basic element pins circumferential	socket female thread	socket through hole	bolt male thread
	Pins		Thread or Hole		
	8, 10, 12	12, 16, 20	M3 – M10	Φ3.2 – Φ10.2	M3 – M10

All threads are available in UNC

Supplies

Based on your different requirements, we also provide some relevant products at the back of this brochure. For further inquiries, please contact our sales representative.

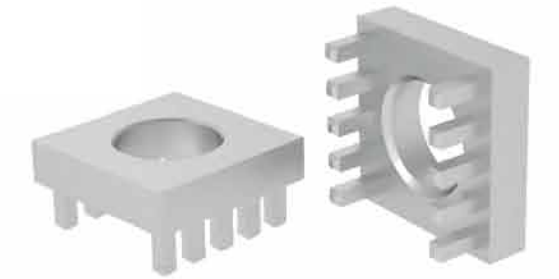

PE11


Features

- Two-piece type, base, dual-row design
- Two-piece combination, suitable for applications with limited installation space and high current requirements

特征

- 双部件，底座，双排式
- 双部件配合使用，适用于安装空间相对狭窄且需要过大电流的场景

Drawings

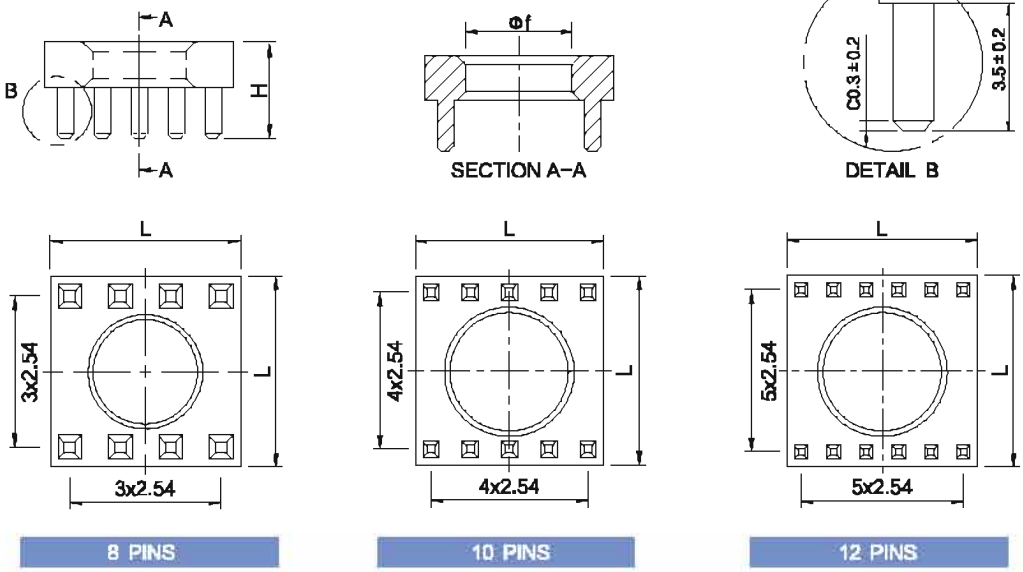


8 PINS | 10 PINS | 12 PINS

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Drill Hole Diameter	1.6mm
Final Hole Diameter	1.475mm/1.45mm
Heat Resistance	−55 °C up to +150 °C
Retaining Force	as per IEC 352-5

Drawing No.	Φf	H	L	Pins	I R (A)
LFPE1101	Φ5.5	6.6	9	8	160
LFPE1102	Φ7.3	6.6	13	10	240
LFPE1103	Φ9.8	6.6	16	12	320
LFPE1104	Φ10.5	6.6	16	12	320

Dimension in mm

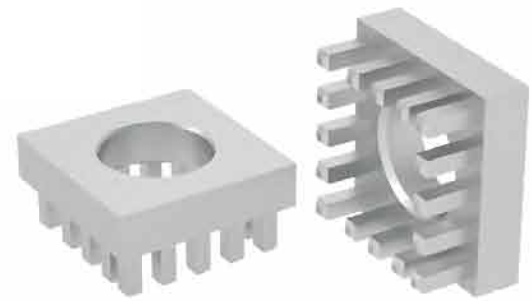

PE12


Features


- Two-piece type, base, Circular-Pin population
- Two-piece combination, suitable for applications with limited installation space and high current requirements

特征


- 双部件，底座，环绕型
- 双部件配合使用，适用于安装空间相对狭窄且需要过大电流的场景

Drawings







SECTION A-A




DETAIL B



12 PINS



16 PINS



20 PINS

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Drill Hole Diameter	1.6mm
Final Hole Diameter	1.475mm/1.45mm
Heat Resistance	-55 °C up to +150 °C
Retaining Force	as per IEC 352-5
Massive Pressfit Zone Pitch	2.85mm

Drawing No.	Φf	H	L	Pins
LFPE1201	Φ6.2	6.6	10	12
LFPE1202	Φ7.3	6.6	13	16
LFPE1203	Φ12	6.6	16	20

Dimension in mm



PE13


Features

- Two-Part, Female Thread. The cable can be fixed on the PCB board with the Base-Part
- Fixing of large heavy components
- UNC thread or customer specific modifications on demand


特征

- 双部件，插座，圆头内螺纹。与底座配合使用，可将电缆线固定在电路板上。
- 用于固定大型重型部件
- 可按客户需求提供 UNC 螺纹或进行定制

Drawings



Diamond knurling



Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Rate Current	up to 300A
Heat Resistance	-55 °C up to +150 °C

Diamond knurling

Drawing No.	M	D	D_2 -0.2	D_3 ±0.05	B	Used Base Plate
LFPE1301	M3	8	5.65	5.65	0.5	LFPE1101
LFPE1302	M5	12	7.45	7.45	0.5	LFPE1102 LFPE1202
LFPE1303	M6	12	7.45	7.45	0.3	LFPE1102 LFPE1202
LFPE1304	M8	15	9.95	9.95	0.5	LFPE1103
LFPE1305	M8	15	10.65	10.65	0.5	LFPE1104
LFPE1306	M4	8	5.65	5.65	0.5	LFPE1101
LFPE1308	M5	10	6.35	6.35	0.3	LFPE1201

Dimension in mm



PE14


Features


- Two-Part, Female Thread. The cable can be fixed on the PCB board with the Base-Part
- Fixing of large heavy components
- UNC thread or customer specific modifications on demand

特征

- 双部件，插座，方头内螺纹。与底座配合使用，可将电缆线固定在电路板上。
- 用于固定大型重型部件
- 可按客户需求提供 UNC 螺纹或进行定制

Drawings





Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Rate Current	up to 300A
Heat Resistance	-55 °C up to +150 °C

Drawing No.	M	L	D_2 -0.2	D_3 ±0.05	B	Used Base Plate
LFPE1401	M3	9	5.65	5.65	0.5	LFPE1101
LFPE1402	M3	10	6.35	6.35	0.5	LFPE1201
LFPE1403	M4	9	5.65	5.65	0.3	LFPE1101
LFPE1404	M4	10	6.35	6.35	0.5	LFPE1201
LFPE1405	M4	13	7.45	7.45	0.5	LFPE1102 LFPE1202
LFPE1406	M5	10	6.35	6.35	0.3	LFPE1201
LFPE1407	M5	13	7.45	7.45	0.5	LFPE1102 LFPE1202
LFPE1408	M6	13	7.45	7.45	0.3	LFPE1102 LFPE1202
LFPE1409	M8	16	10	10	0.5	LFPE1103
LFPE1410	M8	16	10.65	10.65	0.5	LFPE1104
LFPE1411	M8	16	12.15	12.15	0.5	LFPE1203
LFPE1412	M10	16	12.15	12.15	0.5	LFPE1203

Dimension in mm

PE15




Features


- Two-Part, Female Through-Hole. The cable can be fixed on the PCB board with the Base-Part
- Fixing of large heavy components

特征

- 双部件，插座，圆头光孔。与底座配合，可将电缆线、保险丝固定在电路板上
- 用于固定大型重型部件

Drawings





Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Rate Current	up to 300A
Heat Resistance	-55 °C up to +150 °C

Drawing No.	Φf	D	D2-0.2	D3 ±0.05	B	Used Base Plate
LFPE1501	Φ3.2	8	5.65	5.65	0.5	LFPE1101
LFPE1502	Φ4.2	8	5.65	5.65	0.5	LFPE1101
LFPE1503	Φ5.2	12	7.45	7.45	0.5	LFPE1102 LFPE1202
LFPE1504	Φ6.2	12	7.45	7.45	0.3	LFPE1102 LFPE1202
LFPE1505	Φ8.2	15	9.95	9.95	0.5	LFPE1103
LFPE1506	Φ8.2	15	10.65	10.65	0.5	LFPE1104

Dimension in mm



PE16


Features


- Two-Part, Female Through-Hole. The cable can be fixed on the PCB board with the Base-Part
- Fixing of large heavy components

特征

- 双部件，插座，方头光孔。与底座配合，可将电缆线、保险丝固定在电路板上
- 用于固定大型重型部件

Drawings





Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Rate Current	up to 300A
Heat Resistance	-55 °C up to +150 °C

Drawing No.	Φf	L	D_2 -0.2	D_3 ±0.05	B	Used Base Plate
LFPE1601	Φ3.2	9	5.65	5.65	0.5	LFPE1101
LFPE1602	Φ3.2	10	6.35	6.35	0.5	LFPE1201
LFPE1603	Φ4.2	9	5.65	5.65	0.3	LFPE1101
LFPE1604	Φ4.2	10	6.35	6.35	0.5	LFPE1201
LFPE1605	Φ4.2	13	7.45	7.45	0.5	LFPE1202 LFPE1102
LFPE1606	Φ5.2	10	6.35	6.35	0.3	LFPE1201
LFPE1607	Φ5.2	13	7.45	7.45	0.5	LFPE1202 LFPE1102
LFPE1608	Φ6.2	13	7.45	7.45	0.3	LFPE1202 LFPE1102
LFPE1609	Φ6.2	16	10.65	10.65	0.5	LFPE1104
LFPE1610	Φ8.2	16	10	10	0.5	LFPE1103
LFPE1611	Φ8.2	16	10.65	10.65	0.5	LFPE1104
LFPE1612	Φ8.2	16	12.15	12.15	0.5	LFPE1203
LFPE1613	Φ10.2	16	12.15	12.15	0.5	LFPE1203

Dimension in mm



PE17


Features


- Two-Part, Male Thread. The ceble can be fixed on the PCB boerd with the Base-Part
- Fixing of large heavy components
- UNC thread or customer specific modifications on demand

特征

- 双部件，插针，圆头外螺纹。与底座配合使用，可将电缆线、保险丝固定在电路板上
- 用于固定大型重型部件
- 可按客户需求提供 UNC 螺纹或进行定制

Drawings






Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Rate Current	up to 300A
Heat Resistance	-55 °C up to +150 °C

Drawing No.	M	H	C₂	D	D₂-0.2	D₃ ±0.05	Used Base Plate
LFPE1701	M3	13.4	5	8	5.65	5.65	LFPE1101
LFPE1702	M4	14.4	6	8	5.65	5.65	LFPE1101
LFPE1703	M5	16.4	8	12	7.45	7.45	LFPE1102 LFPE1202
LFPE1704	M6	18.4	10	12	7.45	7.45	LFPE1102 LFPE1202
LFPE1705	M8	21.4	13	15	9.95	9.95	LFPE1103
LFPE1706	M8	21.4	13	15	10.65	10.65	LFPE1104

Dimension in mm

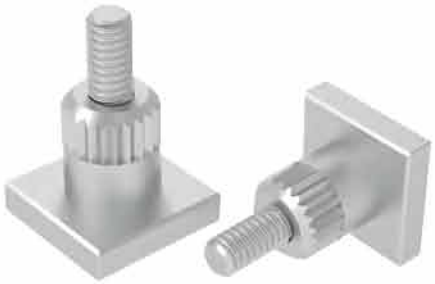

PE18


Features


- Two-Part, Male Thread. The cable can be fixed on the PCB board with the Base-Part
- Fixing of large heavy components
- UNC thread or customer specific modifications on demand

特征

- 双部件，插针，方头外螺纹。与底座配合使用，可将电缆线、保险丝固定在电路板上
- 用于固定大型重型部件
- 可按客户需求提供 UNC 螺纹或进行定制

Drawings



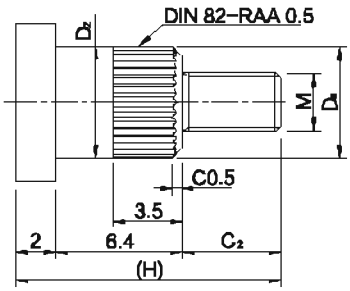


Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Rate Current	up to 300A
Heat Resistance	-55 °C up to +150 °C

Drawing No.	M	H	L	C_2	D_2 -0.2	D_3 ±0.05	Used Base Plate
LFPE1801	M3	13.4	9	5	5.6	5.6	LFPE1101
LFPE1802	M3	14.4	10	6	6.35	6.35	LFPE1201
LFPE1803	M4	14.4	9	6	5.6	5.6	LFPE1101
LFPE1804	M4	14.4	10	6	6.35	6.35	LFPE1201
LFPE1805	M4	16.4	13	8	7.45	7.45	LFPE1202 LFPE1102
LFPE1806	M5	16.4	13	8	7.45	7.45	LFPE1202 LFPE1102
LFPE1807	M5	17.4	10	9	6.35	6.35	LFPE1201
LFPE1808	M6	18.4	13	10	7.45	7.45	LFPE1202 LFPE1102
LFPE1809	M8	21.4	16	13	10	10	LFPE1103
LFPE1810	M8	21.4	16	13	10.65	10.65	LFPE1104
LFPE1811	M8	21.4	16	13	12.15	12.15	LFPE1203
LFPE1812	M10	21.4	16	13	12.15	12.15	LFPE1203

Dimension in mm

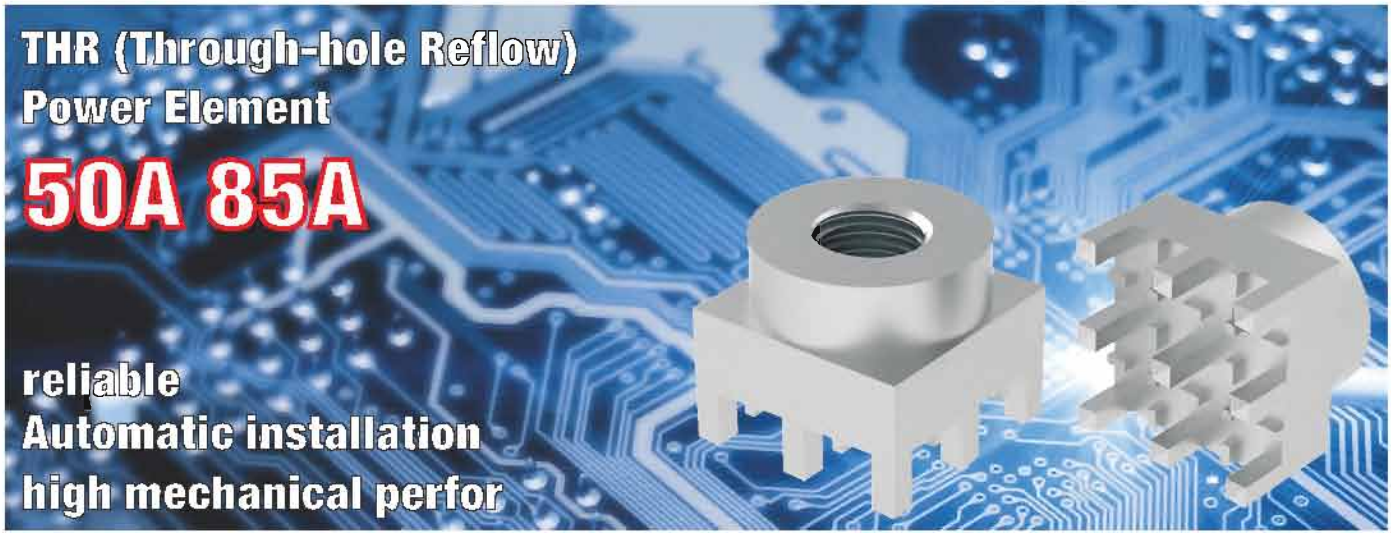

The miniaturization of electronic components has elevated the requirements of our products. In the PCB industry, low power components increased the demand and the requirements of automation. After years of research and development, we developed miniaturization and low resistance THR products series. The product can meet the requirements of either manual or automatic installation for the line to board connection or plate to board 90 degree connection.


THR (Through-hole Reflow, also called pin in paste-PIP) technology is the technology of combining high mechanical strength and automated processing. For the large number of PCB processing board application of perforated elements, this technology can be replaced of wave-soldering in SMT process.

These products can be handled like SMD products because the two products are using the same principle. At the same time, the clear benefits of THR products is that it has better mechanical bonding strength can be achieved with vias.


THR series products have 4, 8, 9, three kinds of pin configuration, the maximum current support up to 85A. By integrating the design, the soldering are more stable and easier to control within the production tolerances. The through hole reflow welding has lower resistance, less current loss, improve work efficiency, reduce energy consumption compared to microwave soldering.

The THR product series is a better choice for environmental friendliness that require high mechanical connection strength and low energy consumption.

Product installation flow chart

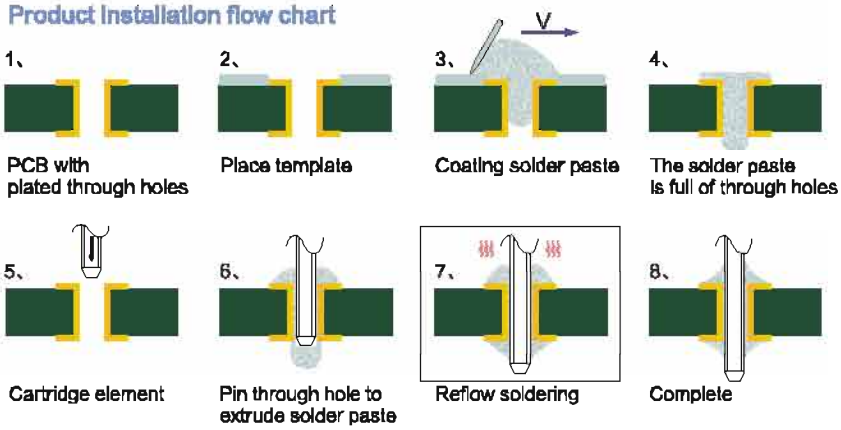


Product installation drawing

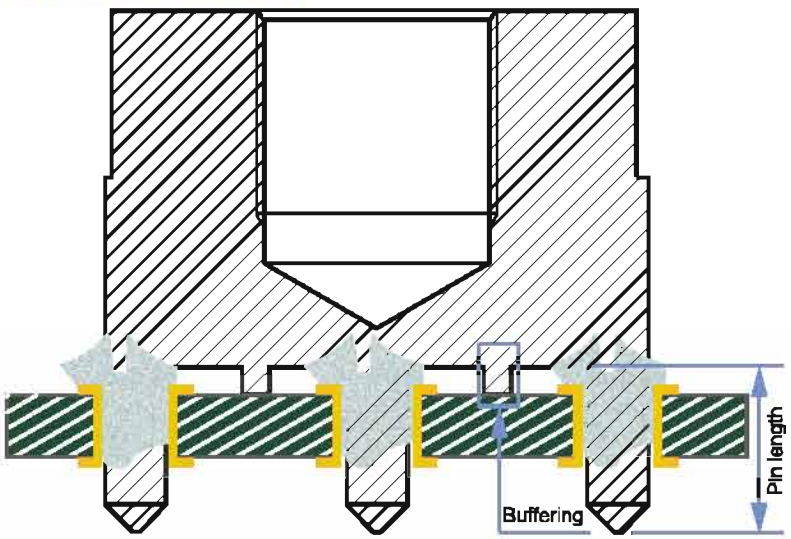

The Advantages of Through hole reflow soldering

1. Through hole reflow soldering provides better quality low PPM rate (PPM rate of defects) which can be less than 20%.
2. Soldering tinless defects, and the rework rate is very low.
3. The layout design of the PCB has less consideration factors compared to the wave soldering process.
4. The process is simple and the equipment is easy to operate.
5. The hole reflow soldering equipment covers less area, because of its printing presses and reflow furnace are smaller, so only a small area required.
6. Free of Tin slag.
7. The machine is fully enclosed, clean, and odorless in the production workshop.
8. The reflow soldering equipment management and maintenance is easy.
9. The printing template is adopted in the printing process, and each welding point and the amount of printed paste can be adjusted according t the requirements.
10. During the reflow, the use of special templetes, the temperature of each welding point can be adjusted according to the need.

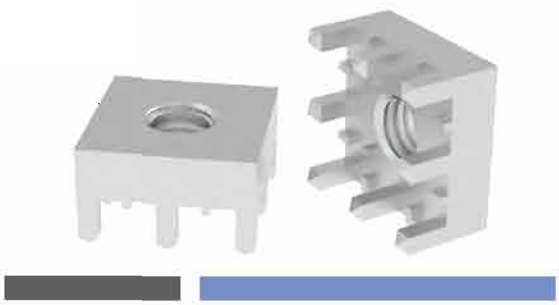

PE19


Features

- Solderable high current Wire-to-Board connections with a focus on automated assembly
- PCB connection for fixing cable lugs
- Cable or PCB angle assembly

特征

- 可焊接高电流线对板连接，重点是可以自动化装配
- 可将电缆线固定在电路板上
- 电缆或 PCB 有角度装配

Drawings

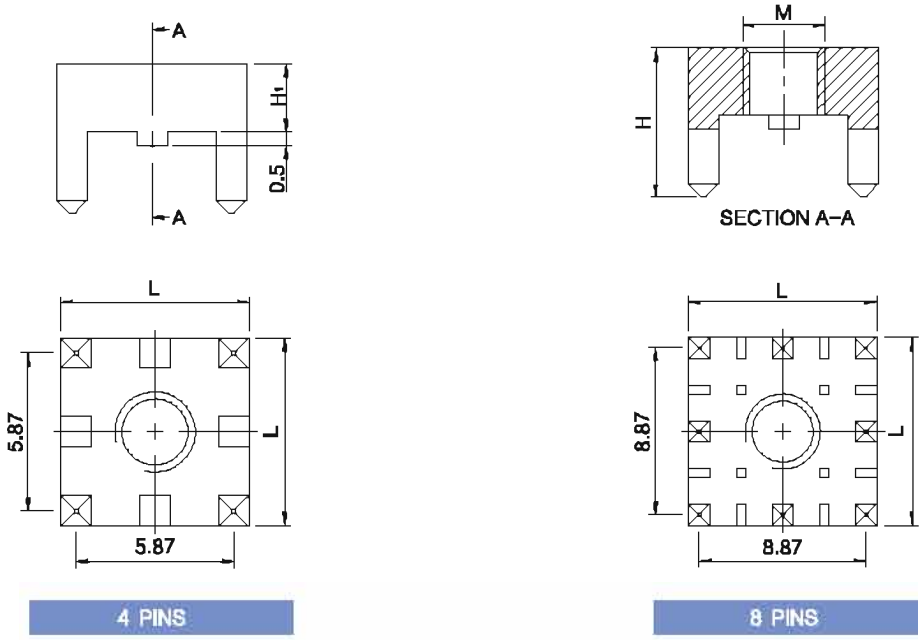


Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Solder Cream Thickness	150 µm
Heat Resistance	−55 °C up to +150 °C
Packaging	Bulk; Tape and Reel

Drawing No.	M	H	H1	L	Pins	I R (A)	Tigntening Torque
LFPE1901	M3	5.5	2.5	7	4	50	0.5Nm
LFPE1902	M4	5.5	2.5	7	4	50	1.2Nm
LFPE1903	M4	6	3	10	8	85	1.2Nm
LFPE1904	M5	6.5	3.5	10	8	85	2.2Nm

Dimension in mm

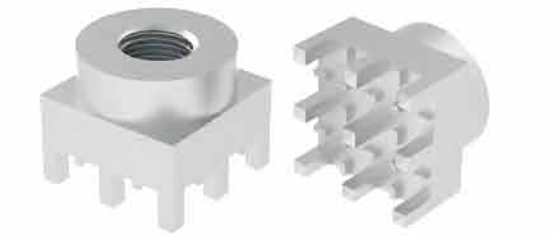

PE20


Features

- Solderable high current Wire-to-Board connections with a focus on automated assembly
- PCB connection for fixing cable lugs
- Cable or PCB angle assembly

特征

- 可焊接高电流线对板连接，重点是可以自动化装配
- 可将电缆线固定在电路板上
- 电缆或 PCB 有角度装配

Drawings

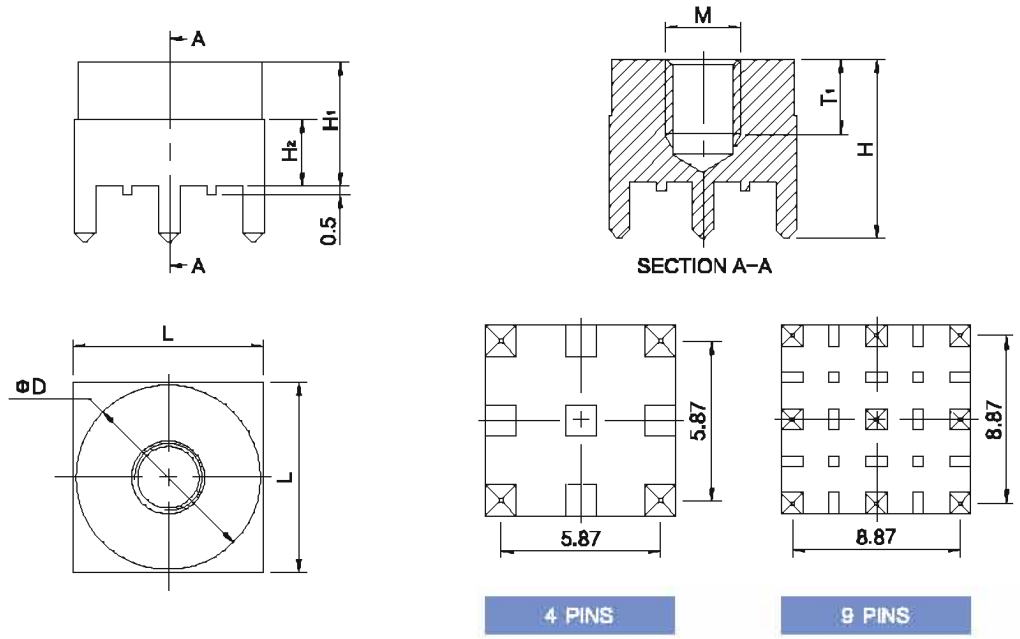


Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Solder Cream Thickness	150 µm
Heat Resistance	−55 °C up to +150 °C
Packaging	Bulk; Tape and Reel

Drawing No.	M	T_1	H	H_1	H_2	ΦD	L	Pins	I R (A)	Tightening Torque
LFPE2001	M3	3.5	8.5	5.5	3.5	Φ6.5	7	4	50	0.5Nm
LFPE2002	M4	4	9	6	3.5	Φ6.5	7	4	50	1.2Nm
LFPE2003	M4	4	9.5	6.5	3.5	Φ9.5	10	9	85	1.2Nm
LFPE2004	M5	4	9.5	6.5	3.5	Φ9.5	10	9	85	2.2Nm

Dimension in mm

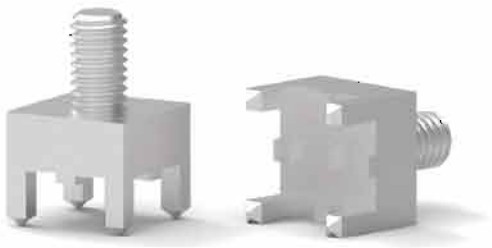

PE21


Features


- Solderable high current Wire-to-Board connections with a focus on automated assembly
- PCB connection for fixing cable lugs
- Cable or PCB angle assembly

特征


- 可焊接高电流线对板连接，重点是可以自动化装配
- 可将电缆线固定在电路板上
- 电缆或 PCB 有角度装配

Drawings

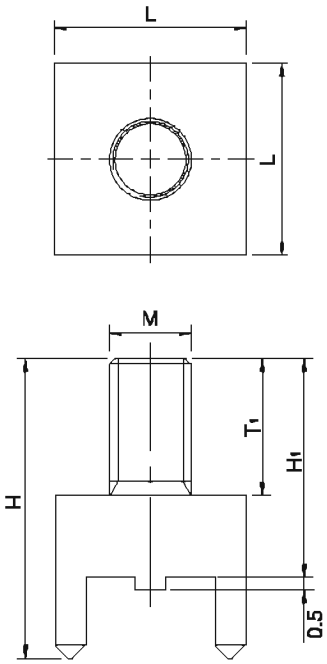



4 PINS



9 PINS

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Solder Cream Thickness	150 µm
Heat Resistance	−55 °C up to +150 °C
Packaging	Bulk; Tape and Reel

Drawing No.	M	H	H1	T1	L	Pins	I R (A)	Tigntening Torque
LFPE2101	M3	11	8	5	7	4	50	0.5Nm
LFPE2102	M4	11	8	5	7	4	50	1.2Nm
LFPE2103	M4	11	8	5	10	9	85	1.2Nm
LFPE2104	M5	13	10	7	7	4	50	2.2Nm
LFPE2105	M5	13	10	7	10	9	85	2.2Nm


Dimension in mm

THR System of
Pin and mounting hole layout


Research and development of THR products for PCB layout and production has specific requirements, thus, we provide a standard PCB product layout and design specifications of solder paste bushing.

For customized products, the layout design for the PCB and the solder bushing need to be correct in order to achieve the optimum performance of the products.

Recommended Land Pattern: [mm]

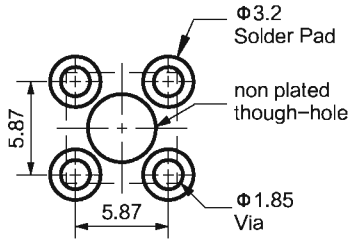


Stencil Suggestion:




This layout is only for PE19 4Pins

Recommended Land Pattern: [mm]

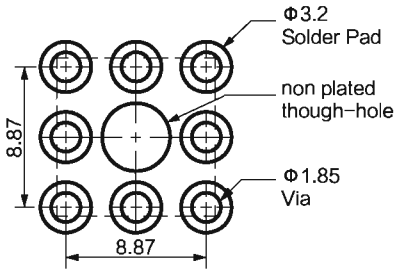


Stencil Suggestion:




This layout is only for PE19 8Pins

Recommended Land Pattern: [mm]




Stencil Suggestion:




This layout is only for PE20, PE21 4Pins

Recommended Land Pattern: [mm]

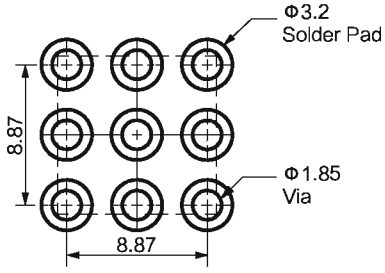

Stencil Suggestion:



This layout is only for PE20, PE21 9Pins



PE22


Features

- For soldering in SMT,it is suitable for fully automated assembly
- PCB connection for fixing cable lugs
- UNC thread or customer specific modifications on demand

特征

- 表面贴装焊接，适用于全自动组装
- 可将电缆线固定在电路板上
- 可按客户需求提供 UNC 螺纹或进行定制

Drawings

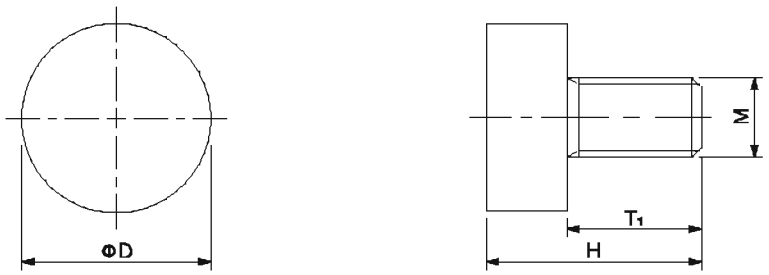

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Solder Cream Thickness	150 µm
Heat Resistance	−55 °C up to +150 °C
Packaging	Bulk; Tape and Reel

Drawing No.	M	H	T_1	ΦD
LFPE2201	M3	8	5	Φ7
LFPE2202	M4	8	5	Φ7
LFPE2203	M4	9.5	6	Φ9
LFPE2204	M5	12.5	8	Φ9
LFPE2205	M6	15.5	10	Φ13
LFPE2206	M8	20.5	13	Φ13
LFPE2207	M10	24	16	Φ16

Dimension in mm



PE23


Features


- For soldering in SMT,it is suitable for fully automated assembly
- PCB connection for fixing cable lugs
- UNC thread or customer specific modifications on demand

特征

- 表面贴装焊接，适用于全自动组装
- 可将电缆线固定在电路板上
- 可按客户需求提供 UNC 螺纹或进行定制

Drawings





Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Solder Cream Thickness	150 µm
Heat Resistance	−55 °C up to +150 °C
Packaging	Bulk; Tape and Reel

Drawing No.	M	H	H1	T1	ΦD
LFPE2301	M3	8.8	8	5	Φ7
LFPE2302	M4	8.8	8	5	Φ7
LFPE2303	M4	10.5	9.5	6	Φ9
LFPE2304	M5	13.5	12.5	8	Φ9
LFPE2305	M6	16.5	15.5	10	Φ13
LFPE2306	M8	21.5	20.5	13	Φ13
LFPE2307	M10	25	24	16	Φ16

Dimension in mm



PE24


Features


- For soldering in SMT,it is suitable for fully automated assembly
- PCB connection for fixing cable lugs
- UNC thread or customer specific modifications on demand

特征

- 表面贴装焊接，适用于全自动组装
- 可将电缆线固定在电路板上
- 可按客户需求提供 UNC 螺纹或进行定制

Drawings






SECTION A–A

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Solder Cream Thickness	150 µm
Heat Resistance	−55 °C up to +150 °C
Packaging	Bulk; Tape and Reel

Drawing No.	M	H	T_1	ΦD	I R (A)	Tigntening Torque
LFPE2401	M3	7	4	Φ7	50	0.5Nm
LFPE2402	M4	7	4	Φ7	50	1.2Nm
LFPE2403	M5	7	4	Φ9	70	2.2Nm

Dimension in mm

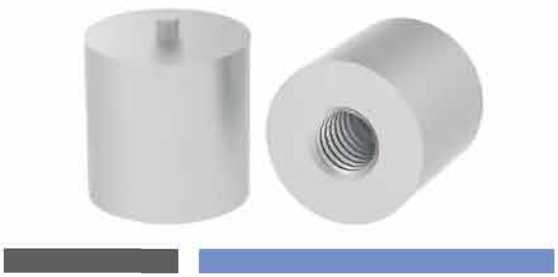

PE25


Features


- For soldering in SMT,it is suitable for fully automated assembly
- PCB connection for fixing cable lugs
- UNC thread or customer specific modifications on demand

特征

- 表面贴装焊接，适用于全自动组装
- 可将电缆线固定在电路板上
- 可按客户需求提供 UNC 螺纹或进行定制

Drawings





SECTION A–A

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Solder Cream Thickness	150 µm
Heat Resistance	−55 °C up to +150 °C
Packaging	Bulk; Tape and Reel

Drawing No.	M	H	H1	T1	ΦD	I R (A)	Tightening Torque
LFPE2501	M3	7.8	7	4	Φ7	50	0.5Nm
LFPE2502	M4	7.8	7	4	Φ7	50	1.2Nm
LFPE2503	M5	7.8	7	4	Φ9	70	2.2Nm

Dimension in mm



PE26


Features

- For soldering in SMT,it is suitable for fully automated assembly
- PCB connection for fixing cable lugs
- UNC thread or customer specific modifications on demand

特征

- 表面贴装焊接，适用于全自动组装
- 可将电缆线固定在电路板上
- 可按客户需求提供 UNC 螺纹或进行定制

Drawings

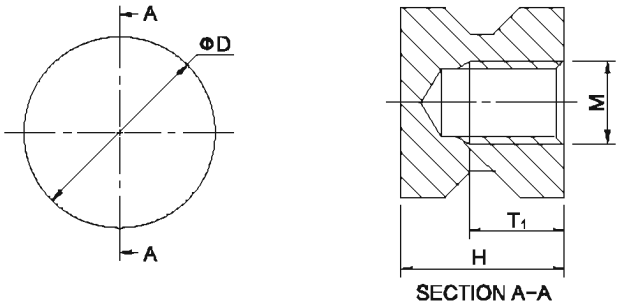

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Solder Cream Thickness	150 µm
Heat Resistance	−55 °C up to +150 °C
Packaging	Bulk; Tape and Reel

Drawing No.	M	H	T1	ΦD
LFPE2601	M3	6	3.5	Φ7
LFPE2602	M4	7	4	Φ9
LFPE2603	M5	7	4	Φ9
LFPE2604	M6	11.5	6.5	Φ13
LFPE2605	M8	13.5	8	Φ13
LFPE2606	M10	17.5	11	Φ16

Dimension in mm



PE27


Features


- For soldering in SMT,it is suitable for fully automated assembly
- PCB connection for fixing cable lugs
- UNC thread or customer specific modifications on demand

特征

- 表面贴装焊接，适用于全自动组装
- 可将电缆线固定在电路板上
- 可按客户需求提供 UNC 螺纹或进行定制

Drawings





SECTION A–A

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Solder Cream Thickness	150 µm
Heat Resistance	–55 °C up to +150 °C
Packaging	Bulk; Tape and Reel

Drawing No.	M	H	H_1	T_1	ΦD
LFPE2701	M3	7	6	3.5	Φ7
LFPE2702	M4	8	7	4	Φ9
LFPE2703	M5	8	7	4	Φ9
LFPE2704	M6	12.5	11.5	6.5	Φ10
LFPE2705	M8	14.5	13.5	8	Φ13
LFPE2706	M10	18.5	17.5	11	Φ16

Dimension in mm



PE28


Features

- For soldering in SMT,it is suitable for fully automated assembly
- PCB connection for fixing cable lugs
- UNC thread or customer specific modifications on demand

特征

- 表面贴装焊接，适用于全自动组装
- 可将电缆线固定在电路板上
- 可按客户需求提供 UNC 螺纹或进行定制

Drawings

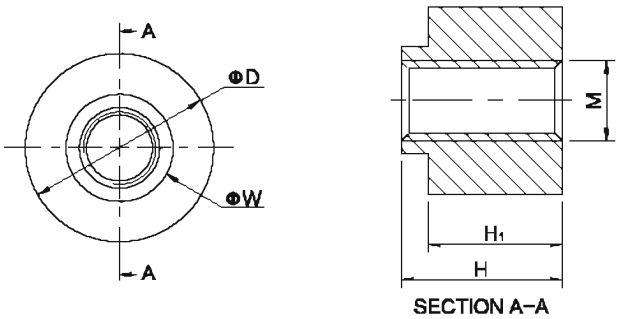

SECTION A–A

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Solder Cream Thickness	150 µm
Heat Resistance	−55 °C up to +150 °C
Packaging	Bulk; Tape and Reel

Drawing No.	M	H	H_1	ΦD	ΦW	I R (A)	Tigntening Torque
LFPE2801	M3	4	3	Φ7	Φ4	50	0.5Nm
LFPE2802	M3	6	5	Φ7	Φ4	50	0.5Nm
LFPE2803	M4	4	3	Φ7	Φ5	50	1.2Nm
LFPE2804	M4	6	5	Φ7	Φ5	50	1.2Nm
LFPE2805	M5	6	5	Φ9	Φ6	70	2.2Nm

Dimension in mm



PE29


Features

- For soldering in SMT,it is suitable for fully automated assembly
- PCB connection for fixing cable lugs
- UNC thread or customer specific modifications on demand

特征

- 表面贴装焊接，适用于全自动组装
- 可将电缆线固定在电路板上
- 可按客户需求提供 UNC 螺纹或进行定制

Drawings

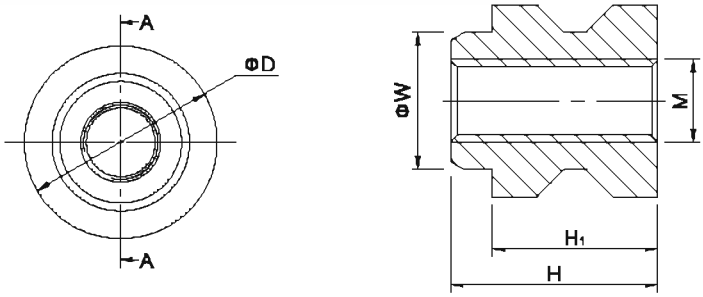


Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Solder Cream Thickness	150 µm
Heat Resistance	−55 °C up to +150 °C
Packaging	Bulk; Tape and Reel

Drawing No.	M	H	H1	ΦD	ΦW
LFPE2901	M3	7.5	6	Φ7	Φ5
LFPE2902	M4	8.5	7	Φ9	Φ6
LFPE2903	M5	8.5	7	Φ9	Φ6
LFPE2904	M6	13	11.5	Φ13	Φ9
LFPE2905	M8	15	13.5	Φ13	Φ9
LFPE2906	M10	19	17.5	Φ16	Φ12

Dimension in mm

PE30

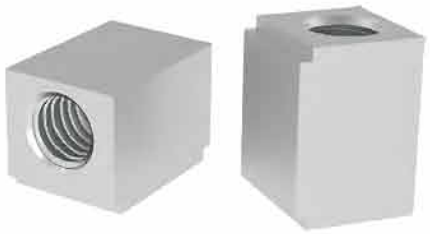


Features

- For soldering in SMT,it is suitable for fully automated assembly
- PCB connection for fixing cable lugs
- UNC thread or customer specific modifications on demand

特征

- 表面贴装焊接，适用于全自动组装
- 可将电缆线固定在电路板上
- 可按客户需求提供 UNC 螺纹或进行定制

Drawings

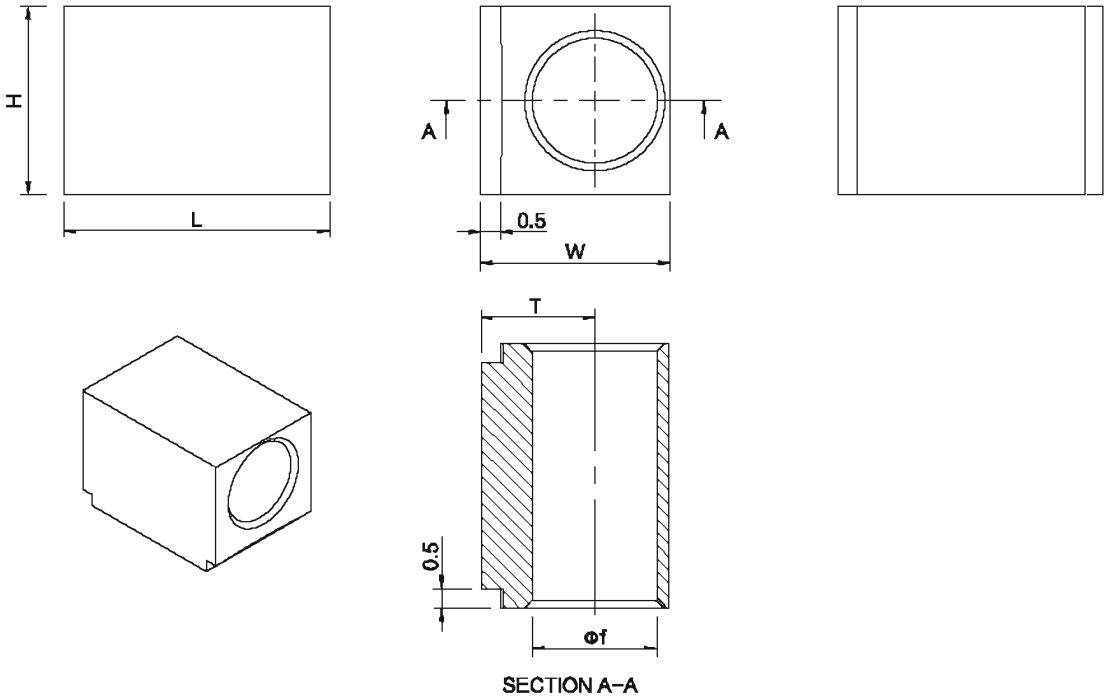

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Solder Cream Thickness	120 μm
Heat Resistance	−55 °C up to +150 °C
Packaging	Bulk; Tape and Reel

Drawing No.	Φf/M	L	W	H	T	I R (A)	Tightening Torque
LFPE3001	Φ3.3	7	5	5	3	50	—
LFPE3002	M3	7	5	5	3	50	0.4Nm

Dimension in mm



PE31


Features

- For soldering in SMT,it is suitable for fully automated assembly
- PCB connection for fixing cable lugs
- High mechanical forces and torques, Small footprint

特征

- 表面贴装焊接，适用于全自动组装
- 可将电缆线固定在电路板上
- 高机械力和扭矩，占用面积小

Drawings

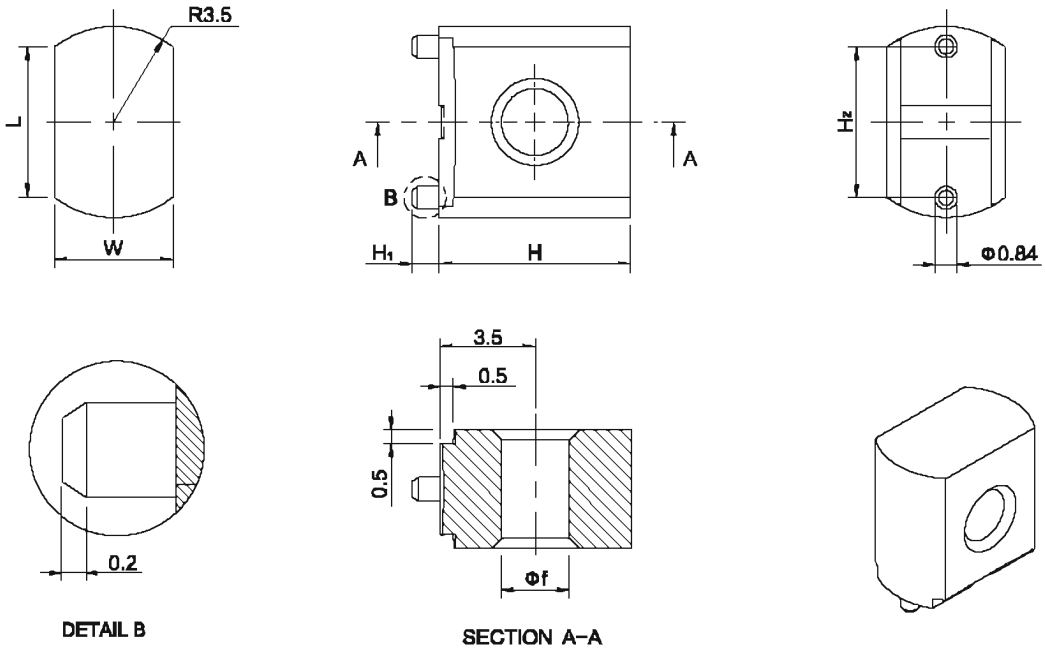

DETAIL B


SECTION A–A

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Solder Cream Thickness	120 µm
Heat Resistance	−55 °C up to +150 °C
Packaging	Bulk; Tape and Reel

Drawing No.	Φf/M	L	W	H	H_1	H_2	I R (A)	Tigntening Torque
LFPE3101	Φ3.3	5.5	4.33	7	1.0	5.54	50	—
LFPE3102	M3	5.5	4.33	7	1.0	5.54	50	0.4Nm

Dimension in mm

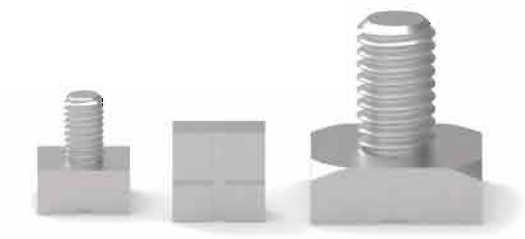

PE32


Features


- For soldering in SMT,Reels for fully automated assembly
- PCB connection for fixing cable lugs
- UNC thread or customer specific modifications on demand

特征

- 表面贴装焊接，也可以用于全自动组装
- 可将电缆线固定在电路板上
- 可按客户需求提供 UNC 螺纹或进行定制

Drawings

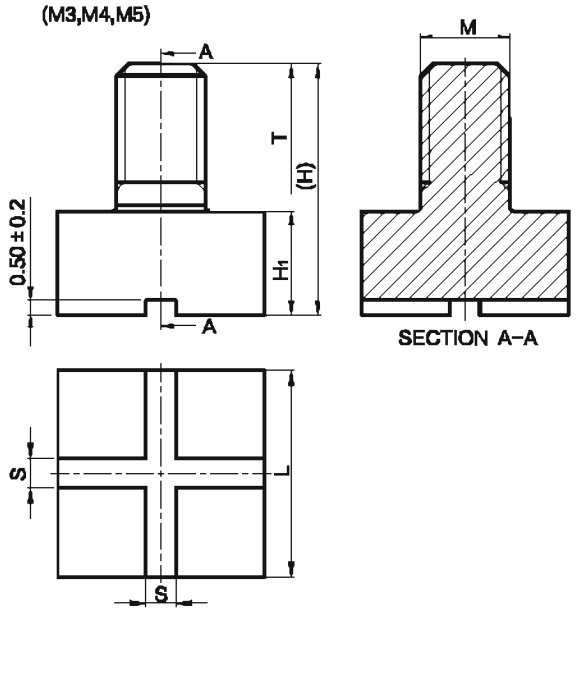

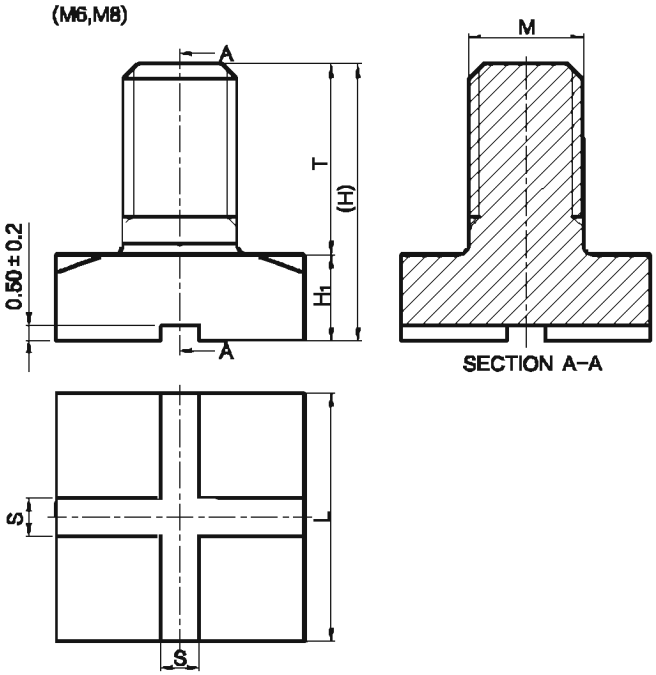

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Solder Cream Thickness	150 µm
Heat Resistance	−55 °C up to +150 °C

Drawing No.	M	H	H_1	T	L	S±0.2	I R (A)	Tigntening Torque
LFPE3201	M3	8.5	3.5	5	7	1	54	0.5Nm
LFPE3202	M4	9.5	3.5	6	9	1	72	1.2Nm
LFPE3203	M5	11.5	3.5	8	9	1	98	2.2Nm
LFPE3204	M6	14.5	4.5	10	13	2	130	3.9Nm
LFPE3205	M8	17.5	4.5	13	13	2	198	9Nm

Dimension In mm



PE33

Features


- For soldering in SMT,Reels for fully automated assembly
- PCB connection for fixing cable lugs
- UNC thread or customer specific modifications on demand

特征


- 表面贴装焊接，也可以用于全自动组装
- 可将电缆线固定在电路板上
- 高机械力和扭矩，占用面积小

Drawings

(M3,M4,M5,M6)

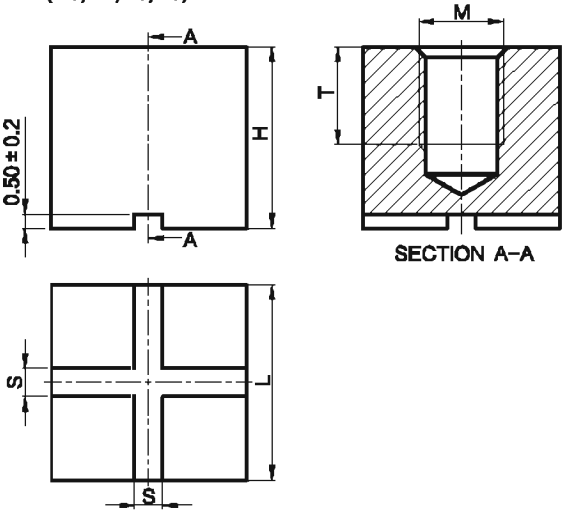

(M8)

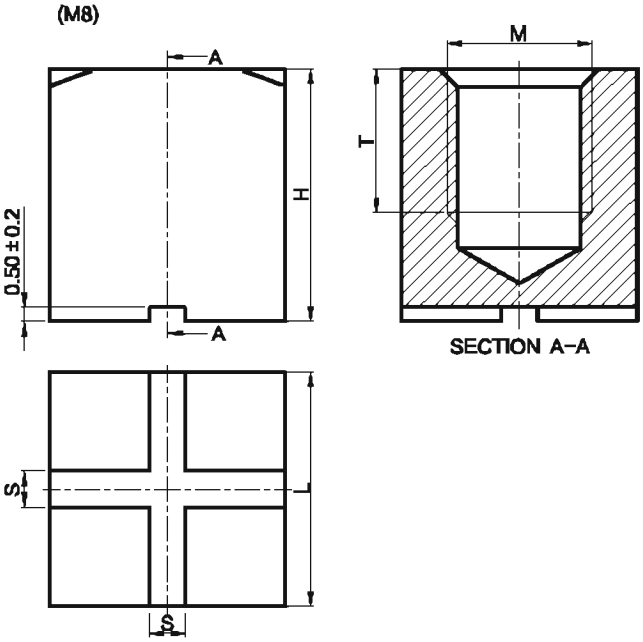

Technical Data

PROPERTIES	
Material	Brass
Surface	Tin plated
Solder Cream Thickness	150 µm
Heat Resistance	−55 °C up to +150 °C

Drawing No.	M	H	T	L	S±0.2	I R (A)	Tightening Torque
LFPE3301	M3	6.5	3.5	7	1	54	0.5Nm
LFPE3302	M4	7.5	4	9	1	72	1.2Nm
LFPE3303	M5	7.5	4	9	1	98	2.2Nm
LFPE3304	M6	11	6.5	10	1	130	3.9Nm
LFPE3305	M8	14	8	13	2	198	9Nm

Dimension in mm



PE34


Features

- Surface-mount soldering
- Support and insulation，Conductive contact

特征

- 表面贴装焊接，支撑和隔离，触点导电
- 支撑和隔离,触点导电

Drawings

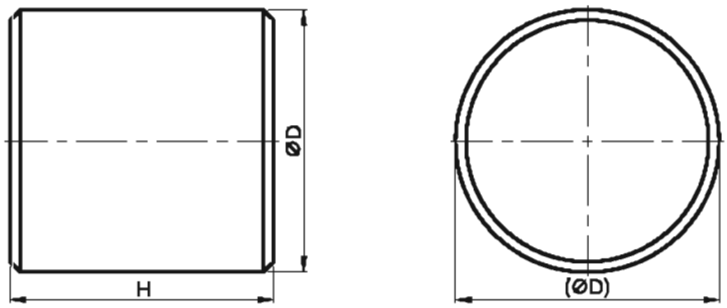


Technical Data

Part Number	ΦD	H	Plating
LFPE3401	1.5 1.5	1.0	Gold Tin
LFPE3402	2.0 2.0	1.0	Gold Tin
LFPE3403	3.0 3.0	1.0	Gold Tin
LFPE3404	3.5 3.5	1.0	Gold Tin
LFPE3405	4.0 4.0	1.0	Gold Tin
LFPE3406	5.0 5.0	1.0	Gold Tin
LFPE3407	6.0 6.0	1.0	Gold Tin

Part Number	ΦD	H	Plating
LFPE3408	2.5	0.5	Gold Tin
LFPE3409	2.5	1.0	Gold Tin
LFPE3410	2.5	1.5	Gold Tin
LFPE3411	2.5	2.0	Gold Tin
LFPE3412	2.5	2.5	Gold Tin
LFPE3413	2.5	3.0	Gold Tin
LFPE3414	2.5	3.5	Gold Tin
LFPE3415	2.5	4.0	Gold Tin

Part Number	ΦD	H	Plating
LFPE3416	2.5	5.0	Gold Tin
LFPE3417	1.0	0.5	Gold Tin
LFPE3418	1.0	1.2	Gold Tin
LFPE3419	1.0	1.45	Gold Tin
LFPE3420	1.0	1.65	Gold Tin
LFPE3421	1.0	1.8	Gold Tin
LFPE3422	1.5	1.5	Gold Tin
LFPE3423	1.5	2.5	Gold Tin

Dimension in mm

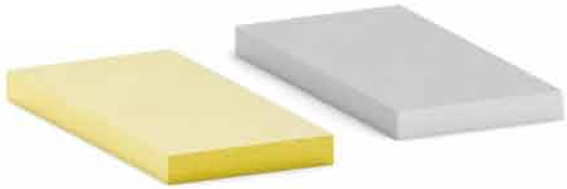

PE35


Features

- Surface-mount soldering
- Conductive contact

特征

- 表面贴装焊接
- 触电导电


Drawings

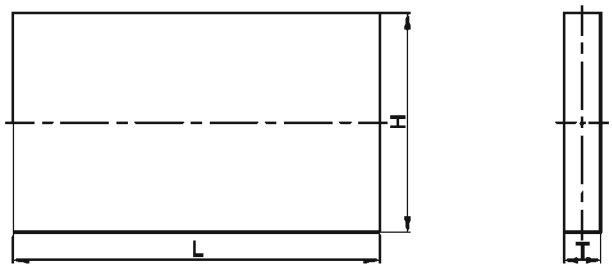

Technical Data

Part Number	L	H	T
LFPE3501	1.5	0.75	0.5
LFPE3502	2.0	1.25	0.5
LFPE3503	3.2	1.6	0.5
LFPE3504	5.0	2.5	0.5
LFPE3505	6.3	3.1	0.5
LFPE3506	1.3	1.1	0.65

Dimension in mm

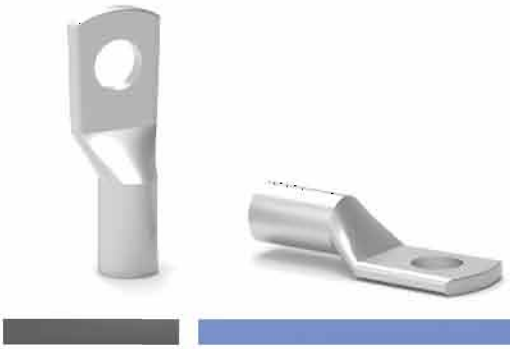

PE44


Features

- For cable connection
- Easy and secure installation
- Improved conductivity efficiency

特征

- 连接电缆线
- 方便安装且牢靠
- 导电效率更好

Drawings

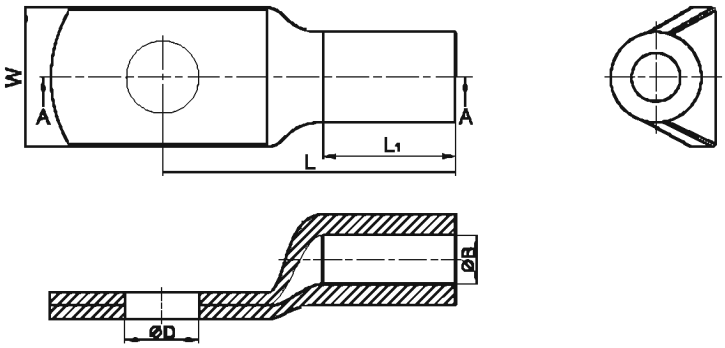

SECTION A-A

Technical Data

Drawing No.	Nominal Bolt size	ΦB	ΦD	W	L1	L	Nominal (mm²) Wire Cross Section
LFPE4401	M3	1.8	3.2	6.5	6	12	1.5
LFPE4402	M3	2.3	3.2	7.5	6	12	2.5
LFPE4403	M4	2.3	4.3	7.5	6	13	2.5
LFPE4404	M4	3	4.3	8.5	8	17	4
LFPE4405	M4	3.5	4.3	10	9.5	19	6
LFPE4406	M5	3.5	5.3	10	9.5	21	6
LFPE4407	M5	4.5	5.3	12	10.5	22.5	10
LFPE4408	M5	5.5	5.3	12	13	26	16
LFPE4409	M6	4.5	6.4	12	10.5	22.5	10
LFPE4410	M6	5.5	6.4	12	13	27	16
LFPE4411	M6	7	6.4	14	15	30	25
LFPE4412	M6	8.5	6.4	17	17	32.5	35
LFPE4413	M8	7	8.4	16	15	32.5	25
LFPE4414	M8	8.5	8.4	17	17	35	35
LFPE4415	M8	10	8.4	20	19	37	50
LFPE4416	M8	12	8.4	24	21	43	70
LFPE4417	M10	10	10.5	20	19	39	50
LFPE4418	M10	12	10.5	24	21	45	70
LFPE4419	M10	13.5	10.5	26	25	48	95

Dimension in mm

LSMTSO




Features

- For soldering in SMT,it is suitable for fully automated assembly
- PCB connection for fixing cable lugs
- UNC thread or customer specific modifications on demand

特征

- 表面贴装焊接，适用于全自动组装
- 可将电缆线固定在电路板上
- 可按客户需求提供 UNC 螺纹或进行定制

Drawings

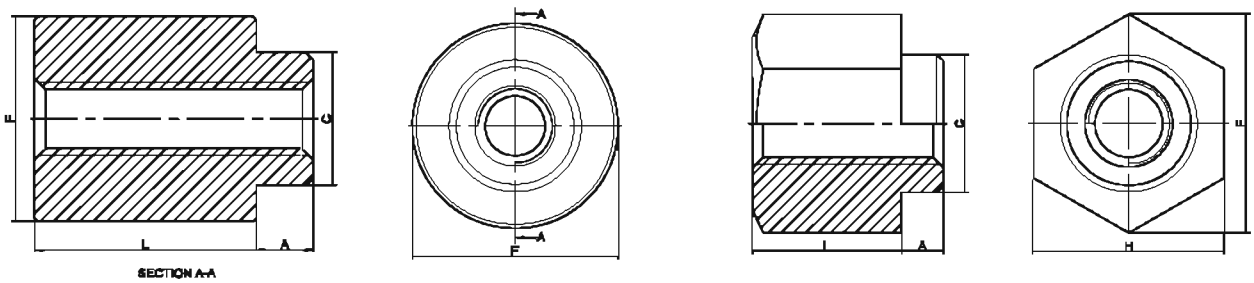

Technical Data


UNIFIED/unit:Inch

Thread Size	Thru Hole +.004 −.003	Type	Thread or Thru Hole Code	Length Code "L" ±.005 (Length code in 32nds of an inch)				Min. Sheet Thickness	A Max.	C Max.	E		H Nom.	ΦH Hole size in sheet +.003 −.000	ΦD Min. Solder Pad
				.062	.125	.250	.375				Ref.	±.005			
.060−80 (#0−80)	−	LSMTSO	080	2	4	−	−	.020	.019	.095	.114	−	.125	.098	.165
.086−56 (#2−56)	−	LSMTSO	256	2	4	8	12	.060	.060	.142	−	.219	−	.147	.244
.112−40 (#4−40)	−	LSMTSO	440	2	4	8	12	.060	.060	.161	−	.219	−	.166	.244
.138−32 (#6−32)	−	LSMTSO	632	2	4	8	12	.060	.060	.208	−	.281	−	.213	.306
.164−32 (#8−32)	−	LSMTSO	832	2	4	8	12	.060	.060	.245	−	.344	−	.250	.369
−	.116	LSMTSO	116	2	4	8	12	.060	.060	.161	−	.219	−	.166	.244
−	.143	LSMTSO	143	2	4	8	12	.060	.060	.208	−	.281	−	.213	.306

ISO METRIC/unit:mm

Thread Size x Pitch	Thru Hole +0.10 −0.08	Type	Thread or Thru Hole Code	Length Code "L" ±.013 (Length code in millimeters)							Min. Sheet Thickness	A Max.	C Max.	E		H Nom.	ΦH Hole Size in sheet +0.08	ΦD Min. Solder Pad
														Ref.	±0.13			
S1	−	LSMTSO	M1	1	2	3	−	−	−	−	0.5	0.48	2.41	3.66	−	3.18	2.5	4.19
S1.2	−	LSMTSO	M1.2	1	2	3	−	−	−	−	0.5	0.48	2.41	3.66	−	3.18	2.5	4.19
S1.4	−	LSMTSO	M1.4	1	2	3	−	−	−	−	0.5	0.48	2.41	3.66	−	3.18	2.5	4.19
M1.6x0.35	−	LSMTSO	M1.6	1	2	3	−	−	−	−	0.5	0.48	2.41	3.66	−	3.18	2.5	4.19
M2x0.4	−	LSMTSO	M2	−	2	3	4	6	8	10	1.53	1.53	3.6	−	5.56	−	3.73	6.2
M2.5x0.45	−	LSMTSO	M25	−	2	3	4	6	8	10	1.53	1.53	4.09	−	5.56	−	4.22	6.2
M3x0.5	−	LSMTSO	M3	−	2	3	4	6	8	10	1.53	1.53	4.09	−	5.56	−	4.22	6.2
M3.5x0.6	−	LSMTSO	M35	−	2	3	4	6	8	10	1.53	1.53	5.28	−	7.14	−	5.41	7.77
M4x0.7	−	LSMTSO	M4	−	2	3	4	6	8	10	1.53	1.53	6.22	−	8.74	−	6.35	9.37
−	3.6	LSMTSO	3.6	−	2	3	4	6	8	10	1.53	1.53	5.28	−	7.14	−	5.41	7.77
−	4.2	LSMTSO	4.2	−	2	3	4	6	8	10	1.53	1.53	6.22	−	8.74	−	6.35	9.37

Dimension in mm

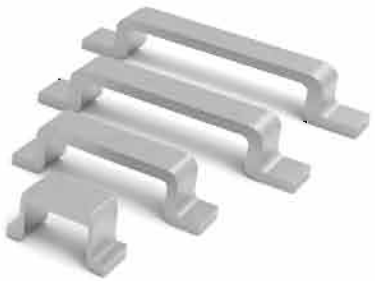

PE35-MJP


Features

- Capable of carrying higher current and providing effective current distribution
- Excellent thermal conductivity and heat dissipation
- Simplifies PCB circuit layout
- Provides jumper connections, clearance, or routing around other components
- Surface-mountable, suitable for fully automated assembly


特征

- 能承受更大的载流和有效的分流
- 具有良好的导热和散热性
- 简化PCB板线路布局
- 跳线，避空或避开其他元件
- 表面贴装，适用于全自动组装

Drawings

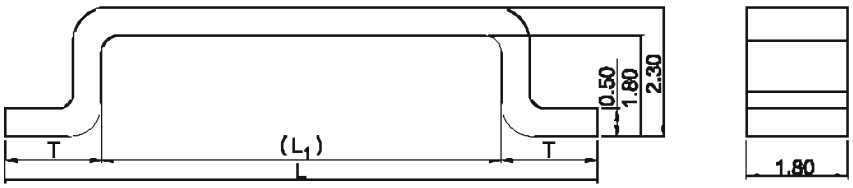

Recommended PCB Land Pattern

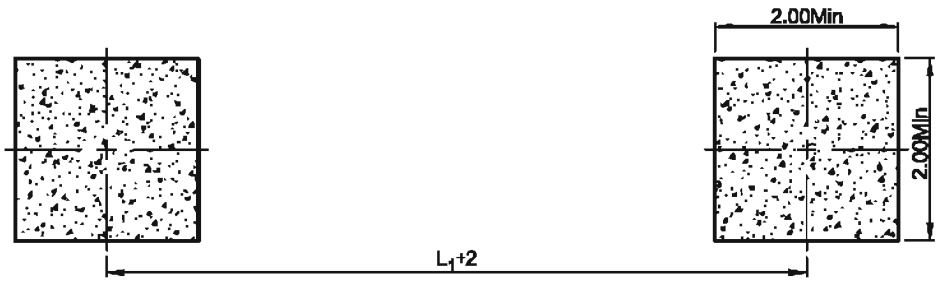


Technical Data

PROPERTIES	
Material	Copper/Phosphor Bronze
Surface	Tin Plated
Rated Current	20 A
Packaging	Embossed Carrier Tape

Drawing No.	L_1	L	T
LFMAC641	1.85	4.85	1.5
LFMAC642	3.08	6.48	1.7
LFMAC643	5.62	9.02	1.7
LFMAC644	8.16	11.56	1.7
LFMAC645	10.7	14.1	1.7
LFMAC646	13.24	16.64	1.7
LFMAC647	15.78	19.18	1.7
LFMAC648	18.32	21.72	1.7
LFMAC649	23.4	26.8	1.7

Dimension in mm

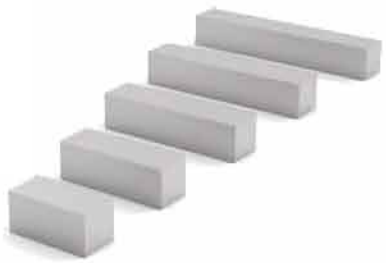

PE35-SD


Features

- Capable of carrying higher current and providing effective current distribution
- Excellent thermal conductivity and heat dissipation
- Simplifies PCB circuit layout and jumper connections
- Surface-mountable, suitable for fully automated assembly


特征

- 能承受更大的载流和有效的分流
- 具有良好的导热和散热性
- 简化PCB板线路布局和跳线
- 表面贴装，适用于全自动组装

Drawings

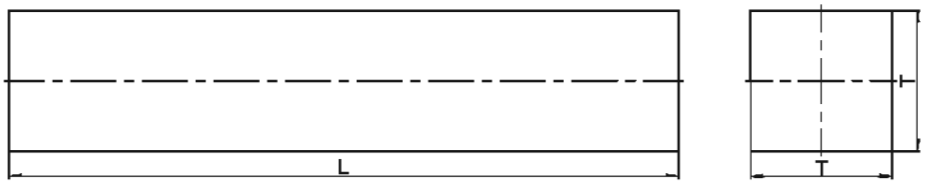

Recommended PCB Land Pattern

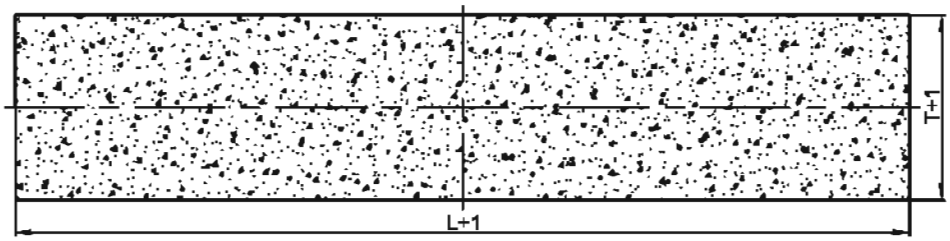

Technical Data

PROPERTIES	
Material	Copper
Surface	Tin Plated
Rated Current	60/100/150 A
Packaging	Embossed Carrier Tape

Drawing No.	L	T	I R (A)
LFPE35110	10 mm	1.5 mm	60
LFPE35111	15 mm	1.5 mm	60
LFPE35112	20 mm	1.5 mm	60
LFPE35113	30 mm	1.5 mm	60
LFPE35114	10 mm	2.0 mm	100
LFPE35115	15 mm	2.0 mm	100
LFPE35116	20 mm	2.0 mm	100
LFPE35117	30 mm	2.0 mm	100
LFPE35118	10 mm	2.5 mm	150
LFPE35119	15 mm	2.5 mm	150
LFPE35120	20 mm	2.5 mm	150
LFPE35121	30 mm	2.5 mm	150

Dimension in mm



PE35-PW


Features

- Capable of carrying higher current and providing effective current distribution
- Excellent thermal conductivity and heat dissipation
- Simplifies PCB circuit layout and jumper connections
- Surface-mountable, suitable for fully automated assembly


特征

- 能承受更大的载流和有效的分流
- 具有良好的导热和散热性
- 简化PCB板线路布局和跳线
- 表面贴装，适用于全自动组装

Drawings

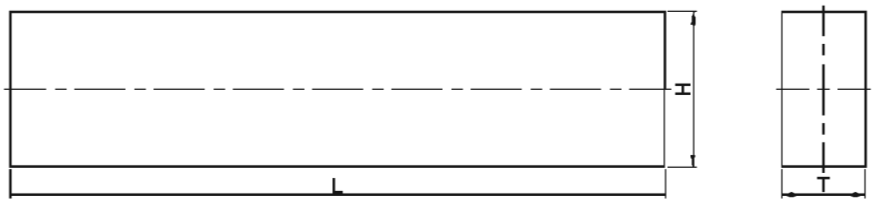

Recommended PCB Land Pattern

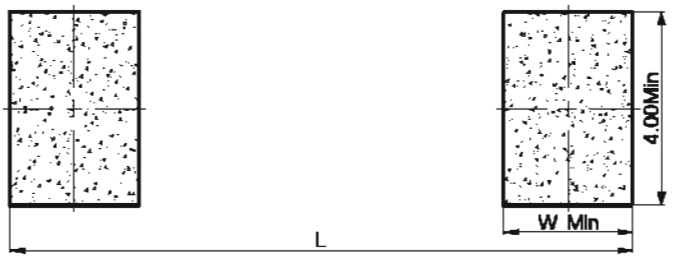

Technical Data

PROPERTIES	
Material	Copper
Surface	Tin Plated
Rated Current	50 A
Packaging	Embossed Carrier Tape

Drawing No.	L	H	T	W
LFMAC662	5.08	3.0	2.0	2.0
LFMAC663	7.62	3.0	2.0	3.0
LFMAC664	10.16	3.0	2.0	3.0
LFMAC665	12.7	3.0	2.0	3.0
LFMAC666	15.24	3.0	2.0	3.0
LFMAC667	17.78	3.0	2.0	3.0
LFMAC668	20.32	3.0	2.0	3.0
LFMAC669	22.86	3.0	2.0	3.0
LFMAC670	25.4	3.0	2.0	3.0

Dimension in mm

PE35-OEM




Features

- Capable of carrying higher current and providing effective current distribution
- Excellent thermal conductivity and heat dissipation
- Simplifies PCB circuit layout and jumper connections
- Surface-mountable, suitable for fully automated assembly

特征

- 能承受更大的载流和有效的分流
- 具有良好的导热和散热性
- 简化PCB板线路布局和跳线
- 表面贴装，适用于全自动组装

Drawings

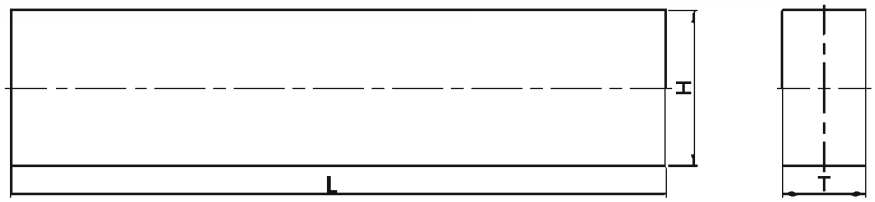

Technical Data

T	H	L											
0.8	2.0	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
0.8	2.5	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
0.8	3.0		3.0	4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
0.8	3.5	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
0.8	4.0			4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
0.8	5.0				5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
1.0	2.0	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
1.0	2.5	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
1.0	3.0		3.0	4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
1.0	3.5	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
1.0	4.0			4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
1.0	5.0				5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
1.2	2.0	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
1.2	2.5		3.0	4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
1.2	3.0		3.0	4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
1.2	3.5		3.0	4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
1.2	4.0			4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
1.2	5.0				5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
1.5	3.0		3.0	4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
1.5	3.5			4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
1.5	4.0			4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
1.5	5.0				5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
1.5	8.0							10.0	12.0	15.0	20.0	25.0	30.0
1.5	10.0								12.0	15.0	20.0	25.0	30.0
1.8	3.0		3.0	4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
1.8	3.5		3.0	4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
1.8	4.0			4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
1.8	5.0				5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
1.8	8.0							10.0	12.0	15.0	20.0	25.0	30.0
1.8	10.0								12.0	15.0	20.0	25.0	30.0
2.0	3.5		3.0	4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
2.0	4.0			4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
2.0	5.0				5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
2.0	8.0							10.0	12.0	15.0	20.0	25.0	30.0
2.0	10.0								12.0	15.0	20.0	25.0	30.0
3.0	4.0			4.0	5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
3.0	5.0				5.0	6.0	8.0	10.0	12.0	15.0	20.0	25.0	30.0
3.0	8.0							10.0	12.0	15.0	20.0	25.0	30.0
3.0	10.0								12.0	15.0	20.0	25.0	30.0

Dimension in mm

PE36



PE37



PE38



PE39



PE41




PE43



HK-2



HK-3



HK-4



BLOCK terminals



Plate terminals



In-saiL® International with companies in:



地址：中国广东省深圳市龙华街道昌永路和平工业园金星大厦13C

Jinxing Building 13C,Heping Industrial Park,Changyong Road,
Longhua District,Shenzhen City,Guangdong Province,China.

Tel：+86-755-2900 2800　　E-mail：sales@in-sail.com

Fax：+86-755-2900 2700　　Website：http://www.in-sail.com

In-saiL®

力帆&力本（中国）运营中心
In-saiL&Leadum(China)Operation Center

力本精密部件（东莞）有限公司
Leadum Precision Parts (Dongguan) Co.,Ltd

力本精密部件（昆山）有限公司
Leadum Precision Parts (Kunshan) Co.,Ltd

力本五金制品（成都）有限公司
Leadum Hardware Products(Chengdu) Co., Ltd

深圳力帆精密五金有限公司
Shenzhen In-saiL Precision Parts Co., Ltd

深圳山本精密五金部件有限公司
Shenzhen Sandum Precision Parts Co., Ltd