



BOXING ELECTRONICS

浙江博星电子有限公司



博星电子

Since **1992**

Zhejiang Boxing Electronics Co.,Ltd



浙江博星电子有限公司

Zhejiang Boxing Electronics Co.,Ltd

地址：浙江省缙云县东渡镇大桥南路1188号

ADD : No.1188,theSouth Street of the bridge,
Jinyun County,Zhejiang,China

电话<TEL> : 0578-3130998

Email : sales@bxcn86.com
bxchina86@163.com

Web : www.zjboxing.com





ISO9001:2000 Quality Management System Certification obtained in 2002
 ISO/TS16949:2009 Quality Management System Certification obtained in January 2010
 Recognized as a national high-tech enterprise in December 2022.



BOXING PROFILE

The headquarter of the Zhejiang Boxing Electronic Co., Ltd. is located at 1188 Daqiao South Road, Dongdu Town, Jinyun County, Lishui City, Zhejiang Province. It is one of the earliest privately-owned enterprises in China engaged in the research and development, manufacturing, and sales of alternator rectifier bridges and rectifier diodes.

Since our establishment in 1992, the company has been committed to the research and development of product technology and has participated in the formulation and review of industry technical standards (QC/T422). We currently utilize internationally advanced manufacturing equipment such as vacuum sintering furnaces and hydrogen protection sintering furnaces, as well as high-precision fully automatic testing instruments, to ensure the quality of our products. The rectifiers produced by our company are mainly used in a variety of series of generators from renowned brands such as LADA, MITSUBISHI, BOSCH, DEKO, KOMATSU, HITACHI, VALEO, PETRAY, DENSO, and LUCAS. We have established partnership with more than 100 domestic enterprises, and our business covers multiple countries and areas like America, Europe, Southeast Asia, the Middle East, and Africa. We adhere to scientific management and advocate lean manufacturing, continually enhancing the quality management system from inception to completion.

We devoted to ourselves to the national industry, sticking to the principles of creating results, sharing results, and practicing integrity; continuously promoting the development of corporate and social benefits; adhering to a service-oriented approach, serving customers, employees, and society, and striving to provide customers with excellent products and services, aiming for win-win cooperation.

Rectifier Instruction Warning

- 1、Insure there is no any burr in the surface of insurance cover,rotor,stator and rectifier before assembling.
- 2、When tighten the rectifier, insure the tightening torque of screw is confirm to the specification (see below form in details).
- 3、Insure the connection between Rectifier terminal, stator leads and excitation line are correct, the way of its connection should be welded or fastened, if by weld, insure the stator seam allowance and the edn cover allowance are connected tightly, after welded, the welding point need be full , no cold joint and no solder left. If by fastener, the tightening torque of screw should confirm to the specification(see below form in details).
- 4、The polarity can't be connected oppositely. The bonding polarity of storage battery must be as the same as the bonding polarity requestof alternator, otherwise, the storage battery will discharge the silicon diode, causing the silicon diode burning out.
- 5、In the running of alternator, it is forbidden to test the Generator if it is discharge or not by connecting Its armature terminal and minus earth, it will burn out the diode or fuse and wire.
- 6、In the running of engine, to avoid short circuit or damaging the Generator and regulator, do not disassemble any electrical part.
- 7、The connection of "+" between storage battery and alternator must be tight and stable.If the charging circuit breaks in sudden in the running of engine,the high voltage will breakdown diodes and damage other semiconductor elements.
- 8、Do not test the alternator insulation status by using Tramegger or 220V alternating current if the 6 diodes of Rectifier and stator still connected, otherwise, the diodes will be easily breakdown.

Form: The Standard of Fastener Tightening Torque

SIZE	SCREW	NUT	FASTENING BOLT	WIRE BOLT
M4	1.3-1.6N.m	1.3-1.6 N.m	1.3~1.6N.m	1.3-1.6 N.m
M5	3.2~3.8N.m	5.5~6.5 N.m	5.5~6.5N.m	3.5~3.8N.m
M6	6.0~7.0 N.m	7.0-9.ON.m	7.0-9.ON.m	5.5~6.0N.m
M8	N	N	N	5.5~6.0N.m



CONTENTS

BXA	001–019
BXB	020–054
BXC	055–061
BXD	062–072
BXE	073–084
BXF	085–088
BXH	089–108
BXL	109–110
BXM	111–118
BXN	119–144
BXO	145–147
BXT	148–177
BXV	178–196
OTHER	197–200
BXDG	201–204



BXA002-B



BXA002-B



BXA002-B

FEATURES

Diodes: 8-50A Avalanche
With M6 x 48mm Battery Post
With M5 x 35mm Trio Post
With M5 x 35mm W Post
With Trio
With Capacitor

REFERENCES

MOBILETRON RK-01
CARGO 231472
ISKRA 16903507

BXA003-H



BXA003-H



BXA003-H

FEATURES

Diodes: 6-50A Ampere
With "W" Terminal

REFERENCES

OE: 9402.3701-06
UTM ER1108A
ZAUFER 312N10066Z

BXA005-F



BXA005-F



BXA005-F

FEATURES

Diodes: 8-50A Avalanche
With M8 x 36mm Battery Post
With M4 x 19.8mm Trio Post
With M5 x 21.3mm W Post
With Trio
With Capacitor

BXA008



BXA008



BXA008

FEATURES

Diodes: 8-50A Avalanche
With M6 x 48mm Battery Post
With M5 x 35mm Trio Post
With M5 x 35mm W Post
With M5 x 52mm Ground Post
With Trio
With Capacitor
For 24V Alternators



BXA009



BXA009



BXA009

FEATURES

Diodes: 8–50A Ampere
With M8 × 49mm Battery Post
With Trio
With Capacitor

BXA213



BXA213



BXA213

FEATURES

Diodes: 8–50A Ampere
With M6 × 48mm Battery Post
With M5 × 35mm Trio Post
With Trio
With Capacitor

BXA213-B



BXA213-B



BXA213-B

FEATURES

Diodes: 8–50A Ampere
With M6 × 41.6mm Battery Post
With M5 × 35mm Trio Post
With Trio
With Capacitor

REFERENCES

MOBILETRON RK-02

BXA213-F




BXA213-F



BXA213-F

FEATURES

Diodes: 6–35A Avalanche
With M8 × 49mm Battery Post
With M5 × 35mm Trio Post
With Trio
With Capacitor



BXA214-A



BXA214-A



BXA214-A

FEATURES

Diodes:8-50A Avalanche
With M8 × 49mm Battery Post
With M5 × 35mm Trio Post
With M5 × 35mm W Post
With Trio
With Capacitor

REFERENCES

CARGO:231472
ISKRA:16903507

BXA214-B



BXA214-B



BXA214-B

FEATURES

Diodes:8-50A Avalanche
With M8 × 49mm Battery Post
With M5 × 35mm Trio Post
With M5 × 35mm W Post
With Trio
With Capacitor

BXA2802



BXA2802



BXA2802

FEATURES

Diodes:8-50A Avalanche
With M8 × 38mm Battery Post
With M5 × 30mm Trio Post
With M5 × 30mm W Post
With Trio
With Capacitor
For 24V Alternators

REFERENCES

ISKRA:MGX927
KRAUF:AEI9243UT

BXA2802-A



BXA2802-A



BXA2802-A

FEATURES

Diodes:6-50A Avalanche
With M8 × 38mm Battery Post
With M5 × 30mm Trio Post
With M5 × 30mm W Post
With Trio
With Capacitor
For 24V Alternators

BXA2802-B



BXA2802-B



BXA2802-B

FEATURES

Diodes: 6-70A Avalanche
With M8 × 38mm Battery Post
With M5 × 30mm Trio Post
With Trio
With Capacitor

BXA2802-B1



BXA2802-B1



BXA2802-B1

FEATURES

Diodes: 6-70A Avalanche
With M8 × 22.5mm Battery Post
With M6 × 14mm Trio Post
With M5 × 30mm W Post
With Trio
With Capacitor

BXA2802-B3



BXA2802-B3



BXA2802-B3

FEATURES

Diodes: 6-80A Avalanche
With M8 × 38mm Battery Post
With M5 × 30mm Trio Post
With Trio
With Capacitor

BXA2802-C1



BXA2802-C1



BXA2802-C1

FEATURES

Diodes: 6-80A Avalanche
With M8 × 38mm Battery Post
With M5 × 30mm Trio Post
With M5 × 30mm W Post
With Trio
With Capacitor

BXA2802-E



BXA2802-E



BXA2802-E

FEATURES

Diodes: 6-70A Avalanche
With M8 x 38mm Battery Post
With M5 x 30mm Trio Post
With M5 x 30mm W Post
With M6 x 33.5mm Ground Post
With Trio
With Capacitor

BXA2802-E1



BXA2802-E1



BXA2802-E1

FEATURES

Diodes: 6-80A Avalanche
With M8 x 38mm Battery Post
With M5 x 30mm Trio Post
With M5 x 30mm W Post
With M6 x 33.5mm Ground Post
With Trio
With Capacitor

BXA2802-E2



BXA2802-E2



BXA2802-E2

FEATURES

Diodes: 6-80A Avalanche
With M8 x 38mm Battery Post
With M5 x 30mm Trio Post
With M5 x 30mm W Post
With M6 x 48mm Ground Post
With Trio
With Capacitor

BXA2802-E3



BXA2802-E3



BXA2802-E3

FEATURES

Diodes: 6-60A Avalanche
With M8 x 38mm Battery Post
With M5 x 30mm Trio Post
With M5 x 30mm W Post
With M6 x 33.5mm Ground Post
With Trio
With Capacitor

BXA2802-F



BXA2802-F



BXA2802-F

FEATURES

Diodes: 8-60A Avalanche
With M8 × 22.5mm Battery Post
With M6 × 14mm Trio Post
With M5 × 30mm W Post
With Trio
With Capacitor
For 24V Alternators

BXA2802-H



BXA2802-H



BXA2802-H

FEATURES

Diodes: 8-50A Avalanche
With (M5+M8) × 23mm Battery Post
With M4 × 15mm Trio Post
With M5 × 11mm W Post
With Trio
With Capacitor
For 24V Alternators

BXA2802-H1



BXA2802-H1



BXA2802-H1

FEATURES

Diodes: 8-70A Avalanche
With (M5+M8) × 23mm Battery Post
With M4 × 15mm Trio Post
With M5 × 11mm W Post
With Trio
With Capacitor

BXA2802-K



BXA2802-K




BXA2802-K

FEATURES

Diodes: 6-50A Avalanche
With M8 × 38mm Battery Post
With M5 × 30mm Trio Post
With M5 × 30mm W Post
With M6 × 33.5mm Ground Post
With Trio
With Capacitor
For 24V Alternators



BXA2803

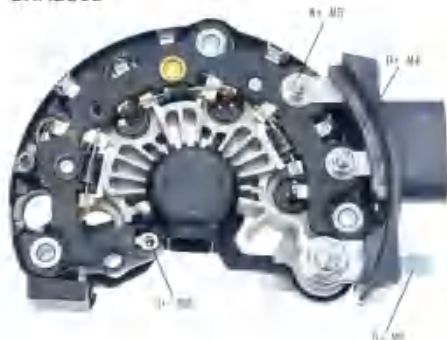

BXA2803



BXA2803

FEATURES

Diodes:6–50A Avalanche
With (M6+M8) × 36mm Battery Post
With M4 × 19.8mm Trio Post
With M5 × 21.3mm W Post
With Trio
With Capacitor
For 24V Alternators

BXA2803-A



BXA2803-A



BXA2803-A

FEATURES

Diodes:6–60A Avalanche
With (M6+M8) × 36mm Battery Post
With M4 × 19.8mm Trio Post
With M5 × 21.3mm W Post
With Trio
With Capacitor
For 24V Alternators

BXA10801



BXA10801



BXA10801

FEATURES

Diodes:6–35A Ampere
With Trio
With “D+” Lead Wire 95mm

REFERENCES

OEM NO: 56–65–02
YY:12040100/LA1114

BXA10801-B



BXA10801-B



BXA10801-B

FEATURES

Diodes:6–35A Ampere
With Trio
With “D+” Lead Wire 100mm



BXA10801-E



BXA10801-E



BXA10801-E

FEATURES

Diodes:6-35A Ampere
With Trio
With "D+" Lead Wire 85mm

BXA10801-H



BXA10801-H



BXA10801-H

FEATURES

Diodes:6-35A Ampere
With Trio
With "D+" Lead Wire 115mm

BXA10802



BXA10802



BXA10802

FEATURES

Diodes:6-35A Ampere
Without Trio

BXA10803



BXA10803



BXA10803

FEATURES

Diodes:10-25A Ampere
With Trio
With "D+" Lead Wire 90mm



BXA10803-B



BXA10803-B



BXA10803-B

FEATURES

Diodes:10-35A Ampere
With Trio
With "D+" Lead Wire 90mm

BXA10804



BXA10804



BXA10804

FEATURES

Diodes:6-35A Ampere
With Trio
With "D+" Lead Wire 115mm
With "D+" Terminal

BXA10805



BXA10805



BXA10805

FEATURES

Diodes: 6-35A Ampere
With Trio
With "D+" Lead Wire 110mm
With "D+" Terminal

REFERENCES

OEM NO:56-65-02
YY:204-010/LA1114

BXA10805-C



BXA10805-C



BXA10805-C

FEATURES

Diodes: 6-35A Ampere
With Trio
With "D+" Lead Wire 105mm
With "D+" Terminal

BXA10806



BXA10806



BXA10806

FEATURES

Diodes: 6–35A Ampere
Without Trio

REFERENCES

AS ARC9083S
KRAUF AER5665AD, AER5665UT
Lada 566502E
Orbita Б П В 566502 E
UTM ER5665A
ZAUFER 312N10451Z

BXA10807-A



BXA10807-A



BXA10807-A

FEATURES

Diodes: 6–50A Ampere
With Trio
With “D+” Lead Wire 115mm
With “D+” Terminal

REFERENCES

Lada 566502, Б П В 566502
Orbita Б П В 566502 Г
UTM ER6502A
ZAUFER 312N10065Z

BXA10807-B



BXA10807-B



BXA10807-B

FEATURES

Diodes: 6–50A Ampere
With Trio
With “D+” Lead Wire 115mm
With “D+” Terminal

BXA10807-C



BXA10807-C



BXA10807-C

FEATURES

Diodes: 6–50A Ampere
Without Trio



BXA10809



BXA10809



BXA10809

FEATURES

Diodes: 6-35A Ampere
With Trio
With "D+" Lead Wire 85mm
With "D+" Lead Wire 115mm

REFERENCES

Cargo 133397
KRAUF AER3397AD, AER3397UT
Lada 21083701314, 21083701315,
Unipoint RECL030, RECL032
UTM ER3397A
ZAUFER 312N10655Z

BXA11001



BXA11001



BXA11001


FEATURES

Diodes: 6-35A Avalanche
With M6 x 36mm Battery Post
With Trio
With Capacitor
With "D+" Lead Wire 75mm
Without "W" Terminal

REFERENCES

YY:12036200

BXA11001-A7

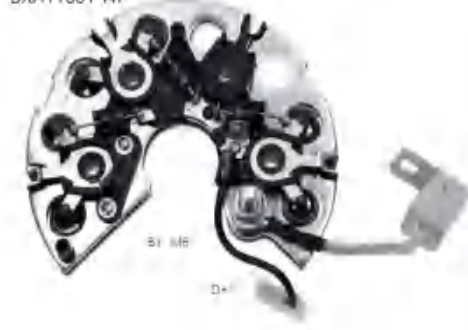

BXA11001-A7



BXA11001-A7

FEATURES

Diodes: 6-35A Avalanche
With M6 x 36mm Battery Post
With Trio
With Capacitor
With "D+" Lead Wire 75mm
With "W" Terminal 6.3

BXA11001-A12



BXA11001-A12



BXA11001-A12

FEATURES

Diodes: 6-50A Ampere
With M6 x 29.5mm Battery Post
With Trio
With Capacitor
With "D+" Lead Wire 75mm

REFERENCES

KRAUF: AER5171UT, AER8171UT
KZATE: Tr110504
UTM: ER5171D, ER5171E, ER5171F
ZAUFER: 312N10018Z

BXA11001-A14



BXA11001-A14




BXA11001-A14

FEATURES

Diodes: 8–35A Ampere
With M6 × 36mm Battery Post
With Trio
With Capacitor
With “D+” Lead Wire 75mm
With “W” Terminal 6.3

BXA11001-B6

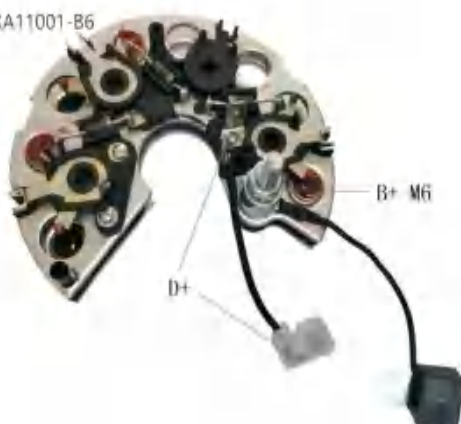

BXA11001-B6



BXA11001-B6

FEATURES

Diodes: 6–35A Ampere
With M6 × 36mm Battery Post
With Trio
With Capacitor
With “D+” Lead Wire 75mm
With “W” Terminal 3.0

BXA11002



BXA11002



BXA11002

FEATURES

Diodes: 6–35A Ampere
With M6 × 36mm Battery Post
Without Trio
With “P” Lead Wire 65mm

BXA11002-C8



BXA11002-C8



BXA11002-C8

FEATURES

Diodes: 8–50A Ampere
With M6 × 36mm Battery Post
With Trio
With Capacitor
With “D+” Lead Wire 75mm

REFERENCES

AER5128UT



BXA11002-D



BXA11002-D



BXA11002-D

FEATURES

Diodes: 8-35A Ampere
With M6 x 36mm Battery Post
With Trio
With Capacitor
With "D+" Lead Wire 75mm
With "W" Terminal 3.0

BXA11002-E3



BXA11002-E3



BXA11002-E3

FEATURES

Diodes: 6-50A Ampere
With M8 x 36.5mm Battery Post
With Trio
With Capacitor
With "D" Lead Wire 75mm
With "W" Terminal 6.3

BXA11002-K



BXA11002-K



BXA11002-K

FEATURES

Diodes: 6-35A Ampere
With M6 x 36mm Battery Post
Without Trio
With Capacitor
With "P" Lead Wire 75mm
With "W" Terminal 6.3

BXA11003



BXA11003



BXA11003

FEATURES

Diodes: 6-35A Ampere
With M6 x 36mm Battery Post
With Trio
Without "D+" Terminal
With "D+" Lead Wire 75mm

BXA11007-B



BXA11007-B



BXA11007-B

FEATURES

Diodes: 8-50A Avalanche
With M6 x 36mm Battery Post
With Trio
With Capacitor
With "D+" Lead Wire 75mm
With "W" Terminal 6.3

BXA11007-C



BXA11007-C



BXA11007-C

FEATURES

Diodes: 6-35A Avalanche
With M6 x 36mm Battery Post
With Trio
With Capacitor
With "D+" Lead Wire 75mm
With "W" Terminal 6.3

BXA11007-C4



BXA11007-C4



BXA11007-C4

FEATURES

Diodes: 6-50A Ampere
With M6 x 36mm Battery Post
With Trio
With Capacitor
With "D+" Lead Wire 75mm
With "W" Terminal 6.3

BXA11011





BXA11011



BXA11011

FEATURES

Diodes: 6-50A Avalanche
With M6 x 48.5mm Battery Post
With Trio
With Capacitor
With "D+" Lead Wire 60mm

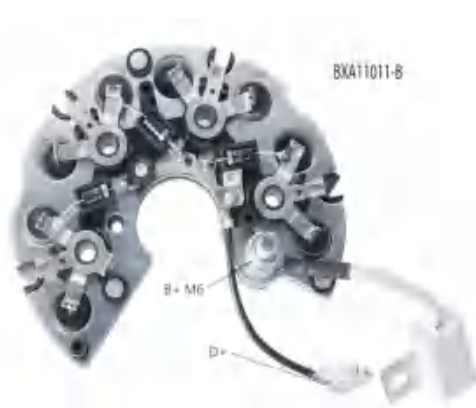

BXA11011-B



BXA11011-B

BXA11011-B

FEATURES

Diodes: 8-70A Ampere
With M6 x 48.5mm Battery Post
With Trio
With Capacitor
With "D+" Lead Wire 60mm
With "W" Terminal 6.3

BXA11011-A



BXA11011-A




BXA11011-A

FEATURES

Diodes: 6-50A Avalanche
With M6 x 48.5mm Battery Post
With Trio
With Capacitor
With "D+" Lead Wire 60mm
With "W" Terminal 6.3

BXA11011-E

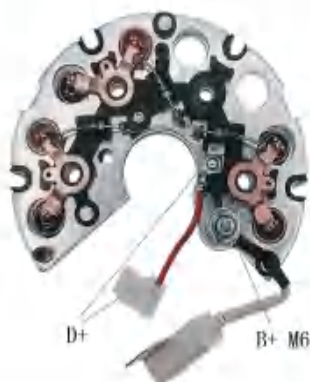

BXA11011-E




BXA11011-E

FEATURES

Diodes: 6-35A Ampere
With M6 x 48.5mm Battery Post
With Trio
With Capacitor
With "D+" Lead Wire 60mm

BXA11011-F

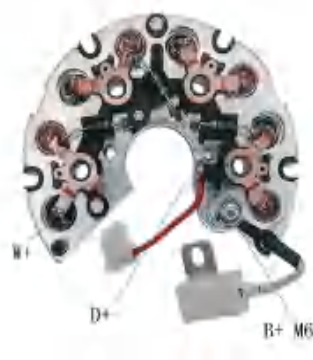

BXA11011-F



BXA11011-F

FEATURES

Diodes: 8-35A Ampere
With M6 x 48.5mm Battery Post
With Trio
With Capacitor
With "D+" Lead Wire 60mm
With "W" Terminal 6.3

BXA11501



BXA11501



BXA11501

FEATURES

Diodes: 6–25A Ampere
With M5 × 34mm W Post

BXA11801-A



BXA11801-A



BXA11801-A

FEATURES

Diodes: 6–50A Ampere
With Trio
With M5 × 34mm “W” Post

BXA11801-C



BXA11801-C



BXA11801-C

FEATURES

Diodes: 6–35A Ampere
With M5 × 34mm “W” Post

REFERENCES

KRAUF: AER1139KL

BXA11801-D



BXA11801-D



BXA11801-D

FEATURES

Diodes: 6–50A Ampere
With M5 × 34mm “W” Post



BXA11801-Y



BXA11801-Y



BXA11801-Y

FEATURES

Diodes: 6–25A Ampere
With M5 × 34mm “W” Post

BXA11802



BXA11802



BXA11802

FEATURES

Diodes: 6–35A Ampere
With “W” Terminal 6.3
With M4 × 30mm “W” Post



BXA11803



BXA11803

FEATURES

Diodes: 6–35A Ampere
With M5 × 34mm “W” Post

REFERENCES

YUNYI:203–310/LA1139

BXA11804



BXA11804



BXA11804

FEATURES

Diodes: 6–35A Ampere
With Trio
With “D+” Lead Wire 90mm
With M5 × 34mm “W” Post

BXA11805



BXA11805



BXA11805

FEATURES

Diodes: 6–35A Ampere
With M6 × 52.5mm Battery Post
With Trio
With “D+” Lead Wire 105mm
With M5 × 34mm “W” Post
With “W” Terminal 6.3

BXA11807-A



BXA11807-A



BXA11807-A

FEATURES

Diodes: 6–25A Ampere
With M5 × 34mm “W” Post
With “W” Terminal 6.3

BXA14401



BXA14401



BXA14401

FEATURES

Diodes: 10–50A Ampere
Diameter OD: 144mm
With Trio
With “D+” Lead Wire 100mm

BXA14402



BXA14402



BXA14402

FEATURES

Diodes: 6–50A Ampere
With M6 × 27.7mm “W” Post
With Trio
With Capacitor
With “D+” Lead Wire 115mm
With “W” Lead Wire 105mm

REFERENCES

KRAUF AER1193KL ALR7014KL



BX A14402-A



BX A14402-A

BX A14402-A

FEATURES

Diodes: 6-50A Ampere
With M6 x 27.7mm "W" Post
Without Trio
With Capacitor
With "W" Lead Wire 105mm

REFERENCES

KAMAZ B710002 OE: 65623701



BX A17001-B



BX A17001-B

BX A17001-B

FEATURES

Diodes: 14-50A Ampere
With M8*49.5mm Battery Post
With Trio
With Capacitor



BX A17002-A



BX A17002-A

BX A17002-A

FEATURES

Diodes: 14-50A Ampere
With M8*49.5mm Battery Post
With M8*36.5 Ground Post
With Trio
With Capacitor

BXB11202-B1



BXB11202-B1



BXB11202-B1

FEATURES

Diodes:6-50A Ampere
Diameter OD:112mm
With M8 × 42mm Battery Post
With Trio
With Capacitor
Connection type to the stator star(Y)

REFERENCES

BOSCH:1127319552,1127320852
CARGO:135176,138077,230242
MOBILETRON:RB-122H
TRANSPO:IBR852
FIT UNIT:CA733IR
YUNYI: BHP11201

BXB11202-C



BXB11202-C



BXB11202-C

FEATURES

Diodes:6-50A Ampere
Diameter OD:112mm
With M8 × 42mm Battery Post
With Trio
With Capacitor
Connection type to the stator star(Y)

REFERENCES

BOSCH:1127319552,1127320852
CARGO:135176,138077,230242
MOBILETRON:RB-122H
TRANSPO:IBR852
FIT UNIT:CA733IR
YUNYI: BHP11201

BXB11202-D



BXB11202-D



BXB11202-D

FEATURES

Diodes:8-50A Avalanche
Diameter OD:112mm
With M8 × 42mm Battery Post
With Trio
With Capacitor
Connection type to the stator star(Y)

REFERENCES

BOSCH:1127320850
CARGO:135439
TRANSPO:IBR850
YUNYI: 240-060/BHP11203

BXB11203-A



BXB11203-A



BXB11203-A

FEATURES

Diodes:8-50A Ampere
Diameter OD:112mm
With M8 × 42mm Battery Post
With Trio
With Capacitor
Connection type to the stator star(Y)

REFERENCES

BOSCH:1127319560,1127319011
CARGO:135440
MOBILETRON:RB-134H
YUNYI: 240-080/BHP11204



BxB11203-A3



BxB11203-A3

**BxB11203-A3****FEATURES**

Diodes:6-35A Ampere
Diameter OD:112mm
With M8 × 42mm Battery Post
With Trio
With Capacitor
Connection type to the stator star(Y)

REFERENCES

BOSCH:1127319021,1127319673
CARGO:135546
YUNYI: 240-100BHP11206

BxB11205



BxB11205

**BxB11205****FEATURES**

Diodes:8-35A Ampere
Diameter OD:112mm
With M8 × 42mm Battery Post
With Trio
With Capacitor
Connection type to the stator star(Y)

BxB11205-B



BxB11205-B

**BxB11205-B****FEATURES**

Diodes:6-50A Avalanche
Diameter OD:112mm
With M8 × 42mm Battery Post
With Trio
With Capacitor
Connection type to the stator star(Y)

REFERENCES

BOSCH:1127320807,1127319593
CARGO:137333
TRANSPO:IBR844
FIT UNIT:CA1044IR
YUNYI:BHP11202

BxB11205-C



BxB11205-C

**BxB11205-C****FEATURES**

Diodes:8-50A Avalanche
Diameter OD:112mm
With M8 × 42mm Battery Post
With Trio
With Capacitor
Connection type to the stator star(Y)

BXB11401



BXB11401



BXB11401

FEATURES

Diodes:6-35A Ampere
Diameter OD:114mm
With M6 x 54mm Battery Post
With Trio
With "B+" Terminal
With "D+" Terminal
With "W" Terminal

REFERENCES

BOSCH:1127011131 CARGO:134341
MOBILETRON:RB-16H
TRANPO:IBR301
YUNYI:242-130/BHP11412
For use on:Volvo Diesel

BXB11402



BXB11402



BXB11402

FEATURES

Diodes:6-25A Ampere
Diameter OD:114mm
With Trio
With "B+" Terminal
With "D+" Terminal
With "W" Terminal

REFERENCES

BOSCH:1127011116,1127320506
CARGO:131559
MOBILETRON:RB-03HA
TRANPO:IBR302
FIT UNIT:CA345IR
YUNYI: 12421200/BHP11411
For use on :Audi,VW Diesel

BXB11403



BXB11403



BXB11403

FEATURES

Diodes:6-35A Ampere
Diameter OD:114mm
With Trio
With "B+" Terminal
With "D+" Terminal

REFERENCES

TRANPO:IBR303
YUNYI:BHP11404

BXB11404



BXB11404



BXB11404

FEATURES

Diodes:6-35A Ampere
Diameter OD:114mm
With M6 x 54mm Battery Post
With Trio
With "B+" Terminal
With "D+" Terminal

REFERENCES

BOSCH:1127011138,1127320501
CARGO:130602
MOBILETRON:RB-02H
TRANPO:IBR304
YUNYI: 242-150/BHP11413



BXB11405



BXB11405



BXB11405

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 114mm
With M8 x 52mm Battery Post
Without Trio
With "B+" Terminal
With "W" Terminal

BXB11405-A1



BXB11405-A1



BXB11405-A1

FEATURES

Diodes: 6-35A Ampere
Diameter OD: 114mm
With M6 x 51mm Battery Post
Without Trio
With "B+" Terminal
With "W" Terminal

REFERENCES

BOSCH: 9120067027, 9121067385
CARGO: 136591
MOBILETRON: RB-83H
TRANSPO: IBR388
YUNYI: 242-271/BHP11426A

BXB11405-B



BXB11405-B



BXB11405-B

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 114mm
With M6 x 51mm Battery Post
Without Trio
With "B+" Terminal

REFERENCES

CARGO: 136556
FIT UNIT: 9120060020, E9YJ-10346A
LESTER/WAI: 13300
YUNYI: 242-430/BHP11435

BXB11405-C



BXB11405-C



BXB11405-C

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 114mm
With M8 x 52mm Battery Post
With Trio
With "B+" Terminal

BXB11405-D



BXB11405-D



BXB11405-D

FEATURES

Diodes: 8–35A Ampere
Diameter OD: 114mm
With M6 × 47mm Battery Post
With Trio
With “B+” Terminal

BXB11405-F



BXB11405-F



BXB11405-F

FEATURES

Diodes: 8–50A Ampere
Diameter OD: 114mm
With M8 × 52mm Battery Post
Without Trio
With “B+” Terminal
With “W” Terminal

REFERENCES

Bosch 1127319034, 6033GD4334,
6033GD4337
KRAUF AEB4334LK, AEB4334UX
Transpo IBR346
UTM EB4334A
ZAUFER 312N10478Z

BXB11405-M



BXB11405-M



BXB11405-M

FEATURES

Diodes: 6–50A Ampere
Diameter OD: 114mm
With M8 × 52mm Battery Post
With M5 × 45mm “W” Post
Without Trio
With “B+” Terminal
With “W” Terminal

BXB11405-T




BXB11405-T



BXB11405-T

FEATURES

Diodes: 8–50A Avalanche
Diameter OD: 114mm
With M8 × 54mm Battery Post
Without Trio



BXB11405-W



BXB11405-W



BXB11405-W

FEATURES

Diodes: 8–35A Ampere
Diameter OD: 114mm
With M6 × 51mm Battery Post
Without Trio
With “B+” Terminal
With “W” Terminal

BXB11405-Y1



BXB11405-Y1



BXB11405-Y1

FEATURES

Diodes: 6–50A Ampere
Diameter OD: 114mm
With M6 × 51mm Battery Post
Without Trio
With “B+” Terminal

REFERENCES

BOSCH: 9121067379
MOBILETRON: RB–81H
TRANSPON: IBR323
YUNYI: 242–281/BHP11426A–1

BXB11406-A



BXB11406-A



BXB11406-A

FEATURES

Diodes: 6–50A Ampere
Diameter OD: 114mm
With M8 × 54mm Battery Post
With M5 × 45mm “D+” Post
Without Trio
With “B+” Terminal
With “W” Terminal

BXB11406-C



BXB11406-C



BXB11406-C

FEATURES

Diodes: 6–50A Ampere
Diameter OD: 114mm
With M6 × 49mm Battery Post
With M5 × 35mm “D+” Post
With Trio
With “B+” Terminal
With “D+” Terminal

BXB11406-E



BXB11406-E



BXB11406-E

FEATURES

Diodes:6-35A Ampere
Diameter OD:114mm
With M6 × 49mm Battery Post
With M5 × 48mm "D+" Post
With Trio
With "B+" Terminal
With "W" Terminal

REFERENCES

BOSCH:1127320665
CARGO:132667
YUNYI: 242-080/BHP11406

BXB11407-A



BXB11407-A



BXB11407-A

FEATURES

Diodes:6-25A Ampere
Diameter OD:114mm
With M6 × 49mm Battery Post
With M4 × 44mm "D+" Post
With M5 × 48mm "W" Post
With Trio
With "B+" Terminal

REFERENCES

BOSCH:1127011095,1127011096
CARGO:131468
MOBILETRON:RB-07H
TRANSPO:IBR314
YUNYI: 242-040/BHP11403

BXB11411



BXB11411



BXB11411

FEATURES

Diodes:6-35A Ampere
Diameter OD:114mm
With M8 × 54mm Battery Post
With M5 × 50mm "D+" Post
With Trio
With "B+" Terminal

REFERENCES

BOSCH:1127320601,1127320661
CARGO:132668,230361
MOBILETRON:RB-05H
TRANSPO:IBR316
YUNYI: 242-160/BHP11414

BXB11419



BXB11419



BXB11419

FEATURES

Diodes:6-35A Ampere
Diameter OD:114mm
With M5 × 50mm "W" Post
With Trio
With "B+" Terminal
With "D+" Terminal

REFERENCES

BOSCH:1127011139,1127320372
CARGO:132669
MOBILETRON:RB-06HA
TRANSPO:IBR317
YUNYI: 242-170/BHP11415



BXB11425-A



BXB11425-A



BXB11425-A

FEATURES

Diodes: 6-35A Ampere
Diameter OD: 114mm
With M6 x 51mm Battery Post
With M5 x 40mm "D+" Post
With M5 x 40mm "W" Post
With M4 x 44mm "E" Post
With Trio

BXB11426-A



BXB11426-A



BXB11426-A

FEATURES

Diodes: 8-35A Avalanche
Diameter OD: 114mm
With (M6+M8) x 43mm Battery Post
With M5 x 40mm "D+" Post
With M5 x 40mm "W" Post
With (M5+M8) x 43mm "E" Post
With Trio
For 24V Alternators

BXB11426-B



BXB11426-B



BXB11426-B

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 114mm
With M8 x 52mm Battery Post
With M5 x 45mm "D+" Post
With M5 x 45mm "W" Post
With Trio

BXB11426-D



BXB11426-D



BXB11426-D

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 114mm
With M8 x 57mm Battery Post
With M5 x 40mm "D+" Post
With M5 x 40mm "W" Post
With M4 x 45mm "E" Post
With Trio

BXB11427



BXB11427



BXB11427

FEATURES

Diodes:6-35A Ampere
Diameter OD:114mm
With M6 × 51mm Battery Post
With M5 × 40mm “D+” Post
With Trio
With “B+” Terminal
With “W” Terminal

BXB11427-A



BXB11427-A



BXB11427-A

FEATURES

Diodes:8-35A Ampere
Diameter OD:114mm
With M6 × 51mm Battery Post
With M5 × 40mm “D+” Post
With Trio
With “B+” Terminal
With “W” Terminal

BXB11427-D



BXB11427-D



BXB11427-D

FEATURES

Diodes:8-35A Ampere
Diameter OD:114mm
With M6 × 51mm Battery Post
With Trio
With “B+” Terminal
With “W” Terminal
With “D+” Terminal

REFERENCES

CARGO:F010LD1067(WAI)
TRANSPO:IBR276
OEM NO:W060-69
YUNYI: 12424000/BHP11433A

BXB11427-Y



BXB11427-Y



BXB11427-Y

FEATURES

Diodes:8-35A Ampere
Diameter OD:114mm
With M6 × 51mm Battery Post
With Trio
With “B+” Terminal
With “W” Terminal
With “D+” Terminal



BXB11428

FEATURES

Diodes:8-35A Ampere
Diameter OD:114mm
With M8 × 54mm Battery Post
With M5 × 45mm "D+" Post
With Trio
With "B+" Terminal
With "W" Terminal

REFERENCES

FIT UNIT:11.203.850
YUNYI: 242-E90/1242E900

BXB11428-A



BXB11428-A



BXB11428-A

FEATURES

Diodes:8-35A Ampere
Diameter OD:114mm
With M8 × 54mm Battery Post
Without Trio
With "B+" Terminal
With "W" Terminal

BXB11428-C



BXB11428-C



BXB11428-C

FEATURES

Diodes:8-50A Avalanche
Diameter OD:114mm
With M8 × 52mm Battery Post
Without Trio
With "W" Terminal

BXB11428-C1



BXB11428-C1



BXB11428-C1

FEATURES

Diodes:8-50A Avalanche
Diameter OD:114mm
With M8 × 52mm Battery Post
Without Trio
With "B+" Terminal

BXB11428-D



BXB11428-D



BXB11428-D

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 114mm
With M8 x 54mm Battery Post
With M5 x 45mm "D+" Post
With Trio
With "B+" Terminal

BXB11430



BXB11430



BXB11430

FEATURES

Diodes: 6-35A Ampere
Diameter OD: 114mm
With M6 x 49mm Battery Post
With Trio
With "B+" Terminal
With "D+" Terminal

BXB11430-A



BXB11430-A



BXB11430-A

FEATURES

Diodes: 6-50A Ampere
Diameter OD: 114mm
With M6 x 49mm Battery Post
With Trio
With "B+" Terminal
With "D+" Terminal

BXB11430-B




BXB11430-B



BXB11430-B

FEATURES

Diodes: 8-50A Ampere
Diameter OD: 114mm
With M6 x 51mm Battery Post
With Trio
With "B+" Terminal
With "W" Terminal
With "D+" Terminal



BxB11432



BxB11432

**BxB11432****FEATURES**

Diodes: 8–35A Ampere
Diameter OD: 114mm
With M8 × 54mm Battery Post
With M5 × 45mm “D+” Post
With Trio
With “B+” Terminal
With “W” Terminal

REFERENCES

BOSCH: 1127320692
CARGO: 138165
MOBILETRON: RB–80H
TRANSPO: IBR324
YUNYI: 242–351/BHP11427A

BxB11432-B1



BxB11432-B1

**BxB11432-B1****FEATURES**

Diodes: 6–25A Ampere
Diameter OD: 114mm
With M8 × 54mm Battery Post
With M5 × 40mm “D+” Post
With Trio
With “B+” Terminal
With “W” Terminal

BxB11432-D



BxB11432-D

**BxB11432-D****FEATURES**

Diodes: 8–50A Ampere
Diameter OD: 114mm
With M8 × 54mm Battery Post
With Trio
With “B+” Terminal
With “W” Terminal

BxB11432-E



BxB11432-E

**BxB11432-E****FEATURES**

Diodes: 8–50A Ampere
Diameter OD: 114mm
With M8 × 54mm Battery Post
With M5 × 40mm “D+” Post
With Trio
With “B+” Terminal
With “W” Terminal

REFERENCES

BOSCH: 1127320692
CARGO: 138165
MOBILETRON: RB–80H
TRANSPO: IBR324

BXB11432-F



BXB11432-F



BXB11432-F

FEATURES

Diodes: 8–50A Ampere
Diameter OD: 114mm
With M8 × 54mm Battery Post
With M5 × 45mm “D+” Post
With M5 × 45mm “E” Post
With Trio
With “B+” Terminal
With “W” Terminal

BXB11435



BXB11435



BXB11435

FEATURES

Diodes: 6–30A Ampere
Diameter OD: 114mm
With M6 × 54mm Battery Post
With M5 × 50mm “D+” Post
With M5 × 50mm “W” Post
With M4 × 45mm “E” Post
With Trio

BXB11436



BXB11436



BXB11436

FEATURES

Diodes: 6–25A Ampere
Diameter OD: 114mm
With M6 × 54mm Battery Post
With M4 × 45mm “E” Post
With Trio
With “B+” Terminal
With “D+” Terminal

BXB11445



BXB11445



BXB11445

FEATURES

Diodes: 6–35A Ampere
Diameter OD: 114mm
With M6 × 47mm Battery Post
Without Trio
With “B+” Terminal
With “W” Terminal

REFERENCES

BOSCH: 9120067027, 9121067385
CARGO: 136591
MOBILETRON: RB–83H
TRANSPO: IBR388
YUNYI: 242–271/BHP11426A



BxB11445-A



BxB11445-A

**BxB11445-A****FEATURES**

Diodes:8-35A Ampere
Diameter OD:114mm
With M6 × 54mm Battery Post
Without Trio
With “B+” Terminal

REFERENCES

BOSCH:9121067379
MOBILETRON:RB-81H
TRANSPO:IBR323
YUNYI:242-281/BHP11426A-1

BxB11445-B



BxB11445-B

**BxB11445-B****FEATURES**

Diodes:8-50A Ampere
Diameter OD:114mm
With M8 × 52mm Battery Post
Without Trio
With “B+” Terminal
With “W” Terminal

BxB11446



BxB11446

**BxB11446****FEATURES**

Diodes:6-35A Ampere
Diameter OD:114mm
With (M6+M8) × 43mm Battery Post
With M5 × 40mm “D+” Post
With Trio
With “B+” Terminal
With “W” Terminal

REFERENCES

BOSCH:1127320914
CARGO:133998
MOBILETRON:RB-18H
TRANSPO:IBR322
YUNYI:242-200/BHP11418

BxB11447



BxB11447

**BxB11447****FEATURES**

Diodes:6-35A Ampere
Diameter OD:114mm
With M6 × 49mm Battery Post
With M4 × 40mm “D+” Post
With M5 × 45mm “W” Post
With Trio
With “B+” Terminal

REFERENCES

BOSCH:1127320667
CARGO:135890
MOBILETRON:RB-38H
TRANSPO:IBR667
YUNYI: 242-210/BHP11419

BXB11450-A



BXB11450-A



BXB11450-A

FEATURES

Diodes:6-35A Avalanche
Diameter OD:114mm
With M6 × 54mm Battery Post
With M4 × 44mm "D+" Post
With Trio

BXB11450-D



BXB11450-D



BXB11450-D

FEATURES

Diodes:6-35A Avalanche
Diameter OD:114mm
With M6 × 54mm Battery Post
With M4 × 44mm "D+" Post
With Trio

BXB11450-E



BXB11450-E



BXB11450-E

FEATURES

Diodes:6-35A Avalanche
Diameter OD:114mm
With M6 × 54mm Battery Post
With M4 × 44mm "D+" Post
With Trio
With "D+" Lead Wire 75mm
With "W" Lead Wire 75mm

BXB11460



BXB11460



BXB11460

FEATURES

Diodes:6-35A Ampere
Diameter OD:114mm
With M6 × 54mm Battery Post
With Trio
With "D+" Lead Wire 60mm
With "D+" Terminal

REFERENCES

IBR310



BXB12002-M



BXB12002-M



BXB12002-M

FEATURES

Diodes:8-35A Ampere
Diameter OD:120mm
With M6 × 54mm Battery Post
With Trio
With Capacitor

BXB12008-C2



BXB12008-C2



BXB12008-C2

FEATURES

Diodes:6-50A Ampere
Diameter OD:120mm
With M8 × 54mm Battery Post
With Trio
With Capacitor
With "D+" Lead Wire 70mm
With 510 Ω 3W Resistor

BXB12008-H



BXB12008-H



BXB12008-H

FEATURES

Diodes:8-35A Ampere
Diameter OD:120mm
With M8 × 50mm Battery Post
With Trio
With Capacitor
With "D+" Lead Wire 70mm
With 510 Ω 3W Resistor

BXB12028



BXB12028



BXB12028

FEATURES

Diodes:6-35A Ampere
Diameter OD:120mm
With M8 × 52mm Battery Post
With M5 × 40mm "D+" Post
With Trio
Without Capacitor
With "B+" Terminal

REFERENCES

BOSCH:1127320702,1127320709,
1127320722
CARGO:133261
MOBILETRON:RB-55H
TRANSP0:IBR355
YUNYI: 242-720/BHP121011

BXB12030-A



BXB12030-A



BXB12030-A

FEATURES

Diodes:8-50A Ampere
Diameter OD:120mm
With M8 × 52mm Battery Post
With M5 × 40mm "D+" Post
With M4 × 45mm "W" Post
With Trio
With Capacitor

BXB12032



BXB12032



BXB12032

FEATURES

Diodes:8-35A Ampere
Diameter OD:120mm
With M8 × 52mm Battery Post
With M5 × 40mm "D+" Post
With Trio
With "B+" Terminal
Without Capacitor

REFERENCES

BOSCH:1127320705,1127320710,
1127320723
CARGO:138082,233778
MOBILETRON:RB-54H
TRANSPO:IBR354
YUNYI:242-660/BHP121005

BXB12033



BXB12033



BXB12033

FEATURES

Diodes:8-35A Ampere
Diameter OD:120mm
With M8 × 52mm Battery Post
With M5 × 40mm "D+" Post
With Trio
With "B+" Terminal
With "W" Terminal
Without Capacitor

BXB12035



BXB12035




BXB12035

FEATURES

Diodes:6-50A Avalanche
Diameter OD:120mm
With M8X38mm Battery Post(L)
With M8X30mm Battery Post(R)
For 24V Alternators
Connection type to the stator star(Y)

REFERENCES

BOSCH:F00M123202,0124415001
CARGO:230360
MOBILETRON:RB-115H
TRANSPO:IBR238



BXB12035-F2



BXB12035-F2



BXB12035-F2

FEATURES

Diodes:6-50A Avalanche
Diameter OD:120mm
With M8X33mm Battery Post(L)
With M8X26mm Battery Post(R)
Connection type to the stator star(Y)

BXB12038



BXB12038




BXB12038

FEATURES

Diodes:8-50A Avalanche
Diameter OD:120mm
With M8X38mm Battery Post(L)
With M8X38mm Battery Post(R)
With Trio
For 24V Alternators
With "N" Lead Wire 75mm
Connection type to the stator star(Y)

BXB12041

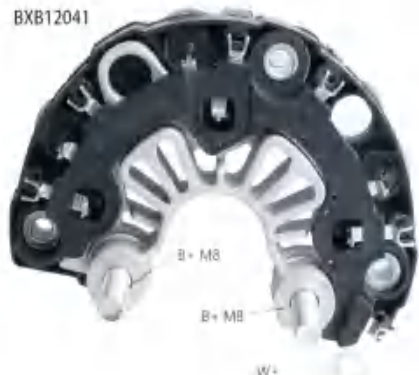

BXB12041



BXB12041

FEATURES

Diodes:6-50A Avalanche
Diameter OD:120mm
With M8 x 36mm Battery Post(L)
With M8 x 36mm Battery Post(R)
For 24V Alternators
Connection type to the stator delta(Δ)

REFERENCES

Bosch F00M133210, F00M133223
Cargo 231524
Transpo IBR223
Unipoint REC2806, REC2811

BXB12042-A



BXB12042-A



BXB12042-A

FEATURES

Diodes:6-50A Avalanche
Diameter OD:129mm
With M8 x 38mm Battery Post(L)
With M8 x 38mm Battery Post(R)
For 28V Alternators
With 129 mm negative heat sink
Connection type to the stator delta(Δ)



BXB12042-B1



BXB12042-B1



BXB12042-B1

FEATURES

Diodes: 6-60A Avalanche
Diameter OD: 120mm
With M8 × 36mm Battery Post(L)
With M8 × 36mm Battery Post(R)
For 28V Alternators
Connection type to the stator delta (Δ)

BXB12042-D



BXB12042-D



BXB12042-D

FEATURES

Diodes: 6-50A Avalanche
Diameter OD: 129mm
With M8 × 36mm Battery Post(L)
With M8 × 36mm Battery Post(R)
With 129 mm negative heat sink
Connection type to the stator delta (Δ)

REFERENCES

BOSCH: FOOM133237
TRANSPO: IBR237
YUNYI: 243-452/BHP12054HD

BXB12042-G



BXB12042-G



BXB12042-G

FEATURES

Diodes: 6-50A Avalanche
Diameter OD: 129mm
With M8 × 49mm Battery Post(L)
With M8 × 30mm Battery Post(R)
With M5 × 14mm "W" Post
With 129 mm negative heat sink
For 24V Alternators
Connection type to the stator delta (Δ)

REFERENCES

FIT UNIT: 012465507617
YUNYI: 1243DU00

BXB12042-W1




BXB12042-W1



BXB12042-W1

FEATURES

Diameter OD: 120mm
With M8 × 36mm Battery Post(L)
With M8 × 32mm Battery Post(R)
With "W" Terminal
Connection type to the stator delta (Δ)



BXB12042-X1



BXB12042-X1



BXB12042-X1

FEATURES

Diodes:6-50A Avalanche
Diameter OD:120mm
With M8 × 32mm Battery Post (L)
With M8 × 32mm Battery Post (R)
With “W” Terminal
Connection type to the stator star(Y)

BXB12043



BXB12043



BXB12043

FEATURES

Diodes:6-50A Avalanche
Diameter OD:129mm
With M8 × 35.5mm Battery Post (L)
With M8 × 30mm Battery Post (R)
With 129 mm negative heat sink
Connection type to the stator delta(Δ)
For 24V Alternators

BXB12043-W1



BXB12043-W1



BXB12043-W1

FEATURES

Diodes:6-60A Avalanche
Diameter OD:129mm
With M8 × 35.5mm Battery Post(L)
With M8 × 35.5mm Battery Post(R)
With “W” Terminal
With 129 mm negative heat sink
Connection type to the stator delta(Δ)

BXB12043-W2



BXB12043-W2



BXB12043-W2

FEATURES

Diodes:6-70A Avalanche
Diameter OD:129mm
With M8 × 22.5mm Battery Post(L)
With M8 × 35.5mm Battery Post(R)
With “W” Terminal
For 24V Alternators
With 129 mm negative heat sink
Connection type to the stator delta(Δ)



BxB12044-K



BxB12044-K

**BxB12044-K****FEATURES**

Diodes:6-60A Avalanche
 Diameter OD:120mm
 With M6 × 36mm Battery Post (L)
 With M8-6H Battery Post (R)
 Connection type to the stator star(Y)

BxB12047-C



BxB12047-C

**BxB12047-C****FEATURES**

Diodes:8-50A Ampere
 Diameter OD:120mm
 With (M6+M8) × 36mm Battery Post (L)
 With (M6+M8) × 36mm Battery Post (R)
 Connection type to the stator star(Y)

BxB12048



BxB12048

**BxB12048****FEATURES**

Diodes:6-50A Avalanche
 Diameter OD:129mm
 With M8 × 36mm Battery Post(L)
 With M8 × 36mm Battery Post(R)
 With Trio
 For 24V Alternators
 With 129 mm negative heat sink
 Connection type to the stator delta(Δ)

BxB12048-K



BxB12048-K

**BxB12048-K****FEATURES**

Diodes:6-80A Avalanche
 Diameter OD:129mm
 With M8 × 30mm Battery Post(L)
 With M8 × 30mm Battery Post(R)
 With Trio
 With 129 mm negative heat sink
 Connection type to the stator delta(Δ)



BXB12050



BXB12050



BXB12050

FEATURES

Diodes: 6–60A Avalanche
Diameter OD: 129mm
With M8 × 40mm Battery Post(L)
With M8 × 20mm Battery Post(R)
For 24V Alternators
With 129 mm negative heat sink
Connection type to the stator delta (Δ)

BXB12051



BXB12051



BXB12051

FEATURES

Diodes: 8–50A Avalanche
Diameter OD: 120mm
With (M6+M8) × 40mm Battery Post(L)
With (M6+M8) × 40mm Battery Post(R)
For 28V Alternators
Connection type to the stator star (Y)

BXB12053



BXB12053




BXB12053

FEATURES

Diodes: 8–50A Avalanche
Diameter OD: 120mm
With M8 × 36mm Battery Post(L)
With M8 × 36mm Battery Post(R)
With Trio
For 28V Alternators
Connection type to the stator star (Y)

BXB12053-C

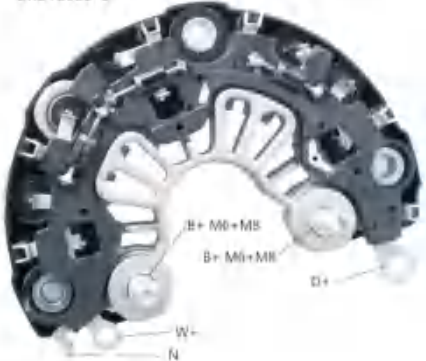

BXB12053-C



BXB12053-C

FEATURES

Diodes: 8–50A Avalanche
Diameter OD: 120mm
With (M6+M8) × 36mm Battery Post(L)
With (M6+M8) × 36mm Battery Post(R)
With Trio
For 28V Alternators
Connection type to the stator star (Y)



BXB12054



BXB12054



BXB12054

FEATURES

Diodes: 6–50A Avalanche
Diameter OD: 120mm
With (M6+M8) × 36mm Battery Post(L)
With (M6+M8) × 36mm Battery Post(R)
Connection type to the stator delta(Δ)
Without Trio

BXB12055



BXB12055



BXB12055

FEATURES

Diodes: 8–35A Ampere
Diameter OD: 120mm
With M8 × 54mm Battery Post
With M5 × 45mm “D+” Post
With M5 × 45mm “W” Post
With Trio
With Capacitor
With “D+” Lead Wire 70mm
With “W” Lead Wire 70mm

BXB12056



BXB12056



BXB12056

FEATURES

Diodes: 8–35A Ampere
Diameter OD: 120mm
With M6 × 51mm Battery Post
With M4 × 40mm “D+” Post
With M4 × 40mm “W” Post
With M4 × 40mm “N” Post
With M4X40mm Ground Post
With Trio
With Capacitor
With “D+” Lead Wire 70mm

BXB12066




BXB12066



BXB12066

FEATURES

Diodes: 12–35A Avalanche
Diameter OD: 120mm
With M8 × 40mm Battery Post(L)
With M8 × 40mm Battery Post(R)
Connection type to the stator delta(Δ)



BXB12201



BXB12201



BXB12201

FEATURES

Diodes:14-50A Ampere
Diameter OD:122mm
With M8 × 33mm Battery Post
With M5 × 20mm "D+" Post
With Trio
With Capacitor
With "W" Terminal
Connection type to the stator delta(Δ)

BXB12202



BXB12202



BXB12202

FEATURES

Diodes:6-50A Avalanche
Diameter OD:122mm
With M8 × 33mm Battery Post
With M5 × 20mm "D+" Post
With Trio
With Capacitor
With "W" Terminal
Connection type to the stator delta(Δ)

BXB12202-B



BXB12202-B



BXB12202-B

FEATURES

Diodes:12-50A Avalanche
Diameter OD:122mm
With M8 × 33mm Battery Post
With M5 × 20mm "D+" Post
With Trio
With Capacitor
Connection type to the stator delta(Δ)

BXB12202-C



BXB12202-C



BXB12202-C

FEATURES

Diodes:12-50A Ampere
Diameter OD:122mm
With M8 × 30mm Battery Post
With M5 × 20mm "D+" Post
With Trio
With Capacitor
Connection type to the stator delta(Δ)

BXB12202-H2



BXB12202-H2



BXB12202-H2

FEATURES

Diodes:12-50A Ampere
Diameter OD:122mm
With M8 × 33mm Battery Post
With M5 × 20mm "D+" Post
With Trio
With Capacitor
Connection type to the stator star(Y)

REFERENCES

Cargo 137259
Ika 165141
KRAUF AEB0860AD, AEB0860UT
Transpo IBR860
Unipoint REC264

BXB12501



BXB12501



BXB12501

FEATURES

Diodes:8-35A Ampere
Diameter OD:125mm
With M8 × 52mm Battery Post
With M4 × 32mm "D+" Post
With M6 × 54mm Ground Post
With M5 × 35mm "W" Post
With Trio
With "B+" Terminal

REFERENCES

TRANSPO:IBR955
YUNYI: 242-A80/BHP12511

BXB12505



BXB12505



BXB12505

FEATURES

Diodes:14-35A Ampere
Diameter OD:125mm
With M8 × 52mm Battery Post
With M4 × 32mm "D+" Post
With M6 × 54mm Ground Post
With M5 × 35mm "W" Post
With Trio
With "B+" Terminal

REFERENCES

BOSCH:1127320361
CARGO:133530
MOBILETRON:RB-72H
TRANSPO:IBR340
YUNYI: 242-A70/BHP12510

BXB12507




BXB12507



BXB12507

FEATURES

Diodes:14-35A Ampere
Diameter OD:125mm
With 7/16-14 × 73.5mm Battery Post
With M4 × 39mm "D+" Post
With M5 × 49mm Ground Post
With M5 × 35mm "W" Post
With Trio
With "D+" Lead Wire 110mm



BXB12507-A

FEATURES

Diodes:14-35A Ampere
Diameter OD:125mm
With 7/16-14 x 73.5mm Battery Post
With M4 x 39mm "D+" Post
With M5 x 49mm Ground Post
With M5 x 35mm "W" Post
With Trio



BXB12701

FEATURES

Diodes:6-50A Avalanche
Diameter OD:130mm
With M8X40.5mm Battery Post(L)
With M8 x 30mm Battery Post(R)
For 24V Alternators
Connection type to the stator delta(Δ)

REFERENCES

KRAUF AEP1042BJ:AEP1042BP



BXB12702

FEATURES

Diodes:6-70A Avalanche
Diameter OD:130mm
With M8X40.5mm Battery Post(L)
With M8 x 30mm Battery Post(R)
For 24V Alternators
Connection type to the stator delta(Δ)

REFERENCES

AVI168D3002



BXB12705

FEATURES

Diodes:6-50A Ampere
Diameter OD:130mm
With M8X40.5mm Battery Post(L)
With M8 x 30mm Battery Post(R)
Connection type to the stator delta(Δ)

REFERENCES

AVI147D3002



BxB12806-C3



BxB12806-C3

**BxB12806-C3****FEATURES**

Diodes:3-50A Avalanche
Diameter OD:128mm
With M8 × 33mm Battery Post(R)
For 24V Alternators
With "B+" Terminal M4-6H
With "W" Terminal M4-6H
Customer provide Negative heat sink

BxB12806-K



BxB12806-K

**BxB12806-K****FEATURES**

Diodes:6-50A Avalanche
Diameter OD:128mm
With M6 × 36mm Battery Post(R)
For 24V Alternators
With "B+" Terminal M4-6H
With M5 × 23mm "W" Post

BxB12807-W



BxB12807-W

**BxB12807-W****FEATURES**

Diodes:3-50A Avalanche
Diameter OD:128mm
With M8X33mm Battery Post(L)
With "B+" Terminal M4-6H
With "W" Terminal M4-6H
Customer provide Negative heat sink

BxB12808-A4



BxB12808-A4

**BxB12808-A4****FEATURES**

Diodes:3-50A Avalanche
Diameter OD:128mm
With M8 × 30mm Battery Post(R)
With M8 × 30mm Battery Post(L)
For 24V Alternators
With "B+" Terminal M4-6H
With "W" Terminal M4-6H



BXB12812-A



BXB12812-A




BXB12812-A

FEATURES

Diodes:3-50A Avalanche
Diameter OD:128mm
With M8 × 33mm Battery Post(R)
For 24V Alternators
With “B+” Terminal M4-6H
With M5 × 23mm “W” Post
With Trio
Customer provide Negative heat sink

BXB12813-F

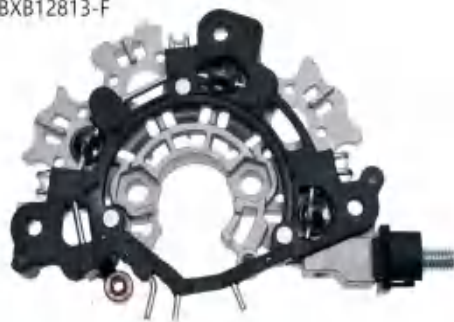

BXB12813-F



BXB12813-F

FEATURES

Diodes:3-50A Avalanche
Diameter OD:128mm
With M8 × 36mm Battery Post
With “B+” Terminal M4-6H
With “W” Terminal M4-6H
Customer provide Negative heat sink

BXB12820-A



BXB12820-A



BXB12820-A

FEATURES

Diodes:3-35A Avalanche
Diameter OD:128mm
With M8 × 30mm Battery Post(R)
With M8 × 30mm Battery Post(L)
For 24V Alternators
With “B+” Terminal M4-6H
With “W” Terminal M4-6H
Customer provide Negative heat sink

BXB12826



BXB12826



BXB12826

FEATURES

Diodes:10-50A Avalanche
Diameter OD:128mm
With M8 × 32mm Battery Post
With “B+” Terminal M4-6H
With “W” Terminal M4-6H

REFERENCES

FIT UNIT:0125812044
YUNYI:244-FU0/1244FU00

BXB12827



BXB12827



BXB12827

FEATURES

Diodes:6-60A Avalanche
With M8 × 32mm Battery Post
With “B+” Terminal M4-6H
With “W” Terminal M4-6H

REFERENCES

FIT UNIT:0125711075
OEM NO:A000906551
YUNYI:1244DF00

BXB12828



BXB12828



BXB12828

FEATURES

Diodes:6-60A Avalanche
Diameter:128mm
With M8 × 26mm Battery Post
With “B+” Terminal M4-6H
With “W” Terminal M4-6H

REFERENCES

BOSCH:0125711103
YUNYI:12449400/BHP12828A

BXB12829



BXB12829



BXB12829

FEATURES

Diodes:6-60A Avalanche
With M8 × 26mm Battery Post
With “B+” Terminal M4-6H
With “W” Terminal M4-6H

REFERENCES

FIT UNIT:0125811001
YUNYI:244-DH0

BXB12829-A




BXB12829-A



BXB12829-A

FEATURES

Diodes:10-60A Avalanche
With M8 × 26mm Battery Post
With “B+” Terminal M4-6H
With “W” Terminal M4-6H



BxB12830



BxB12830



BxB12830

FEATURES

Diodes:6-70A Avalanche
Diameter OD:128mm
With M8 × 26mm Battery Post
With “B+” Terminal M4-6H
With “W” Terminal M4-6H

REFERENCES

BOSCH:F00M346135
YUNYI:12442800/BHP12815A

BxB12831



BxB12831



BxB12831

FEATURES

Diodes:6-60A Avalanche
Diameter OD:128mm
With M8 × 23.5mm Battery Post
With “B+” Terminal M4-6H
With “W” Terminal M4-6H

REFERENCES

BOSCH:F00M573907
YUNYI:1244CM00

BxB12832



BxB12832



BxB12832

FEATURES

Diodes:10-60A Avalanche
Diameter OD:128mm
With M8 × 32mm Battery Post
With “B+” Terminal M4-6H
With “W” Terminal M4-6H

REFERENCES

FIT UNIT:0125813002
YUNYI:244-DS0

BxB13001-B3



BxB13001-B3



BxB13001-B3

FEATURES

Diodes:6-70A Avalanche
Diameter OD:130mm
With M8 × 33mm Battery Post(L)
With “B+” Terminal M4-6H
With “W” Terminal M4-6H
Customer provide Negative heat sink

BXB13001-C8



BXB13001-C8



BXB13001-C8

FEATURES

Diodes:3-80A Avalanche
Diameter OD:130mm
With M8 × 30mm Battery Post(L)
With “B+” Terminal M4-6H
With “W” Terminal M4-6H
Customer provide Negative heat sink

BXB13003-F



BXB13003-F



BXB13003-F

FEATURES

Diodes:6-70A Avalanche
Diameter OD:130mm
With (M8+M8) × 30mm Battery Post
With “B+” Terminal M4-6H
With “W” Terminal M4-6H
Customer provide Negative heat sink

BXB13003-F1



BXB13003-F1



BXB13003-F1

FEATURES

Diodes:3-70A Avalanche
Diameter OD:130mm
With (M8+M8) × 30mm Battery Post
With “B+” Terminal M4-6H
With “W” Terminal M4-6H
Customer provide Negative heat sink

BXB13004-F1



BXB13004-F1



BXB13004-F1

FEATURES

Diodes:3-70A Avalanche
Diameter OD:130mm
With M8 × 30mm Battery Post(R)
With “B+” Terminal M4-6H
With “W” Terminal M4-6H
Customer provide Negative heat sink



BXB13006



BXB13006



BXB13006

FEATURES

Diodes: 8-70A Avalanche
Diameter OD: 130mm
With M8 x 54mm Battery Post
With M4 x 44mm "D+" Post
With M5 x 45mm "W" Post
With (M6+M8) x 43mm Ground Post
With Trio
With Capacitor
For 24V Alternators

BXB14001



BXB14001



BXB14001

FEATURES

Diodes: 6-80A Avalanche
Diameter OD: 140mm
With M8 x 22.5mm Battery Post(R)
With M8-6H Battery Post(L)
For 24V Alternators

REFERENCES

KRAUF AEP1315BJ, AEP1315WC
Prestolite 6530399A

BXB14001-A



BXB14001-A



BXB14001-A

FEATURES

Diodes: 6-80A Avalanche
Diameter OD: 140mm
With M8 x 38mm Battery Post(L)
With M8X30mm Battery Post(R)
For 24V Alternators

BXB14001-B



BXB14001-B



BXB14001-B

FEATURES

Diodes: 6-80A Avalanche
Diameter OD: 140mm
With M8 x 38mm Battery Post(L)
With M8X38mm Battery Post(R)
For 24V Alternators

REFERENCES

Prestolite 6530252, AEP1515

BXB14506-B



BXB14506-B



BXB14506-B

FEATURES

Diodes:14-50A Ampere
Diameter OD:145mm
With M8 × 54mm Battery Post
With M5 × 30mm "D+" Post
With M8 × 54mm Ground Post
With M5 × 25mm "W" Post
With Trio
With "B+" Terminal

BXB14506-D



BXB14506-D



BXB14506-D

FEATURES

Diodes:14-50A Ampere
Diameter OD:145mm
With M8 × 52mm Battery Post
With M8 × 52mm Ground Post
With M5 × 34.5mm "D+" Post
With M5 × 25mm "W" Post
With Trio
With "B+" Terminal

REFERENCES

BOSCH:1127320547,1127320571
CARGO:136581
TRANSPO:IBR547
YUNYI:242-AM0/BHO14502

BXB2201



BXB2201

FEATURES

Diodes:6-70A Avalanche
With M8 × 28.5mm Battery Post


REFERENCES

Bosch F00M256202
Cargo 333715
Mobiletron RB170HD
Transpo IBR2201
WAI 52-9866-W
ZAUFER 312N10056Z

BXB9001



BXB9001

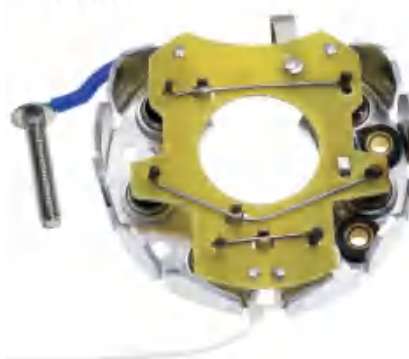

BXB9001

FEATURES

Diodes:6-25A Ampere
Diameter OD:90mm
With M6 × 32.5mm Battery Post
With Trio
With "B+" Lead Wire 130mm

REFERENCES

BOSCH:9121080595
TRANSPO:IBR595
YUNYI:242-B60/BHP9006



BXB9002



BXB9002



BXB9002

FEATURES

Diodes:6-35A Ampere
Diameter OD:90mm
With M6 × 46mm Battery Post
Without Trio

BXB9003



BXB9003



BXB9003

FEATURES

Diodes:6-25A Ampere
Diameter OD:90mm
With M6 × 54mm Battery Post
With M5 × 34mm "D+" Post
With M5 × 45mm "W" Post
With Trio

REFERENCES

UTM EB9002A
ZAUFER 312N10978Z

BXB9003-A



BXB9003-A



BXB9003-A

FEATURES

Diodes:6-35A Ampere
Diameter OD:90mm
With M6 × 49mm Battery Post
With M5 × 34mm "D+" Post
With Trio

BXB9004



BXB9004



BXB9004

FEATURES

Diodes:6-25A Ampere
Diameter OD:90mm
With "B+" Terminal
With "D+" Terminal
With Trio

BXB9004-A




BXB9004-A



BXB9004-A FEATURES

Diodes: 6-25A Ampere
Diameter OD: 90mm
With "B+" Terminal
With "D+" Terminal
With M5 x 45mm "W" Post
With Trio



BXC008



BXC008



BXC008

FEATURES

Diodes: 6–30A Ampere
With “B+” Lead Wire 45mm
With M4 × 20mm “W” Post
With Stamped Steel Heat Sink

BXC009



BXC009



BXC009

FEATURES

Diodes: 8–30A Ampere
With “B+” Lead Wire 45mm
With M4 × 20mm “W” Post
With Stamped Steel Heat Sink

BXC009-H



BXC009-H



BXC009-H

FEATURES

Diodes: 8–30A Ampere
With M4 × 20mm “W” Post
With Stamped Steel Heat Sink

BXC012-A



BXC012-A



BXC012-A

FEATURES

Diodes: 6–30A Ampere
With Trio
With “B+” Lead Wire 45mm
With “D+” Lead Wire 100mm
With M4 × 22mm “W” Post
With Stamped Steel Heat Sink



BXC015



BXC015



BXC015

FEATURES

Diodes: 8–30A Ampere
With Trio
With M4 × 21mm “W” Post
With Stamped Steel Heat Sink

BXC015-H



BXC015-H



BXC015-H

FEATURES

Diodes: 8–30A Ampere
With Trio
With “B+” Lead Wire 45mm
With “D+” Lead Wire 100mm
With M4 × 21mm “W” Post
With Stamped Steel Heat Sink

BXC021



BXC021



BXC021

FEATURES

Diodes: 6–30A Ampere
With M4 × 20mm “W” Post
With Stamped Steel Heat Sink

BXC022-C



BXC022-C



BXC022-C

FEATURES

Diodes: 6–30A Ampere
With Trio
With M4 × 20mm “W” Post
With Stamped Steel Heat Sink



BXC023



BXC023



BXC023

FEATURES

Diodes: 6–30A Ampere
With M4 × 20mm “W” Post
With Stamped Steel Heat Sink

BXC034



BXC034



BXC034

FEATURES

Diodes: 8–30A Ampere
With Trio
With “D+” Lead Wire 60mm

BXC037-C1



BXC037-C1



BXC037-C1

FEATURES

Diodes: 8–35A Ampere
With Trio

BXC037-M



BXC037-M



BXC037-M

FEATURES

Diodes: 6–35A Ampere
With Trio



BXC039




BXC039

FEATURES

Diodes: 6–35A Ampere
With Trio
With “D+” Lead Wire 95mm
Customer provide Negative heat sink

BXC046

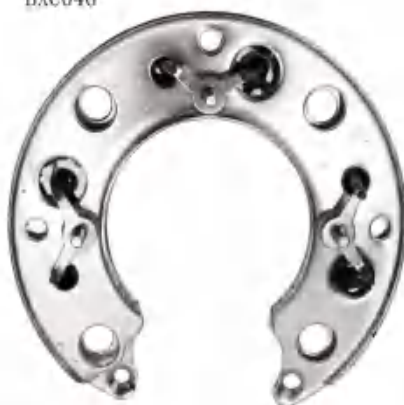

BXC046



BXC046

FEATURES

Diodes: 6–35A Ampere
With M4 × 24mm “W” Post
With Stamped Steel Heat Sink

BXC049



BXC049



BXC049

FEATURES

Diodes: 6–35A Ampere
With M6 × 30mm Battery Post
With M4 × 20mm “W” Post
With Stamped Steel Heat Sink

BXC050



BXC050



BXC050

FEATURES

Diodes: 6–30A Ampere
With “B+” Lead Wire 45mm
With Stamped Steel Heat Sink



BXC051



BXC051



BXC051

FEATURES

Diodes: 6–35A Ampere
With M6 × 42mm Battery Post
With Aluminum Heat Sink

BXC056-E



BXC056-E



BXC056-E

FEATURES

Diodes: 8–35A Ampere
With Trio
With M4 × 21mm “W” Post
With “B+” Lead Wire 45mm
With “D+” Lead Wire 100mm
With Aluminum Heat Sink

BXC071-H4



BXC071-H4



BXC071-H4

FEATURES

Diodes: 8–35A Ampere
With M6 × 31.6mm Battery Post
With M4 × 37mm Battery Bolt
With M4 × 42mm Ground Post
With Trio

BXC073



BXC073



BXC073

FEATURES

Diodes: 6–35A Ampere
With Trio
With “D+” Lead Wire 75mm
With M4 × 21mm “W” Post
With Aluminum Heat Sink

BXC074-B1



BXC074-B1




BXC074-B1

FEATURES

Diodes: 8-50A Avalanche
With Trio
With "B+" Lead Wire 76mm
With "D+" Lead Wire 100mm
With M4 x 21mm "W" Post
With Aluminum Heat Sink

BXC075-B1

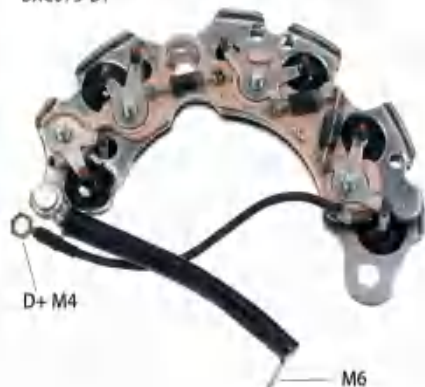

BXC075-B1



BXC075-B1

FEATURES

Diodes: 8-35A Avalanche
With Trio
With "B+" Lead Wire 76mm
With "D+" Lead Wire 100mm
With M4 x 21mm "W" Post
With Aluminum Heat Sink
For 24V Alternators

BXC080



BXC080



BXC080

FEATURES

Diodes: 8-50A Avalanche
With Trio
With "B+" Lead Wire 45mm
With "D+" Lead Wire 100mm
With M4 x 24mm "W" Post
With Aluminum Heat Sink

BXC081




BXC081



BXC081

FEATURES

Diodes: 8-50A Avalanche
With M6 x 35.5mm Battery Post
With Trio
With "D+" Lead Wire 100mm
With M4 x 24mm "W" Post
With Aluminum Heat Sink



BXC082

FEATURES

Diodes: 8-50A Avalanche
With M6 × 35.5mm Battery Post
With Trio
With "D+" Lead Wire 100mm
With M4 × 24mm "W" Post
With Aluminum Heat Sink



BXD1004



BXD1004




BXD1004

FEATURES

Diodes: 6-35A Ampere Button

BXD1102

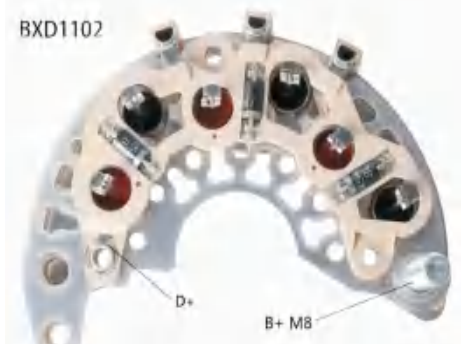

BXD1102



BXD1102

FEATURES

Diodes: 6-50A Ampere
With M8 x 40mm Battery Post
With Trio

REFERENCES

MOBILETRON: RD-39H

TRANSPO: DR2295

YUNYI: 214-090/DC1102

BXD1102-B



BXD1102-B



BXD1102-B

FEATURES

Diodes: 6-50A Ampere
With M6 x 20mm Battery Post
Without Trio

BXD1102-B3



BXD1102-B3




BXD1102-B3

FEATURES

Diodes: 6-50A Avalanche
With M8 x 40mm Battery Post (R)
With M6 x 20mm Battery Post (L)
Without Trio



BXD1103

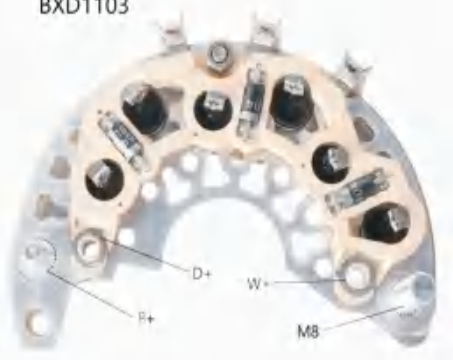

BXD1103



BXD1103


FEATURES

Diodes: 6-50A Avalanche
With M8 × 40mm Battery Post (R)
With M6 × 20mm Battery Post (L)
With Trio

REFERENCES

MOBILETRON: RD-39H
TRANSPO: DR2206
YUNYI: 214-100/DC1103

BXD1104

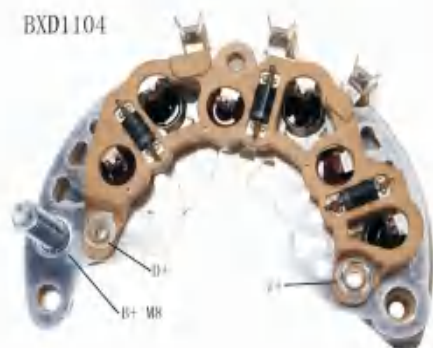

BXD1104



BXD1104

FEATURES

Diodes: 6-50A Ampere
With M8 × 40mm Battery Post
With Trio

BXD1124



BXD1124



BXD1124

FEATURES

Diodes: 3-35A Avalanche
With M8 × 37mm Battery Post(L)
With M8 × 29mm Battery Post(R)
Customer provide Negative heat sink

BXD1124-B



BXD1124-B



BXD1124-B

FEATURES

Diodes: 3-50A Avalanche
With M8 × 37mm Battery Post (L)
With M8 × 29mm Battery Post (R)
Customer provide Negative heat sink



BXD1124-H



BXD1124-H




BXD1124-H

FEATURES

Diodes: 3-50A Avalanche
With M8 × 29mm Battery Post (L)
With M8 × 37mm Battery Post (R)
Customer provide Negative heat sink

BXD12501-A

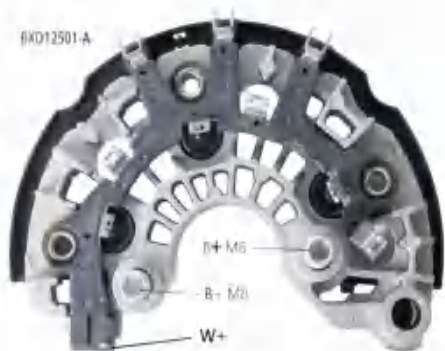

BXD12501-A



BXD12501-A

FEATURES

Diodes: 3-60A Avalanche
With M8 × 29mm Battery Post (L)
With M8 × 37mm Battery Post (R)
Bracket ID: 137.6mm
Bearing ID: 38mm

BXD12502



BXD12502




BXD12502

FEATURES

Diodes: 6-60A Avalanche
With M8 × 29mm Battery Post (L)
With M8 × 37mm Battery Post (R)
Bracket ID: 137.6mm
Bearing ID: 38mm
Customer provide Negative heat sink

BXD1922-A

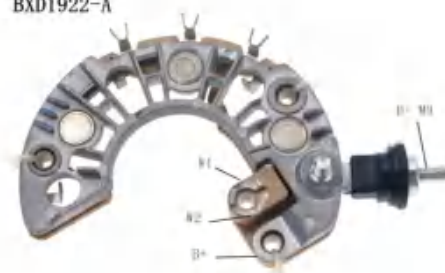

BXD1922-A



BXD1922-A

FEATURES

Diodes: 3-50A Avalanche
With M6 × 23.5mm Battery Mounting Bolt
With M8 Battery Post
Customer provide Negative heat sink



BXD1928



BXD1928



BXD1928

FEATURES

Diodes: 6–50A Avalanche
With M6 Battery Post
With M6 × 24mm Battery Mounting Bolt

BXD1929



BXD1929



BXD1929

FEATURES

Diodes: 6–50A Avalanche
With M8 × 41.5 Battery Post
Without Trio

BXD2401



BXD2401



BXD2401

FEATURES

Diodes: 6–35A Avalanche
With 5/16"–18 × 45 Battery Post
For 24V Alternators

BXD2402



BXD2402



BXD2402

FEATURES

Diodes: 6–50A Avalanche
With 5/16"–18 × 45 Battery Post



BXD2402-H



BXD2402-H



BXD2402-H

FEATURES

Diodes: 6-50A Avalanche
With 5/16"-18 x 45 Battery Post

BXD4400-A



BXD4400-A




BXD4400-A

FEATURES

Diodes: 6-50A Avalanche
With M6 x 53 Battery Post

BXD5000

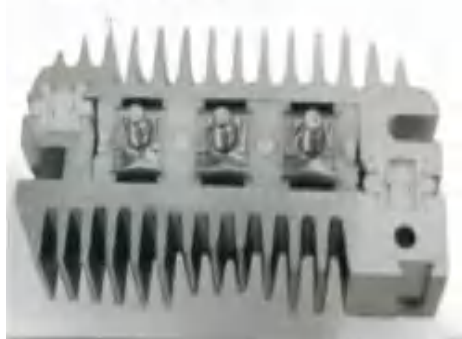

BXD5000


FEATURES

Diodes: 6-25A Ampere Button

BXD5002



BXD5002

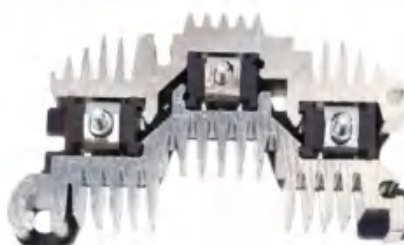

BXD5002

FEATURES

Diodes: 6-35A Ampere Button

REFERENCES

Cargo 131877
Mobiletron Rd05
Transpo Dr5173



BXD5005



BXD5005



BXD5005

FEATURES

Diodes: 6–35A Ampere
With Trio
With Capacitor

BXD5005-E



BXD5005-E



BXD5005-E

FEATURES

Diodes: 6–35A Avalanche
Without Trio
With Capacitor

BXD5005-G



BXD5005-G



BXD5005-G

FEATURES

Diodes: 6–35A Ampere
With Trio
With Capacitor

REFERENCES

CARGO: 230983
TRANSPO: DR5165
YUNYI: 210–260/DC5304

BXD5006



BXD5006

FEATURES

Diodes: 6–50A Ampere
Without Trio
With Capacitor

REFERENCES

Cargo 131880
Mobiletron RD95A, RD95HD
Transpo Dr4000


BXD5007



BXD5007 FEATURES

Diodes: 6–35A Ampere
With M8 × 42mm Battery Post
Without Trio
With Capacitor

BXD5008

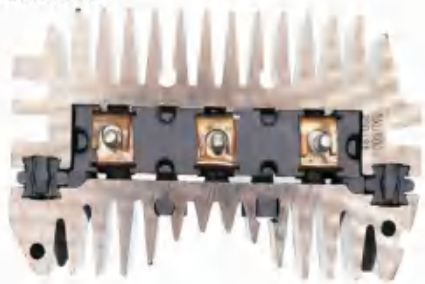


BXD5008



BXD5008 FEATURES

Diodes: 6–25A Ampere Button

BXD5008-D

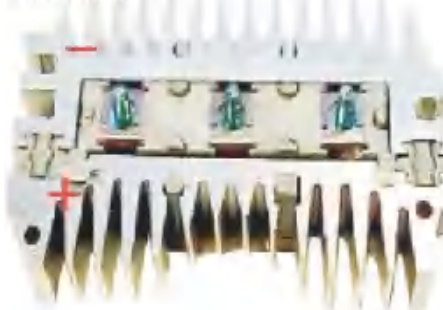

BXD5008-D FEATURES

Diodes: 6–35A Ampere Button

BXD5040



BXD5040



BXD5040 FEATURES

Diodes: 6–50A Ampere
With Trio

REFERENCES

KRAUF AED4504BP, AED4504LP

BXD5160



BXD5160




BXD5160

FEATURES

Diodes: 6–35A Ampere
With Capacitor

BXD5163

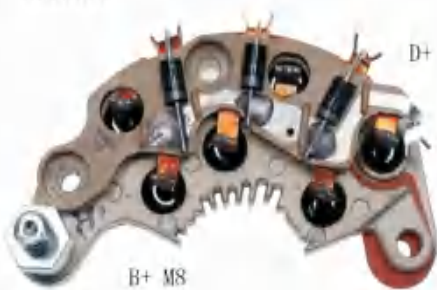

BXD5163




BXD5163


FEATURES

Diodes: 6–50A Ampere
With M8 x 46 Battery Post
With Trio
Without Capacitor

BXD5176PF

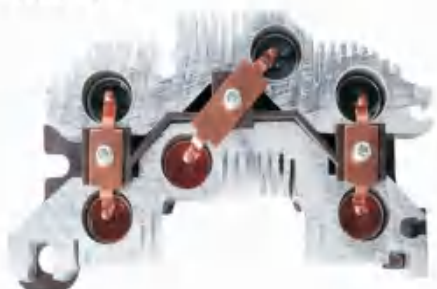

BXD5176PF

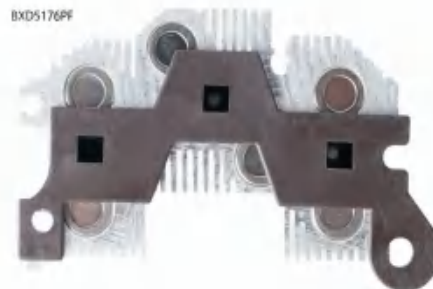

BXD5176PF

FEATURES

Diodes: 6–50A Ampere

REFERENCES

DELCO: 10467052 1989774
CARGO: 131881
MOBILETRON: RD-06A
TRANSPON: DR5176P

BXD5181



BXD5181



BXD5181

FEATURES

Diodes: 6–50A Avalanche
For 24V Alternators

REFERENCES

elco Remy 10501636, 10512367
KRAUF AED0003LK, AED0003UT
Transpo DR5183
UTM ED0003A



BXD5185



BXD5185



BXD5185

FEATURES

Diodes: 6–25A Ampere Button

REFERENCES

DELCO: 1852209, 1875627


CARGO: 130673

MOBILETRON: RD–09

TRANSPO: DR5040 DR5000 Dr5042

YUNYI: 212–170/DC5185

BXD5185-A

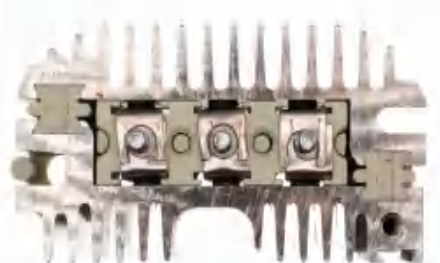

BXD5185 A



BXD5185-A

FEATURES

Diodes: 6–25A Ampere Button

BXD5192



BXD5192



BXD5192

FEATURES

Diodes: 6–35A Ampere Button

REFERENCES

Cargo 131873

Mobiletron RD12, RD12H

Transpo Dr5050

BXD6110



BXD6110



BXD6110

FEATURES

Diodes: 6–50A Ampere

With M6 × 41.6 Battery Post

Customer provide Negative heat sink



BXD6111-C



BXD6111-C



BXD6111-C

FEATURES

Diodes: 6-50A Avalanche
With M8 × 45 Battery Post
Customer provide Negative heat sink
For 24V Alternators

BXD6111-M3



BXD6111-M3



BXD6111-M3

FEATURES

Diodes: 6-80A Avalanche
With 5/16"-18 × 45 Battery Post
Customer provide Negative heat sink

BXD6113-C



BXD6113-C



BXD6113-C

FEATURES

Diodes: 6-60A Avalanche
With M8 × 40mm Battery Post
With M6 × 26mm Battery Post
Customer provide Negative heat sink
For 28V Alternators

BXD8410



BXD8410



BXD8410

FEATURES

Diodes: 8-50A Avalanche
With M6 Battery Post
With Trio
With "W" Lead Wire 120mm

REFERENCES

KRAUF AED1215LP
Transpo DR8410
UTM ED1215A
ZAUFER 312N10564Z



BXD9410



BXD9410



BXD9410

FEATURES

Diodes: 6–35A Avalanche
With M6 × 38.6mm Battery Post
With Trio
With P–Terminal

REFERENCES

DELCO: 19020604 19020606
CARGO: 235028
MOBILETRON: DR9411
TRANSPO: AED9411
YUNYI: 214–210/DC9411

BXD9411-E



BXD9411-E



BXD9411-E

FEATURES

Diodes: 6–35A Ampere
With M6 × 38.6mm Battery Post
With Trio

REFERENCES

Delco Remy 19020601
Cargo 235027, 235139, 239037
Mobiletron: Rd32
Transpo: Dr9410

BXE007-B



BXE007-B



BXE007-B FEATURES

Diodes: 6-35A Avalanche
With M6 Battery Post
With Trio
With "D+" Terminal
With "B+" Terminal

BXE007-E



BXE007-E



BXE007-E FEATURES

Diodes: 6-35A Avalanche
With M8 x 36mm Battery Post
With Trio
With "D+" Terminal
With "B+" Terminal

BXE019



BXE019



BXE019 FEATURES

Diodes: 6-30A Ampere
With Trio
With Capacitor
With "B+" Lead Wire 40mm

REFERENCES

Cargo 132462
Kia 3736783000, 3736783001

BXE020-A



BXE020-A



BXE020-A FEATURES

Diodes: 6-35A Ampere
With M6 x 36mm Battery Post
With Trio



BXE022



BXE022



BXE022 FEATURES

Diodes: 8–35A Ampere
With M6 Battery Post
With Trio
With Capacitor
With 1W 51 Ohm Resistor

BXE023-B



BXE023-B



BXE023-B FEATURES

Diodes: 8–35A Ampere
With M6 Battery Post
With Trio
With Capacitor
With 1W 51 Ohm Resistor

BXE027



BXE027



BXE027 FEATURES

Diodes: 8–35A Ampere
With M6 Battery Post
With Trio
With Capacitor
With 1W 51 Ohm Resistor

BXE028-E



BXE028-E




BXE028-E FEATURES

Diodes: 8–35A Ampere
With M6–6H Battery Post
With Trio
With “W” Terminal
With “N” Terminal
With “D+” Lead Wire 65mm
With “N” Lead Wire 155mm



BXE028-F1

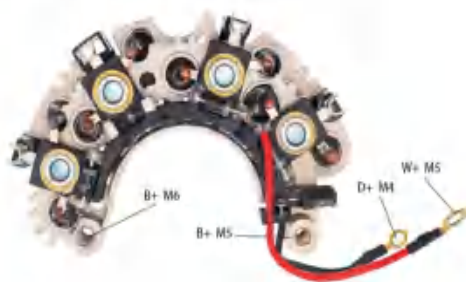

BXE028-F1



BXE028-F1 FEATURES

Diodes: 8-35A Ampere
With M5-6H Battery Post
With Trio
With "W" Terminal
With "D+" Lead Wire 70mm
With "W" Lead Wire 110mm

BXE031-AB



BXE031-AB



BXE031-AB FEATURES

Diodes: 8-35A Ampere
With M5-6H Battery Post
With Trio
With "N" Terminal
With "D+" Terminal
With "D+" Lead Wire 80mm
With "W" Lead Wire 110mm

BXE032-E



BXE032-E



BXE032-E FEATURES

Diodes: 8-50A Ampere
With M5 x 20 Battery Post
With Trio
With "N" Terminal
With "D+" Terminal
With "D+" Lead Wire 80mm
With "W" Lead Wire 110mm

BXE035-B



BXE035-B



BXE035-B FEATURES

Diodes: 8-35A Ampere
With M6 x 35mm Battery Post
With Aluminum Heat Sink



BXE036



BXE036



BXE036

FEATURES

Diodes:8-35A Ampere
With M6 × 39mm Battery Post
With Copper Heat Sink

REFERENCES

KRAUF AEW7766AD, AEW7766SK
UTM EW7766A
ZAUFER 312N10229Z

BXE036-A



BXE036-A




BXE036-A

FEATURES

Diodes:8-35A Ampere
With M6 × 39mm Battery Post
With Aluminum Heat Sink

BXE037-C1

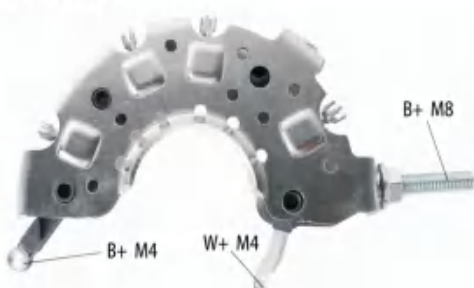

BXE037-C1



BXE037-C1

FEATURES

Diodes:8-35A Ampere
With M8 × 45mm Battery Post
With "B+" Terminal
With "W" Terminal
With Copper Heat Sink

BXE043




BXE043



BXE043

FEATURES

Diodes:8-35A Ampere
With M8 × 45mm Battery Post
With Trio
With "B+" Terminal
With M5 × 43.5mm Ground Mounting Bolt
With M5 × 25mm Trio Post

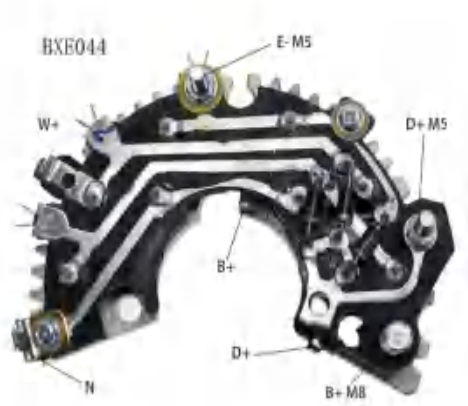

BXE044

FEATURES

Diodes: 8–30A Ampere
 With M8 × 45mm Battery Post
 With Trio
 With “B+” Terminal
 With “N” Terminal
 With M5 × 25mm Trio Post
 With M5 × 43.5mm Ground Mounting Bolt

BXE051



BXE051



BXE051

FEATURES

Diodes: 6–30A Ampere
 With M6 × 64mm Battery Post
 With M5 × 59mm Ground Mounting Bolt
 With M4 × 14mm “W” Post

BXE062-C



BXE062-C



BXE062-C

FEATURES

Diodes: 6–35A Ampere
 With M6 × 32mm Battery Post
 With Trio
 With “D+” Terminal
 Customer provide Negative heat sink

BXE064



BXE064



BXE064

FEATURES

Diodes: 8–35A Avalanche
 With M8 × 32mm Battery Post
 Without Trio
 With “W” Terminal
 For 24V Alternators



BXE064-A2



BXE064-A2



BXE064-A2

FEATURES

Diodes: 8-50A Avalanche
With M6 x 44mm Battery Post
With Trio
With "D+" Terminal

BXE064-B



BXE064-B



BXE064-B

FEATURES

Diodes: 8-50A Avalanche
With M6 x 44mm Battery Post
With Trio
With "D+" Terminal

BXE065



BXE065



BXE065

FEATURES

Diodes: 6-50A Avalanche
With M8 x 49mm Battery Post
With M4 x 35mm Trio Post
With M5 x 40mm "W" Post
With M6 x 56mm Ground Post
With Trio
For 24V Alternators

BXE066-D




BXE066-D




BXE066-D

FEATURES

Diodes: 3-35A Ampere
With M8 x 35.5mm Battery Post
With Trio
With "D+" Terminal
Customer provide Negative heat sink



BXE067

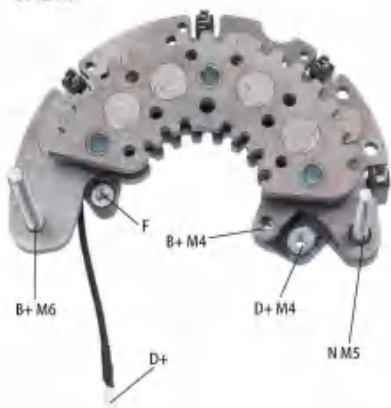

BXE067




BXE067

FEATURES

Diodes: 8–50A Avalanche
With M6 × 43mm Battery Post
With M5 × 28mm “N” Post
With Trio
With “D+” Terminal
With “D+” Lead Wire 90mm
For 24V Alternators

BXE069

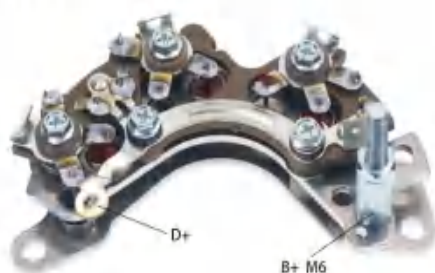

BXE069



BXE069

FEATURES

Diodes: 6–25A Ampere
With M6 × 44mm Battery Post
With Trio
With “D+” Terminal
With “B+” Terminal

BXE069-A



BXE069-A



BXE069-A

FEATURES

Diodes: 6–25A Ampere
With M6 × 44mm Battery Post
With Trio
With “D+” Terminal

BXE069-F



BXE069-F



BXE069-F

FEATURES

Diodes: 6–25A Ampere
With Trio
With “D+” Terminal
With “B+” Terminal



BXE070



BXE070

**BXE070****FEATURES**

Diodes: 6–35A Ampere
With M8 × 59mm Battery Post
With M5 × 8mm Ground Mounting Bolt
With M5 × 40mm Ground Mounting Bolt
With Trio
With Capacitor
With “D+” Terminal
With “W” Terminal

BXE071



BXE071

**BXE071****FEATURES**

Diodes: 8–35A Ampere
With M8 × 62.5mm Battery Post
With M6 × 46mm Ground Mounting Bolt
With Trio
With Capacitor
With “D+” Terminal
With “W” Terminal

BXE075



BXE075

**BXE075****FEATURES**

Diodes: 8–35A Avalanche
With M6 × 39mm Battery Post
With M5 × 50mm “W” Post
With Trio
With “D+” Terminal
For 24V Alternators

BXE077



BXE077

**BXE077****FEATURES**

Diodes: 8–50A Avalanche
With M8 × 42.5mm Battery Post
With M5 × 20mm “W” Post
With M4 × 13.5mm Trio Post
With Trio
With “D+” Terminal
With “D+” Lead Wire 80mm
For 24V Alternators



BXE079



BXE079



BXE079

FEATURES

Diodes: 8-50A Avalanche
With M8 × 42.5mm Battery Post
With M5 × 12mm "W" Post
With M5 × 12mm Trio Post
With Trio
With "D+" Terminal
With "D+" Lead Wire 80mm
For 24V Alternators

BXE080



BXE080




BXE080

FEATURES

Diodes: 6-50A Avalanche
With M8 × 42.5mm Battery Post
With Trio
With "D+" Terminal
With "W" Terminal
With "D+" Lead Wire 80mm
For 24V Alternators

BXE080-A

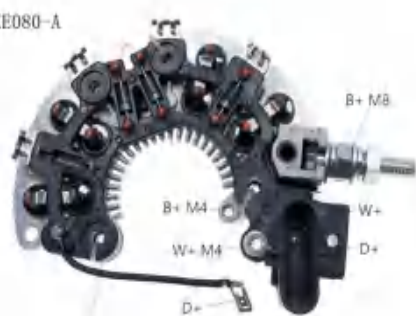

BXE080-A



BXE080-A

FEATURES

Diodes: 8-50A Avalanche
With M8 × 42.5mm Battery Post
With Trio
With "D+" Terminal
With "W" Terminal
With "D+" Lead Wire 80mm
For 24V Alternators

BXE080-A1



BXE080-A1



BXE080-A1

FEATURES

Diodes: 8-50A Avalanche
With M8 × 42.5mm Battery Post
With "W" Terminal
With "W" Lead Wire 80mm
Without Trio
For 24V Alternators



BXE081



BXE081



BXE081

FEATURES

Diodes: 6-35A Avalanche
 With M8 x 54.5mm Battery Post (L)
 With M6 x 36mm Battery Post (R)
 With Trio
 With "D+" Terminal
 With "W" Terminal
 With "D+" Lead Wire 80mm
 For 24V Alternators

BXE081-A



BXE081-A



BXE081-A

FEATURES

Diodes: 8-50A Avalanche
 With M8 x 54.5mm Battery Post (L)
 With M6 x 36mm Battery Post (R)
 With Trio
 With "D+" Terminal
 With "W" Terminal
 With "D+" Lead Wire 80mm
 For 24V Alternators

BXE090



BXE090




BXE090

FEATURES

Diodes: 8-50A Avalanche
 With M6 x 43.3mm Battery Post (L)
 With M4 x 14mm Trio Post
 With M4 x 14mm "W" Post
 With M4 x 14mm N Post
 With Trio
 With "D+" Terminal
 With "W" Terminal
 With "D+" Lead Wire 90mm
 For 24V Alternators

BXE092

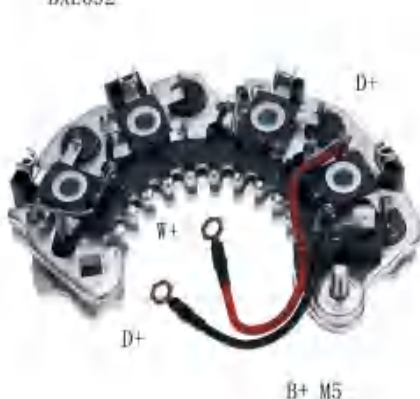

BXE092



BXE092

FEATURES

Diodes: 8-60A Ampere
 With M5 x 20.5mm Battery Post
 With Trio
 With "D+" Lead Wire 75mm
 With "W" Lead Wire 110mm
 With "D+" Terminal



BXE092-D



BXE092-D




BXE092-D


FEATURES

Diodes: 8-70A Ampere
 With M6 × 41mm Battery Post(L)
 With M5 × 20.5mm Battery Post(R)
 With M6 × 52.5mm Ground Mounting Bolt
 With Trio
 With "D+" Lead Wire 75mm
 With "W" Lead Wire 110mm
 With "D+" Terminal

BXE13001

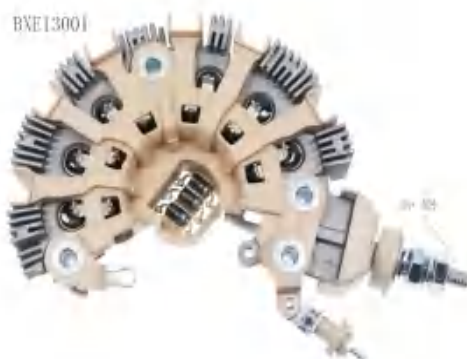

BXE13001

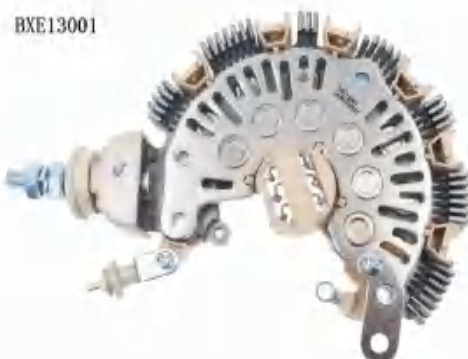

BXE13001

FEATURES

Diodes: 12-50A Ampere
 With 5/16-18 × 60mm Battery Post
 With M4 × 27mm "W" Post
 With Trio

REFERENCES

KRAUF AEN7007LP, AEN7007MA
 ZAUFER 312N10258Z

BXE14501



BXE14501



BXE14501

FEATURES

Diodes: 18-50A Avalanche
 With M8 × 43.3mm Battery Post (L)
 With M5 × 21mm Trio Post
 With M4 × 14mm "W" Post
 With M4 × 14mm N Post
 With Trio
 With "D+" Terminal
 With "W" Terminal
 With "D+" Lead Wire 110mm
 For 24V Alternators

BXE14502-A



BXE14502-A



BXE14502-A

FEATURES

Diodes: 18-50A Ampere
 With M8 × 38mm Battery Post
 With M8 × 38mm Ground Mounting Bolt
 With M4 × 14mm Trio Post
 With M4 × 14mm "W" Post
 With M4 × 14mm N Post
 With Trio
 With "D+" Terminal
 With "W" Terminal
 With "D+" Lead Wire 185mm

BXE1722



BXE1722




BXE1722

FEATURES

Diodes:8-35A Ampere
With M6 Battery Post
With Trio
With Capacitor
With 51 Ω 1W Resistor

BXE173

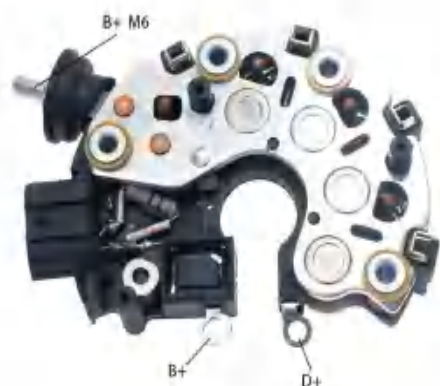

BXE173



BXE173

FEATURES

Diodes:8-35A Ampere
With M6 Battery Post
With Trio
With Capacitor
With 51 Ω 1W Resistor

BXE1824



BXE1824



BXE1824

FEATURES

Diodes:8-35A Ampere
With M6 Battery Post
With Trio
With Capacitor
With 51 Ω 1W Resistor

BXE255-B




BXE255-B



BXE255-B

FEATURES

Diodes:8-35A Ampere
With M8 \times 26mm Battery Post
With M4 \times 15mm Trio Post
With M5 \times 20mm "W" Post
With Trio
With Capacitor
With 330 Ω 3W Resistor



BXF1040



BXF1040



BXF1040

FEATURES

Diodes: 6–35A Ampere
With M7 × 27mm Battery Post
With M5 × 26mm Ground Mounting Bolt

REFERENCES

FORD: D6AZ10304A GY–1327
TRANSPO: FR1040
YUNYI:FD1002

BXF1070



BXF1070

FEATURES

Diodes: 6–25A Ampere Button
With M7 × 27mm Battery Post
With M5 × 26mm Ground Mounting Bolt

REFERENCES

FORD: D6AZ10304A GY–1327
CARGO: 131421
MOBILETRON: RF–08H
TRANSPO: FR1070
YUNYI: FD1001

BXF2013



BXF2013



BXF2013

FEATURES

Diodes: 8–35A Ampere
With M6 × 38mm Battery Post
Diameter OD: 133mm
With Capacitor
Drop-down Stator Terminals

REFERENCES

FORD:F5AZ–10304BA
CARGO: 136209
MOBILETRON: RF–043
TRANSPO: FR2013
FIT UNIT: CA1034IR
YUNYI: FD3001DW

BXF2023



BXF2023



BXF2023

FEATURES

Diodes: 8–50A Ampere
With M6 × 38mm Battery Post
Diameter OD: 147mm
With Capacitor
Drop-down Stator Terminals

REFERENCES

FORD:F5AZ10304AA
CARGO: 136210
MOBILETRON: RF–053
TRANSPO: FR2023
YUNYI:FD3002DW



BXF3003



BXF3003



BXF3003

FEATURES

Diodes: 8–50A Ampere
Diameter OD: 133mm
With Capacitor
Drop-down Stator Terminals

REFERENCES

FORD: F5OZ–10300FA
CARGO: 139668
MOBILETRON: RF–063
TRANSPO: FR3003
YUNYI: FD4001DW

BXF6003



BXF6003



BXF6003

FEATURES

Diodes: 8–35A Ampere
With M6 × 33.5mm Battery Post
Diameter OD: 136mm
With Capacitor
Drop-down Stator Terminals
Connection type to the stator star(Y)

REFERENCES

FORD: F8WU10A366AAIP
CARGO: 230842
MOBILETRON: RF–103
TRANSPO: FR6003
YUNYI: FD6000DW

BXF6013



BXF6013

FEATURES

Diodes: 8–35A Ampere
With M6 × 33.5mm Battery Post
Diameter OD: 136mm
With Capacitor
Drop-down Stator Terminals
Connection type to the stator star(Y)

REFERENCES

FORD: 98AZ103046EA
CARGO: 233208
MOBILETRON: RF–113
TRANSPO: FR6013
YUNYI: FD6001DW

BXF6023



BXF6023



BXF6023

FEATURES

Diodes: 8–50A Ampere
With M6 × 33.5mm Battery Post
Diameter OD: 149mm
With Capacitor
Drop-down Stator Terminals
Connection type to the stator star(Y)

REFERENCES

FORD: F8AU10A366AAIP
CARGO: 230870
MOBILETRON: RF–123
TRANSPO: RF6023
YUNYI: FD6002DW



BXF6073



BXF6073

FEATURES

Diodes: 6–50A Ampere
With M6 × 33.5mm Battery Post
Diameter OD: 149mm
With Capacitor
Drop-down Stator Terminals
Connection type to the stator delta(Δ)

REFERENCES

FORD: 1F8U10300CD
CARGO: 233207
MOBILETRON: RF-133
TRANSPO: FR6073
YUNYI: FD6011DW

BXF6083



BXF6083


FEATURES

Diodes: 6–50A Ampere
With M6 × 33.5mm Battery Post
Diameter OD: 136mm
With Capacitor
Drop-down Stator Terminals
Connection type to the stator delta(Δ)

REFERENCES

FORD: 1L8Z-10346AB
MOBILETRON: RF-153
TRANSPO: FR6083
YUNYI: FD6012DW

BXF6102

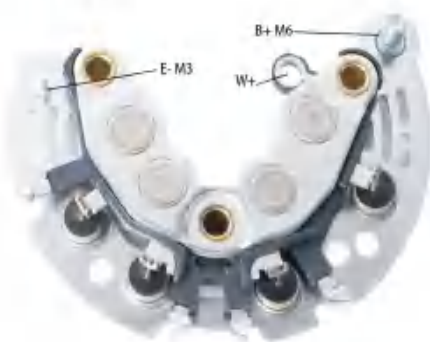

BXF6102



BXF6102

FEATURES

Diodes: 8–50A Avalanche
Diameter OD: 114mm
With M6 × 16.4mm Battery Post (L)
With M3 × 10.3mm Battery Post (R)

REFERENCES

CARGO: 235019
MOBILETRON: RF-18HV
TRANSPO: FR6102
YUNYI: FD61001A

BXF6102-B



BXF6102-B



BXF6102-B


FEATURES

Diodes: 8–50A Ampere
Diameter OD: 114mm
With M6 × 39mm Battery Post (L)
With M3 × 10.3mm Battery Post (R)

REFERENCES

MOBILETRON: RF-19H
TRANSPO: FR6100
VALEO: 3N2110300BB
YUNYI: FD61002A

BXF6105

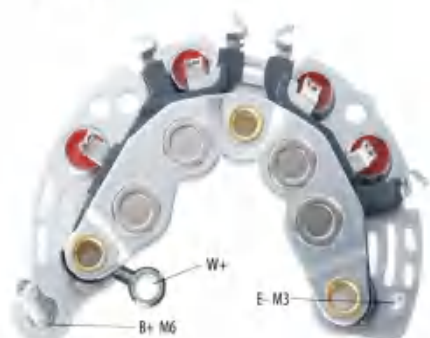

BXF6105



BXF6105

FEATURES

Diodes: 8–50A Ampere
 Diameter OD: 105mm
 With M6 × 39mm Battery Post (L)
 With M3 × 10.3mm Battery Post (R)

REFERENCES

MOBILETRON: RF-22HV
 TRANSPON: FR6104
 YUNYI: FD61003A



BXH10001



BXH10001



BXH10001

FEATURES

Diodes: 6-30A Ampere
Diameter OD: 100mm
With M5 x 41.6mm Battery Bolt
With M5 x 31mm Mounting Bolt
With Trio

REFERENCES

HITACHI:L135-3320,L135-332000
CARGO:132406
TRANSPO:IHR734
MOBILETRON:RH-20
YUNYI:12510400/HI10002F

BXH10003



BXH10003



BXH10003

FEATURES

Diodes: 6-30A Ampere
Diameter OD: 100mm
With M5 x 44mm Battery Post
With M5 x 40mm Battery Bolt
With M5 x 31mm Mounting Bolt
With Trio

BXH10005



BXH10005



BXH10005

FEATURES

Diodes: 6-30A Ampere
Diameter OD: 100mm
With M5 x 31mm Mounting Bolt
Without Trio

BXH10006



BXH10006



BXH10006

FEATURES

Diodes: 6-30A Ampere
Diameter OD: 100mm
With M5 x 31mm Mounting Bolt
With Trio
With "D+" Lead Wire 45mm

BXH10014



BXH10014



BXH10014

FEATURES

Diodes: 8–30A Ampere
Diameter OD: 100mm
With (M5+M4) × 39mm Mounting Bolt
With Trio

BXH10301



BXH10301



BXH10301

FEATURES

Diodes: 6–35A Ampere
Diameter OD: 103mm
With M6 × 43.5mm Battery Post
With M5 × 31.5mm Mounting Bolt
With Trio

BXH10301-C



BXH10301-C



BXH10301-C

FEATURES

Diodes: 6–35A Ampere
Diameter OD: 103mm
With M6 × 19.8mm Battery Post
With M5 × 31.5mm Mounting Bolt
With Trio

BXH10301-D



BXH10301-D



BXH10301-D

FEATURES

Diodes: 8–35A Ampere
Diameter OD: 103mm
With M6 × 19.8mm Battery Post
With M5 × 31.5mm Mounting Bolt
Without Trio



BXH10302



BXH10302

**BXH10302****FEATURES**

Diodes: 8–35A Ampere
Diameter OD: 98mm
With M6 × 33mm Battery Post
With Trio

REFERENCES

Mobiletron RH92, RH95
Transpo IHR784
UTM EH0784A
ZAUFER 312N10272Z

BXH10304



BXH10304

**BXH10304****FEATURES**

Diodes: 8–35A Avalanche
Diameter OD: 98mm
With M6 × 33mm Battery Post
Without Trio

BXH10501



BXH10501

**BXH10501****FEATURES**

Diodes: 6–25A Ampere
With “D+” Lead Wire 150mm
With “B+” Lead Wire 60mm
With “E” Lead Wire 60mm
With Trio
With 750 Ohm Resistor

BXH10501-A




BXH10501-A

**BXH10501-A****FEATURES**

Diodes: 6–25A Ampere
With Trio
With 750 Ohm Resistor

BXH10801-A

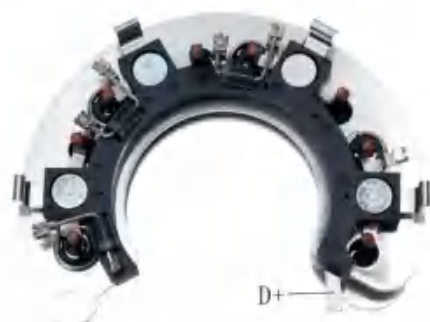

BXH10801-A



BXH10801-A

FEATURES

Diodes: 8–35A Ampere
With M5 × 31mm Mounting Bolt
With Trio

BXH10802



BXH10802



BXH10802

FEATURES

Diodes: 8–50A Ampere
With M6 × 36mm Battery Post
With M5 × 39mm Mounting Bolt
With M5 × 45mm Ground Post
With Trio
With Copper Heat Sink

BXH11002



BXH11002



BXH11002

FEATURES

Diodes: 6–30A Ampere
Diameter OD: 100mm
With M6 × 38mm Battery Post
With M5 × 44mm Battery Bolt
With Trio

REFERENCES

Cargo 136738
KRAUF AEA5006LK
Mando 809162, 811875, A600C0231, AC155603
Mobiletron RM123
Transpo IMR5005, IYR5006

BXH11102



BXH11102




BXH11102

FEATURES

Diodes: 6–35A Ampere
Diameter OD: 111mm
With M5 × 31mm Mounting Bolt
With M5 × 46.5mm Battery Bolt
With Trio



BXH11104

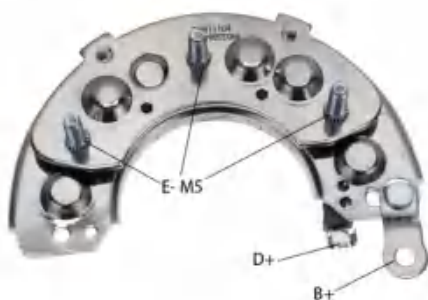

BXH11104



BXH11104

FEATURES

Diodes: 6-35A Ampere
Diameter OD: 111mm
With M5 × 31mm Mounting Bolt
With Trio

BXH11106



BXH11106



BXH11106

FEATURES

Diodes: 6-35A Ampere
Diameter OD: 111mm
With M6 × 49mm Battery Bolt
With M5 × 31mm Mounting Bolt
With Trio

BXH11107-F



BXH11107-F



BXH11107-F

FEATURES

Diodes: 6-35A Ampere
Diameter OD: 111mm
With M5 × 31mm Mounting Bolt
With Trio
With Aluminum Heat sinks

REFERENCES

HITACHI: L140-13202, L140-53202
CARGO: 131603
TRANSPO: IHR723
MOBILETRON: RH-04
YUNYI: 12520100/HI111116

BXH11109



BXH11109



BXH11109

FEATURES

Diodes: 6-35A Ampere
Diameter OD: 111mm
With M5 × 31mm Mounting Bolt
With Trio
With "D+" Lead Wire 65mm

REFERENCES

Diodes: 6-35A Ampere
Diameter OD: 111mm
With M5 × 31mm Mounting Bolt
With Trio
With "D+" Lead Wire 65mm

BXH11110



BXH11110



BXH11110


FEATURES

Diodes: 6–30A Ampere
Diameter OD: 111mm
With M5 × 41.5mm Battery Bolt
With M5 × 31mm Mounting Bolt
With Trio

BXH11112



BXH11112

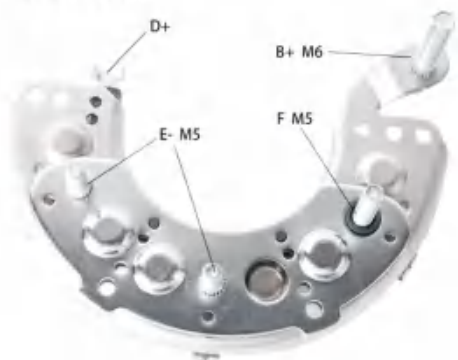

BXH11112

FEATURES

Diodes: 6–35A Ampere
Diameter OD: 111mm
With M6 × 35.2mm Battery Post
With M5 × 31mm Mounting Bolt
With M5 × 41.5mm Battery Bolt
With Trio

REFERENCES

YUNYI:12518900/HI11130F

BXH11201-A



BXH11201-A



BXH11201-A

FEATURES

Diodes: 6–35A Ampere
With M6 × 52mm Battery Post
With M5 × 40mm Mounting Bolt
With Trio

BXH11201-C



BXH11201-C



BXH11201-C

FEATURES

Diodes: 6–35A Ampere
With M5 × 43mm Battery Post
With M5 × 40mm Mounting Bolt
With M5 × 48.5mm Ground Post
With Trio



BXH11202



BXH11202



BXH11202

FEATURES

Diodes: 6–35A Ampere
With M6 × 43mm Battery Post
With M5 × 40mm Mounting Post
With Trio

BXH11203-C



BXH11203-C



BXH11203-C

FEATURES

Diodes: 6–35A Ampere
With M6 × 44mm Battery Post
With M5 × 31mm Mounting Bolt
With M5 × 40mm Battery Bolt
With Trio
With Aluminum Heat Sink

BXH11204



BXH11204



BXH11204


FEATURES

Diodes: 6–35A Ampere
With M6 × 35mm Battery Post
With M5 × 31mm Mounting Bolt
With Trio
With Aluminum Heat Sink

BXH11301



BXH11301

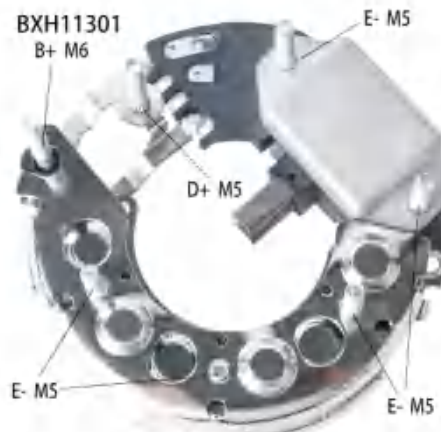

BXH11301

FEATURES

Diodes: 6–30A Ampere
Diameter OD: 111mm
With M5 × 40mm Mounting Post
With M5 × 20mm Mounting Bolt
With Trio

REFERENCES

OEM NO: JA789IR ALT4269
CARGO: 135680
YUNYI: 12514700/HI1124F
Complete set with
REC HI1124+REG (12–0031) 28V
YUNYI: 11516100/HI113ZT12835F

BXH11401



BXH11401



BXH11401

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 114mm
With M6 × 19.8mm Battery Post
With M5 × 31mm Mounting Bolt

BXH11402



BXH11402



BXH11402

FEATURES

Diodes: 6-35A Ampere
Diameter OD: 114mm
With M6 × 43mm Battery Post
With M5 × 31.5mm Mounting Bolt

BXH11403



BXH11403



BXH11403

FEATURES

Diodes: 8-35A Avalanche
Diameter OD: 114mm
With M6 × 19.8mm Battery Post
With M5 × 31.5mm Mounting Bolt

BXH11404




BXH11404



BXH11404

FEATURES

Diodes: 6-35A Ampere
Diameter OD: 114mm
With M8 × 45.6mm Battery Post
With M5 × 31.5mm Mounting Bolt



BXH11405

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 114mm
With (M4+M6) × 51mm Battery Post
With M5 × 42.5mm Mounting Bolt
With Trio

REFERENCES

HITACHI: L180G-8320 LR235-503C
MOBILETRON: RH-74A+VR-H2000-86B
CARGO: 333052
YUNYI: 12505400/HI11402
Complete set with
REC HI11402+REG(05-0031)24V
YUNYI: 11509100 HI11402ZT



BXH11406

FEATURES

Diodes: 6-35A Ampere
Diameter OD: 114mm
With M6 × 19.8mm Battery Post
With M5 × 31.5mm Mounting Bolt

REFERENCES

HITACHI: LR160-727, LR180-741H
CARGO: 230662
TRANSPON: IHR778+IH767
MOBILETRON: RH-32
YUNYI: 12506100/HI11405
REC HI11405+REG (05-0151) 14V
1150A010 HI11405ZT

BXH11407




BXH11407

BXH11407

FEATURES

Diodes: 8-35A Avalanche
Diameter OD: 114mm
With M6 × 19.8mm Battery Post
With M5 × 31.5mm Mounting Bolt

BXH11408

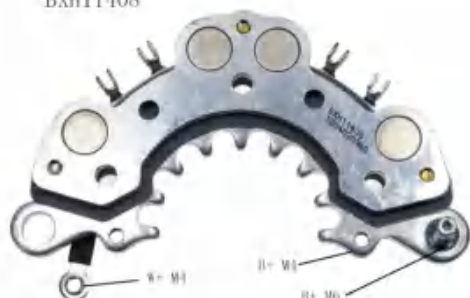

BXH11408



BXH11408

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 114mm
With M6 × 19.8mm Battery Post
With M5 × 31.5mm Mounting Bolt



BXH11408-A



BXH11408-A



BXH11408-A

FEATURES

Diodes: 6-35A Ampere
Diameter OD:114mm
With M6 × 19.8mm Battery Post
With M5 × 31.5mm Mounting Bolt

BXH11410-A



BXH11410-A



BXH11410-A

FEATURES

Diodes: 8-35A Ampere
Diameter OD:114mm
With M8 × 45.6mm Battery Post
With M5 × 31.5mm Mounting Bolt

BXH11410-B



BXH11410-B



BXH11410-B

FEATURES

Diodes: 8-35A Ampere
Diameter OD:114mm
With M6 × 43mm Battery Post
With M5 × 31.5mm Mounting Bolt

BXH11414-A



BXH11414-A



BXH11414-A

FEATURES

Diodes: 6-35A Ampere
Diameter OD:114mm
With M8 × 38mm Battery Post
With M5 × 31.5mm Mounting Bolt



BXH11415

BXH11415

FEATURES

Diodes: 8-50A Avalanche
Diameter OD:114mm
With M6 × 19.8mm Battery Post
With M5 × 31.5mm Mounting Bolt



BXH11415

BXH11421-A1

BXH11421-A1

BXH11421-A1

FEATURES

Diodes: 8-35A Ampere
Diameter OD:114mm
With M8 × 42mm Battery Post
With M5 × 31.5mm Mounting Bolt



BXH11501

BXH11501

BXH11501

FEATURES

Diodes: 6-35A Ampere
Diameter OD:115mm
With M8 × 38mm Battery Post
With M5 × 31.5mm Mounting Bolt



BXH11502

BXH11502

BXH11502

FEATURES

Diodes: 8-35A Ampere
Diameter OD:115mm
With M6 × 43mm Battery Post
With M5 × 31.5mm Mounting Bolt





BXH11503



BXH11503



BXH11503

FEATURES

Diodes: 8–35A Ampere
 Diameter OD: 115mm
 With M8 × 45.6mm Battery Post
 With M5 × 31.5mm Mounting Bolt

BXH11504



BXH11504



BXH11504

FEATURES

Diodes: 8–35A Ampere
 Diameter OD: 115mm
 With M6 × 19.8mm Battery Post
 With M5 × 31.5mm Mounting Bolt

BXH11510



BXH11510



BXH11510

FEATURES

Diodes: 6–35A Ampere
 With M6 × 49mm Battery Post
 With M5 × 37mm Battery Mounting Bolt
 With M5 × 37mm Ground Post
 With M5 × 37mm Ground Mounting Bolt
 With 20 Ohm Resistor
 With Trio

BXH11801



BXH11801



BXH11801

FEATURES

Diodes: 6–35A Ampere
 Diameter OD: 118mm
 With M5 × 41.5mm Battery Bolt
 With M5 × 31mm Mounting Bolt
 With Trio

REFERENCES

Mobiletron RH01
 Transpo IHR603, IHR603HD
 Unipoint REC667, REC667L
 UTM EH1603A
 WPS 318105
 ZAUFER 312N10606Z



BXH11803



BXH11803



BXH11803

FEATURES

Diodes: 6-35A Ampere
Diameter OD:118mm
With M5 × 31mm Mounting Bolt
With Trio

BXH11805



BXH11805



BXH11805

FEATURES

Diodes: 6-35A Ampere
Diameter OD:118mm
With M6 × 35.3mm Battery Post
With M5 × 46.5mm Battery Bolt
With M5 × 42mm Mounting Bolt
With Trio

REFERENCES

Transpo IHR722
Unipoint REC680
UTM EH1129A
ZAUFER 312N10702Z

BXH11806



BXH11806



BXH11806

FEATURES

Diodes: 8-35A Ampere
Diameter OD:118mm
With M6 × 48mm Battery Post
With M5 × 35mm Mounting Bolt
With Trio

BXH11807



BXH11807



BXH11807

FEATURES

Diodes: 8-35A Ampere
Diameter OD:118mm
With M6 × 48mm Battery Post
With M5 × 39mm Mounting Bolt
With Trio



BXH11808



BXH11808




BXH11808

FEATURES

Diodes: 8–35A Ampere
Diameter OD:118mm
With M6 × 48mm Battery Post
With M5 × 38mm Battery Post
With M5 × 35mm Mounting Bolt
With M5 × 42mm “D+” Post
With Trio

BXH11810

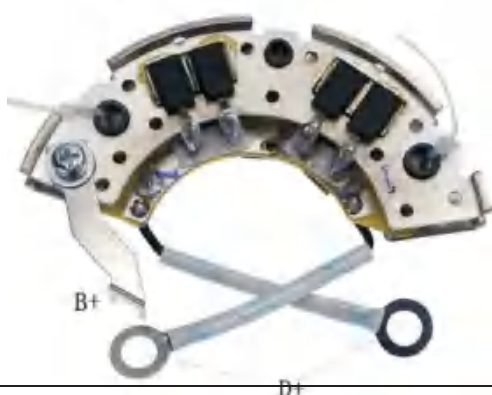

BXH11810



BXH11810

FEATURES

Diodes: 8–35A Ampere
With “D+” Lead Wire 40mm
With Trio

BXH11901



BXH11901



BXH11901

FEATURES

Diodes: 8–50A Ampere
Diameter OD:119mm
With M6 × 19.8mm Battery Post
With M5 × 31.5mm Mounting Bolt

BXH11902-A




BXH11902-A



BXH11902-A

FEATURES

Diodes: 6–50A Avalanche
Diameter OD:119mm
With M6 × 19.8mm Battery Post
With M5 × 31.5mm Mounting Bolt



BXH11903



BXH11903




BXH11903

FEATURES

Diodes: 8-50A Avalanche
Diameter OD:119mm
With M6 × 19.8mm Battery Post
With M5 × 31.5mm Mounting Bolt

BXH11904

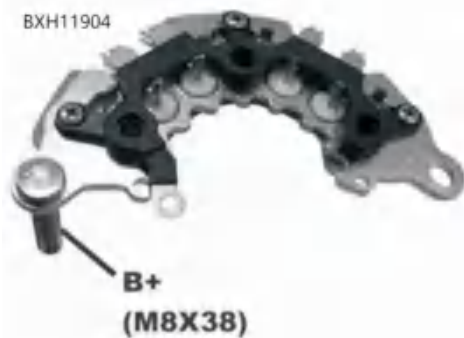

BXH11904

FEATURES

Diodes: 8-35A Ampere
Diameter OD:119mm
With M8 × 40.5mm Battery Post
With M5 × 31.5mm Mounting Bolt

BXH12001



BXH12001



BXH12001

FEATURES

Diodes: 8-50A Avalanche
With M8 × 36mm Battery Post
With "W" Lead Wire 65mm
For 24V Alternators

BXH12002



BXH12002



BXH12002

FEATURES

Diodes: 12-50A Avalanche
With M8 × 40.5mm Battery Post



BXH12003



BXH12003



BXH12003

FEATURES

Diodes: 8-50A Avalanche
With M8 x 36mm Battery Post
With "W" Lead Wire 65mm
With "D+" Lead Wire 65mm
With Trio
For 24V Alternators

BXH12101



BXH12101



BXH12101

FEATURES

Diodes: 12-35A Ampere
With M8 x 49mm Battery Post
With M5 x 31.5mm Mounting Bolt

BXH12401



BXH12401




BXH12401

FEATURES

Diodes: 8-50A Ampere
Diameter OD:124mm
With M8 x 48mm Battery Post
With M5 x 33.5mm Mounting Bolt
With Trio

BXH12402

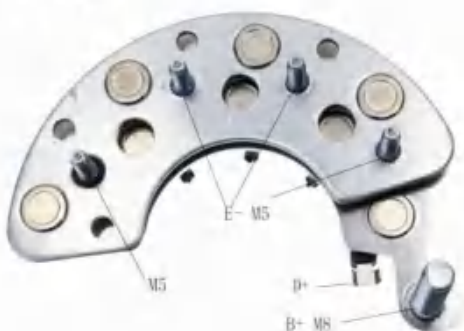

BXH12402



BXH12402

FEATURES

Diodes: 8-50A Ampere
Diameter OD:124mm
With M8 x 48mm Battery Post
With M5 x 33.5mm Battery Bolt
With M5 x 33.5mm Mounting Bolt
With Trio



BXH12403



BXH12403



BXH12403

FEATURES

Diodes: 8-35A Avalanche
Diameter OD: 124mm
With M8 x 48mm Battery Post
With M5 x 42.5mm Battery Post
With M5 x 37mm Mounting Bolt
With M5 x 37mm "D+" Post
With Trio
For 24V Alternators

BXH12501



BXH12501



BXH12501

FEATURES

Diodes: 8-50A Avalanche
With M6 x 52mm Battery Post
With M5 x 42mm Mounting Bolt
With 20 Ohm Resistor
With Trio
With Capacitor



BXH12701



BXH12701

FEATURES

Diodes: 8-35A Avalanche
Diameter OD: 127mm
With M6 x 51mm Battery Post
With M5 x 31.5mm Mounting Bolt
For 24V Alternators

REFERENCES

HITACHI: LR280-508
YUNYI: 12502100/HI11308B
Complete set with
REC HI11308B+REG (05-016H) 24V
YUNYI: 11503700 HI11308BZT



BXH12701-A1



BXH12701-A1

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 127mm
With M6 x 24mm Battery Post
With M5 x 31.5mm Mounting Bolt

BXH12702-A



BXH12702-A




BXH12702-A

FEATURES

Diodes: 8-35A Ampere
Diameter OD:127mm
With M8 x 49mm Battery Post
With M5 x 31.5mm Mounting Bolt

BXH12703

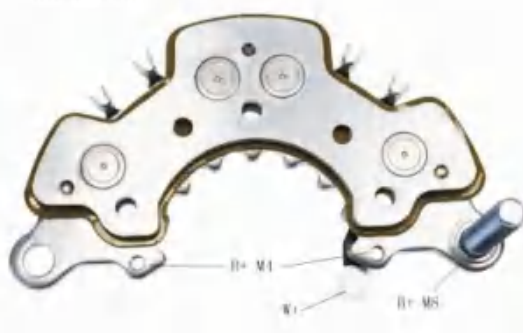

BXH12703



BXH12703

FEATURES

Diodes: 8-35A Ampere
Diameter OD:127mm
With M8 x 49mm Battery Post
With M5 x 31.5mm Mounting Bolt

BXH13001



BXH13001



BXH13001


FEATURES

Diodes: 6-50A Avalanche
With M8 x 59.5mm Battery Post
With M5*40mm Ground Post
With M5*38mm Mounting Bolt

BXH13201



BXH13201

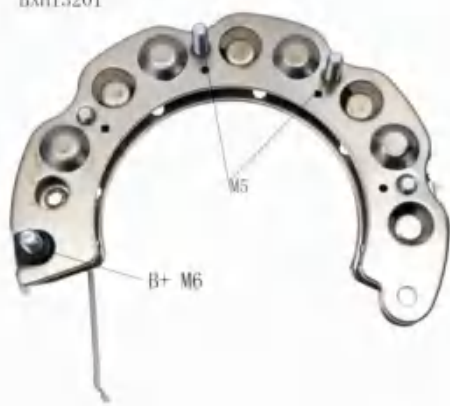

BXH13201

FEATURES


Diodes: 8-30A Ampere
Diameter OD:132mm
With M5 x 30mm Mounting Bolt
With Trio

REFERENCES

Cargo 234578
Isuzu 1812191070
KRAUF AEK4578UT
Nikko 0357300270, 0357300300, 0357300460
UTM EK4578A
ZAUFER 312N10524Z



BXH13203

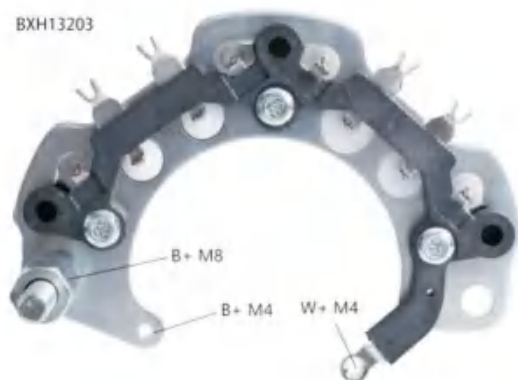

BXH13203

**BXH13203****FEATURES**

Diodes: 8-35A Avalanche
Diameter OD: 132mm
With M8*49.5mm Battery Post
For 28V Alternators

BXH13204



BXH13204

**BXH13204****FEATURES**

Diodes: 8-35A Avalanche
Diameter OD: 132mm
With M6*38mm Battery Post
For 28V Alternators

REFERENCES

UTM EW9930A, EW9930B
ZAUFER 312N10941Z

BXH13205



BXH13205

**BXH13205****FEATURES**

Diodes: 8-35A Avalanche
Diameter OD: 132mm
With M8*22.5mm Battery Post
For 28V Alternators

BXH13501



BXH13501

**BXH13501****FEATURES**

Diodes: 8-35A Avalanche
Diameter OD: 135mm
With Trio
For 28V Alternators

BXH9501



BXH9501



BXH9501

FEATURES

Diodes: 6-25A Ampere
With M5 × 31mm Mounting Bolt
With (M4+M5) × 40mm Mounting Bolt
With Trio



BXL110-B



BXL110-B



BXL110-B

FEATURES

Diodes: 6-25A Ampere
Diameter OD:115mm
With M6 x 43.7mm Battery Post
With M5 x 53.7mm W-Post
With "D+" Lead Wire 105mm
With Trio

REFERENCES

LUCAS:84574 UBB138 CARGO:138808
MOBILETRON:RL-22H
TRANSPO:ILR569HD
YUNYI:12001400/LUS149

BXL111



BXL111



BXL111

FEATURES

Diodes: 6-25A Ampere
Diameter OD:115mm
With M6 x 43.7mm Battery Post
With M8 x 38mm Battery post
With M5 x 45mm W-Post
With M5 x 30mm Trio post
With "D+" Lead Wire 105mm
With Trio

BXL112



BXL112



BXL112

FEATURES

Diodes: 6-25A Ampere
Diameter OD:115mm
With M6 x 43.7mm Battery Post
With M5 x 45mm W-Post
With "D+" Lead Wire 105mm
With Trio

REFERENCES

LUCAS:84468,UBB136 CARGO:132720
MOBILETRON:RL-11H
TRANSPO:ILR567HD
FIT UNIT:CA1031IR
YUNYI:12000500/LUS136

BXL114



BXL114



BXL114

FEATURES

Diodes: 6-25A Ampere
Diameter OD:115mm
With M6 x 43.7mm Battery Post
With M5 x 53.7mm W-Post
With M4 x 28 Trio post
With "D+" Lead Wire 105mm
With Trio

BXL115



BXL115



BXL115

FEATURES

Diodes: 6–35A Ampere
Diameter OD : 115mm
With M6 × 45mm Battery Post
With “D+” Lead Wire 0.75 × 45mm
With Trio

BXL116



BXL116



BXL116

FEATURES

Diodes: 6–25A Ampere
Diameter OD: 115mm
With M6 × 43.7mm Battery Post
With M6 × 56mm Ground Post
With M5 × 45mm W-Post
With M5 × 30mm Trio Post
With Lead Wire 105mm
With Trio

REFERENCES

LUCAS:4572,UBB145 CARGO:136666
MOBILETRON:RL-21H
TRANSPO:ILR572HD
YUNYI:12001100/LUS145

BXL166



BXL166



BXL166

FEATURES

Diodes: 9–25A Ampere Button
With M5 × 50mm Mounting Post
With “D+” Lead Wire 80mm

REFERENCES

LUCAS:83166,83334,83520,83842
CARGO:130643
MOBILETRON:130643
TRANSPO:ILR166
YUNYI:12010100/LUS1101

BXL166-A



BXL166-A



BXL166-A

FEATURES

Diodes: 9–25A Ampere
With M5 × 50mm Mounting Post



BXM010



BXM010



BXM010

FEATURES

Diodes: 6–35A Ampere
With M6 × 44mm Battery post
With M5 × 40mm Mounting Post
With M5 × 35mm Mounting Bolt
With “D+” Terminal
With Trio

REFERENCES

Cargo 134977
Magnetron 0135240, 0135241,
0140830, 0140831, 443930135240
UTM EG4977A
VAG 115901500
ZAUFER 312N10274Z

BXM010-B



BXM010-B



BXM010-B

FEATURES

Diodes: 6–35A Ampere
With M6 × 44mm Battery post
With M5 × 40mm Mounting Post
With M5 × 35mm Mounting Bolt
With “D+” Lead Wire 56mm
With “D+” Terminal
With Trio

BXM010-C



BXM010-C




BXM010-C

FEATURES

Diodes: 6–35A Ampere
With M6 × 44mm Battery post
With M5 × 40mm Mounting Post
With M5 × 35mm Mounting Bolt
With “W” Lead Wire 130mm
With “W” Lead Wire 160mm

BXM010-C4

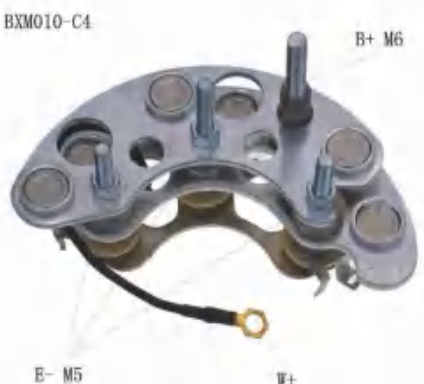

BXM010-C4



BXM010-C4

FEATURES

Diodes: 6–50A Ampere
With M6 × 44mm Battery post
With M5 × 40mm Mounting Post
With M5 × 35mm Mounting Bolt
With “W” Lead Wire 130mm



BXM102



BXM102



BXM102


FEATURES

Diodes: 6-25A Ampere Button
With Trio
With "D+" Terminal
With "D+" Lead Wire 100mm

BXM102-A



BXM102-A

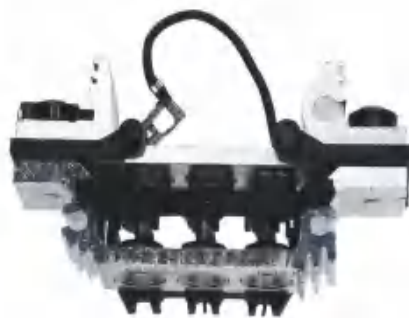

BXM102-A


FEATURES

Diodes: 6-50A Avalanche
With Trio
With "D+" Terminal
With "B+" Terminal
With "D+" Lead Wire 120mm

BXM103



BXM103

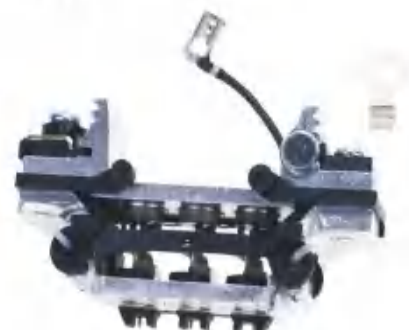

BXM103


FEATURES

Diodes: 6-35A Avalanche
With M6 x 51mm Battery Post
With "D+" Lead Wire 110mm
With Trio "D+" Terminal
With Trio
For 24V Alternators

BXM104



BXM104

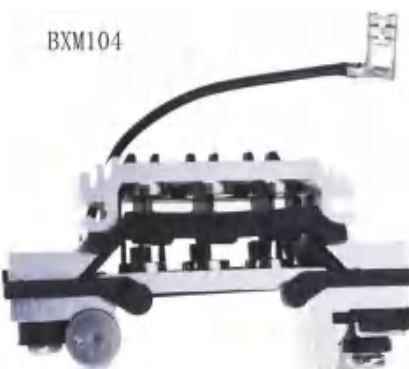

BXM104

FEATURES

Diodes: 6-50A Ampere
With M6 x 52.5mm Battery Post
With M5 x 16mm Trio Post
With "D+" Lead Wire 110mm
With Trio "D+" Terminal
With Trio



BXM105



BXM105




BXM105

FEATURES

Diodes: 6–50A Avalanche
With M8 × 53.5mm Battery Post
With “D+” Lead Wire 110mm
With Trio
With “B+” Terminal

BXM105-B6

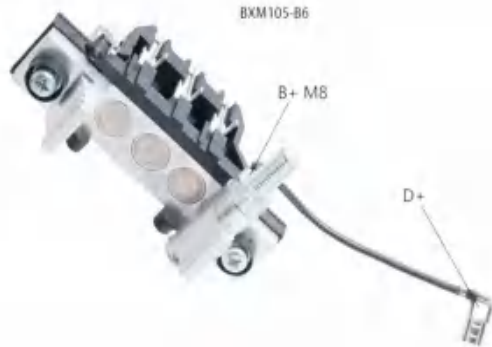

BXM105-B6




BXM105-B6

FEATURES

Diodes: 6–35A Avalanche
With M8 × 53.5mm Battery Post
With “D+” Lead Wire 110mm
With Trio
For 24V Alternators

BXM106

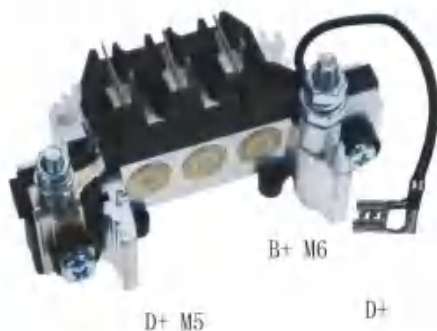

BXM106



BXM106

FEATURES

Diodes: 6–35A Avalanche
With M6 × 51mm Battery Post
With M5 × 16mm Trio Post
With “D+” Lead Wire 110mm
With Trio
With “D+” Terminal

BXM212



BXM212



BXM212

FEATURES

Diodes: 6–50A Ampere
Diameter OD: 111mm
With M8 × 51mm Battery Post

REFERENCES

Magneti Marelli 63625002, 85552110
Mobiletron: RI35
Transpo: IXR638

BXM212-A



BXM212-A



BXM212-A

FEATURES

Diodes: 6-35A Ampere
Diameter OD: 111mm
With M6 x 41.6mm Battery Post

BXM212-B



BXM212-B



BXM212-B

FEATURES

Diodes: 6-50A Avalanche
Diameter OD: 111mm
With M6 x 41.6mm Battery Post

BXM212-D



BXM212-D



BXM212-D


FEATURES

Diodes: 6-50A Avalanche
Diameter OD: 111
With M6 x 41.6mm Battery Post

REFERENCES

Cargo 231026, 233792 Mobiletron RI32H
Transpo IXR631

BXM212-D1

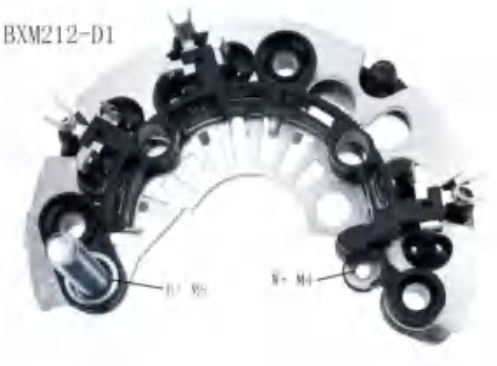


BXM212-D1



BXM212-D1

FEATURES

Diodes: 6-50A Avalanche
Diameter OD : 111mm
With M8 x 51mm Battery Post



BXM212-F



BXM212-F



BXM212-F

FEATURES

Diodes: 6-35A Avalanche
Diameter OD : 111mm
With M6 x 24mm Battery Post

BXM212-H



BXM212-H



BXM212-H

FEATURES

Diodes: 8-50A Avalanche
Diameter OD : 111mm
With M8 x 46.3mm Battery Post

BXM542-A



BXM542-A



BXM542-A

FEATURES

Diodes: 6-50A Amper
With M6 x 41mm Battery Post (L)
With M4 x 17 Battery Prost(R)
With Trio
With "D+" Lead Wire 105mm

REFERENCES

Cargo 136740, 236255 Mobiletron RI16H
Transpo IXR542

BXM6301-A



BXM6301-A



BXM6301-A

FEATURES

Diodes: 6-50A Ampere
Diameter OD: 111mm
With M8 x 46.3mm Battery Post

BXM6302-B



BXM6302-B



BXM6302-B

FEATURES

Diodes: 6-35A Ampere
Diameter OD: 121mm
With M6 x 36mm Battery Post

BXM6304



BXM6304



BXM6304

FEATURES

Diodes: 6-50A Ampere
Diameter OD: 121mm
With M6 x 43mm Battery Post

REFERENCES

MAGNETI MARELLI: 63624202
CARGO: 138801
MOBILETRON: RI-24H
TRANPO: IXR719

BXM6305



BXM6305



BXM6305

FEATURES

Diodes: 6-35A Ampere
Diameter OD: 111mm
With M6 x 43mm Battery Post

REFERENCES

MAGNETI MARELLI: 63341730
CARGO: 112121
MOBILETRON: CA1217IR

BXM6307-A



BXM6307-A



BXM6307-A

FEATURES

Diodes: 6-50A Ampere
Diameter OD: 111mm
With M8 x 51mm Battery Post



BXM633-A



BXM633-A



BXM633-A

FEATURES

Diodes: 6-50A Avalanche
Diameter OD: 111mm
With M8 x 46.6mm Battery Post

REFERENCES

TRANSPO: IXR633

BXM634



BXM634




BXM634


FEATURES

Diodes: 8-50A Ampere
Diameter OD: 111mm
With M8 x 51mm Battery Post

BXM6901

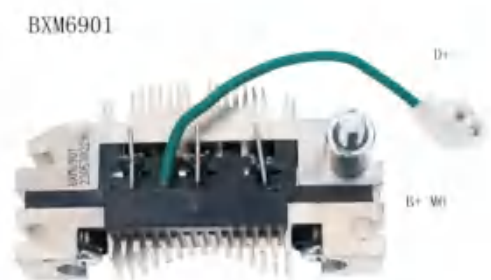

BXM6901

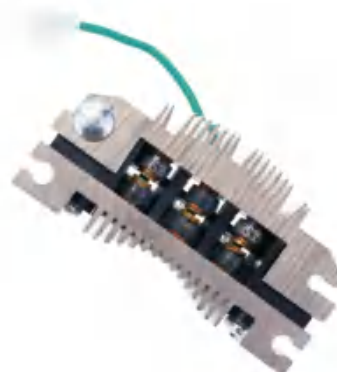

BXM6901


FEATURES

Diodes: 6-25A Ampere Button
With M6 x 45mm Battery Post
With Trio
With "D+" Lead Wire 100mm
Thick: 19.5mm

REFERENCES


Cargo 131391
Mobiletron RI02, RI02H, RI02HA
Transpo IXR693

B+ (M6x12)

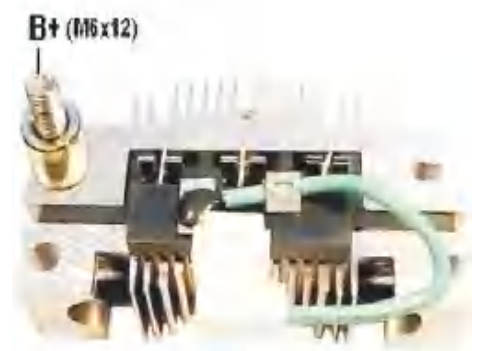

Thick: 17.5 mm

B+ (M6x12)

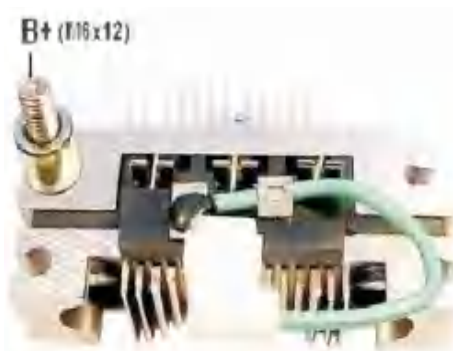


BXM6902

BXM6902

FEATURES

Diodes: 6-50A Ampere Button
With M6 x 45mm Battery Post
With Trio
With "D+" Lead Wire 100mm
Thick: 17.5mm

BXM6905

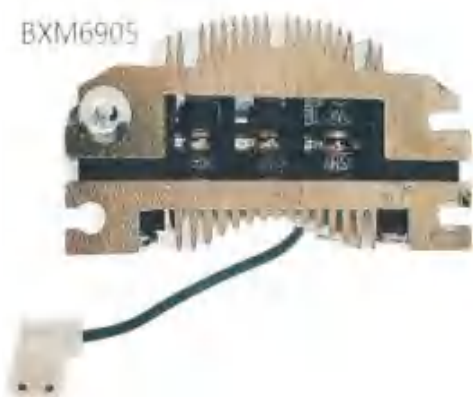

BXM6905



BXM6905

FEATURES

Diodes: 6-50A Ampere Button
With M6 × 45mm Battery Post
With Trio
With "D+" Lead Wire 100mm
Thick: 17.5mm

REFERENCES

Magneti Marelli 63621501, 64826011,
74877471, 74878691
Mobiletron RI02HA
Transpo IXR692

BXM6905-A



BXM6905-A



BXM6905-A

FEATURES

Diodes: 6-30A Ampere
With M6 × 33.5mm Battery Post
With Trio
With "D+" Lead Wire 100mm

BXM691



BXM691



BXM691

FEATURES

Diodes: 6-50A Ampere Button
With Trio
With "D+" Terminal
Thick: 17.5mm



BXN037



BXN037

**BXN037****FEATURES**

Diodes: 8–35A Ampere
Diameter OD: 114mm
With M6 × 51mm Battery Post
With M5 × 39mm Battery Mounting Bolt
With M5 × 40mm Battery Mounting Bolt
With M5*39mm Ground Post
With M5*39mm Ground Mounting Bolt
With M5*40mm Ground Mounting Bolt
Without Trio

REFERENCES

KRAUF AEW1512LP

BXN038



BXN038

**BXN038****FEATURES**

Diodes: 8–35A Ampere
Diameter OD: 114mm
With M6 × 51mm Battery Post
With M5 × 39mm Battery Mounting Bolt
With M5 × 40mm Battery Mounting Bolt
With M5*39mm Ground Post
With M5*39mm Ground Mounting Bolt
With M5*40mm Ground Mounting Bolt
With Trio

BXN050



BXN050

**BXN050****FEATURES**

Diodes: 6–35A Ampere
Diameter OD: 114mm
With M6 × 48mm Battery Post
With M5 × 42.5mm Battery Mounting Bolt
With M5*38mm Ground Post
With M5 × 42.5mm Mounting Bolt

BXN050-A



BXN050-A

**BXN050-A****FEATURES**

Diodes: 8–35A Ampere
Diameter OD: 114mm
With M6 × 48mm Battery Post
With M5 × 42.5mm Battery Mounting Bolt
With M5*38mm Ground Post
With M5 × 42.5mm Mounting Bolt



BXN050-F



BXN050-F



BXN050-F

FEATURES

Diodes: 8-30A Ampere
Diameter OD: 114mm
With M6 x 48mm Battery Post
With M5 x 42.5mm Battery Mounting Bolt
With M5*40mm Ground Post
With M5 x 42.5mm Mounting Bolt
With "W" Lead Wire 100mm


REFERENCES

Cargo 132655, 132657
Denso 0215901890, 0215901900, 0215901910,
Mobiletron Rn41

BXN050-F1



BXN050-F1

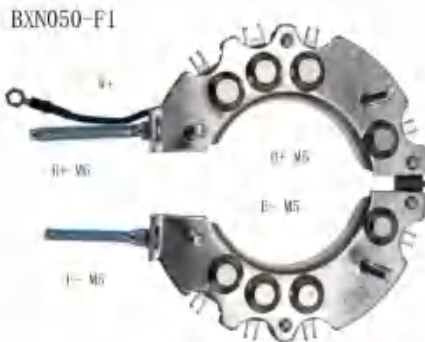

BXN050-F1

FEATURES

Diodes: 8-30A Ampere
Diameter OD: 114mm
With M6 x 48mm Battery Post
With M5 x 42.5mm Battery Mounting Bolt
With M5*40mm Ground Post
With M5 x 42.5mm Mounting Bolt
With "W" Lead Wire 100mm

BXN10001



BXN10001



BXN10001

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 100mm
With M6 x 43mm Battery Post
With Copper Heat Sink


REFERENCES

NIPPONDENSO: 021580-2160
TRANSPON: INR720
MOBILETRON: RN-13
CARGO: 132082
YY: NPD10001

BXN10001-B



BXN10001-B

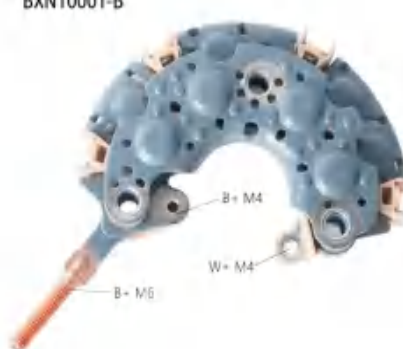


BXN10001-B

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 100mm
With M6*43mm Battery Post
With Aluminum Heat Sink

REFERENCES

NIPPONDENSO: 021580-2160
TRANSPON: INR720
MOBILETRON: RN-13
CARGO: 132082



BXN10001-C



BXN10001-C



BXN10001-C

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 100mm
With M6*43mm Battery Post
With Aluminum Heat Sink

BXN10002



BXN10002



BXN10002

FEATURES

Diodes: 6-35A Ampere
Diameter OD: 100mm
With M6*43mm Battery Post
With Copper Heat Sink

BXN10004-B



BXN10004-B



BXN10004-B

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 100mm
With M6*41.5mm Battery Post
With Trio
With Copper Heat Sink

BXN10005



BXN10005



BXN10005

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 100mm
With M6*41.5mm Battery Post
With Copper Heat Sink

BXN10008-B



BXN10008-B



BXN10008-B

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 100mm
With M6*48mm Battery Post
With Aluminum Heat Sink

REFERENCES

LESTER:13739
TRANSPO:INR5028
DENSO:021580-5300

BXN10009



BXN10009



BXN10009

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 100mm
With M6*43mm Battery Post
With Ground Screw Hole
With Aluminum Heat Sink

BXN10010



BXN10010



BXN10010

FEATURES

Diodes: 8-50A Ampere
Diameter OD: 100mm
With M6*41mm Battery Post
With Copper Heat Sink

REFERENCES

NIPPONDENSO:021580-4120
TRANSPO:INR727
MOBILETRON:RN-14
CARGO: 135415
YY:NPD10006

BXN10011



BXN10011



BXN10011

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 100mm
With M6*43mm Battery Post
With Aluminum Heat Sink



BXN10301

BXN10301



BXN10301

FEATURES

Diodes: 8-50A Ampere
Diameter OD: 103mm
With M6*66.5mm Battery Post
With Ground Screw Hole
With Cooper Heat sinks

BXN10301-A



BXN10301-A



BXN10301-A

FEATURES

Diodes: 8-50A Ampere
Diameter OD: 103mm
With M6*43mm Battery Post
With Ground Screw Hole
With Copper Heat Sink

BXN10301-D



BXN10301-D



BXN10301-D

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 103mm
With M6x66.5 Battery Post(31°)
With Ground Screw Hole
With Cooper Heat sinks


REFERENCES

NIPPONDENSO:100211-2400,
100211-4640,100211-5450
TRANPO:INR722(B+为M8)
MOBILETRON:RN-05
CARGO:135043

BXN10303-B



BXN10303-B

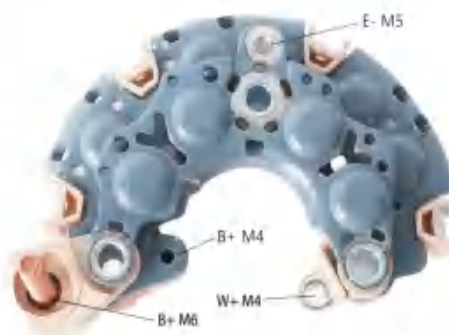

BXN10303-B

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 103mm
With M6 x 43mm Battery Post
With Ground Screw Hole
With Cooper Heat sinks

REFERENCES

NIPPONDENSO: 021580-3640,
021580-4660
TRANPO: INR729
MOBILETRON: RN-01
CARGO: 135417

BXN10305



BXN10305



BXN10305

FEATURES

Diodes: 8–35A Ampere
Diameter OD: 103mm
With M6*66.5mm Battery Post
With Ground Screw Hole
With Aluminum Heat Sink

REFERENCES

Mobiletron RN03, RN03PL,
RN36Transpo INR402

BXN10306



BXN10306



BXN10306

FEATURES

Diodes: 8–50A Ampere
Diameter OD: 103mm
With M6*66.5mm Battery Post
With Ground Screw Hole
With Aluminum Heat Sink

REFERENCES

INR402P

BXN10306-A



BXN10306-A



BXN10306-A

FEATURES

Diodes:8–50A Ampere
Diameter OD: 103mm
With M8*49mm Battery Post
With Ground Screw Hole
With Aluminum Heat Sink

REFERENCES

Cargo 136741
Denso 0215804850Mobiletron RN04, RN07
Transpo INR739

BXN10306-H



BXN10306-H



BXN10306-H

FEATURES

Diodes:8–35A Ampere
Diameter OD: 103mm
With M6*66.5mm Battery
With Ground Screw Hole
With Aluminum Heat Sink



BXN10308



BXN10308



BXN10308

FEATURES

Diodes: 8–50A Ampere
Diameter OD: 103mm
With M8*74mm Battery Post
With Ground Screw Hole
With Aluminum Heat Sink

REFERENCES

Cargo 135043
Mobiletron RN05
Toyota 2735743100, 2735746130
Transpo INR722, INR722P

BXN10501-B1



BXN10501-B1



BXN10501-B1

FEATURES

Diodes: 3–35A Ampere
Diameter OD: 110mm
With M6*34.8mm Battery
With Aluminum Heat Sink
Customer provide Negative heat sink

BXN10501-B2



BXN10501-B2



BXN10501-B2

FEATURES

Diodes: 3–35A Ampere
Diameter OD: 110mm
With M6*34.8mm Battery Post
With Aluminum Heat Sink
Customer provide Negative heat sink

BXN11201-C



BXN11201-C



BXN11201-C

FEATURES

Diodes: 12–50A Ampere
Diameter OD: 112mm
With M6*43mm Battery Post

REFERENCES

AEM9110 RM241 265–011
新飞度

BXN11301



BXN11301



BXN11301

FEATURES

Diodes: 8-50A Ampere
Diameter OD: 113mm
With M6*44mm Battery Post
With Ground Screw Hole
With Copper Heat Sink

BXN11303



BXN11303



BXN11303

FEATURES

Diodes: 8-50A Ampere
Diameter OD: 113mm
With M8*74mm Battery Post
With Ground Screw Hole
With Copper Heat Sink

REFERENCES

NIPPONDENSO:021580-4690
TRANSPO:INR733
MOBILETRON:RN-11
DENSO:137874

BXN11305



BXN11305



BXN11305


FEATURES

Diodes:8-50A Ampere
Diameter OD: 113mm
With M6*66.5mm Battery Post
With Ground Screw Hole
With Copper Heat Sink

BXN11305-A



BXN11305-A

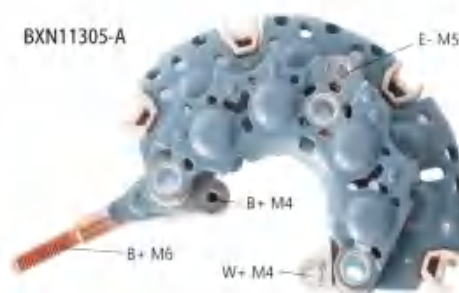


BXN11305-A

FEATURES

Diodes:8-35A Ampere
Diameter OD: 113mm
With M6X66.5 Battery Post(36°)
With Ground Screw Hole
With Aluminum Heat Sink

REFERENCES

NIPPONDENSO:121000-4230
TRANSPO:INR735P
MOBILETRON:RN-08



BXN11306



BXN11306

**BXN11306****FEATURES**

Diodes:8-35A Ampere
Diameter OD: 113mm
With M6*44mm Battery Post
With Ground Screw Hole
With Aluminum Heat Sink

BXN11306-D



B+ M6

BXN11306-D

**BXN11306-D****FEATURES**

Diodes:8-50A Ampere
Diameter OD: 113mm
With M6*66.5mm Battery Post
With Ground Screw Hole
With Aluminum Heat Sink

BXN11306-E1



BXN11306-E1

**BXN11306-E1****FEATURES**

Diodes: 8-50A Ampere
Diameter OD: 113mm
With M8*74mm Battery Post
With Ground Screw Hole
With Aluminum Heat Sink

REFERENCES

TRANSPO:INR733P
MOBILETRON:RN-11
DENSO:021580-4690
CASCO:137874
YY:NPD11302L

BXN11306-G



BXN11306-G

**BXN11306-G****FEATURES**

Diodes: 8-35A Ampere
Diameter OD: 113mm
With M6*52.5mm Battery Post
With Ground Screw Hole
With Aluminum Heat Sink

BXN11306-G1



B+ M8

BXN11306-G1



BXN11306-G1

FEATURES

Diodes: 8-50A Ampere
Diameter OD: 113mm
With M8*74mm Battery Post
With Ground Screw Hole
With Aluminum Heat Sink

BXN11306-Y1



BXN11306-Y1



BXN11306-Y1

FEATURES

Diodes: 8-50A Ampere
Diameter OD: 113mm
With M8*74mm Battery Post
With Ground Screw Hole
With Aluminum Heat Sink

BXN11307



BXN11307



BXN11307

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 113mm
With M6*44mm Battery Post
With Trio
With Ground Screw Hole
With Aluminum Heat Sink

BXN11307-A1



BXN11307-A1



BXN11307-A1

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 113mm
With M6*66.5mm Battery Post
With Trio
With Ground Screw Hole
With Aluminum Heat Sink



BXN11307-D



BXN11307-D



BXN11307-D

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 113mm
With M6*44mm Battery Post
With Trio
With Ground Screw Hole
With Aluminum Heat Sink

BXN11308



BXN11308



BXN11308

FEATURES

Diodes: 8-50A Ampere
Diameter OD: 113mm
With M8*74mm Battery Post
With Ground Screw Hole
With Copper Heat Sink

BXN11310



BXN11310



BXN11310

FEATURES

Diodes: 8-50A Ampere
Diameter OD: 113mm
With M8*49mm Battery Post
With Copper Heat Sink

REFERENCES

RANSPO: INR736
MOBILETRON: RN-16
DENSO: 021580-2500, 021580-4590
CASCO: 233246 YY: NPD11308

BXN11504

B+ M5

E- M5



B- M6

E- M5

BXN11504



BXN11504

FEATURES

Diodes: 6-30A Ampere
Diameter OD: 114mm
With M6*49mm Battery Post
With M5 x 37mm Battery Mounting Bolt
With M5*37mm Ground Post
With M5*37mm Ground Mounting Bolt

REFERENCES

KRAUF AEN1464LP

BXN11506



BXN11506



BXN11506

FEATURES

Diodes: 6–30A Ampere
Diameter OD: 114mm
With M6 × 49mm Battery Post
With M5 × 37mm Battery Mounting Bolt
With M5 × 42mm Ground Post
With M5 × 37mm Ground Mounting Bolt

BXN11507-B



BXN11507-B



BXN11507-B

FEATURES

Diodes: 6–35A Ampere
Diameter OD: 109mm
With M6 × 34.8mm Battery Post
With Aluminum Heat sinks

BXN11507-D



BXN11507-D



BXN11507-D

FEATURES

Diodes: 6–35A Ampere
Diameter OD: 109mm
With M8 × 49mm Battery Post
With Aluminum Heat sinks

REFERENCES

Denso 0215809210
Mobiletron RN64
UTM EN9210A
ZAUFER 312N10709Z

BXN11508-B



BXN11508-B



BXN11508-B

FEATURES

Diodes: 6–35A Avalanche
Diameter OD: 109mm
With M6 × 34.8mm Battery Post
With Aluminum Heat sinks

REFERENCES

NIPPONDENSO: 021580–9220
LESTER: 23371
TRANPO: INR438



BXN11601-E



BXN11601-E



BXN11601-E

FEATURES

Diodes: 12-35A Ampere
Diameter OD: 117mm
With M8 × 35mm Battery Post
With Aluminum Heat sinks

BXN11601-F2



BXN11601-F2



BXN11601-F2

FEATURES

Diodes: 12-35A Ampere
Diameter OD: 117mm
With M6 × 34.8mm Battery Post
With Aluminum Heat sinks

BXN11601-F8



BXN11601-F8



BXN11601-F8

FEATURES

Diodes: 12-50A Ampere
Diameter OD: 117mm
With M6 × 33mm Battery Post
With Aluminum Heat sinks

REFERENCES

NIPPONDENSO:10421-0338,
1041-0009
TRANSPO:INR422
MOBILETRON:RN-34
YY:NPD11702AL

BXN11601-H1



BXN11601-H1



BXN11601-H1

FEATURES

Diodes: 6-35A Ampere
Diameter OD: 117mm
With M6 × 34.8mm Battery Post
With Aluminum Heat sinks



BXN11508-G4



BXN11508-G4



BXN11508-G4

FEATURES

Diodes: 6-35A Ampere
Diameter OD: 109mm
With M6 × 33mm Battery Post
With Aluminum Heat sinks

BXN11508-H



BXN11508-H



BXN11508-H

FEATURES

Diodes: 6-35A Ampere
Diameter OD: 109mm
With M6 × 34.8mm Battery Post
With Aluminum Heat sinks

BXN11601



BXN11601



BXN11601

FEATURES

Diodes: 6-35A Ampere
Diameter OD: 117mm
With M6 × 34.8mm Battery Post
With Aluminum Heat sinks

REFERENCES

NIPPONDENSO:021580-6610,
2735703-0070
TRANSPO:INR430
MOBILETRON:RN-46

BXN11601-A2



BXN11601-A2



BXN11601-A2

FEATURES

Diodes: 12-50A Avalanche
Diameter OD: 117mm
With M6 × 34.8mm Battery Post
With Aluminum Heat sinks



BXN11601-T



BXN11601-T



BXN11601-T

FEATURES

Diodes: 12-35A Ampere
Diameter OD: 117mm
With M6 × 34.8mm Battery Post
With Aluminum Heat sinks

BXN11601-X



BXN11601-X



BXN11601-X

FEATURES

Diodes: 12-50A Avalanche
Diameter OD: 117mm
With M6 × 33mm Battery Post
With Aluminum Heat sinks

BXN11601-X1



BXN11601-X1



BXN11601-X1

FEATURES

Diodes: 12-35A Ampere
Diameter OD: 117mm
With M6 × 33mm Battery Post
With Aluminum Heat sinks

BXN11601-X2



BXN11601-X2



BXN11601-X2

FEATURES

Diodes: 6-50A Avalanche
Diameter OD: 117mm
With M6 × 34.8mm Battery Post
With Aluminum Heat sinks
For 24V Alternators

BXN11601-X7



BXN11601-X7



BXN11601-X7

FEATURES

Diodes: 6-50A Ampere
Diameter OD: 117mm
With M6 × 33mm Battery Post
With Aluminum Heat sinks

REFERENCES

NIPPONDENSO:021580-6610,2735703-0070
TRANSPO:INR430
MOBILETRON:RN-46 YY:NPD11701AL

BXN11601-X8



BXN11601-X8



BXN11601-X8

FEATURES

Diodes: 6-50A Ampere
Diameter OD: 117mm
With M8 × 36mm Battery Post
With Aluminum Heat sinks

BXN11601-Y1



BXN11601-Y1



BXN11601-Y1

FEATURES

Diodes: 7-50A Ampere
Diameter OD: 117mm
With M8 × 36mm Battery Post
With Aluminum Heat sinks

REFERENCES

LESTER:13868
TRANSPO:INR423
MOBILETRON:RN-55
YY:NPD11720AL

BXN11602



BXN11602



BXN11602

FEATURES

Diodes: 6-50A Ampere
Diameter OD: 117mm
With M6 × 34.8mm Battery Post
With Aluminum Heat sinks

REFERENCES

NIPPONDENSO:021580-6490
TRANSPO:INR429
MOBILETRON:RN-48



BXN11602-A



BXN11602-A



BXN11602-A

FEATURES

Diodes: 12-50A Ampere
Diameter OD: 117mm
With M6 x 34.8mm Battery Post
With Aluminum Heat sinks

REFERENCES

LESTER:11390,13919,13978
MOBILETRON:RN-60
WAI:INR425
FIT UNITS:31100-R40-A01

BXN11602-A2



BXN11602-A2



BXN11602-A2

FEATURES

Diodes: 12-50A Avalanche
Diameter OD: 117mm
With M6 x 34.8mm Battery Post
With Aluminum Heat sinks

BXN11602-B6



BXN11602-B6



BXN11602-B6

FEATURES

Diodes: 6-50A Ampere
Diameter OD: 117mm
With M6 x 33mm Battery Post
With Aluminum Heat sinks

BXN11602-H



BXN11602-H



BXN11602-H

FEATURES

Diodes: 12-35A Ampere
Diameter OD: 117mm
With M6 x 33mm Battery Post
With Aluminum Heat sinks

BXN11602-P



BXN11602-P



BXN11602-P

FEATURES

Diodes: 12-35A Avalanche
Diameter OD: 117mm
With M6 × 34.8mm Battery Post
With Aluminum Heat sinks

BXN11602-P2



BXN11602-P2



BXN11602-P2

FEATURES

Diodes: 6-50A Alternators
Diameter OD: 117mm
With M6 × 34.8mm Battery Post
With Aluminum Heat sinks

BXN11602-P3



BXN11602-P3



BXN11602-P3

FEATURES

Diodes: 12-50A Avalanche
Diameter OD: 117mm
With M6 × 34.8mm Battery Post
With Aluminum Heat sinks

BXN11603



BXN11603



BXN11603

FEATURES

Diodes: 7-50A Avalanche
Diameter OD: 117mm
With M6 × 34.8mm Battery Post
With Aluminum Heat sinks



BXN11604



BXN11604



BXN11604

FEATURES

Diodes: 12-50A Avalanche
Diameter OD: 117mm
With M6 x 34.8mm Battery Post
With Aluminum Heat sinks

BXN13001



BXN13001



BXN13001

FEATURES

Diodes: 8-30A Ampere
Diameter OD: 130mm
With 7/16-14 x 57mm Battery Post
With 1/4-20*47mm Ground Post
With Trio
With "D+" Lead Wire 75mm
With "W" Lead Wire 75mm

REFERENCES

UTM EQ9902A, KQ9902A
ZAUFER 312N10724Z

BXN13002



BXN13002



BXN13002

FEATURES

Diodes: 12-35A Avalanche
Diameter OD: 130mm
With M8 x 57mm Battery Post

BXN13002-A



BXN13002-A



BXN13002-A

FEATURES

Diodes: 12-50A Avalanche
Diameter OD: 130mm
With M6 x 24mm Battery Post

BXN13601



BXN13601



BXN13601

FEATURES

Diodes: 12-50A Avalanche
Diameter OD: 136mm
With M8 x 46.5mm Battery Post
With Aluminum Heat sinks

REFERENCES

LESTER: 11353
FIT UNIT: 104210-6191, 37300-3F020

BXN13602-A



BXN13602-A



BXN13602-A

FEATURES

Diodes: 12-50A Avalanche
Diameter OD: 136mm
With M8 x 40mm Battery Post
With Aluminum Heat sinks

REFERENCES

Cargo 335561
KRAUF AEN6767AN, AEN6767UT
Mobiletron RN67, RN78
Toyota 273600P470

BXN13603



BXN13603



BXN13603

FEATURES

Diodes: 12-50A Ampere
Diameter OD: 136mm
With M8 x 46.5mm Battery Post
With Aluminum Heat sinks

BXN13603-A




BXN13603-A



BXN13603-A

FEATURES

Diodes: 12-50A Ampere
Diameter OD: 136mm
With M8 x 46.5mm Battery Post
With Aluminum Heat sinks



BXN13604

BXN13604

FEATURES

Diodes: 12–50A Avalanche
Diameter OD: 134mm
With M8 × 46.5mm Battery Post
With Aluminium Heat sinks
For 24V Alternators

REFERENCES

TRANSPON: INR440
MOBILETRON: RN–59



BXN13604-B



BXN13604-B

BXN13604-B

FEATURES

Diodes: 12–50A Ampere
Diameter OD: 136mm
With M8 × 40mm Battery Post
With Aluminium Heat sinks



BXN13801



BXN13801

BXN13801

FEATURES

Diodes: 8–50A Ampere
Diameter OD: 138mm
With 5/16–18 × 60mm Battery Post
With Trio
With Aluminium Heat sinks

REFERENCES

AS ARC6047
Cargo 333826
Denso 0215805350
KRAUF AEN5002LP, AEN9535LP,
AEN9535SK, AEN9535UT
Transpo INR9535



BXN15002



BXN15002

BXN15002

FEATURES

Diodes: 8–50A Ampere
Diameter OD: 150mm
With 8 × 57mm Battery Post
With M5 × 51mm Ground Post
With M5 × 39mm Ground Mounting Bolt
With “W” Lead Wire 110mm

BXN8301



BXN8301



BXN8301


FEATURES

Diodes: 8-35A Ampere
Diameter OD:83mm
With M6 × 51.6mm Battery Post(33°)
With Copper Heat Sink

BXN8303-B



BXN8303-B

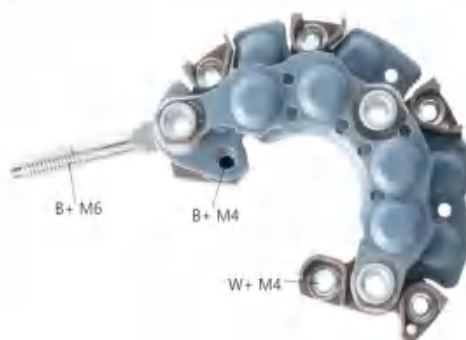

BXN8303-B

FEATURES

Diodes:8-35A Ampere
Diameter OD:83mm
With M6 × 42.5 Battery Post(33°)
With Copper Heat Sink

REFERENCES

NIPPONDENSO:021580-3110
TRANSPO:INR718
MOBILETRON:RN-18
CARGO:13787

BXN8304



BXN8304



BXN8304

FEATURES

Diodes: 8-35A Ampere
Diameter OD:83mm
With M6 × 41mm Battery Post
With Copper Heat Sink

BXN8304-B



BXN8304-B



BXN8304-B

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 83mm
With M6 × 41mm Battery Post
With Copper Heat Sink

REFERENCES

NIPPONDENSO:100211-4640
TRANSPO:INR716
MOBILETRON:RN-26
CARGO:137873



BXN8801



BXN8801



BXN8801

FEATURES

Diodes: 8–35A Ampere
Diameter OD: 88mm
With M6 × 51.6mm Battery Post
With Copper Heat Sink

REFERENCES

Cargo 132540
Mobiletron RN15
Transpo INR724

BXN8801-A1



BXN8801-A1



BXN8801-A1

FEATURES

Diodes: 8–35A Ampere
Diameter OD: 88mm
With M6 × 51.6mm Battery Post
With Copper Heat Sink

BXN8801-B1



BXN8801-B1



BXN8801-B1

FEATURES

Diodes: 8–35A Ampere
Diameter OD: 88mm
With M6 × 51.6mm Battery Post
With Aluminum Heat Sink

BXN8802



BXN8802




BXN8802

FEATURES

Diodes: 8–35A Ampere
Diameter OD: 88mm
With M6 × 41mm Battery Post
With Copper Heat Sink



BXN8802-C

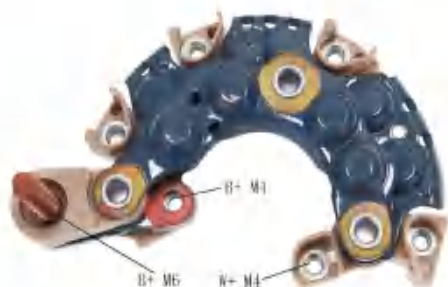

BXN8802-C



BXN8802-C

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 88mm
With M6 x 41mm Battery Pos
With Copper Heat Sink

BXN8803



BXN8803



BXN8803

FEATURES

Diodes: 8-25A Ampere
Diameter OD: 88mm
With M6 Battery Post
With Trio
With Capacitor
With Aluminum Heat Sink

BXN8804



BXN8804



BXN8804

FEATURES

Diodes: 8-25A Ampere
Diameter OD: 88mm
With M6 Battery Post
With Trio
With Capacitor
With Aluminum Heat Sink

BXN8807



BXN8807

FEATURES

Diodes: 8-35A Ampere
Diameter OD: 88mm
With M6 x 42.5mm Battery Post
With Copper Heat Sink

REFERENCES

Denso 0215805590
Suzuki 3162176F00
UTM EN6400A



BXN8808



BXN8808



BXN8808

FEATURES

Diodes: 8–35A Ampere
Diameter OD: 88mm
With M6 × 42.5mm Battery Post
With Aluminum Heat Sink

REFERENCES

MOBILETRON: RN–15
FIT UNIT: 27357–72120, 27357–72150
CARGO: 132540
CASCO: INR737, INR737AL

BXN9001-B1



BXN9001-B1



BXN9001–B1

FEATURES

Diodes: 8–35A Ampere
Diameter OD: 90mm
With M6 × 43mm Battery Post
With Aluminum Heat Sink

BXN9001-A



BXN9001-A



BXN9001–A

FEATURES

Diodes: 8–35A Ampere
Diameter OD: 90mm
With M6 × 43 Battery Post (33°)
With Copper Heat Sink

REFERENCES

TRANSPON: INR725P

BXN9002



BXN9002



BXN9002

FEATURES

Diodes: 8–35A Ampere
Diameter OD: 90mm
With M6 × 41mm Battery Post
With Copper Heat Sink

REFERENCES

Mobiletron RN17
Transpo INR726



BXN9003

FEATURES

Diodes: 8–35A Ampere
Diameter OD: 90mm
With M8 × 48mm Battery Post
With Trio
With Copper Heat Sink




BXN9004

FEATURES

Diodes: 8–35A Ampere
Diameter OD: 90mm
With M8 × 48mm Battery Post
With Trio
With Aluminum Heat Sink

REFERENCES

Cargo 332284
Mobiletron RK04
Transpo IHR789



BXO3001



BXO3001



BXO3001

FEATURES

Diodes: 6–50A Ampere
With M6 × 56.5mm Battery Post
With Aluminum Heat Sink
With Trio

BXO3002



BXO3002



BXO3002

FEATURES

Diodes: 8–35A Ampere
With Aluminum Heat Sink
With Trio
With “D+” Terminal

BXO3003



BXO3003



BXO3003

FEATURES

Diodes: 6–35A Ampere
With Aluminum Heat Sink
With Trio
With “D+” Terminal

BXO6040-C



BXO6040-C



BXO6040-C

FEATURES

Diodes: 6–35A Ampere
With (1/4–20) × 48mm Battery Post
With (10–24) × 43.5mm Battery post
With (10–24) × 41.5mm Trio post
With (10–24) × 43.5mm Trio post
With “W” Lead Wire 1.5 × 115 × 80mm
With “W” Lead Wire 1.5 × 50 × 45mm

BXO6040-C3



BXO6040-C3



BXO6040-C3

FEATURES

Diodes: 6-35A Ampere
 With $(1/4-20) \times 48\text{mm}$ Battery Post
 With $(10-24) \times 43.5\text{mm}$ Battery post
 With $(10-24) \times 41.5\text{mm}$ Trio post
 With $(10-24) \times 43.5\text{mm}$ Trio post
 With "W" Lead Wire $1.5 \times 115 \times 80\text{mm}$
 With "W" Lead Wire $1.5 \times 50 \times 45\text{mm}$

BXO6043-A



BXO6043-A



BXO6043-A

FEATURES

Diodes: 6-30A Ampere
 With $(1/4-20) \times 40.5\text{mm}$ Battery Post
 With $(10-24) \times 43.5\text{mm}$ Battery post
 With $(10-24) \times 41.5\text{mm}$ Trio post
 With $(10-24) \times 36\text{mm}$ Trio post
 With "W" Lead Wire $1.5 \times 131\text{mm}$
 With "W" Lead Wire $1.5 \times 90\text{mm}$
 With "W" Lead Wire $1.5 \times 62\text{mm}$
 With Trio

BXO6047-B



BXO6047-B



BXO6047-B

FEATURES

Diodes: 3-35A Ampere
 With $(10-24) \times 43.5\text{mm}$ Trio post
 With $(10-24) \times 41.5\text{mm}$ Trio post
 Negative Rectifier

BXO6047-B1



BXO6047-B1



BXO6047-B1

FEATURES

Diodes: 3-50A Ampere
 With $(10-24) \times 43.5\text{mm}$ Trio post
 With $(10-24) \times 41.5\text{mm}$ Trio post
 Negative Rectifier



BXO6047-C

BXO6047-C

BXO6047-C

FEATURES

Diodes: 3-35A Ampere
With (1/4-24) × 48mm Battery post
With (10-24) × 43.5mm Battery Mounting post
Positive Rectifier




BXO6047-C4

BXO6047-C4

BXO6047-C4

FEATURES

Diodes: 3-50A Ampere
With (1/4-24) × 48mm Battery post
With (10-24) × 43.5mm Battery Mounting post
Positive Rectifier

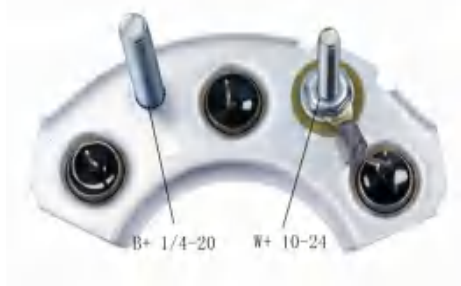

BXO6048-B

BXO6048-B

BXO6048-B

FEATURES

Diodes: 3-30A Ampere
With (1/4-24) × 40mm Battery post
With (10-24) × 36mm Battery Mounting post
With "W" Lead Wire 0.75 × 40mm
With "W" Lead Wire 0.75 × 85mm
With Trio
Positive Rectifier




BXO6048-C


BXO6048-C

BXO6048-C

FEATURES

Diodes: 6-30A Ampere
With (1/4-20) × 40.5mm Battery Post
With (10-24) × 43.5mm Battery post
With (10-24) × 41.5mm Trio post
With (10-24) × 36mm Trio post
With "W" Lead Wire 1.5 × 115 × 80mm
With "W" Lead Wire 1.5 × 50 × 45mm
With Trio

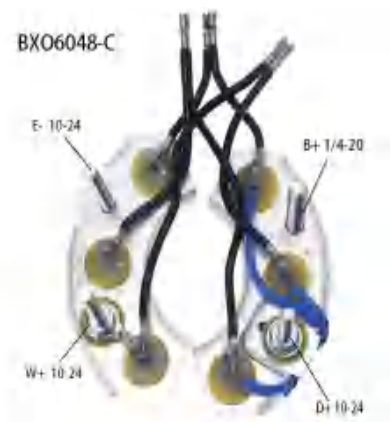

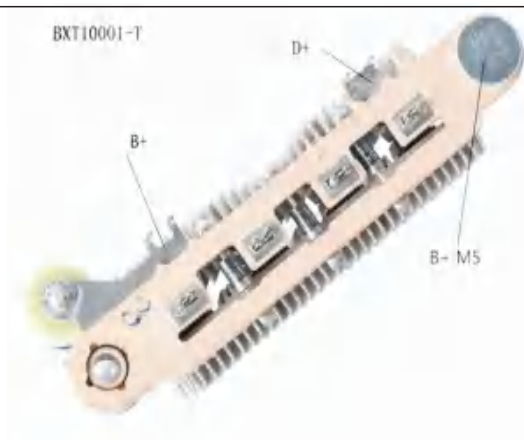

BXT10001-T



BXT10001-T


FEATURES

Diodes:8-50A Ampere
Mounting Length:100mm
With M5 × 44mm Battery Post
With Trio
With Capacitor

BXT10002



BXT10002

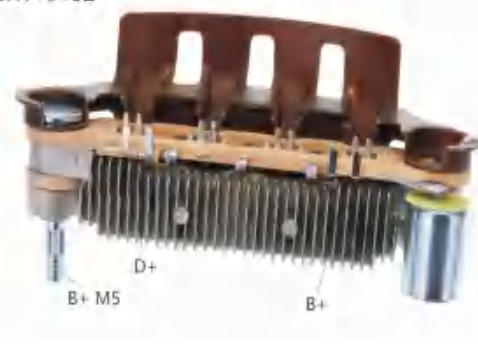

BXT10002


FEATURES

Diodes:8-35A Ampere
Mounting Length:100mm
With M5 × 44mm Battery Post
With Trio
With Capacitor

REFERENCES

Cargo 135229
Ghibaudo PRP719
Mobiletron Rm42
Transpo IMR10044

BXT10003

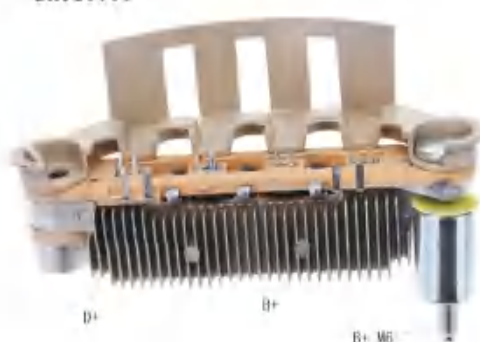

BXT10003



BXT10003

FEATURES

Diodes:8-35A Ampere
Mounting Length:100mm
With M6 × 51mm Battery Post
With Trio
With Capacitor

BXT10004-B3



BXT10004-B3




BXT10004-B3

FEATURES

Diodes:8-50A Ampere
Mounting Length:100mm
With M8 × 57mm Battery Post
Without Trio
Without Capacitor
Positive Heatsink Radian: R21



BXT10004-D3

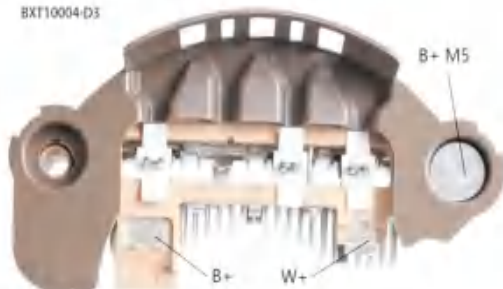

BXT10004-D3



BXT10004-D3

FEATURES

Diodes:6-50A Ampere
Mounting Length:100mm
With M5 x 44mm Battery Post
Without Trio
Without Capacitor

BXT10005-F



BXT10005-F




BXT10005-F

FEATURES

Diodes:8-50A Ampere
Mounting Length:100mm
With M8 x 57mm Battery Post
With Trio
With Capacitor
Positive Heatsink Radian: R21

BXT10006

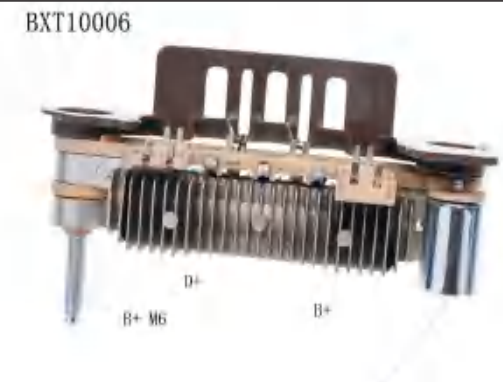

BXT10006



BXT10006


FEATURES

Diodes:8-35A Ampere
Mounting Length:100mm
With M6 x 51mm Battery Post
With Trio
With Capacitor

REFERENCES

Mitsubishi A860T42070
Mobiletron RM47, RM47HV
Transpo IMR10062

BXT10006-D

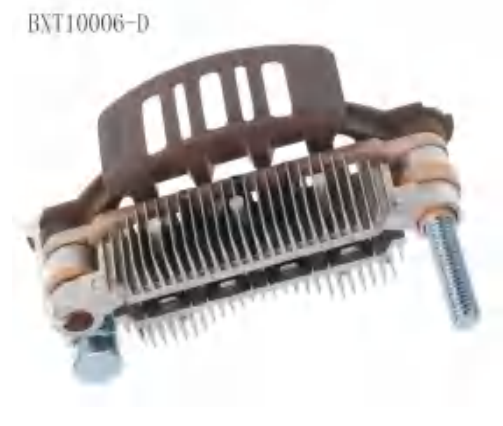

BXT10006-D



BXT10006-D

FEATURES

Diodes:8-35A Ampere
Mounting Length:100mm
With M8 x 57mm Battery Post
With Trio
With Capacitor

REFERENCES

MITSUBISHI:A860X49570
CARGO:233851
MOBILETRON:RM-157H

BXT10007



BXT10007



BXT10007

FEATURES

Diodes:8-35A Ampere
Mounting Length:100mm
With M8 × 61mm Battery Post
With Trio
With Capacitor
With "W" Terminal

BXT10007-B4



B+ M6

BXT10007-B4



B+ M6

BXT10007-B4

FEATURES


Diodes:8-35A Ampere
Mounting Length:100mm
With M6 × 51mm Battery Post
With Trio
With Capacitor
With "W" Terminal

BXT10009



B+ M8

BXT10009

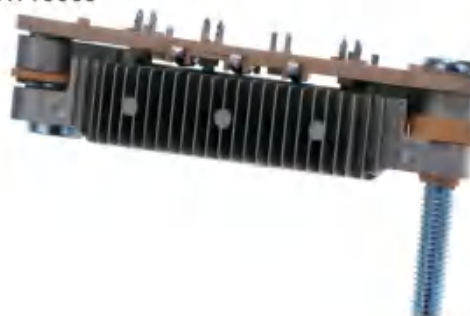

BXT10009


FEATURES

Diodes:6-35A Ampere
Mounting Length:100mm
With M8 × 57mm Battery Post
With Trio
With Capacitor

BXT10017-F1



BXT10017-F1

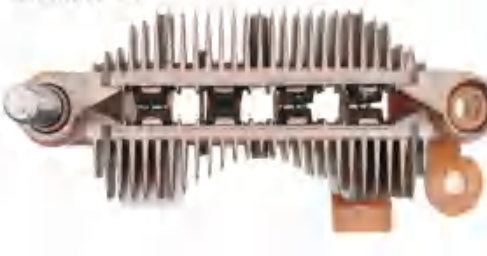


BXT10017-F1

FEATURES

Diodes:8-50A Ampere
Mounting Length:100mm
With M8 × 57mm Battery Post
Without Trio
Without Capacitor



BXT10025

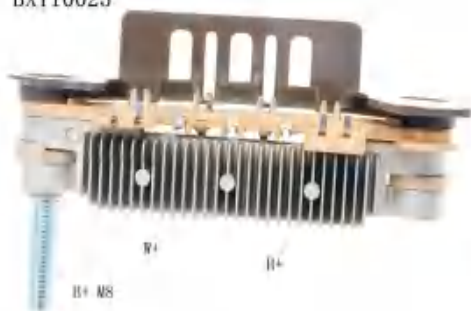

BXT10025



BXT10025

FEATURES

Diodes: 8–35A Ampere
Mounting Length: 100mm
With M8 × 57mm Battery Post
Without Trio
Without Capacitor

BXT10030



BXT10030




BXT10030

FEATURES

Diodes: 12–35A Ampere
Mounting Length: 100mm
With M10 × 54mm Battery Post
With Trio
With Capacitor
With “W” Terminal
With “D+” Terminal
With “B+” Terminal

BXT10035

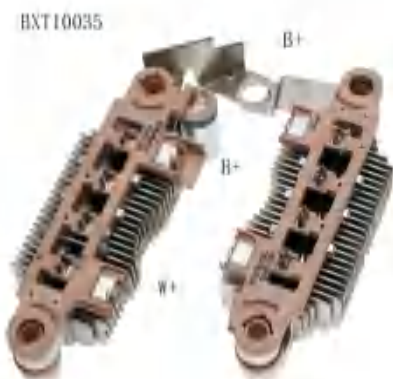

BXT10035



BXT10035

FEATURES

Diodes: 16–35A Ampere
Mounting Length: 100mm
With M10 × 54mm Battery Post
Without Trio
With Capacitor
With “B+” Terminal

REFERENCES

Mitsubishi A860X98470,
A860X98570

BXT10036



BXT10036



BXT10036

FEATURES

Diodes: 16–35A Avalanche
Mounting Length: 100mm
With M5 × 46.8mm Battery Post
Without Trio
With Capacitor
For 24V Alternators



BXT10052



BXT10052




BXT10052

FEATURES

Diodes:8-35A Ampere
Mounting Length:100mm
With M5 × 44mm Battery Post
Without Trio
Without Capacitor

BXT10053

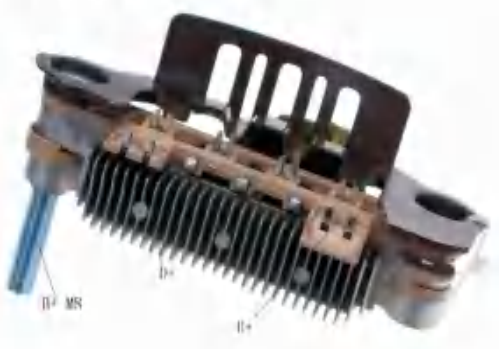

BXT10053




BXT10053

FEATURES

Diodes:8-35A Ampere
Mounting Length:100mm
With M8 × 57mm Battery Post
With Trio
Without Capacitor

BXT10060

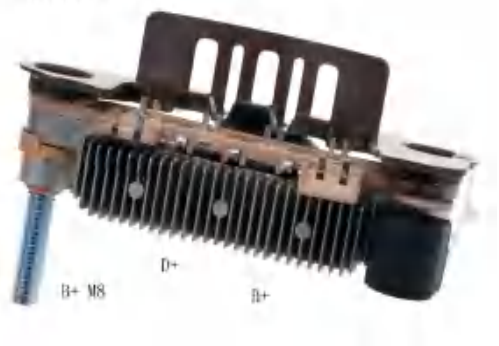

BXT10060




BXT10060

FEATURES

Diodes:8-35A Ampere
Mounting Length:100mm
With M8 × 57mm Battery Post
With Trio
With Capacitor

BXT10062

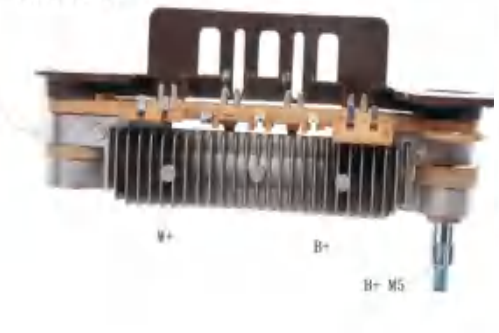

BXT10062



BXT10062

FEATURES

Diodes:8-35A Ampere
Mounting Length:100mm
With M6 × 41mm Battery Post
Without Trio
Without Capacitor



BXT10070

BXT10070

BXT10070

FEATURES

Diodes: 8–35A Ampere
Mounting Length: 100mm
With M5 × 44mm Battery Post
With Trio
With Capacitor



BXT10076

BXT10076

BXT10076

FEATURES

Diodes: 6–35A Ampere
Mounting Length: 100mm
With Trio
With Capacitor



BXT10076-C

BXT10076-C

BXT10076-C

FEATURES

Diodes: 6–35A Ampere
Mounting Length: 100mm
With M6 × 40mm Battery Post
With Trio
With Capacitor



BXT10082

BXT10082

BXT10082

FEATURES

Diodes: 8–50A Ampere
Mounting Length: 100mm
With M8 × 61mm Battery Post
Without Trio
Without Capacitor





BXT11401



BXT11401



BXT11401

FEATURES

Diodes:12-35A Avalanche
With M6 x 28.5mm Battery Post
Diameter OD:114mm

BXT11401-A



BXT11401-A



BXT11401-A

FEATURES

Diodes:12-35A Avalanche
With M8 x 61mm Battery Post
Diameter OD:114mm

BXT11501



BXT11501



BXT11501

FEATURES

Diodes:12-35A Avalanche
With M6 x 51mm Battery Post
Diameter OD:115mm

REFERENCES

Cargo 335342
KRAUF AEM1262BP, AEM1262BS
Mobiletron RM237
Transpo IMR11505

BXT11701-A



BXT11701-A



BXT11701-A

FEATURES

Diodes:9-25A Ampere
With "W" Terminal



BXT12202



BXT12202



BXT12202

FEATURES

Diodes:12-35A Ampere
With M8 × 61mm Battery Post
Diameter OD:122mm



BXT12202-A



BXT12202-A

BXT12202-A

FEATURES

Diodes:12-50A Ampere
With M6 × 28.5mm Battery Post
Diameter OD:122mm



BXT12202-B



BXT12202-B

BXT12202-B

FEATURES

Diodes:12-50A Avalanche
Diameter OD:122mm
With M8 × 61mm Battery Post

REFERENCES

MITSUBISHI:A86X93170
CARGO:330307
LESTER:11231
MOBILETRON:RM-180

BXT12202-D



BXT12202-D



BXT12202-D

FEATURES

Diodes:12-50A Avalanche
With M5 × 43.4mm Battery Post
Diameter OD:122mm



BXT12202-E



BXT12202-E



BXT12202-E

FEATURES

Diodes: 12-50A Avalanche
With M5 x 44mm Battery Post
Diameter OD: 122mm

BXT12203



BXT12203



BXT12203

FEATURES

Diodes: 12-50A Avalanche
With M6 x 28.5mm Battery Post
Diameter OD: 122mm

REFERENCES

Mitsubishi A860X99870,
Mobiletron RM221
Transpo IMR12209, IMR12823
UTM EM2291A

BXT12801



BXT12801



BXT12801

FEATURES

Diodes: 12-50A Avalanche
With M6 x 41mm Battery Post
Diameter OD: 128mm

REFERENCES

KRAUF AEM3081BS
Mitsubishi 1800A190
Mobiletron RM227
UTM EM3081A

BXT12802



BXT12802



BXT12802

FEATURES


Diodes: 12-50A Avalanche
With M6 x 28.5mm Battery Post
Diameter OD: 128mm



BXT12803



BXT12803

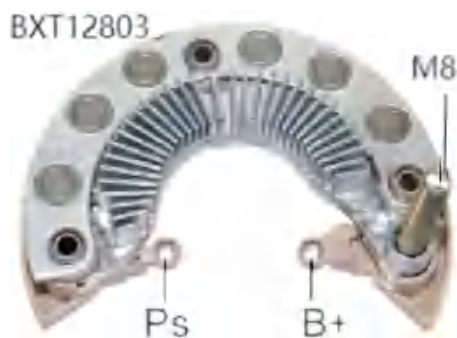

BXT12803

FEATURES

Diodes: 12-50A Avalanche
With M8 × 61mm Battery Post
Diameter OD: 128mm

BXT12804



BXT12804



BXT12804

FEATURES

Diodes: 12-50A Avalanche
With M5 × 44mm Battery Post
Diameter OD: 128mm

BXT12805



BXT12805



BXT12805

FEATURES

Diodes: 12-50A Avalanche
With M6 × 28.5mm Battery Post
Diameter OD: 128mm

BXT12805-A




BXT12805-A



BXT12805-A

FEATURES

Diodes: 16-50A Avalanche
With M5 × 44mm Battery Post
Diameter OD: 128mm

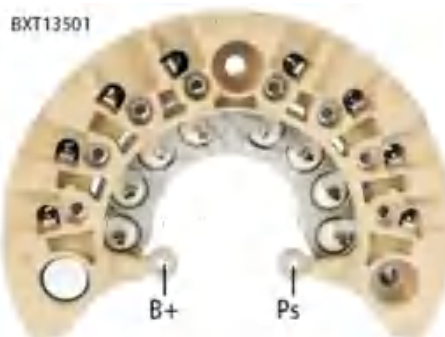


BXT13501

FEATURES

Diodes:16-50A Avalanche
With M6 × 41mm Battery Post
Diameter OD:135mm

BXT13502

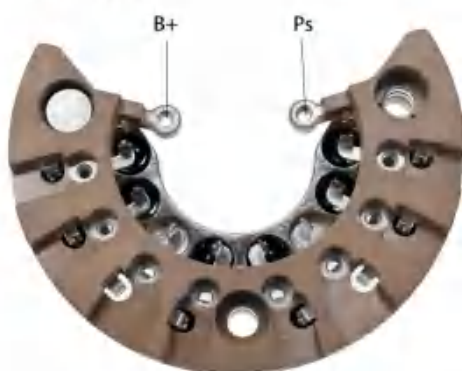

BXT13502




BXT13502

FEATURES

Diodes:12-50A Avalanche
With M6 × 41mm Battery Post
Diameter OD:135mm

BXT5301

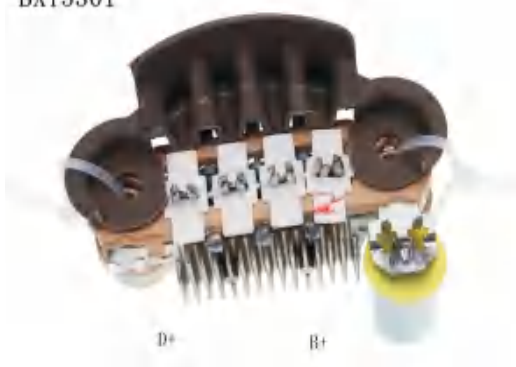

BXT5301




BXT5301

FEATURES

Diodes:8-30A Ampere
Mounting Length:53mm
With Trio
With Capacitor

BXT6501

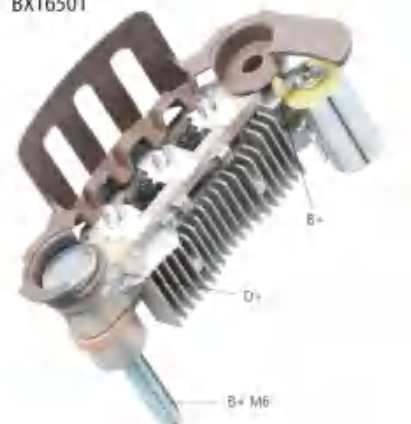

BXT6501



BXT6501

FEATURES

Diodes:6-35A Ampere
Mounting Length:65mm
With M6 × 51mm Battery Post
With Trio
With Capacitor

REFERENCES

MITSUBISHI:A860T22770
CARGO:132789
MOBILETRON:RM-03
TRANSP0:IMR6540



BXT6502



BXT6502




BXT6502

FEATURES

Diodes:6-35A Ampere
Mounting Length:65mm
With M8 × 53.5mm Battery Post
With Trio
With Capacitor

BXT6503

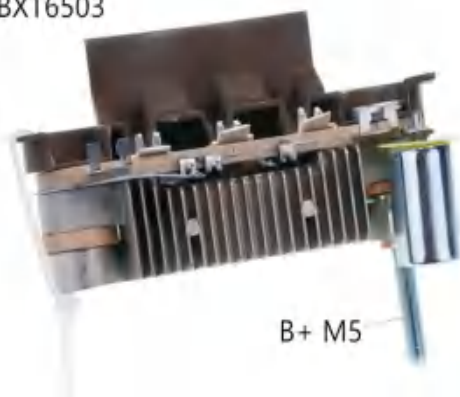

BXT6503



BXT6503

FEATURES

Diodes:6-35A Ampere
Mounting Length:65mm
With M5 × 49mm Battery Post
With Trio
With Capacitor

BXT6504



BXT6504




BXT6504

FEATURES

Diodes:6-35A Ampere
Mounting Length:65mm
With M5 × 49mm Battery Post
With Trio
With Capacitor

BXT6507

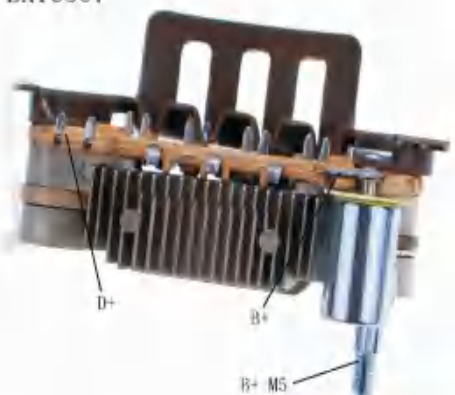

BXT6507



BXT6507

FEATURES

Diodes:8-35A Ampere
Mounting Length:65mm
With M5 × 44mm Battery Post
With Trio
With Capacitor



BXT6508



BXT6508



BXT6508

FEATURES

Diodes: 16–35A Ampere
Mounting Length: 65mm
With M5 × 42.5mm Battery Post
With Trio
With Capacitor
With “W” Terminal

BXT6508-BZ



BXT6508-BZ




BXT6508-BZ

FEATURES

Diodes: 8–35A Ampere
Mounting Length: 65mm
With M5 × 52mm Battery Post
With “B+” Terminal
With Trio
With Capacitor

BXT6512-D

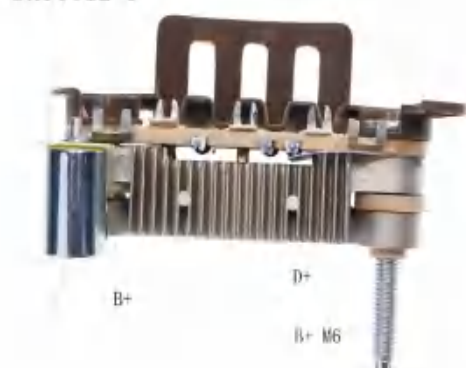

BXT6512-D



BXT6512-D

FEATURES

Diodes: 6–35A Ampere
Mounting Length: 65mm
With M6 × 51mm Battery Post
With Trio
With Capacitor

BXT6513-AZ



BXT6513-AZ



BXT6513-AZ

FEATURES

Diodes: 6–35A Ampere
Mounting Length: 65mm
With M5 × 49mm Battery Post
With Trio
With Capacitor



BXT6514-Z



BXT6514-Z



BXT6514-Z

FEATURES

Diodes:6-35A Ampere
Mounting Length:65mm
With M6 × 51mm Battery Post
With Trio
Without Capacitor

BXT6515



BXT6515



BXT6515

FEATURES

Diodes:8-35A Ampere
Mounting Length:65mm
With M8 × 53.5mm Battery Post
Without Trio
Without Capacitor

BXT7001



BXT7001



BXT7001

FEATURES

Diodes:8-35A Ampere
Mounting Length:70mm
With Copper Heat Sink
With "B+" Lead Wire 4m' × 75mm
With Trio


REFERENCES

Hino 277001700
KRAUF AEW7001UT
Nissan 23500E9007
Sawafuji 121900800XOSF
UTM EW7001A, EW7001B
ZAUFER 312N10547Z

BXT7002-A



BXT7002-A

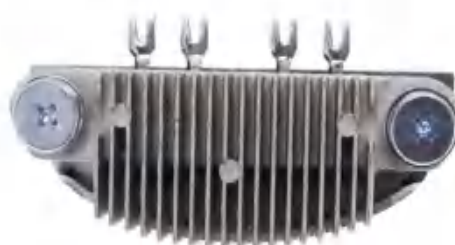

BXT7002-A

FEATURES

Diodes:8-35A Ampere
Mounting Length:70mm
With Copper Heat Sink

REFERENCES

KRAUF AEW7474LP
ZAUFER 312N10771Z

BXT7003

BXT7003

BXT7003

FEATURES

Diodes:6-35A Ampere
Mounting Length:70mm
With Stamped Steel Heat Sink

REFERENCES

KRAUF AEW1033UH
ZAUFER 312N10583Z

BXT7004

BXT7004

BXT7004

FEATURES

Diodes:12-35A Ampere
Mounting Length:70mm
With M10 × 50mm Battery Post
With Stamped Steel Heat Sink

BXT7104-D

BXT7104-D

BXT7104-D

FEATURES

Diodes:6-35A Ampere
Mounting Length:71mm
With M5 × 52mm Battery Post
With Trio
With Capacitor
With "W" Terminal
With Copper Heat Sink

BXT7106-B1

BXT7106-B1

BXT7106-B1

FEATURES

Diodes:12-35A Ampere
Mounting Length:71mm
With M5 × 52mm Battery Post
With Trio
With Capacitor
With Aluminum Heat Sink



BXT7108

BXT7108

BXT7108

FEATURES

Diodes:6-30A Ampere
Mounting Length:71mm
With Trio
With Capacitor
With Aluminum Heat Sink

BXT7500

BXT7500

BXT7500

FEATURES

Diodes:6-35A Ampere
Mounting Length:75mm
With M6 × 51mm Battery Post
With Trio
Without Capacitor

BXT7501

BXT7501

BXT7501

FEATURES

Diodes:6-35A Ampere
Mounting Length:75mm
With Trio
With Capacitor

BXT7502

BXT7502

BXT7502

FEATURES

Diodes:6-35A Ampere
Mounting Length:75mm
With Trio
With Capacitor



BXT7502-EZ



BXT7502-EZ



BXT7502-EZ

FEATURES

Diodes:6-35A Ampere
Mounting Length:75mm
With M6 × 46.6mm Battery Post
With "B+" Terminal
With Trio
With Capacitor

REFERENCES

Cargo 139763
Hyundai 3738042000,
Kia 3738042000
Unipoint REC5701
UTM EM9763A
ZAUFER 312N10036Z

BXT7503



BXT7503



BXT7503

FEATURES

Diodes:12-35A Ampere
Mounting Length:75mm
With Trio
With Capacitor
With "B+" Terminal

REFERENCES

KRAUF AEA9501UT
UTM EA9501A
ZAUFER 312N10432Z

BXT7504-B



BXT7504-B



BXT7504-B

FEATURES

Diodes:8-35A Ampere
Mounting Length:75mm
With M6 × 51mm Battery Post
With Trio
With Capacitor

BXT7508



BXT7508



BXT7508

FEATURES

Diodes:8-35A Ampere
Mounting Length:75mm
With M6 × 51mm Battery Post
With Trio
With Capacitor



BX17509



BXT7509




BXT7509

FEATURES

Diodes:8-35A Ampere
Mounting Length:75mm
With M6 x 51mm Battery Post
With Trio
With Capacitor

BXT7511-D

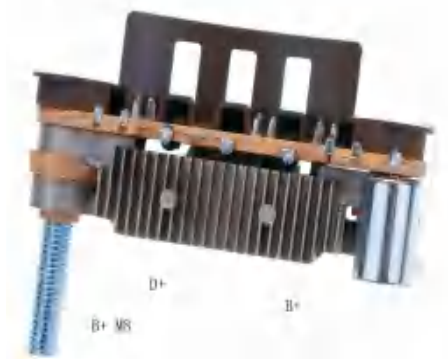

BXT7511-D




BXT7511-D

FEATURES

Diodes:6-35A Ampere
Mounting Length:75mm
With M8 x 57mm Battery Post
With Trio
With Capacitor

BXT7513-A

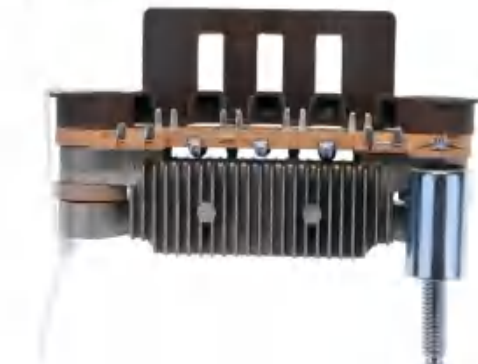

BXT7513-A



BXT7513-A


FEATURES

Diodes:8-35A Ampere
Mounting Length:75mm
With M6 x 48mm Battery Post
With Trio
With Capacitor

BXT7513-D



BXT7513 D

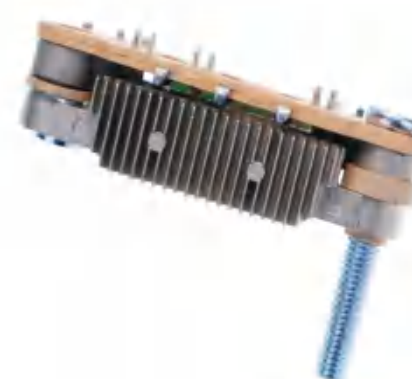

BXT7513-D

FEATURES

Diodes:6-35A Ampere
Mounting Length:75mm
With M8 x 57mm Battery Post
With Trio
With Capacitor

BXT7516



BXT7516



BXT7516

FEATURES

Diodes:6-35A Ampere
Mounting Length:75mm
With M6 × 51mm Battery Post
With Trio
With Capacitor

BXT7518-A



BXT7518-A



BXT7518-A

FEATURES

Diodes:6-35A Ampere
Mounting Length:75mm
With M5 × 49mm Battery Post
With Trio
With Capacitor

BXT7519



BXT7519



BXT7519

FEATURES

Diodes:8-35A Ampere
Mounting Length:75mm
With M5 × 44mm Battery Post
Without Trio
Without Capacitor

BXT7520



BXT7520



BXT7520

FEATURES

Diodes:8-35A Ampere
Mounting Length:75mm
With M6 × 41mm Battery Post
With Trio
With Capacitor



BXT7521-AZ



BXT7521-AZ




BXT7521-AZ

FEATURES

Diodes:6-35A Ampere
Mounting Length:75mm
With M6 × 51mm Battery Post
With Trio
With Capacitor

BXT7522-G8

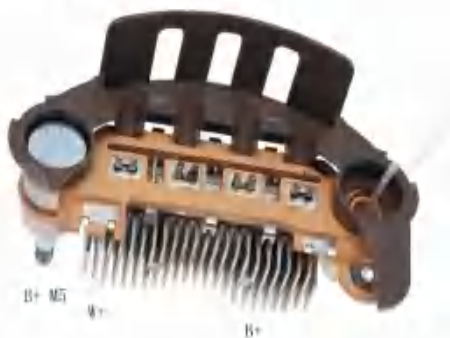

BXT7522-G8




BXT7522-G8

FEATURES

Diodes:8-35A Ampere
Mounting Length:75mm
With M5 × 44mm Battery Post
Without Trio
Without Capacitor

BXT7522-IZ

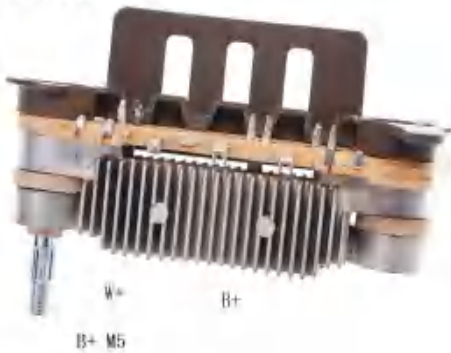

BXT7522-IZ



BXT7522-IZ


FEATURES

Diodes:6-35A Ampere
Mounting Length:75mm
With M5 × 44mm Battery Post
Without Trio
Without Capacitor

BXT7522-K7



BXT7522-K7

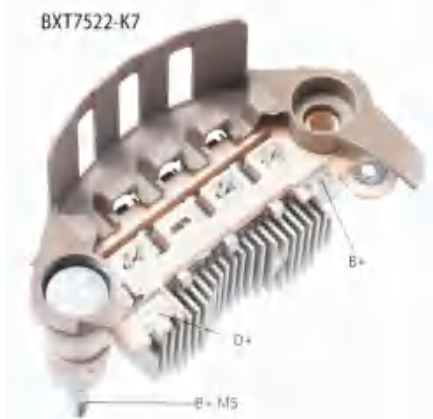

BXT7522-K7

FEATURES

Diodes:6-35A Ampere
Mounting Length:75mm
With M5 × 44mm Battery Post
With Trio
Without Capacitor

BXT7523



BXT7523



BXT7523

FEATURES

Diodes:8-35A Ampere
Mounting Length:75mm
With M6 × 51mm Battery Post
With Trio
With Capacitor
With "W" Terminal

BXT7546



BXT7546



BXT7546


FEATURES

Diodes:6-35A Ampere
Mounting Length:75mm
With M5 × 44mm Battery Post
With Trio
With Capacitor

BXT7547-A



BXT7547-A

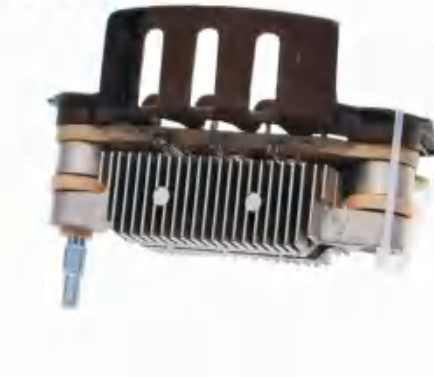

BXT7547-A

FEATURES

Diodes:8-35A Ampere
Mounting Length:75mm
With M5 × 44mm Battery Post
Without Trio
Without Capacitor

BXT7801



BXT7801



BXT7801

FEATURES

Diodes:8-35A Ampere
Mounting Length:78mm
With Trio
With M5 × 49mm Battery Post
With M5 × 49mm Trio Post



BXT7803



BXT7803



BXT7803


FEATURES

Diodes:16–35A Ampere
Mounting Length:78mm
With Trio
With M6 × 45.5mm Battery Post
With M5 × 49mm Trio Post

BXT7804



BXT7804

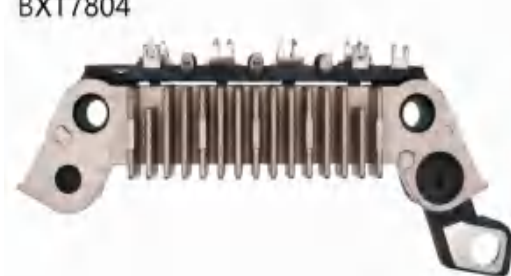

BXT7804


FEATURES

Diodes:8–35A Ampere
Mounting Length:78mm
With Trio

BXT8001



BXT8001

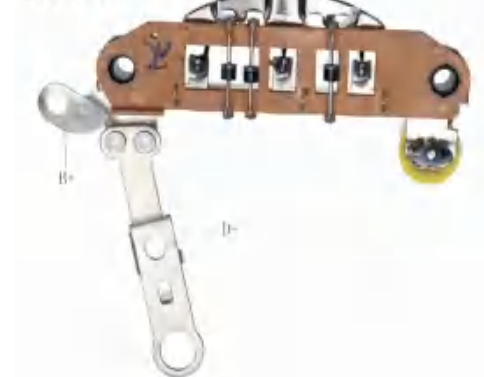

BXT8001


FEATURES

Diodes:6–30A Ampere
Mounting Length:80mm
With Trio
With Capacitor
With “B+” Terminal
With “D+” Terminal
With Copper Heat Sink

BXT8004-C



BXT8004 C

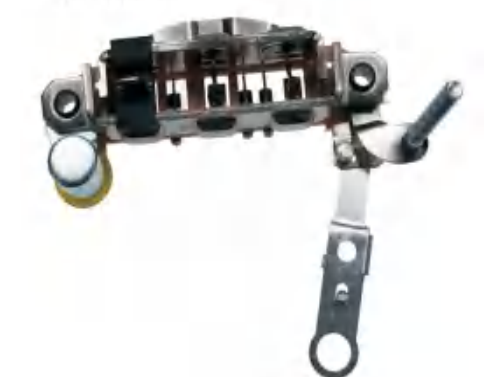

BXT8004-C

FEATURES

Diodes:6–30A Ampere
Mounting Length:80mm
With Trio
With Capacitor
With M5 × 52mm Battery Post
With “D+” Terminal
With “W” Terminal
With Aluminum Heat Sink



BXT8004-D



BXT8004-D



BXT8004-D

FEATURES

Diodes:6-30A Ampere
Mounting Length:80mm
With Trio
With Capacitor
With M5 × 43mm Battery Post
With “D+” Terminal
With Aluminum Heat Sink

BXT8010-A1



BXT8010-A1



BXT8010-A1

FEATURES

Diodes:6-35A Ampere
Mounting Length:80mm
With M8 × 53.5mm Battery Post
With Trio
With Capacitor

BXT8501



BXT8501



BXT8501

FEATURES

Diodes:6-35A Ampere
Mounting Length:85mm
With Trio
With Capacitor

BXT8502



BXT8502



BXT8502

FEATURES


Diodes:8-35A Ampere
Mounting Length:85mm
With M6 × 51mm Battery Post
With Trio
With Capacitor
With “W” Terminal



BXT8503



BXT8503

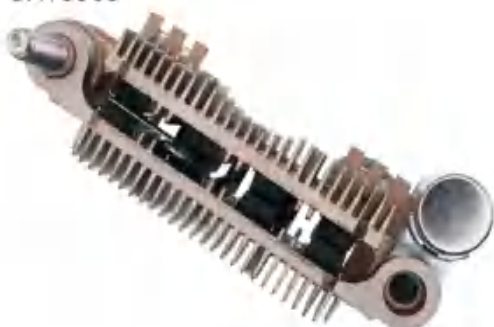

BXT8503

FEATURES

Diodes:8-35A Ampere
Mounting Length:85mm
With M6 × 51mm Battery Post
With Trio
With Capacitor
With "W" Terminal

BXT8506-BZ



BXT8506-BZ



BXT8506-BZ

FEATURES

Diodes:6-35A Ampere
Mounting Length:85mm
With M6 × 51mm Battery Post
With Trio
With Capacitor

BXT8512-A



BXT8512-A



BXT8512-A

FEATURES

Diodes:8-35A Ampere
Mounting Length:85mm
With M5 × 44mm Battery Post
With Trio
With Capacitor

BXT8514



BXT8514



BXT8514


FEATURES

Diodes:8-35A Ampere
Mounting Length:85mm
With M8 × 57mm Battery Post
With Trio
With Capacitor

REFERENCES

MITSUBISHI:A860T42670
CARGO:137076
MOBILETRON:RM-152
TRANSPO:IMR8594

BXT8514-E1

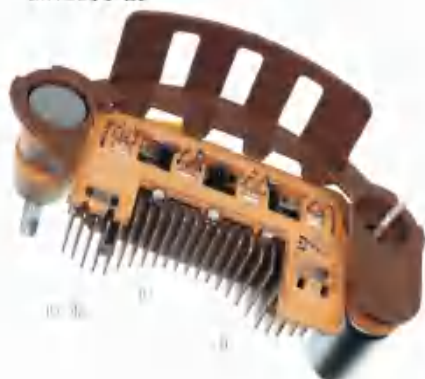

BXT8514-E1



BXT8514-E1


FEATURES

Diodes:8-35A Ampere
Mounting Length:85mm
With M5 × 44mm Battery Post
With Trio
With Capacitor

BXT8514-T



BXT8514-T

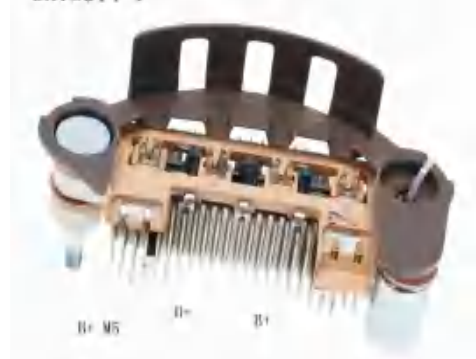

BXT8514-T


FEATURES

Diodes:8-35A Ampere
Mounting Length:85mm
With M5 × 44mm Battery Post
With Trio
With Capacitor

BXT8517



BXT8517

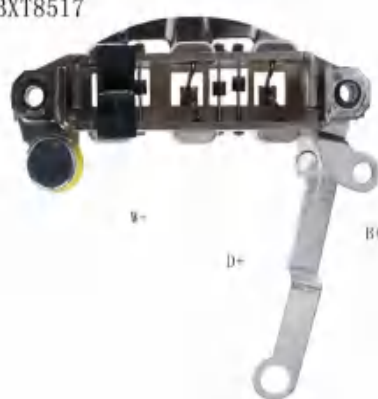

BXT8517

FEATURES

Diodes:6-30A Ampere
Mounting Length:85mm
With Trio
With Capacitor
With "B+" Terminal
With "D+" Terminal
With "W" Terminal
With Copper Heat Sink

BXT8520-A



BXT8520-A



BXT8520-A

FEATURES


Diodes:6-30A Ampere
Mounting Length:85mm
With Trio
With Capacitor
With "B+" Terminal
With "D+" Terminal
With "W" Terminal
With Aluminum Heat Sink



BXT8520-E



BXT8520-E

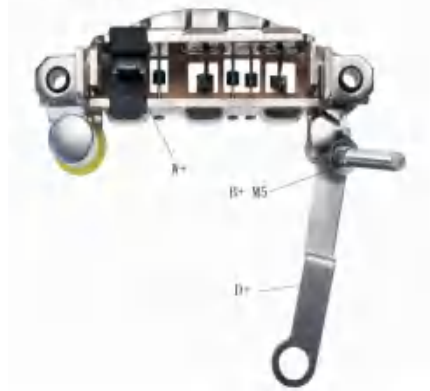

BXT8520-E


FEATURES

Diodes:6-30A Ampere
Mounting Length:85mm
With M5 × 43mm Battery Post
With Trio
With Capacitor
With "D+" Terminal
With "W" Terminal
With Aluminum Heat Sink

BXT8542



BXT8542

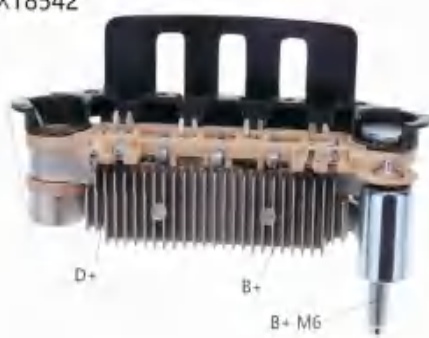


BXT8542

FEATURES

Diodes:6-35A Ampere
Mounting Length:85mm
With M6 × 51mm Battery Post
With Trio
With Capacitor

BXT8544-Y

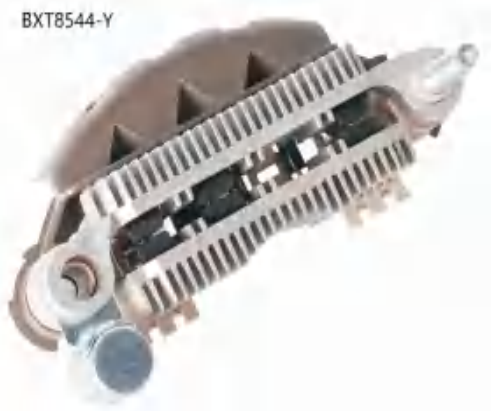

BXT8544-Y



BXT8544-Y

FEATURES

Diodes:6-35A Ampere
Mounting Length:85mm
With M6 × 51mm Battery Post
With Trio
With Capacitor
For use on:Ford Escort, Mazda 323


REFERENCES

MITSUBISHI:A860T38270,B36618W60A
CARGO:136977
MOBILETRON:RM-38
TRANSCO:IMR8548

BXT8552



BXT8552

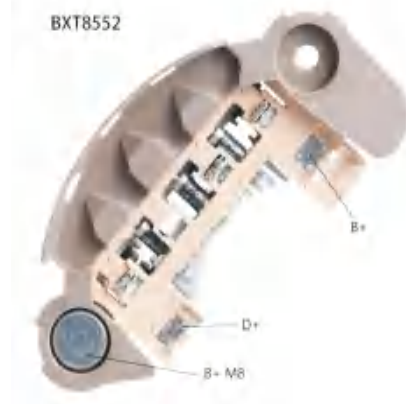

BXT8552

FEATURES

Diodes:6-35A Ampere
Mounting Length:85mm
With M8 × 57mm Battery Post
With Trio
With Capacitor



BXT8565-C



BXT8565-C




BXT8565-C


FEATURES

Diodes:8-35A Ampere
Mounting Length:85mm
With M6 × 41mm Battery Post
Without Trio
Without Capacitor

BXT8568

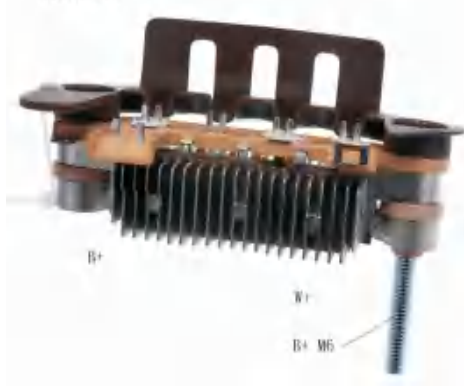

BXT8568

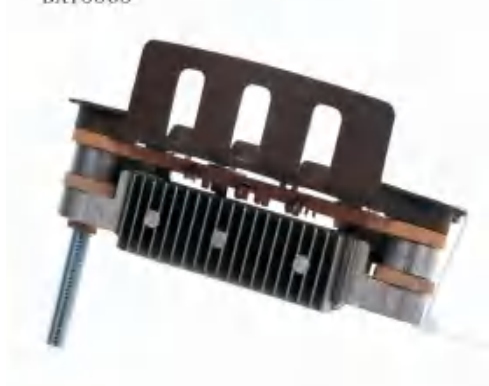

BXT8568

FEATURES

Diodes:6-35A Ampere
Mounting Length:85mm
With M6 × 56mm Battery Post
Without Trio
Without Capacitor

BXT8585-K



BXT8585-K



BXT8585-K

FEATURES

Diodes:8-35A Ampere
Mounting Length:85mm
With M6 × 51mm Battery Post
With Trio
With Capacitor

BXT8585-Z



BXT8585-Z



BXT8585-Z

FEATURES

Diodes:8-35A Ampere
Mounting Length:85mm
With M6 × 51mm Battery Post
Without Trio
Without Capacitor



BXT8588-Z



BXT8588-Z




BXT8588-Z

FEATURES

Diodes:6-35A Ampere
Mounting Length:85mm
With M8 × 57mm Battery Post
With Trio
With Capacitor

BXT8590-Y

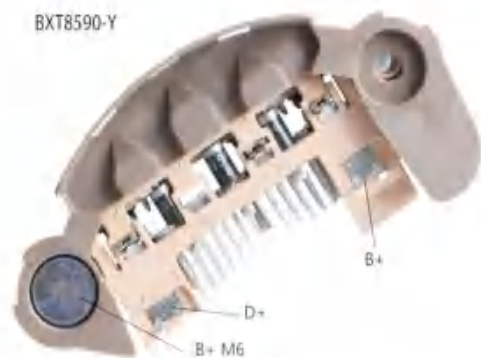

BXT8590-Y




BXT8590-Y

FEATURES

Diodes:6-35A Ampere
Mounting Length:85mm
With M6 × 48mm Battery Post
With Trio
With Capacitor

BXT9001

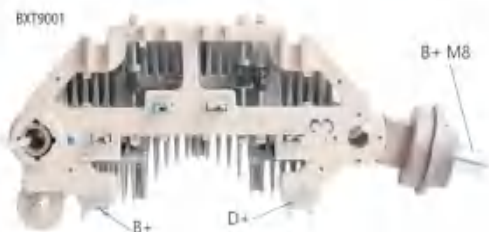

BXT9001



BXT9001

FEATURES

Diodes:8-35A Ampere
Mounting Length:90mm
With M8 Battery Post
With Trio
With Capacitor


REFERENCES

FIT UNIT:0K87T-18300A,AB250474

BXT9001-B



BXT9001-B

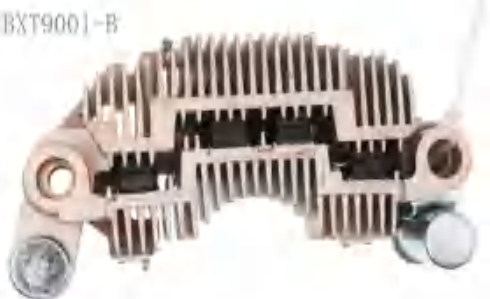

BXT9001-B

FEATURES

Diodes:8-35A Ampere
Mounting Length:90mm
With M8 × 43mm Battery Post
With Trio
With Capacitor



BXT9001-E

FEATURES

Diodes: 8-35A Ampere
Mounting Length: 90mm
With M6 x 43mm Battery Post
With Trio
With Capacitor

BXT9002



BXT9002




BXT9002


FEATURES

Diodes: 8-35A Ampere
Mounting Length: 90mm
With M6 Battery Post
With Trio
With Capacitor

BXT9002-C4

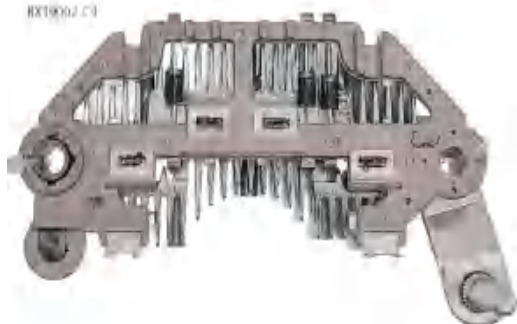

BXT9002-C4

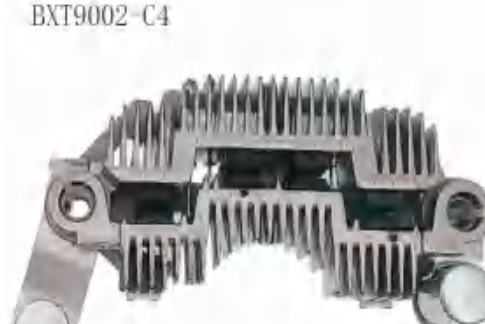

BXT9002-C4

FEATURES

Diodes: 8-35A Ampere
Mounting Length: 90mm
With M6 x 29.5mm Battery Post
With Trio
With Capacitor

BXT9003



BXT9003



BXT9003

FEATURES

Diodes: 8-35A Ampere
Mounting Length: 90mm
With M8 x 43mm Battery Post
With Trio
With Capacitor



BXT9005



BXT9005



BXT9005

FEATURES

Diodes: 8-35A Ampere

Mounting Length:90mm

With M6 × 32mm Battery Post

With Trio

With Capacitor

BXV103-A



BXV103-A



BXV103-A

FEATURES

Diodes: 6-50A Ampere
Diameter OD: 115mm
With Trio
With Capacitor
With 82 Ohm Resistor

BXV103-B



BXV103-B



BXV103-B

FEATURES

Diodes: 6-35A Ampere
Diameter OD: 115mm
With Capacitor
With Trio

REFERENCES

LUCAS:21224163
TRANSPO:IPR103
MOBILETRON:RP-04

BXV11513



BXV11513




BXV11513

FEATURES

Diodes: 6-50A Ampere
Diameter OD: 115mm
With Trio
With 100 Ohm Resistor

BXV11514

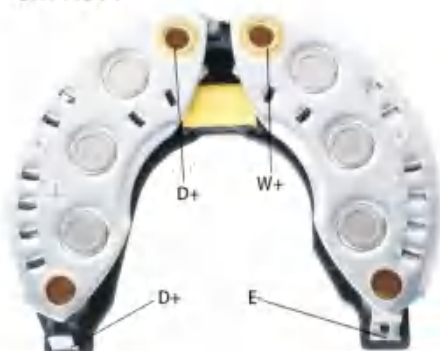

BXV11514



BXV11514

FEATURES

Diodes: 6-50A Ampere
Diameter OD: 115mm
With Capacitor
With Trio
With 100 Ohm Resistor

REFERENCES

CARGO:131228
OEM NO:A103543A



BXV12001-E

FEATURES

Diodes: 3-50A Avalanche
With M8 × 30mm Battery Post
With M4 × 15mm "W" Pos
Connection type to the stator star(Y)
Customer provide Negative heat sink

BXV12001-E2



BXV12001-E2



BXV12001-E2

FEATURES

Diodes: 3-50A Avalanche
With M8 × 30mm Battery Post
Connection type to the stator star(Y)
Customer provide Negative heat sink

BXV12002-E4



BXV12002-E4



BXV12002-E4

FEATURES

Diodes: 4-50A Avalanche
With (M8+M8) × 33mm Battery Post
Connection type to the stator star(Y)
Customer provide Negative heat sink

REFERENCES

FIT UNIT: 0272220890

BXV12002-E6



BXV12002-E6



BXV12002-E6

FEATURES

Diodes: 3-50A Ampere
With (M8+M8) × 33mm Battery Post
Connection type to the stator star(Y)
Customer provide Negative heat sink


REFERENCES

FIT UNIT: F000BL0643



BXV12002-E7

BXV12002-E7

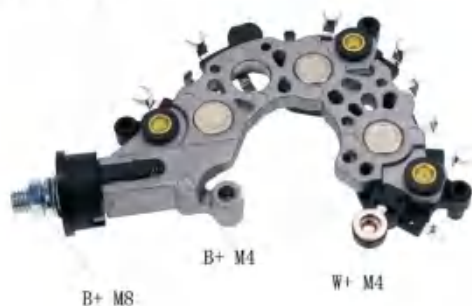

BXV12002-E7

FEATURES

Diodes: 3–50A Ampere
With (M8+M8) × 33mm Battery Post
Connection type to the stator star(Y)
Customer provide Negative heat sink

BXV12002-F

BXV12002-F



BXV12002-F

FEATURES

Diodes: 3–50A Ampere
With M8 × 62.5mm Battery Post
Connection type to the stator star(Y)
Customer provide Negative heat sink

REFERENCES

FIT UNIT:F000BL07P3

BXV12003-A2

BXV12003-A2



BXV12003-A2

FEATURES

Diodes:3–60A Avalanche
With M8 × 40mm Battery Post
Connection type to the stator star(Y)
Customer provide Negative heat sink

REFERENCES

FIT UNIT:F000BL07G5

BXV12003-D1

BXV12003-D1



BXV12003-D1

FEATURES

Diodes:3–60A Avalanche
With M8 × 36mm Battery Post
Connection type to the stator delta(Δ)
Customer provide Negative heat sink

REFERENCES

CARGO:335316



BXV12003-D2



BXV12003-D2



BXV12003-D2

FEATURES

Diodes: 3-35A Ampere
With M8 × 36mm Battery Post
Connection type to the stator delta (Δ)
Customer provide Negative heat sink

REFERENCES

CARGO:335316

BXV12003-D3



BXV12003-D3



BXV12003-D3

FEATURES

Diodes:3-60A Avalanche
With M8 × 30mm Battery Post
Connection type to the stator delta (Δ)
Customer provide Negative heat sink

REFERENCES

Bosch:F000BL9043

BXV12003-F



BXV12003-F



BXV12003-F

FEATURES

Diodes:3-35A Avalanche
With M8 × 30mm Battery Post
Connection type to the stator star(Y)
Customer provide Negative heat sink

REFERENCES

Bosch:F000BL0408

BXV12003-F3



BXV12003-F3



BXV12003-F3

FEATURES


Diodes:3-50A Avalanche
With M8 × 30mm Battery Post
Connection type to the stator star(Y)
Customer provide Negative heat sink

REFERENCES

FIT UNIT:F000BL1728,F000BL0408



BXV12003-N

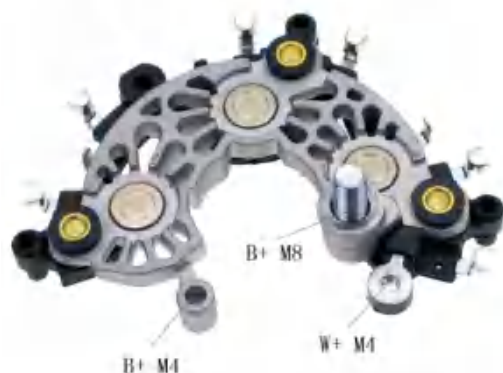

BXV12003-N



BXV12003-N

FEATURES

Diodes: 3-60A Avalanche
With M8 x 40mm Battery Post
Connection type to the stator delta (Δ)
Customer provide Negative heat sink

BXV12004-F



BXV12004-F



BXV12004-F


FEATURES

Diodes: 3-50A Avalanche
With M8 x 30mm Battery Post
Connection type to the stator delta (Δ)
Customer provide Negative heat sink

REFERENCES

TRANSPO: IBR9025

BXV12006-B

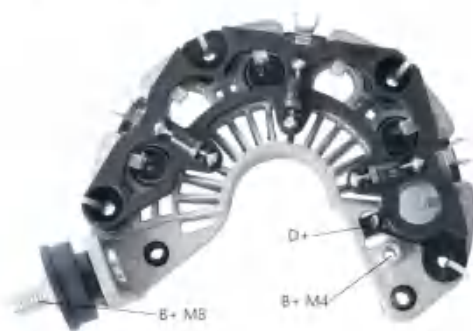

BXV12006-B




BXV12006-B

FEATURES

Diodes: 3-35A Avalanche
With M8 x 35.5mm Battery Post
With Trio
Customer provide Negative heat sink

BXV12007

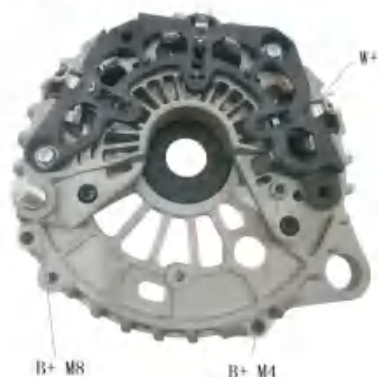

BXV12007

FEATURES

Diodes: 6-50A Avalanche
With M8 x 35.5mm Battery Post
Customer provide Negative heat sink
For 24V Alternators



BXV12007-A



BXV12007-A

FEATURES

Diodes: 6–50A Ampere
With M8 × 35.5mm Battery Post
Customer provide Negative heat sink

BXV12007-B



BXV12007-B



BXV12007-B

FEATURES

Diodes: 8–50A Avalanche
With M8 × 35.5mm Battery Post
With Aluminum Heat Sink
For 24V Alternators

BXV12008-F



BXV12008-F



BXV12008-F

FEATURES

Diodes: 4–35A Ampere
With M8 × 30mm Battery Post
With “W” Terminal
Connection type to the stator star(Y)
Customer provide Negative heat sink

BXV12008-H



BXV12008-H



BXV12008-H

FEATURES

Diodes: 3–50A Ampere
With M8 × 30mm Battery Post
With “W” Terminal
Connection type to the stator delta(Δ)
Customer provide Negative heat sink

BXV12010-F



BXV12010-F



BXV12010-F

FEATURES

Diodes: 3-50A Ampere
With M8 × 38mm Battery Post
Connection type to the stator delta(Δ)
Customer provide Negative heat sink

REFERENCES

FIT UNIT:F000BL0739,F000BL0769

BXV12011-A



BXV12011-A




BXV12011-A

FEATURES

Diodes:3-70A Avalanche
With M8 × 40mm Battery Post
Connection type to the stator delta(Δ)
Customer provide Negative heat sink

BXV12012-A

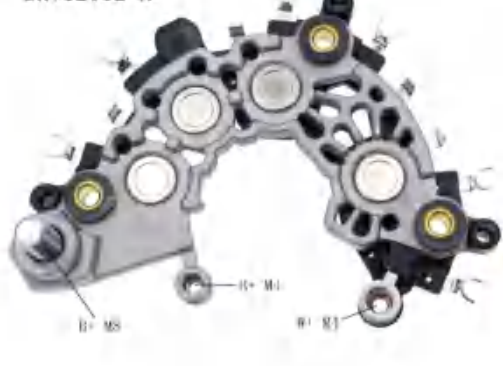

BXV12012-A



BXV12012-A

FEATURES

Diodes: 4-50A Ampere
With M8 × 30mm Battery Post
Connection type to the stator star(Y)
Customer provide Negative heat sink

BXV135



BXV135



BXV135

FEATURES

Diodes: 6-35A Ampere
Diameter OD: 115mm
Without Trie
With Capacitor
With "B+" Terminal

REFERENCES

TRANSPO:IPR135
YY:VAL135
MOBILETRON:RP-01



BXV136

BXV136

BXV136

FEATURES

Diodes: 6–35A Ampere
Diameter OD: 115mm
With Trio
With Capacitor
With “B+” Terminal

REFERENCES

TRANSPO:IPR551



BXV201-A

BXV201-A


BXV201-A

FEATURES

Diodes:3–50A Avalanche
With M8 x 37mm Battery Post
Without Trio
Customer provide Negative heat sink

REFERENCES

VOLTAG:AEV0523
UTM:EV0523A
ZAUFER:312N10078Z

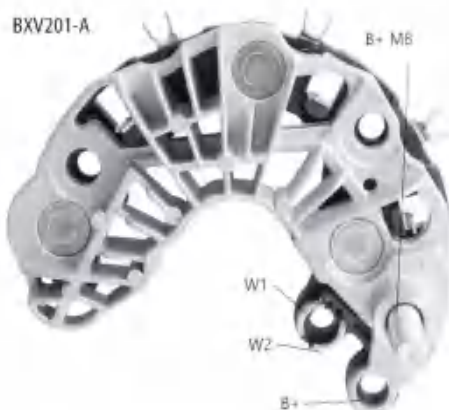

BXV203

BXV203

BXV203

FEATURES

Diodes: 6–50A Ampere
Diameter OD: 115mm
With Trio
With Capacitor
With 330 Ohm Resistor

REFERENCES

TRANSPO:IPR342



BXV206-C1

BXV206-C1


BXV206-C1

FEATURES

Diodes: 3–50A Ampere
Without Trio
With (M8+M6) x 51mm Battery Post
Without negative heat sink as VAL902-2

REFERENCES

TRANSPO:MER528
MOBILETRON:RP-62

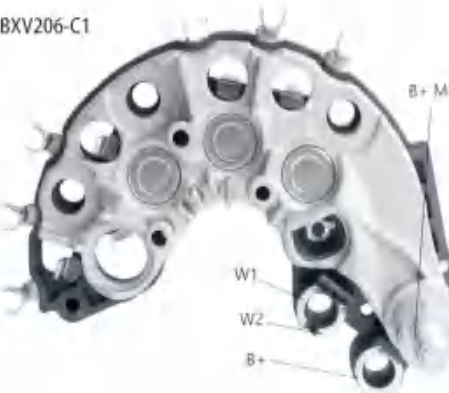



BXV206-F22



BXV206-F22



BXV206-F22

FEATURES

Diodes: 3-50A Ampere
With M8 × 37mm Battery Post
Customer provide Negative heat sink

REFERENCES

TRANPO:MER5252

BXV206-N5



BXV206-N5



BXV206-N5

FEATURES

Diodes: 3-35A Ampere
With M8 × 40mm Battery Post
Customer provide Negative heat sink

BXV207-A2



BXV207-A2



BXV207-A2

FEATURES

Diodes: 3-35A Ampere
With (M8+M6) × 45mm Battery Post
With Trio
Without negative heat sink as VAL211

BXV207-A6



BXV207-A6



BXV207-A6

FEATURES

Diodes: 3-50A Ampere
With (M8+M6) × 45mm Battery Post
Without Trio
Without negative heat sink as VAL211

REFERENCES

Hyundai:37367-02600



BXV207-F6



BXV207-F6



BXV207-F6

FEATURES

Diodes: 3-50A Avalanche
With (M6+M8) × 45mm Battery Post
Without Trio
Customer provide Negative heat sink

BXV207-F7




BXV207-F7

FEATURES

Diodes: 3-50A Avalanche
With (M6+M6) × 47mm Battery Post
With Trio
Customer provide Negative heat sink

BXV207-H2

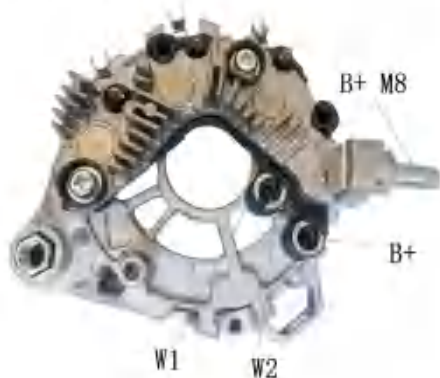

BXV207-H2

FEATURES

Diodes: 3-35A Avalanche
With M8 × 36mm Battery Post
Without Trio
Customer provide Negative heat sink

BXV207-H7



BXV207-H7




BXV207-H7

FEATURES

Diodes: 3-50A Ampere
With M8 × 36mm Battery Post
With Trio
Customer provide Negative heat sink

BXV210

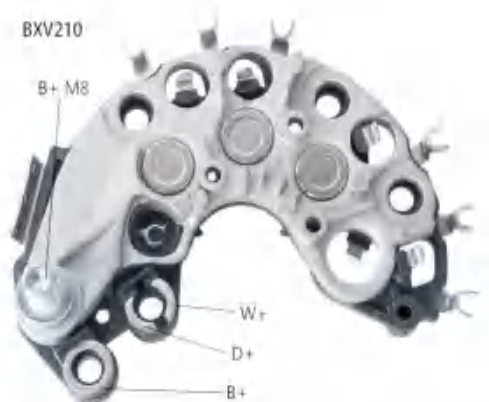

BXV210



BXV210

FEATURES

Diodes: 3–50A Ampere
With (M8+M6) × 45mm Battery Post
With Trio
Without negative heat sink as VAL201

BXV212



BXV212



BXV212

FEATURES

Diodes: 6–50A Ampere
With (M6+M8) × 45mm Battery Post
With Trio
Customer provide Negative heat sink

BXV213-A



BXV213-A



BXV213-A

FEATURES

Diodes: 4–50A Ampere
With (M8+M6) × 45mm Battery Post
With Trio
Without negative heat sink as VAL903

REFERENCES

YY: VAL901H

BXV214



BXV214



BXV214

FEATURES


Diodes: 3–50A Avalanche
With (M8+M6) × 45mm Battery Post
With Trio
Customer provide Negative heat sink
For 24V Alternators

REFERENCES

LESTER:23515
MOBILETRON:RP-40H
FIT UNIT:SG12B020,SG12B045



BXV252

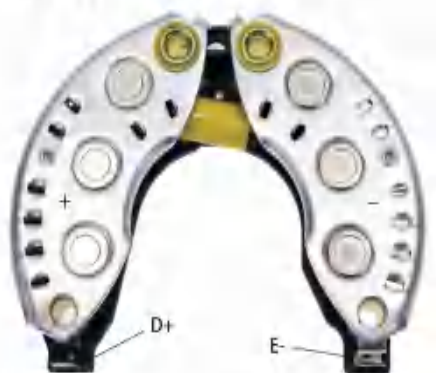

BXV252



BXV252

FEATURES

Diodes: 6–35A Ampere
Diameter OD: 115mm
With Capacitor
Without Trio

REFERENCES

TRANSPO:IPR252
MOBILETRON:RP-07

BXV252-A



BXV252-A




BXV252-A

FEATURES

Diodes: 6–35A Ampere
Diameter OD: 115mm
With Capacitor
Without Trio

BXV307-A1

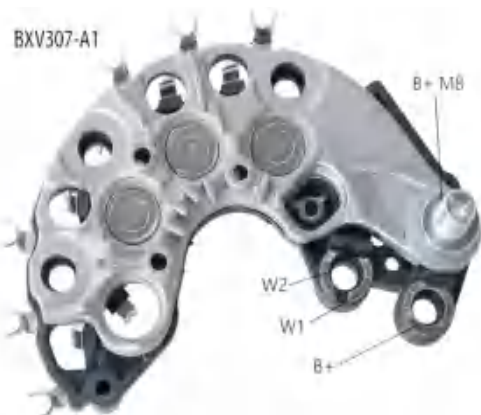

BXV307-A1



BXV307-A1

FEATURES

Diodes:3–50A Avalanche
With (M8+M6) × 45mm Battery Post
Without Trio
Customer provide Negative heat sink

BXV307-A3



BXV307-A3



BXV307-A3

FEATURES

Diodes:4–50A Ampere
With (M6+M8) × 45mm Battery Post
Without Trio
Customer provide Negative heat sink

BXV405-A



BXV405-A



BXV405-A

FEATURES

Diodes: 3-80A Avalanche
With M8 x 37mm Battery Post
Without Trio
Customer provide Negative heat sink

BXV407-F1



BXV407-F1



BXV407-F1


FEATURES

Diodes: 3-60A Avalanche
With M8 x 37mm Battery Post
Without Trio
Customer provide Negative heat sink

REFERENCES

LESTER: 11262, 11425, 20505, 22990
TRANSPO: MER531
CARGO: 239788
VALEO: 2602613, 2650430, 593797
UTM: EV0513A, EV0513B

BXV409-B

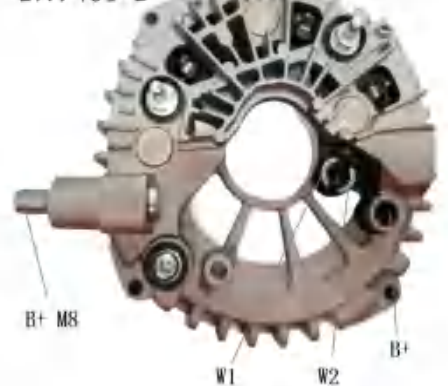

BXV409-B

FEATURES

Diodes: 6-60A Avalanche
With M8 x 45.6mm Battery Post
Without Trio
Customer provide Negative heat sink

REFERENCES

YY: 1280JW00

BXV410-B



BXV410-B

FEATURES

Diodes: 6-50A Avalanche
With M8 x 36mm Battery Post
Without Trio
Customer provide Negative heat sink

REFERENCES

Valeo: 593859
YY: 12805400/VAL212



BXV411-A



BXV411-A



BXV411-A

FEATURES

Diodes: 3-50A Ampere
With M6 x 36mm Battery Post
Bracket ID: 124.5mm
Bearing ID: 37.5mm
Mounting: W/O
Customer provide Negative heat sink

REFERENCES

LESTER: 11334, 20213, 24011, 24052
WAI: MER537
FIT UNIT: 332114, TG12C122

BXV502-A5



BXV502-A5



BXV502-A5


FEATURES

Diodes: 3-50A Avalanche
With M8 x 36mm Battery Post
Customer provide Negative heat sink

REFERENCES

WAI/TRANSPO: MER5225

BXV502-B

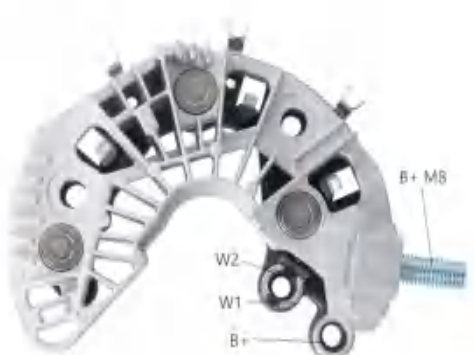

BXV502-B



BXV502-B

FEATURES

Diodes: 3-50A Avalanche
With M8 x 36mm Battery Post
Customer provide Negative heat sink

REFERENCES

LESTER: 13938
TRANSPO: MER5202
FIT UNIT: SG12S084

BXV502-C6



BXV502-C6



BXV502-C6

FEATURES

Diodes: 3-50A Ampere
With M8 x 36mm Battery Post
Customer provide Negative heat sink

BXV537



BXV537



BXV537

FEATURES

Diodes: 6–50A Ampere
Diameter OD: 115mm
With Capacitor
With Trio

BXV539



BXV539



BXV539

FEATURES

Diodes: 6–50A Ampere
Diameter OD: 115mm
With Capacitor
Without Trio

BXV554



BXV554



BXV554

FEATURES

Diodes: 6–50A Ampere
With Capacitor
With Trio
With 82 Ohm Resistor

BXV615



BXV615



BXV615

FEATURES

Diodes: 6–35A Ampere
Diameter OD: 115mm
With Capacitor
Without Trio



BXV713



BXV713



BXV713

FEATURES

Diodes: 6–35A Ampere
Diameter OD: 115mm
With Capacitor
With Trio

BXV747



BXV747



BXV747

FEATURES

Diodes: 6–35A Ampere
Diameter OD: 115mm
With Capacitor
With Trio

BXV815



BXV815



BXV815

FEATURES

Diodes: 12–35A Avalanche
With M8 × 50mm Battery Post

REFERENCES

VALEO: 2809019
TRANSPO:MER1920

BXV820-K1



BXV820-K1



BXV820-K1

FEATURES

Diodes: 6–35A Avalanche
With M8 × 33mm Battery Post
Customer provide Negative heat sink

REFERENCES

VALEO:FG12S015

BXV821-K



BXV821-K



BXV821-K

FEATURES

Diodes: 6-50A Avalanche
With M8 × 33mm Battery Post
Customer provide Negative heat sink

REFERENCES

VALEO:FG12S015

BXV822-B



BXV822-B



BXV822-B

FEATURES

Diodes: 6-35A Avalanche
With M8 × 41.5mm Battery Post
Customer provide Negative heat sink

REFERENCES

VALEO:FG15S024

BXV823



BXV823



BXV823

FEATURES

Diodes:6-35A Avalanche
With M6 × 36mm Battery Post
Customer provide Negative heat sink

REFERENCES

LESTER:11936
VALEO:FGN15S116
VOLTAG:AEV1162
UTM:EV1162A

BXV844



BXV844



BXV844

FEATURES

Diodes: 6-50A Avalanche
Diameter OD: 107mm
With M8 × 47.6mm Battery Post
With "W" Terminal
With Trio

REFERENCES

VALEO:593174
TRANSP:IPR823
MOBILETRON:RP-23



BXV844-F1



BXV844-F1




BXV844-F1

FEATURES

Diodes: 6–50A Avalanche
Diameter OD: 107mm
With M8 × 38mm Battery Post
Without “W” Terminal
With Trio

BXV845

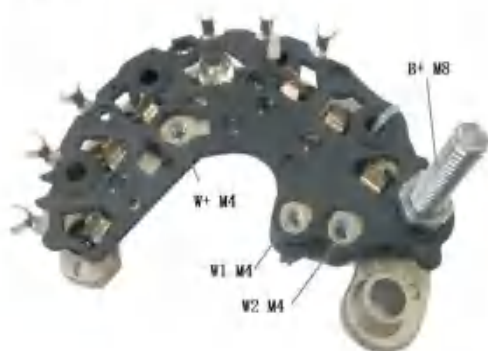

BXV845



BXV845

FEATURES

Diodes: 8–50A Avalanche
With M8 × 47.6mm
Without Trio

REFERENCES

TRANSPO:IPR850
MOBILETRON:RP-23

BXV846



BXV846



BXV846

FEATURES

Diodes: 6–50A Avalanche
With M8 × 47.6mm
With Trio

REFERENCES

TRANSPO:MER592
MOBILETRON:RP-15

BXV850-A



BXV850-A




BXV850-A

FEATURES

Diodes: 6–50A Ampere
With M8 × 38mm Battery Post
Customer provide Negative heat sink

REFERENCES

TRANSPO:MER5268
YY:12852610

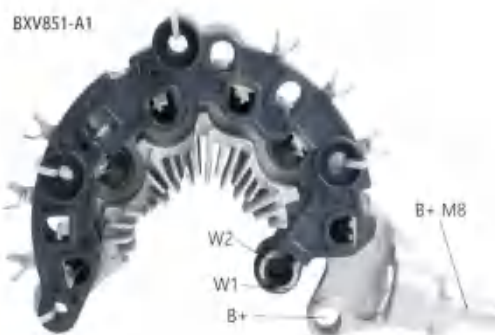

BXV851-A1

FEATURES

Diodes: 6-35A Avalanche
With M8 × 36mm Battery Post
Customer provide Negative heat sink

REFERENCES

AS:ARC3132
VOLTAG:AEV5219
UTM:EV5219B
ZAUFER:312N10772Z



BXV852-A

FEATURES

Diodes: 6-35A Avalanche
With M8 × 36mm Battery Post
Customer provide Negative heat sink

REFERENCES

VALEO:FG15S034



BXV860-A

FEATURES

Diodes: 6-50A Avalanche
With M8 × 36mm
Customer provide Negative heat sink

REFERENCES

VALEO:FG18S036



BXV861-T

FEATURES

Diodes: 6-50A Avalanche
With M8 × 36mm Battery Post
Customer provide Negative heat sink

REFERENCES

TRANSPO:MER530
YY:12850800



BX3000W-07



BX3000W-07



BX3000W-07


FEATURES

Diodes:6-50A Ampere
With M8 x 55mm Battery Post
With M6 x 42mm Ground Post
With (M5+M5) x 74mm "W" Post
With "W" Lead Wire 75mm

BX3000W-07B



BX3000W-07B

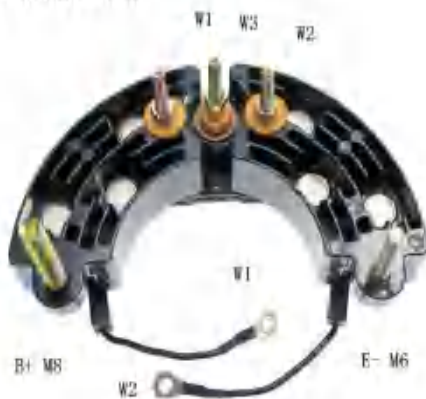

BX3000W-07B


FEATURES

Diodes:6-50A Avalanche
With M8 x 55mm Battery Post
With M6 x 42mm Ground Post
With (M5+M5) x 74mm "W" Post
With "W" Lead Wire 75mm
For 24V Alternators

BX3000W-07D



BX3000W-07D

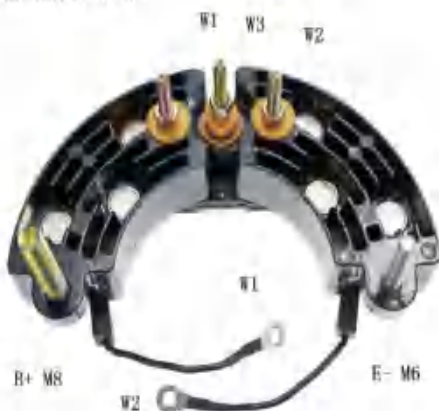

BX3000W-07D

FEATURES

Diodes:6-70A Avalanche
With M8 x 55mm Battery Post
With M6 x 42mm Ground Post
With (M5+M5) x 74mm "W" Post
With "W" Lead Wire 75mm


REFERENCES

Cargo 235357
KRAUF AET6255UW
Prestolite A011103549S
Transpo MR6255
UTM ET6255A

BX3000W-07E



BX3000W-07E

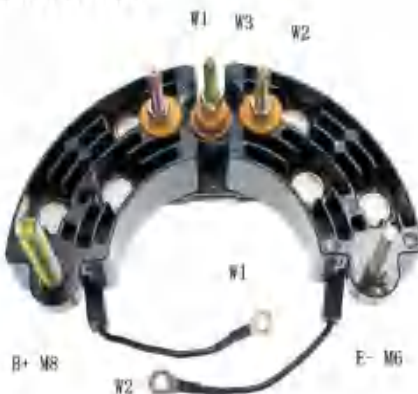


BX3000W-07E

FEATURES

Diodes:6-60A Ampere
With M8 x 55mm Battery Post
With M6 x 42mm Ground Post
With (M5+M5) x 74mm "W" Post
With "W" Lead Wire 75mm



BX3000W-09

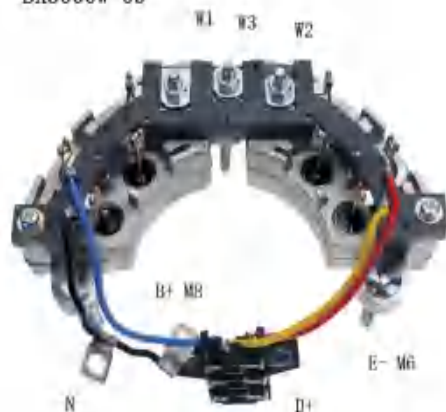

BX3000W-09



BX3000W-09

FEATURES

Diodes: 8-50A Avalanche
With M8 x 55mm Battery Post
With M6 x 42mm Ground Post
With (M5+M5) x 74mm "W" Post
With Trio
For 24V Alternators

BX3000W-09A4



BX3000W-09A4



BX3000W-09A4

FEATURES

Diodes: 8-50A Ampere
With M8 x 55mm Battery Post
With M6 x 42mm Ground Post
With (M5+M5) x 74mm "W" Post
With Trio

BX3000W-09A5



BX3000W-09A5



BX3000W-09A5

FEATURES

Diodes: 8-50A Ampere
With M8 x 48mm Battery Post
With M6 x 42mm Ground Post
With (M5+M5) x 74mm "W" Post
With Trio

BX3000W-09A8



BX3000W-09A8



BX3000W-09A8

FEATURES

Diodes: 8-80A Avalanche
With M8 x 48mm Battery Post
With M6 x 42mm Ground Post
With (M5+M5) x 74mm "W" Post
With Trio



BX3000W-09B3



BX3000W-09B3



BX3000W-09B3

FEATURES

Diodes: 8-50A Ampere
With M8 x 48mm Battery Post
With M6 x 42mm Ground Post
With (M5+M5) x 74mm "W" Post
With Trio

REFERENCES

KRAUF AEP1194AN, AEP1194BJ, AEP1194DS, AEP1194WC, AEP9194DS
Prestolite AVE21194200
Unipoint REC3004, REC3006
ZAUFER 312N10111Z

BX3000W-09B4



BX3000W-09B4



BX3000W-09B4

FEATURES

Diodes: 8-50A Avalanche
With M8 x 48mm Battery Post
With M6 x 42mm Ground Post
With (M5+M5) x 74mm "W" Post
With Trio
For 24V Alternators

BX4000W-02



BX4000W-02



BX4000W-02

FEATURES

Diodes: 12-50A Ampere
With M8 x 55mm Battery Post
With M6 x 66.7mm Ground Post
With M5 x 65mm "W" Post
With Capacitor
With "B+" Lead Wire 80mm
With "E-" Lead Wire 155mm

REFERENCES

8SC3110VC

BX4000W-02B



BX4000W-02B



BX4000W-02B

FEATURES

Diodes: 12-50A Ampere
With M8 x 55mm Battery Pos
With M6 x 66.7mm Ground Post
With M5 x 64mm "W" Post
With Capacitor
With "B+" Lead Wire 80mm
With "E-" Lead Wire 155mm

REFERENCES


KRAUF AEP8281AN, AEP8281DS
Prestolite 0142499T99
Transpo MR8281
Unipoint REC3005



BX4000W-05D



BX4000W-05D

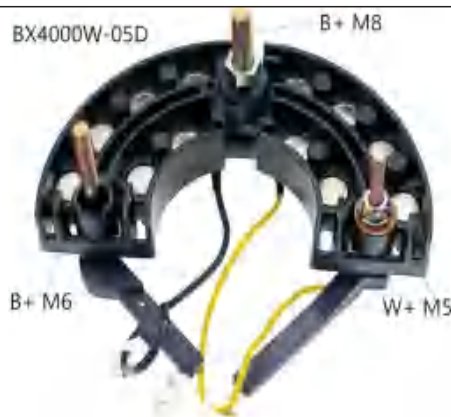

BX4000W-05D

FEATURES

Diodes:12-60A Avalanche
With M8 x 55mm Battery Post
With M6 x 66.7mm Ground Post
With M5 x 64mm "W" Post
With Capacitor
With "B+" Lead Wire 210mm
With "E-" Lead Wire 210mm
For 24V Alternators

BX4000W-06



BX4000W-06



BX4000W-06

FEATURES

Diodes:12-50A Ampere
With M8 x 55mm Battery Post
With M6 x 66.7mm Ground Post
With Capacitor
With "E-" Lead Wire 140mm

REFERENCES

KRAUF AET0030LK
Prestolite A051104922S
Unipoint REC3008
ZAUFER 312N10851Z

BX5000W-05A



BX5000W-05A




BX5000W-05A

FEATURES

Diodes:24-50A Ampere
With 1W15K Ohm Resistor
With 10D431K

BX7KW

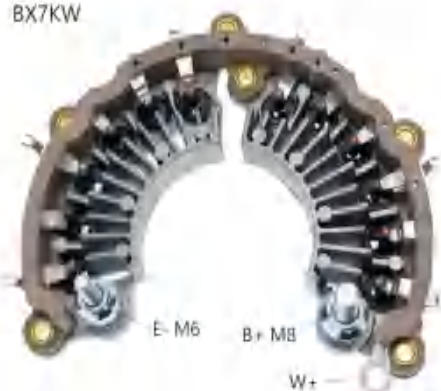

BX7KW



BX7KW

FEATURES

Diodes:12-50A Avalanche
With M8 x 53.2mm Battery Post
With (M6+M8) x 47.7mm Ground Post
For 24V Alternators

REFERENCES

KRAUF AEP1032BP,
AEP1032LP



BXDG7231

FEATURES

Diode: POSITIVE, 35 Ampere, 300V
Dim(mm): 9.7 OD
Lead(mm): 1.5Dia*22L

Original & X-REFERENCES

TRANSPO 7230

BXDG7230

FEATURES

Diode: NEGATIVE, 35 Ampere, 300V
Dim(mm): 9.7 OD
Lead(mm): 1.5Dia*22L

Original & X-REFERENCES

TRANSPO 7231

BXDG7221

FEATURES

Diode: POSITIVE, 35 Ampere, 300V
Dim(mm): 8.4 OD
Lead(mm): 1.5Dia*22L

Original & X-REFERENCES

TRANSPO 7220

BXDG7220

FEATURES

Diode: NEGATIVE, 35 Ampere, 300V
Dim(mm): 8.4 OD
Lead(mm): 1.5Dia*22L

Original & X-REFERENCES

TRANSPO 7221



BXDG8520

FEATURES

Diode: POSITIVE, 35 Ampere, 300V
Dim(mm): 8.8 OD 5/16"
Lead(mm): 1.5Dia*22L

Original & X-REFERENCES

MOBILETRON DD-1011
GARGO 131507
TRANSPO 8524

BXDG8521

FEATURES

Diode: NEGATIVE, 35 Ampere, 300V
Dim(mm): 8.8 OD 5/16"
Lead(mm): 1.5Dia*22L

Original & X-REFERENCES

MOBILETRON DD-1010
GARGO 131507
TRANSPO 8525



BXDG-F1

FEATURES

Diode: NEGATIVE, 70 Ampere, 400V
Stud: 1/4" -28

Original & X-REFERENCES

TRANSPO 1120-R

BXDG-F2

FEATURES

Diode: POSITIVE, 70 Ampere, 400V
Stud: 1/4" -28

Original & X-REFERENCES

GARGO 133495
TRANSPO 1120



BXDG8630

FEATURES

Diode: POSITIVE, 35 Ampere, 300V
Dim(mm): 11.75 OD
Lead(mm): 1.5Dia*20L

Original & X-REFERENCES

WAI 32-8105
WIEGEL DIOUN800024
TRANSPO 8630

BXDG8631

FEATURES

Diode: NEGATIVE, 35 Ampere, 300V
Dim(mm): 11.75 OD
Lead(mm): 1.5Dia*20L

Original & X-REFERENCES

WAI 32-8104
WIEGEL DIOUN800025
TRANSPO 8631

BXDG8635M

FEATURES

Diode: POSITIVE, 35 Ampere, 19-32V
Dim(mm): 11.75 OD
Lead(mm): 1.5Dia*20L

Original & X-REFERENCES

WAI 32-8105
WIEGEL DIOUN800024
TRANSPO 8630



BXDG8636M

FEATURES

Diode:NEGATIVE,35Ampere,19-32V
Dim(mm):11.75 OD
Lead(mm):1.5Dia*20L

Original & X-REFERENCES

WAI 32-8104
WIEGEL DIOUN800025
TRANSPO 8631

BXDG8650

FEATURES

Diode:POSITIVE,50Ampere,300V
Dim(mm):11.75 OD
Lead(mm):1.5Dia*20L

Original & X-REFERENCES

WAI 32-8105
WIEGEL DIOUN800024
TRANSPO 8660

BXDG8651

FEATURES

Diode:NEGATIVE,50Ampere,300V
Dim(mm):11.75 OD
Lead(mm):1.5Dia*20L

Original & X-REFERENCES

WAI 32-8104
WIEGEL DIOUN800025
TRANSPO 8661



BXDG25AP-XB

FEATURES

Diode:POSITIVE,25Ampere,400V
Dim(mm):12.80(1/2")OD
Lead(mm):1.5Dia*12.5L

BXDG25AN-XB

FEATURES

Diode:NEGATIVE,25Ampere,400V
Dim(mm):12.80(1/2")OD
Lead(mm):1.5Dia*12.5L



BXDG-L10119P

FEATURES

Diode:POSITIVE,35Ampere,300V
Dim(mm):10.1(1/2")OD
Lead(mm):1.35Dia*19L

BXDG-L10125N

FEATURES

Diode:NEGATIVE,35Ampere,300V
Dim(mm):10.1(1/2")OD
Lead(mm):1.35Dia*19L



BXDG-003P

FEATURES

Diode:POSITIVE,35Ampere,300V
Dim(mm):12.8(1/2")OD
Lead(mm):1.35Dia*19L

BXDG-D003N

FEATURES

Diode:NEGATIVE,35Ampere,300V
Dim(mm):12.8(1/2")OD
Lead(mm):1.35Dia*19L

BXDG-D00601

FEATURES

Diode:POSITIVE,50Ampere,300V
Dim(mm):12.8(1/2")OD
Lead(mm):1.5Dia*25L

BXDG-D00602

FEATURES

Diode:NEGATIVE,50Ampere,300V
Dim(mm):12.8(1/2")OD
Lead(mm):1.5Dia*25L



BXDG-D001

FEATURES

Diode: POSITIVE, 35 Ampere Buttn, 300V
Dim(mm): 12.8(1/2") OD
Lead(mm): 1.35 Dia * 25L

BXDG-D002

FEATURES

Diode: NEGATIVE, 50 Ampere Button, 300V
Dim(mm): 12.8(1/2") OD
Lead(mm): 1.35 Dia * 25L



BXDG-7980

FEATURES

Diode: POSITIVE, 35 Ampere, 300V
Dim(mm): 13.1(1/2") OD
Lead(mm): 1.35 Dia * 20L

BXDG-7981

FEATURES

Diode: NEGATIVE, 50 Ampere, 300V
Dim(mm): 13.1(1/2") OD
Lead(mm): 1.35 Dia * 20L



BXDG-CP35AP

FEATURES

Diode: POSITIVE, 35 Ampere, 300V
Dim(mm): 12.8(1/2") OD
Lead(mm): 1.35 Dia * 23L

BXDG-CP35AN

FEATURES

Diode: NEGATIVE, 35 Ampere, 300V
Dim(mm): 12.8(1/2") OD
Lead(mm): 1.35 Dia * 23L

BXDG-CP50AP

FEATURES

Diode: POSITIVE, 50 Ampere, 300V
Dim(mm): 12.8(1/2") OD
Lead(mm): 1.35 Dia * 23L

BXDG-CP50AN

FEATURES

Diode: NEGATIVE, 50 Ampere, 300V
Dim(mm): 12.8(1/2") OD
Lead(mm): 1.35 Dia * 23L

BXDG-CP60AP

FEATURES

Diode: POSITIVE, 60 Ampere, 300V
Dim(mm): 12.8(1/2") OD
Lead(mm): 1.35 Dia * 23L

BXDG-CP60AN

FEATURES

Diode: NEGATIVE, 60 Ampere, 300V
Dim(mm): 12.8(1/2") OD
Lead(mm): 1.35 Dia * 23L

BXDG-LB35AP

FEATURES

Diode: POSITIVE, 35 Avalanche 19-24V
Dim(mm): 12.8(1/2") OD
Lead(mm): 1.35 Dia * 23L

BXDG-LB35AN

FEATURES

Diode: NEGATIVE, 35 Avalanche 19-24V
Dim(mm): 12.8(1/2") OD
Lead(mm): 1.35 Dia * 23L

BXDG-LB50AP

FEATURES

Diode: POSITIVE, 50 Avalanche 19-24V
Dim(mm): 12.8(1/2") OD
Lead(mm): 1.35 Dia * 23L

BXDG-LB50AN

FEATURES

Diode: NEGATIVE, 50 Avalanche 19-24V
Dim(mm): 12.8(1/2") OD
Lead(mm): 1.35 Dia * 23L

BXDG-LB60AP

FEATURES

Diode: POSITIVE, 60 Avalanche 19-24V
Dim(mm): 12.8(1/2") OD
Lead(mm): 1.35 Dia * 23L

BXDG-LB60AN

FEATURES

Diode: NEGATIVE, 60 Avalanche 19-24V
Dim(mm): 12.8(1/2") OD
Lead(mm): 1.35 Dia * 23L

BXDG-LB70AP

FEATURES

Diode: POSITIVE, 70 Avalanche 19-24V
Dim(mm): 12.8(1/2") OD
Lead(mm): 1.35 Dia * 23L

BXDG-LB70AN

FEATURES

Diode: NEGATIVE, 70 Avalanche 19-24V
Dim(mm): 12.8(1/2") OD
Lead(mm): 1.35 Dia * 23L



<p>BXDG-LB80AP FEATURES Diode:POSITIVE,80Avalanche 19-24V Dim(mm):12.8(1/2")OD Lead(mm):1.35Dia*23L</p> <p>BXDG-LB80AN FEATURES Diode:NEGATIVE,80Avalanche 19-24V Dim(mm):12.8(1/2")OD Lead(mm):1.35Dia*23L</p> <p>BXDG-HB35AP FEATURES Diode:POSITIVE,35Avalanche 34-42V Dim(mm):12.8(1/2")OD Lead(mm):1.35Dia*23L</p> <p>BXDG-HB35AN FEATURES Diode:NEGATIVE,35Avalanche 34-42V Dim(mm):12.8(1/2")OD Lead(mm):1.35Dia*23L</p> <p>BXDG-HB50AP FEATURES Diode:POSITIVE,50Avalanche 34-42V Dim(mm):12.8(1/2")OD Lead(mm):1.35Dia*23L</p> <p>BXDG-HB50AN FEATURES Diode:NEGATIVE,50Avalanche 34-42V Dim(mm):12.8(1/2")OD Lead(mm):1.35Dia*23L</p> <p>BXDG-HB60AP FEATURES Diode:POSITIVE,60Avalanche 34-42V Dim(mm):12.8(1/2")OD Lead(mm):1.35Dia*23L</p> <p>BXDG-HB60AN FEATURES Diode:NEGATIVE,60Avalanche 34-42V Dim(mm):12.8(1/2")OD Lead(mm):1.35Dia*23L</p>	<p>BXDG-HB70AP FEATURES Diode:POSITIVE,70Avalanche 34-42V Dim(mm):12.8(1/2")OD Lead(mm):1.35Dia*23L</p> <p>BXDG-HB70AN FEATURES Diode:NEGATIVE,70Avalanche 34-42V Dim(mm):12.8(1/2")OD Lead(mm):1.35Dia*23L</p> <p>BXDG-HB80AP FEATURES Diode:POSITIVE,80Avalanche 34-42V Dim(mm):12.8(1/2")OD Lead(mm):1.35Dia*23L</p> <p>BXDG-HB80AN FEATURES Diode:NEGATIVE,80Avalanche 34-42V Dim(mm):12.8(1/2")OD Lead(mm):1.35Dia*23L</p>	
---	---	--