

YB3/YLB series




Single and three phase flameproof motor used for oil pump inside oiling machine



Product Specifications

Model	Rated power		Rated voltage (V)	Rated current (A)	Frequency (Hz)	Speed (r/min)		Eff (η %)	Power Factor (Cos Φ)	IS	TS	Tmax
	(kW)	(HP)				50Hz	60Hz			IN	TN	TN
YB38024	0.75	1	380	1.75	50/60	1390	1670	75	0.82	6.4	2.3	2.3
YB38034	0.9	1.2	380	2.3	50/60	1390	1670	76	0.82	6.4	2.3	2.3
YLB90L1-4	0.55	0.75	220	3.3	50/60	1420	1710	72	0.98	6	1.7	1.8
YLB90L2-4	0.75	1	220	4.6	50/60	1420	1710	76	0.98	6	1.7	1.8
YLB90L3-4	0.9	1.2	220	5.4	50/60	1420	1710	77	0.98	6	1.7	1.8

Installation Dimensions of YB3/YLB series Single & three phase flameproof motor

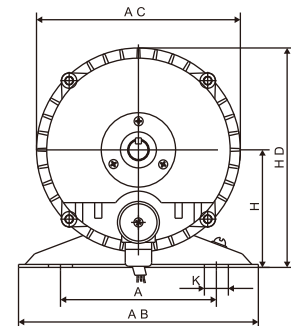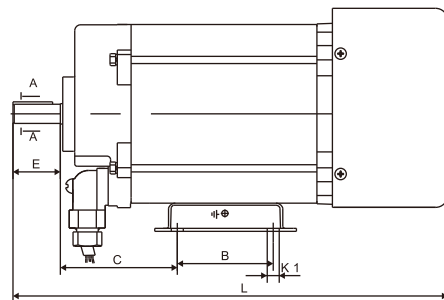

Model	H	A	B	C	D	E	F	G	K	K1	AB	AC	HD	L
YB380	78	150	80	85	16	45	5	13	30	9	190	152	152	322
YLB90	93	150	80	98	16	45	5	13	30	9	200	180	185	378