JIUGUANG

Jiuguang Lighting Technology Co., Ltd.

https://www.jg-ledlight.com/



CATALOG



JIUGUANG

ABOUT US

ABOUT US

Jiuguang Technology Co., Ltd.
Operating since 2008 with over 17 years' experience in the Auto lighting industry, as Jiuguang Lighting.Now we have been producing different LED lights for Vehicle.


Jiuguang Lighting Technology, we continue to consolidate our position in domestic and international markets. Producing LED light for Vehicle producers in the field of vehicles accessories, we offer the greatest opportunity with higher quality and long-term cost savings solutions, which are great advantages for auto manufacturers. Our products are widely used in Jeep, ATU/UTV, RV, SUV, TRUCK and other different models.

We have complete laboratories, equipped with the most advanced technology, mainly devoted to research and development, primarily focused on R&D and conducted product testing in almost 15 different factories. Today, we are working with an experienced team of engineers on R&D. Investing heavily in in Led light production line and spent a lot of time and energy to become a leading manufacturer of vehicle accessories in China. Of course, our products have passed CE, RoHS, E-mark, ISO9001, FCC certification, and we are constantly looking for more energy-saving, more environmentally friendly and more efficient ways.

We have a total plant of 35,000 square meters in Guangzhou. The company has 487 employees, including 32 R&D team. At the same time, we have advanced production equipment, and the monthly production capacity can reach 100,000 cups. Today, we export to 97 countries at home and abroad, serving customers up to 3000 +.

Choose our lights will bring you a distinct vehicle.



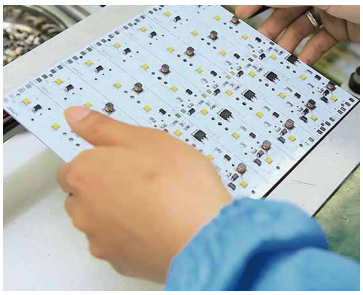



QUALITY

WELL-ESTABLISHED
QUALITY AND PROCESS CONTROL SYSTEM




RAW MATERIAL TEST
Full inspection of raw materials & electronic components




AGING TEST
12V 24V alternating test




AIR TIGHTNESS TEST
Vacuum high pressure
Waterproof | Air tightness test

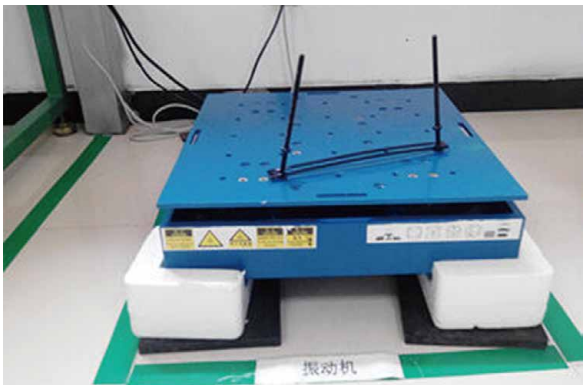

VIBRATION TEST
Fastener stability test

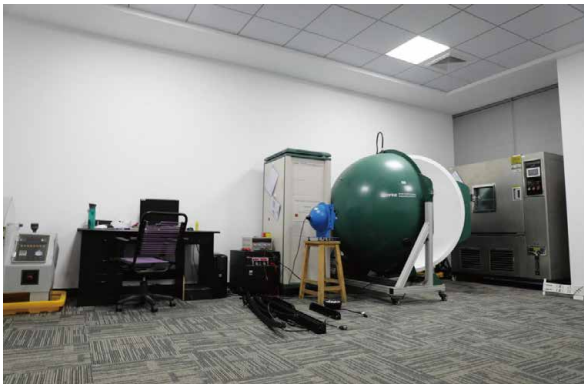

PERFORMANCE TEST
We have experienced R&D team and in house labarory. Lamp are fully compliance with Europe and America regulations and standards.

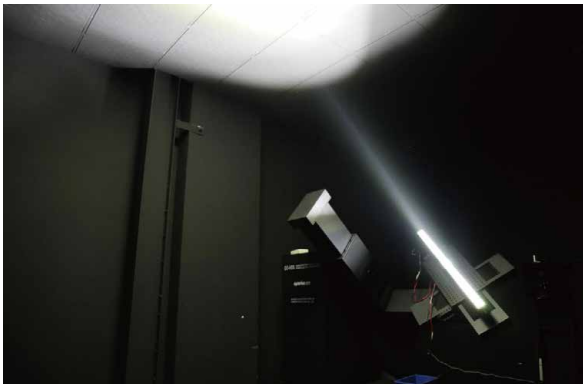

EMC TEST
Fully closed EMC test room ensures the highest accuracy of EMC test.

What We Offer

CUSTOMIZED YOUR PROJECT & BRANDS




Project Develop

Light Customization



Screen Print logo

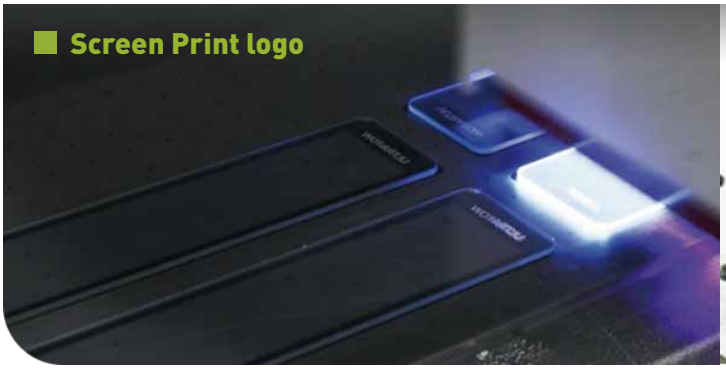


Laser Print logo




What We Offer

OUR SERVICE

Sample Order







Big Stock






Test Report

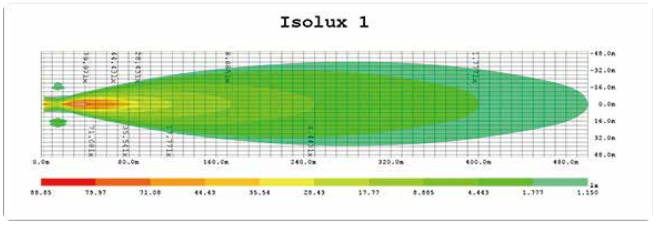


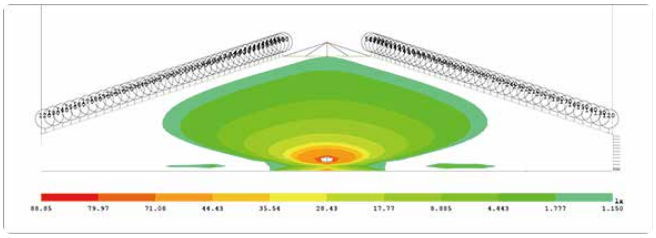

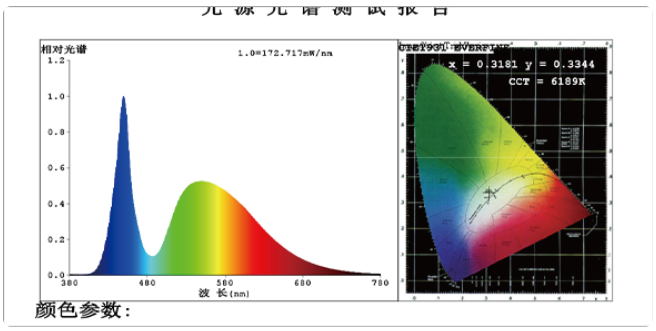



Certification Approve

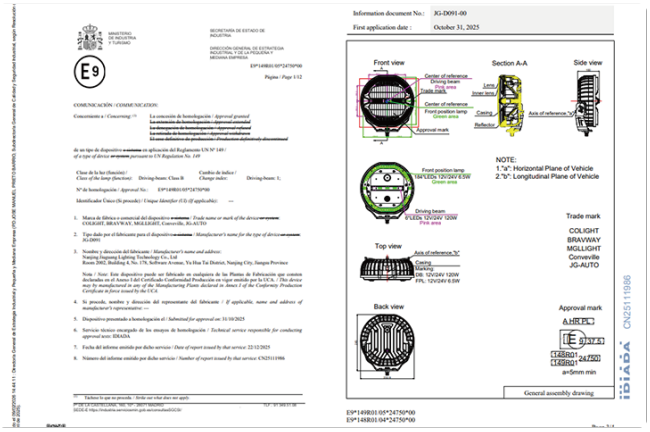



PRODUCT CONTENTS

- DRIVING LIGHTS - 01
- POD LIGHTS - 15
- LED LIGHT BAR - 39
- GRILLE LIGHTS - 50
- MOTORCYCLE LIGHT - 53
- LED WORK LAMP - 63
- CONTROL PANEL - 74
- BRACKETS & WIRING HARNESSES - 83
- UTV ADAPT LIGHTS - 86
- FOG LIGHT - 95

EMARK DRIVING LIGHT

JIUGUANG

JG-D065




6.5" / 75W / 1LUX@517M / IP68&IP69K / 80000H	
Chip	Osram P8 LEDs + Two-color LEDs
Raw Lumens	13288LM/Pair
Operating Voltage	10-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	312 Stainless Steel
Beam	Combo Driving Light (6000K)
DRL	White DRL + Amber PO Light















Certification

ECE R148 ECE R149


OSRAM P8



Cover





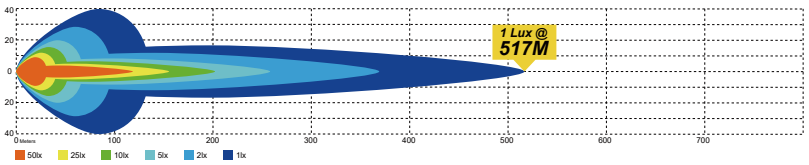


JG-D065-PRO

NEW




6.5" / 75W / 1LUX@517M / IP68&IP69K / 80000H	
Chip	Osram P8 LEDs + Two-color LEDs
Raw Lumens	13288LM/Pair
Operating Voltage	10-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	312 Stainless Steel
Beam	Combo Driving Light (6000K)
DRL	White Welcome Light
	3 Modes White Dynamic + 3 Modes Amber Dynamic






W&A Dynamic Startup Scan





W&A Dynamic Pulse Sweeping



W&A Color-Chasing Mode







Certification


ECE R148 ECE R149

IP68&IP69K



Wire harness



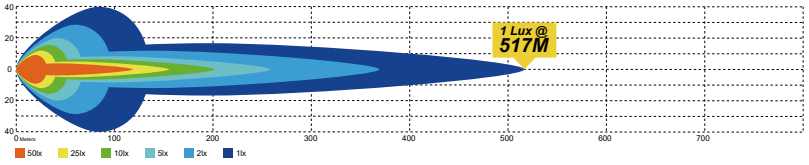


JG-D065-9



9" / 104W / 1LUX@646M / IP68&IP69K / 80000H	
Chip	Osram P9 LEDs + Two-color LEDs
Raw Lumens	22880LM/Pair
Operating Voltage	10-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Reinforced bracket
Beam	Combo Driving Light (6000K)
DRL	White Dynamic Start & Amber Static

White Dynamic Start & Amber Static







Certification


ECE R148 ECE R149

IP68&IP69K



Cover



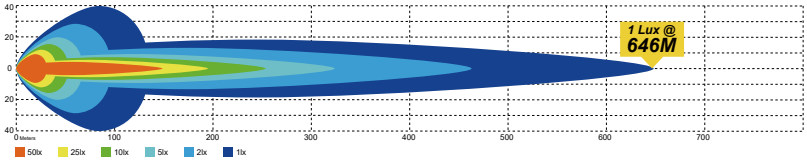


JG-D065-PRO-9

NEW



9" / 104W / 1LUX@646M / IP68&IP69K / 80000H	
Chip	Osram P9 LEDs + Two-color LEDs
Raw Lumens	22880LM/Pair
Operating Voltage	10-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Reinforced bracket
Beam	Combo Driving Light (6000K)
DRL	White Welcome Light
	3 Modes White Dynamic + 3 Modes Amber Dynamic







W&A Dynamic Startup Scan



W&A Dynamic Pulse Sweeping



W&A Color-Chasing Mode





Certification


ECE R148 ECE R149

IP68&IP69K



Wire harness



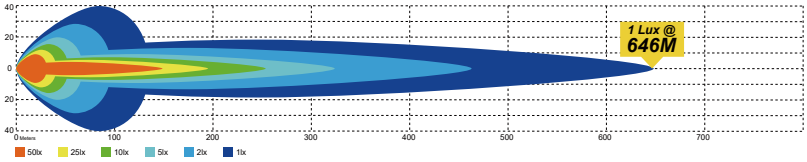



LED PODS & LINKABLE KIT

JIUGUANG

JG-96-D065-5




E-MARK ECE R148 ECE R149 ECE R10



Size	LEDs	Power	Lumen	1LUX	CCT	Voltage	Beam Pattern	DRL	Lifespan	Waterproof
Pair	Osram P8 * 20PCS	100W	11000LM	360M	6000K	9-32V DC	Driving Beam	White & Amber Dynamic Start 4-Dynamic Cycles	30000H	IP68
22 Inch	Osram P8 * 40PCS	200W	22000LM	600M						
32 Inch	Osram P8 * 60PCS	300W	33000LM	700M						
42 Inch	Osram P8 * 80PCS	400W	44000LM	900M						
52 Inch	Osram P8 * 100PCS	500W	55000LM	1038M						
Hosing Material:Die-cast Aluminum Alloy / Bracket Connect: Dovetail Interlocking										

W&A Dynamic Start + 4-Dynamic Cycles

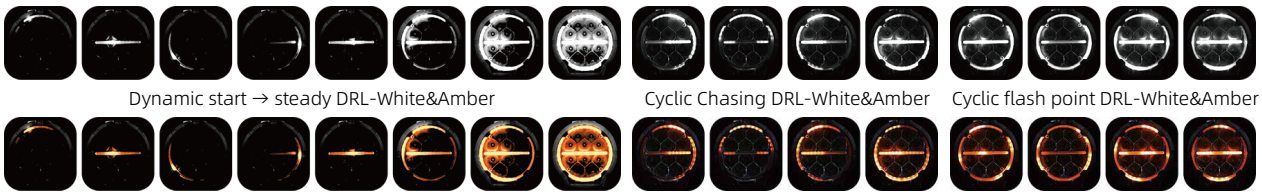


Dynamic start → steady DRL-White&Amber | Cyclic Chasing DRL-White&Amber | Cyclic flash point DRL-White&Amber

Pair / Modular Light Bar



Horizontal Flat Beam




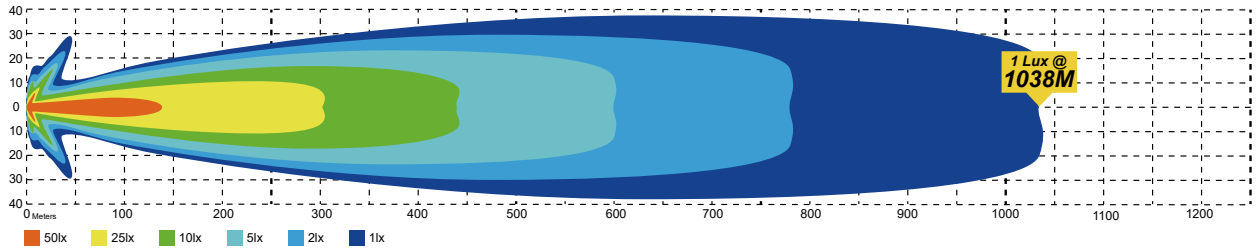

JG-D091-6





9" / 120W / 1LUX@680M / IP68&IP69K / 80000H	
Chip	High Power 20W*6 LEDs + Two-color LEDs
Raw Lumens	9600LM
Operating Voltage	10-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	312 Stainless Steel
Beam	Hi/Lo Driving Beam, White DRL+Amber Position Light
Signal Function	Chasing
Color Temperature	6000K

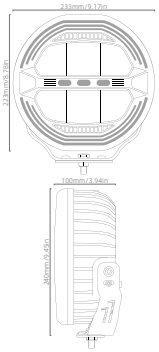

Quality Detail **Anti-glare reflector** **3D Light Structure**



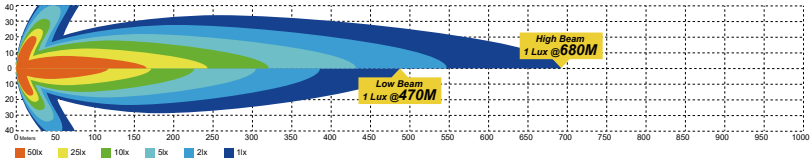


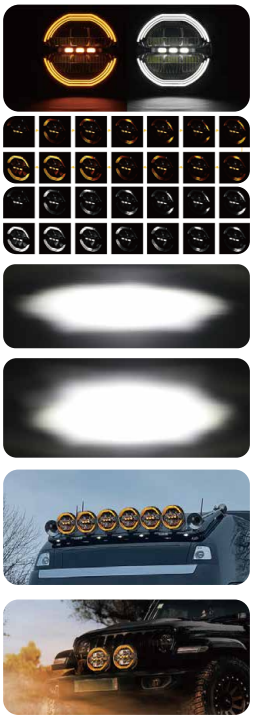


JG-D091-6-7in




7" / 86W / 1LUX@580M / IP68&IP69K / 80000H	
Chip	High Power 10W*6 LEDs + Two-color LEDs
Raw Lumens	8800LM
Operating Voltage	10-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	312 Stainless Steel
Beam	Spot Beam
DRL	White& Amber Dynamic
Color Temperature	6000K

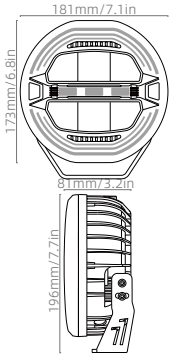

Quality Detail **Anti-glare reflector** **3D Light Structure**

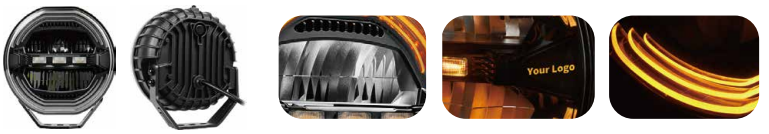

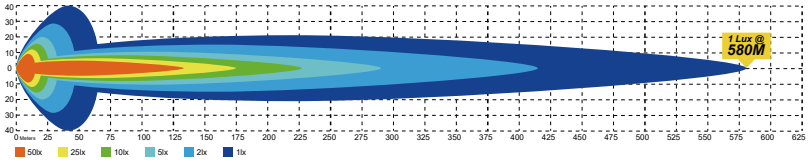




JG-901V-CG-16-ZH




7" / 80W / 1LUX@500M / IP68 / 50000H	
Chip	16pcs *5W
Raw lumens	8800LM
Operating Voltage	10-30V
Housing material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Driving Beam, White/Amber DRL With Chasing
Color temperature	5700K
Lens	PC Lens



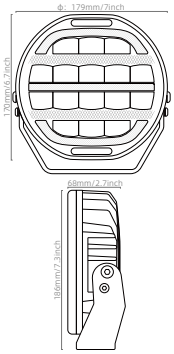

Super High Quality



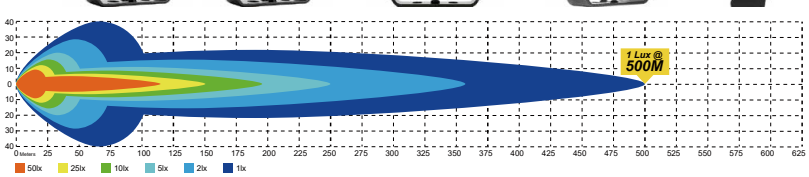


JG-901V-CG-16-ZH-9




9" / 100W / 1LUX@600M / IP68 / 50000H	
Chip	20pcs *5W
Raw lumens	11000LM
Operating Voltage	10-30V
Housing material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Driving Beam, White/Amber DRL With Chasing
Color temperature	5700K
Lens	PC Lens



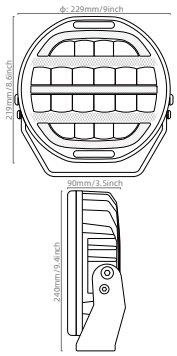

Super High Quality




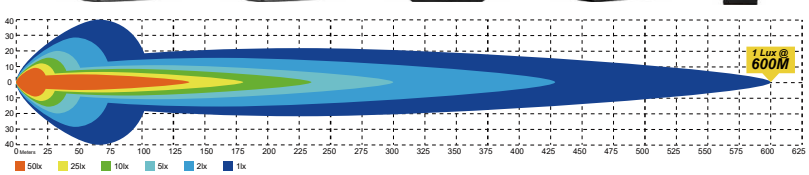


JG-D959-8




9" / 90W / 1LUX@660M / IP68&IP69K / 80000H	
Chip	Osram 10W*8 LEDs + Two-color LEDs
Raw Lumens	7200LM
Operating Voltage	10-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	312 Stainless Steel
Beam	Driving Beam, White DRL, Amber Po Light
Signal Function	Chasing
Color Temperature	6000K

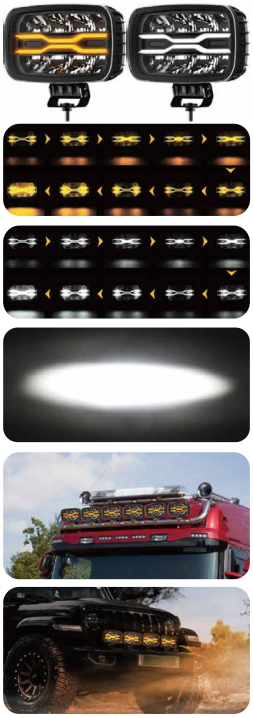

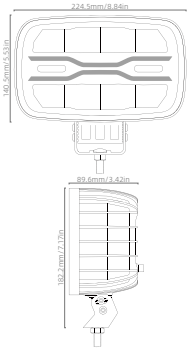

Quality Detail **Anti-glare reflector** **3D Light Structure**



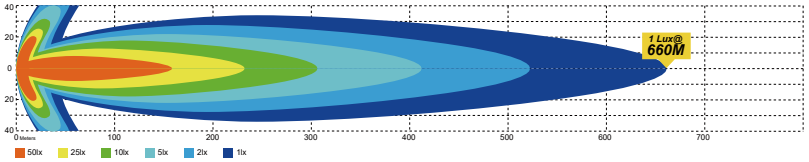


JG-D959-10

NEW



10" / 102W / 1LUX@650M / IP68&IP69K / 80000H	
Chip	10Pcs *SMD
Raw Lumens	16320LM/Pair
Operating Voltage	10-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Reinforced bracket
Beam	Spot Driving Beam
DRL	White&Amber DRL Dynamic
CCT	6000K






Anti-glare reflector **Mechanical Appearance Design** **3D Light Structure**





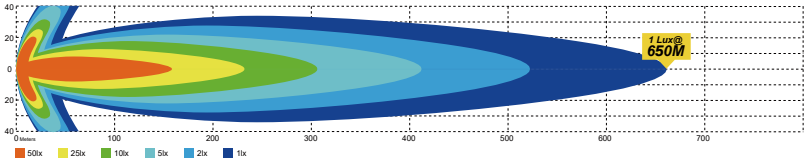

JG-D090-C



9" / 140W / 1LUX@630M / IP68&IP69K / 80000H	
Chip	Osram P9 LEDs + Two-color LEDs
Raw Lumens	29580lm pair
Operating Voltage	10-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	High Beam+ Low Beam + DRL
DRL	White& Amber
Color Temperature	6500K


E-MARK ECE R148 ECE R149















Quality Detail



Cover



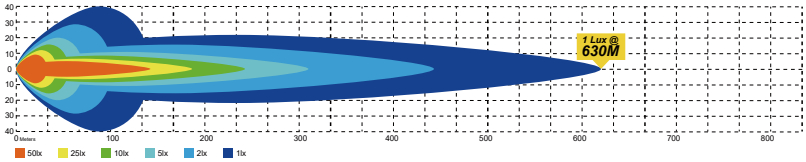

JG-D090-C-7



7" / 70W / 1LUX@488M / IP68&IP69K / 80000H	
Chip	Osram P8 LEDs + Two-color LEDs
Raw Lumens	17280lm pair
Operating Voltage	10-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	High Beam+ Low Beam + DRL
DRL	White& Amber
Color Temperature	6500K


E-MARK ECE R148 ECE R149














Quality Detail



Cover





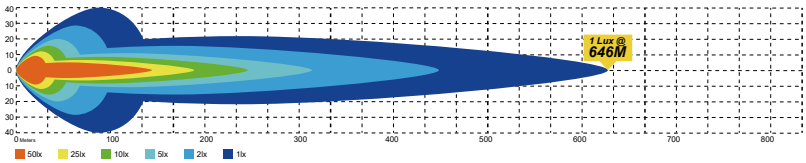


JG-D006-S



9" / 166W / 1LUX@1084M / IP68 / 80000H	
Chip	Osram P8 LEDs
Raw Lumens	19650LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Spot Driving Beam, White Amber DRL
Color Temperature	6000K
Lens	PC Lens






Super High Quality






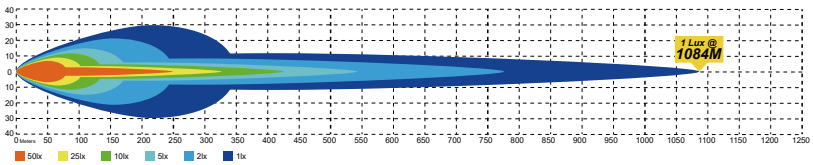


JG-D006-C



9" / 166W / 1LUX@542M / IP68 / 80000H	
Chip	Osram P8 LEDs
Raw Lumens	19650LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Combo Driving Beam, White Amber DRL
Color Temperature	6000K
Lens	PC Lens






Super High Quality






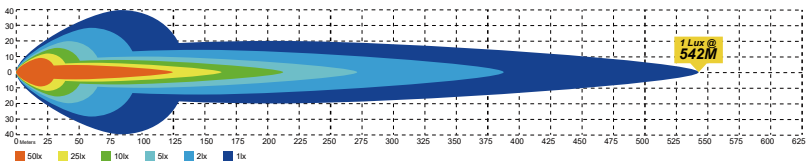


JG-901Y-12-7



7" / 62W / 1LUX@260M / IP68 / 50000H	
Chip	12pcs *5W P8 Osram+ 3030
Raw lumens	13640LM Pair
Operating Voltage	10-30V
Housing material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Driving Beam, White Amber DRL
Color temperature	6000K
Lens	PC Lens






White Amber DRL with Strobe&Flowing Effects







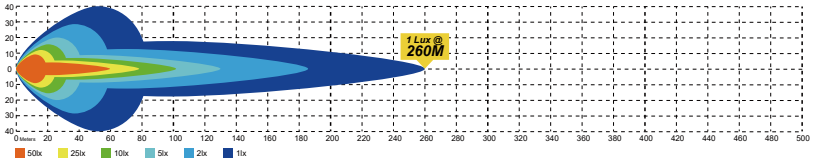


JG-901Y-20-9



9" / 88W / 1LUX@356M / IP68 / 50000H	
Chip	20pcs *5W P8 Osram+ 3030
Raw lumens	19360LM Pair
Operating Voltage	10-30V
Housing material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Driving Beam, White Amber DRL
Color temperature	6000K
Lens	PC Lens






White Amber DRL with Strobe&Flowing Effects





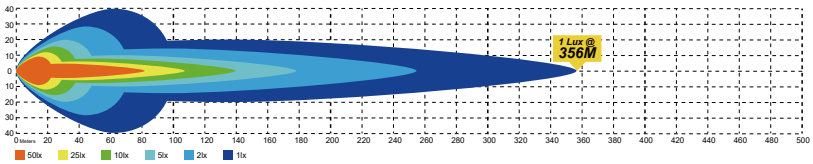


JG-D085




8.5" / 150W / 1LUX@953M / IP68 / 80000H	
Chip	Osram LEDs
Raw Lumens	16600LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Spot Driving Beam
Color Temperature	5700K
Lens	PC Lens












Super High Quality




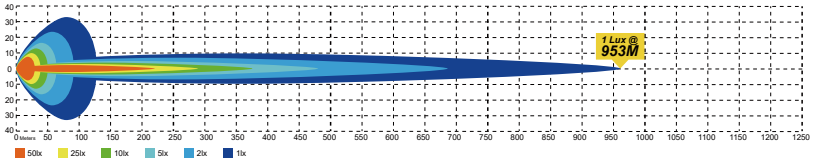

JG-D070





7" / 90W / 1LUX@770M / IP68 / 80000H	
Chip	Osram LEDs
Raw Lumens	12000LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Spot Driving Beam
Color Temperature	5700K
Lens	PC Lens












Heavy Duty Design



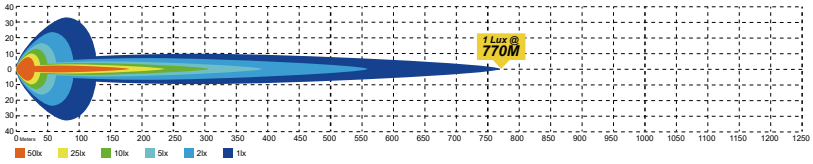

JG-D001




9" / 192W / 1LUX@881M / IP68 / 80000H	
Chip	Osram CRDP-SH
Raw Lumens	21120LM
Operating Voltage	10-30V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Driving Beam+DRL
Color Temperature	6500K
Lens	PC Lens












7inch 9inch DRL White Amber Customization **Cover**



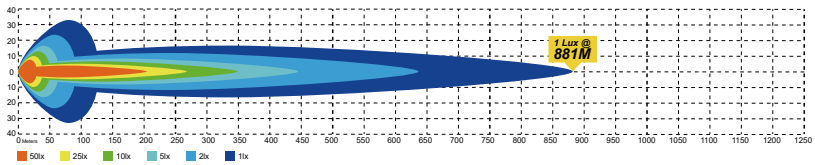

JG-947



7" / 110W / 1LUX@591M / IP68 / 80000H	
Chip	Osram
Raw lumens	9500LM
Operating Voltage	10-30V
Housing material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Driving Beam+DRL
Color temperature	5700K / 3500K
Lens	PC Lens









Clear / Yellow Lens | DRL White Amber Customization **Cover**



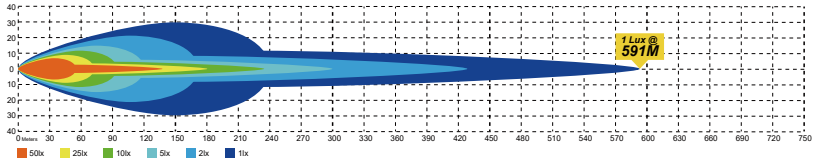







JG-947D




7" / 105W / 1LUX@1100M / IP68 / 50000H	
Chip	8pcs *10W P9 Osram+ 1pc*25W
Raw lumens	11550LM
Operating Voltage	10-30V
Housing material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Driving Beam, White/Amber DRL With Chasing
Color temperature	5700K
Lens	PC Lens









Super High Quality





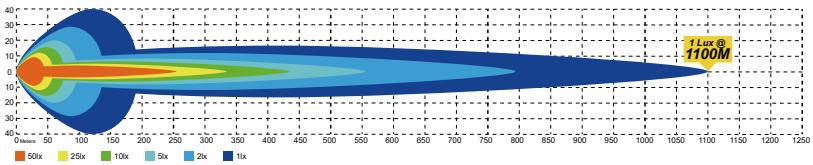


JG-D003-R



9" 7" / 135W 115W / 1LUX@751M / IP68 / 80000H	
Chip	Osram P8 + KW3
Raw Lumens	37776LM / 33332LM
Operating Voltage	10-30V DC
Housing Material	ADC12 Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Combo Driving Beam
Color Temperature	6500K
Lens	PC Lens






9inch **7inch** **DT Interface** **Cover**



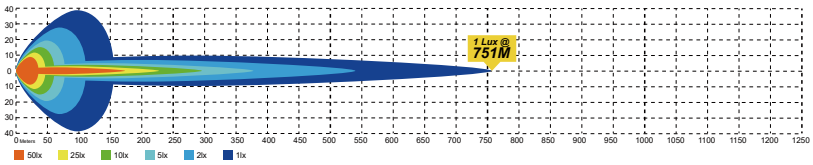

JG-909





7" / 87W / IP67 / 30000H	
Chip	Cree LEDs
Raw Lumens	8800LM
Operating Voltage	10-30V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Combo+180°Side Light+Amber/White DRL
Color Temperature	6500K / 3500K

3''/5''/7''/9'' Optional / Two-color Optional

JG-D004







9" / 150W / 1LUX@780M / IP68 / 80000H	
Chip	Osram P8
Raw Lumens	13000LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Driving Beam
Color Temperature	5700K / 3500K

Silver / Grey Cup Option

JG-901W-12-SL







7''/ 9'' /60W / 120W/ Strobe DRL / 50000H	
Chip	12pcs*5W P8 / 12pcs *10W P9
Raw Lumens	6600LM/ 13200LM
Operating Voltage	10-30V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Driving Beam+White/Amber DRL
Color Temperature	5700K
Certification	E-mark

JG-901V-10








7''/ 9'' /100W/ Chasing DRL / 50000H	
Chip	10pcs*10W P9
Raw Lumens	11000LM
Operating Voltage	10-30V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Driving Beam+White/Amber DRL
Color Temperature	5700K
Certification	E-mark

JG-958-8FG-WY



10" / 60W / White Amber DRL / IP68	
Chip	5W P7
Raw Lumens	8400LM/Pair
Operating Voltage	10-30V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Driving Beam+White & Amber DRL Dynamic
Color Temperature	6000K

JG-958V

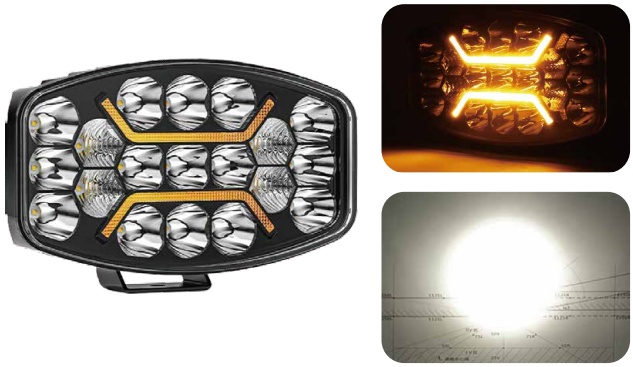

10" / 60W/ Amber DRL/ IP68	
Chip	5W P7
Raw Lumens	6600LM
Operating Voltage	10-30V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Driving Beam + Amber DRL
Color Temperature	6000K

JG-958L



10" / 60W/ Amber DRL/ IP68	
Chip	12pcs*5W P8
Raw Lumens	6600LM
Operating Voltage	10-30V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Driving Beam + Amber DRL
Color Temperature	6000K

JG-958A




10" / 60W/ Amber DRL/ IP68	
Chip	12pcs*5W P8
Raw Lumens	6600LM
Operating Voltage	10-30V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Driving Beam + Amber DRL
Color Temperature	6000K


JG-954Z-PRO




5" / 76W / 1LUX@450M / IP68 / 80000H	
Chip	Luminus*4
Raw Lumens	17600LM Pair
Operating Voltage	12-24V DC
Housing Material	ADC12 Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam(CCT)	Spot Driving Beam 6000K
DRL	14 Modes Dynamic White&Amber DRL
Wire Harness & Silver Black Bezel Pack & Black +Yellow Cover	

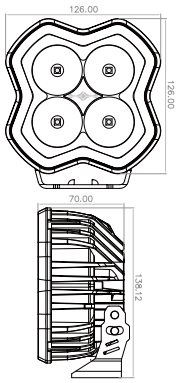

White/Amber DRL - With 7 dynamic modes

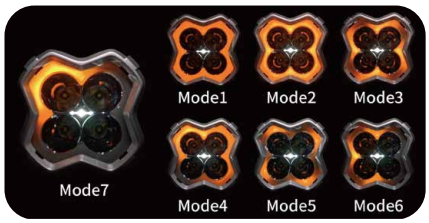

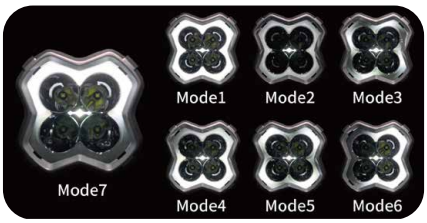



Silver Black Bezel Pack




4 Pin DT Wire Harness






New modular bracket—even more stable.

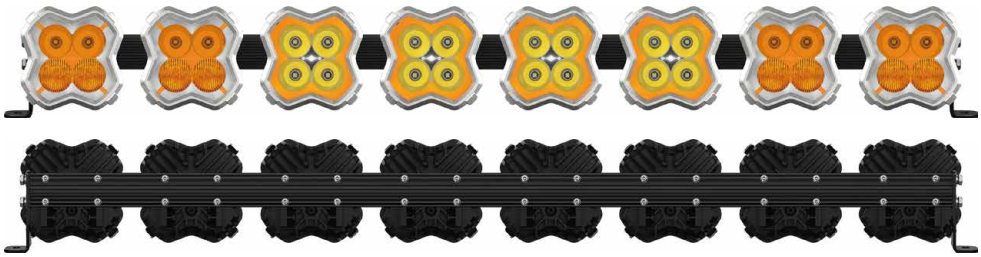



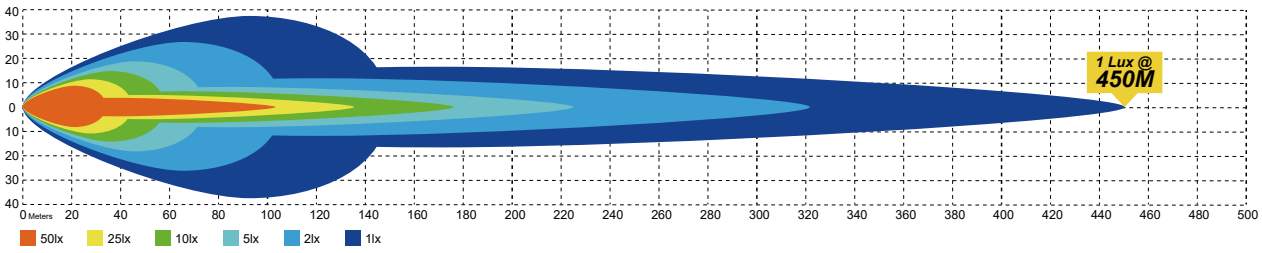


JG-954Z-3-PRO



4" / 45W / 1LUX@450M / IP68 / 80000H	
Chip	Luminus*3
Raw Lumens	9900LM Pair
Operating Voltage	12-24V DC
Housing Material	ADC12 Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam(CCT)	Spot Driving Beam 6000K
DRL	14 Modes Dynamic White&Amber DRL
Wire Harness & Silver Black Bezel Pack & Black +Yellow Cover	




White/Amber DRL
- With 7 dynamic modes















Silver Black Bezel Pack



4 Pin DT Wire Harness




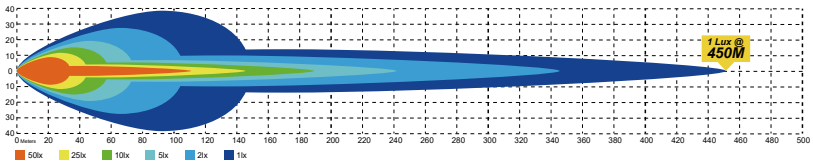

JG-954Z-2-PRO



4.6" / 36W /1LUX@450M /IP68 /80000H	
Chip	Luminus*2
Raw Lumens	7920LM Pair
Operating Voltage	12-24V DC
Housing Material	ADC12 Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam(CCT)	Spot Driving Beam 6000K
DRL	14 Modes Dynamic White&Amber DRL
Wire Harness & Silver Black Bezel Pack & Black +Yellow Cover	




White/Amber DRL
- With 7 dynamic modes















Silver Black Bezel Pack



4 Pin DT Wire Harness



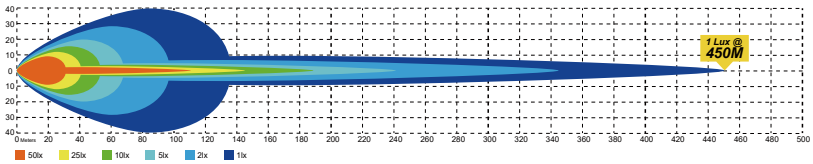

JG-F993



3" / 35W / 1LUX@236M / IP68&IP69K / 80000H	
Chip	Osram P8
Raw Lumens	4480LM
Operating Voltage	9-30V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Brackets
Beam	Driving Beam+Side Shooter+DRL+Backlight
Color Temperature	6500K
Blue / Red / Yellow / Black 4-color Bezel Optional	








3"/5" Optional


Four-color Bezel Optional

Cover

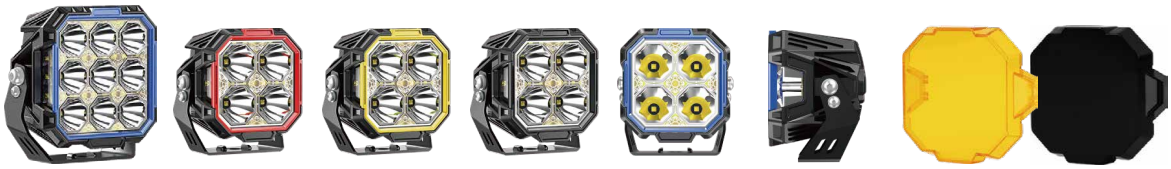

3 Inch LED Pod Light For Truck UTV 4X4 Bumper A-pillar Overhead



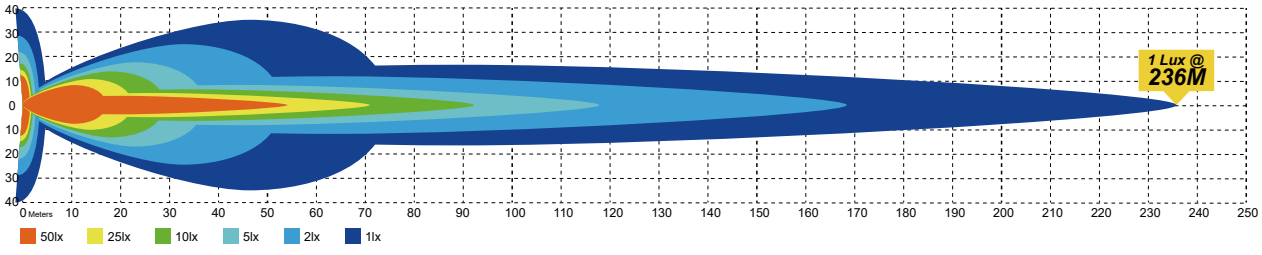

F996-4



4" / 45W / 1LUX@476M&676M / IP69K / 50000H	
Chip	Osram P8
Raw Lumens	4480LM
Operating Voltage	9-30V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Stainless Steel / Iron Bracket
Beam	Driving Beam+Sider Shooter+DRL
Color Temperature	6500K / 3500K
Germany Imported Circuit Design	






1Lux@676m



1Lux@476m






Clear / Yellow Lens, Round / Square Shape



Cover



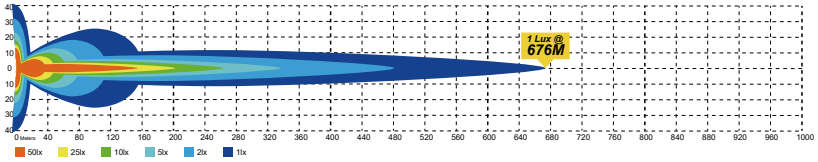


F996-5



5" / 80W / 1LUX@598M&756M / IP69K / 50000H	
Chip	Osram P8
Raw Lumens	8820LM
Operating Voltage	9-30V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Stainless Steel / Iron Bracket
Beam	Driving Beam+Sider Shooter+DRL
Color Temperature	6500K / 3500K
Germany Imported Circuit Design	






1Lux@756m



1Lux@598m






Clear / Yellow Lens, Round / Square Shape



Cover



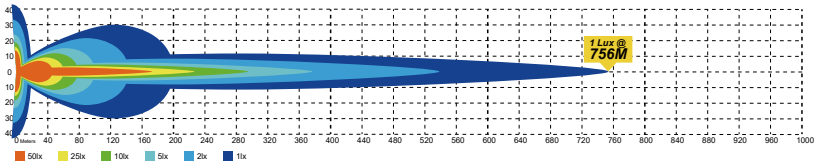

F996DZ-3



3" / 74W / 1LUX@231M / IP68 / 50000H	
Chip	Osram P8
Raw Lumens	5920LM/Pair
Operating Voltage	9-30V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Driving Beam+Sider Shooter+DRL
Color Temperature	6000K
Germany Imported Circuit Design	










Clear / Yellow Lens, Waterproof Wiring Harness **Cover**







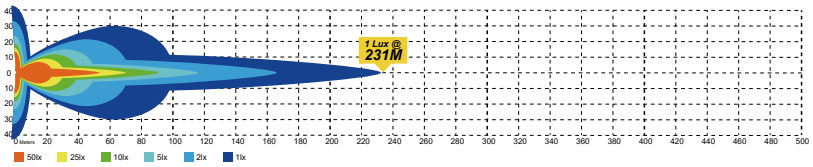

F996DZ-5



5" / 122W / 1LUX@380M / IP68 / 50000H	
Chip	Osram P8
Raw Lumens	9760LM/Pair
Operating Voltage	9-30V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Driving Beam+Sider Shooter+DRL
Color Temperature	6000K
Germany Imported Circuit Design	










Clear / Yellow Lens, Waterproof Wiring Harness **Cover**








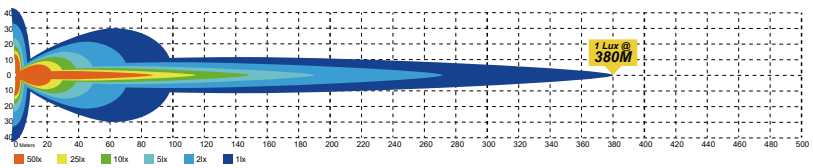


JG-D046-9inch




9" / 240W / 270° Angel / 1LUX@630M / IP68	
Chip	Osram P8 LEDs
Raw Lumens	34800LM/Pair
Operating Voltage	9-32V DC
Housing Material	ADC12 Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Spot Driving Beam + Side Shooter
DRL Color	Amber
Color Temperature	6500K / 3500K





Clear / Yellow Lens Cover DT Wire Harness



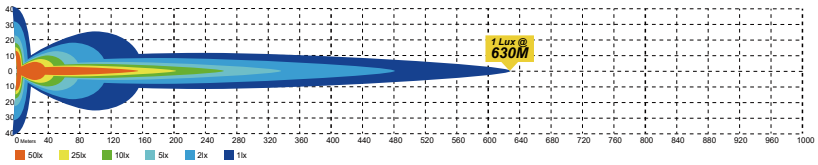









JG-D046-7inch




7" / 192W / 270° Angel / 1LUX@517M / IP68	
Chip	Osram P8 LEDs
Raw Lumens	31900LM/Pair
Operating Voltage	9-32V DC
Housing Material	ADC12 Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Spot Driving Beam + Side Shooter
DRL Color	Amber
Color Temperature	6500K / 3500K





Clear / Yellow Lens Cover DT Wire Harness



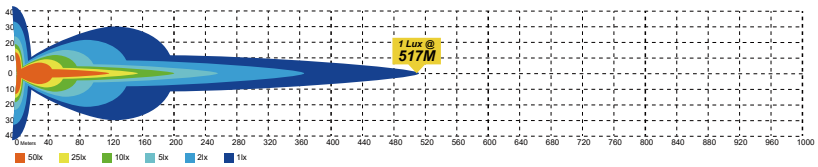









JG-D046-5inch



5" / 120W / 270° Angel / 1LUX@400M / IP68	
Chip	Osram P7 LEDs
Raw Lumens	17500LM/Pair
Operating Voltage	9-32V DC
Housing Material	ADC12 Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Spot Driving Beam + Side Shooter
DRL Color	Amber
Color Temperature	6500K / 3500K





Clear / Yellow Lens




Cover



DT Wire Harness



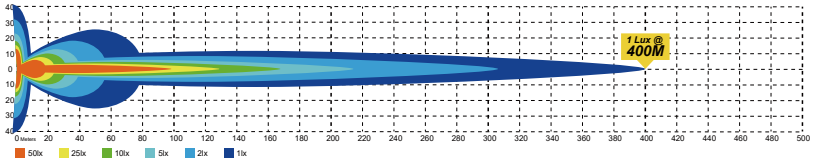













JG-D046-3inch



3" / 54W / 270° Angel / 1LUX@230M / IP68	
Chip	Osram P7 LEDs
Raw Lumens	8700LM/Pair
Operating Voltage	9-32V DC
Housing Material	ADC12 Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Spot Driving Beam + Side Shooter
DRL Color	Amber
Color Temperature	6500K / 3500K





Clear / Yellow Lens




Cover



DT Wire Harness



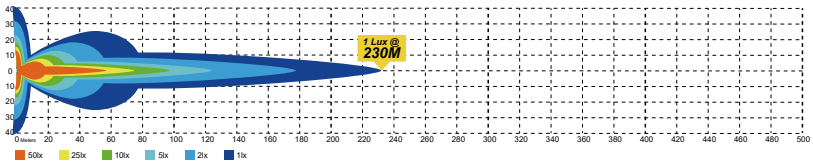









JG-954M-H





5" / 106W / 1LUX@450M / IP68 / 50000H	
Chip	Osram P8 LEDs
Raw Lumens	18000LM
Operating Voltage	9-30V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Driving Beam + Amber Backlit
Color Temperature	6000K
Germany Imported Circuit Design	












Mechanical Design **Waterproof Wiring Harness** **Cover**



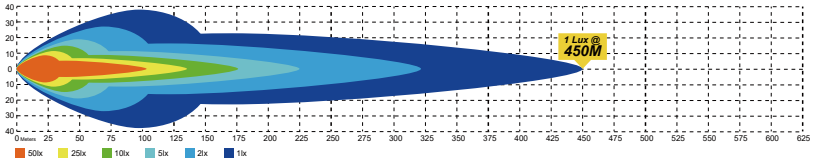

JG-954M-D





5" / 126W / 1LUX@700M / IP68 / 50000H	
Chip	Osram P8 LEDs
Raw Lumens	20600LM
Operating Voltage	9-30V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Driving Beam + Amber Backlit
Color Temperature	6000K
Germany Imported Circuit Design	












Mechanical Design **Waterproof Wiring Harness** **Cover**



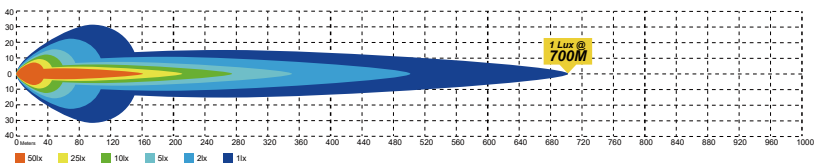


JG-L050



5" / 50W / 1LUX@410M / IP68 / 80000H	
Chip	Osram P9 LEDs+Laser Chip
Raw Lumens	13000LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Laser + Spot Driving Beam
Color Temperature	6500K / 3500K
Lens	PC Lens









Three-color Bezel Replaceable



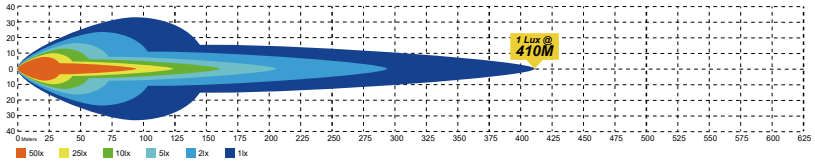



JG-926Z




3" / 25W / 1LUX@280M / IP68 / 50000H	
Chip	Osram P9 LEDs
Raw Lumens	5500L Pair
Operating Voltage	9-30V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Stainless steel bracket
Beam	Spot/ Flood/ Combo Beam
Color Temperature	6000K/ 3500K







6 Styles Available







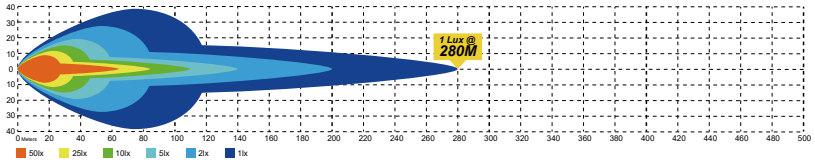




JG-934M-D



3" / 44W / 1LUX@450M / IP68 / 80000H	
Chip	3570*4
Raw Lumens	4840LM/Pair
Operating Voltage	9-32V DC
Housing Material	ADC12 Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Combo Driving Beam + Amber DRL
Color Temperature	6000K
3M Wire Harness & Yellow Black Cover Pack	

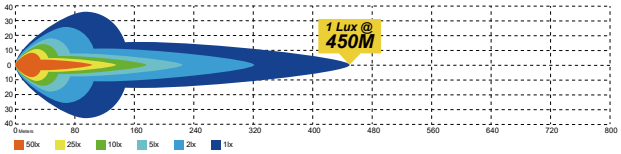






JG-934M-H



3" / 44W / 1LUX@450M / IP68 / 80000H	
Chip	3570*4
Raw Lumens	4840LM/Pair
Operating Voltage	9-32V DC
Housing Material	ADC12 Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Combo Driving Beam + Amber DRL
Color Temperature	6000K
3M Wire Harness & Yellow Black Cover Pack	

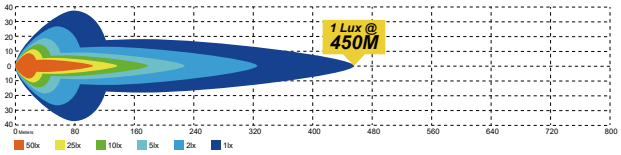






JG-914M



3" / 22W / 1LUX@350M / IP68 / 80000H	
Chip	3570*2
Raw Lumens	2420LM/Pair
Operating Voltage	9-32V DC
Housing Material	ADC12 Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Combo Driving Beam + Amber DRL
Color Temperature	6000K
3M Wire Harness & Yellow Black Cover Pack	

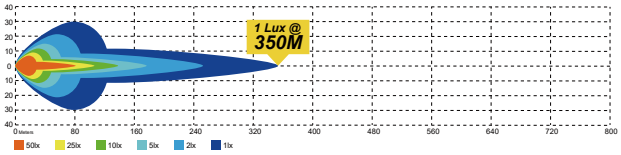






JG-F995-13



5" / 78W / 270° Angel / 1LUX@630M / IP68	
Chip	Osram P8
Raw Lumens	12480LM
Operating Voltage	9-32V DC
Housing Material	ADC12 Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Spot Driving Beam + White Amber DRL
Color Temperature	6000K

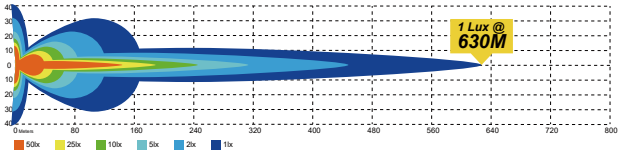







JG-954Z-4



5" / 84W / 1LUX@630M / IP68	
Chip	Imported Chips *4
Raw Lumens	13440LM
Operating Voltage	9-32V DC
Housing Material	ADC12 Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Combo Driving Beam/ Diffuse + Amber DRL
Color Temperature	6000K

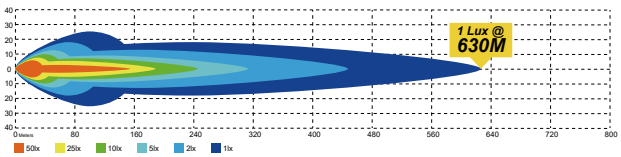






JG-D006-A



6" / 53W / Amber DRL / 1LUX@580M / IP68	
Chip	SMD
Raw Lumens	11660LM Pair
Operating Voltage	9-32V DC
Housing Material	ADC12 Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Spot Driving Beam + Amber DRL
Color Temperature	6000K
Certification	ECE R10

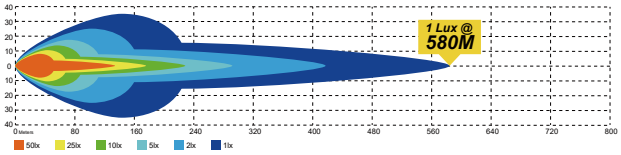






JG-96-F993




3" / 25W / 1LUX@500M / IP68 / 50000H	
Chip	4pcs*10W + two-color chip
Raw Lumens	2750LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Spot Driving Beam, 270° side shooter
DRL	Amber+White/ RGB backlight
Color Temperature	6000K
Bracket	Iron Bracket

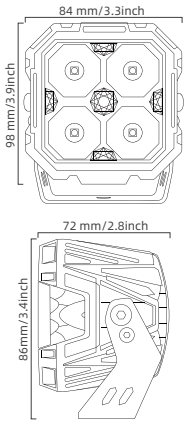





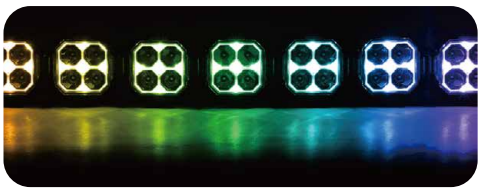

Multi-color Bezel

Amber&white/RGB Backlight Option

Black / Yellow Cover




Linkable Light Bar



Self-contained Wire Set






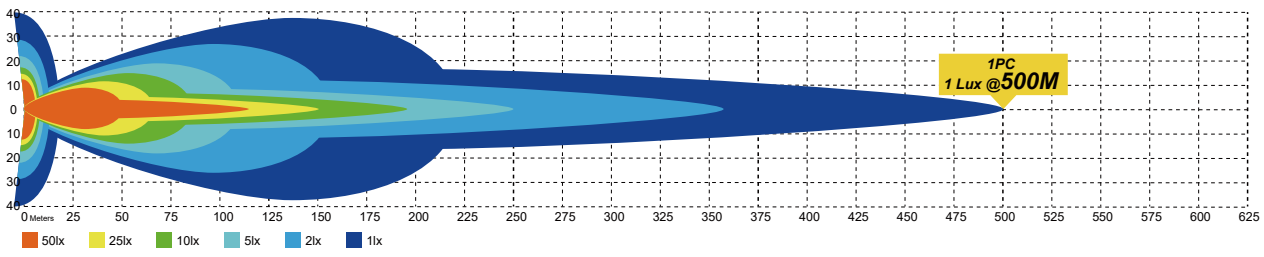


JG-954Z



4.6" / 40W / 1LUX@380M / IP68 / 50000H	
Chip	4pcs*10W CREE XML-5 LEDs
Raw Lumens	4400LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	10°spot Driving Beam
Color Temperature	6000K / 3500K Optional
Germany Imported Circuit Design	

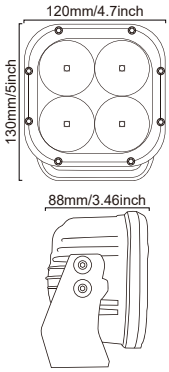

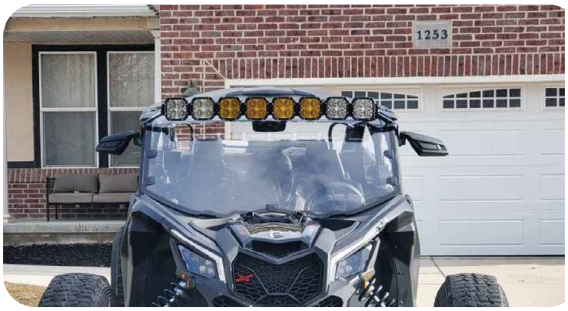




Multi-color Bezel



Linkable Light Bar






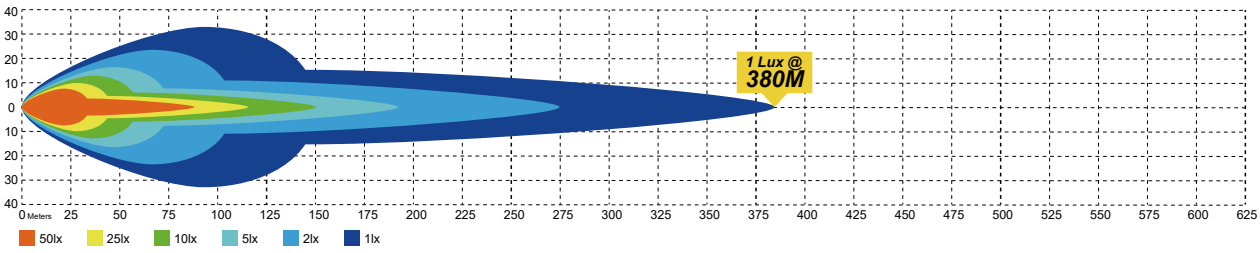

JG-LB050



5" / 45W / 1LUX@1038M / IP68 / 80000H	
Chip	High Intensity Osram LEDs
Raw Lumens	6200LM/Pcs
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Driving Beam+laser Beam
Color Temperature	6000k / 3500k
Can Be Spliced Design Strip Light	

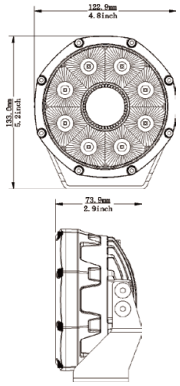







White / Amber Lens　Black / Yellow Bezel　Laser / Led Option　Cover




Linkable Light Bar





Self-contained Wire Set




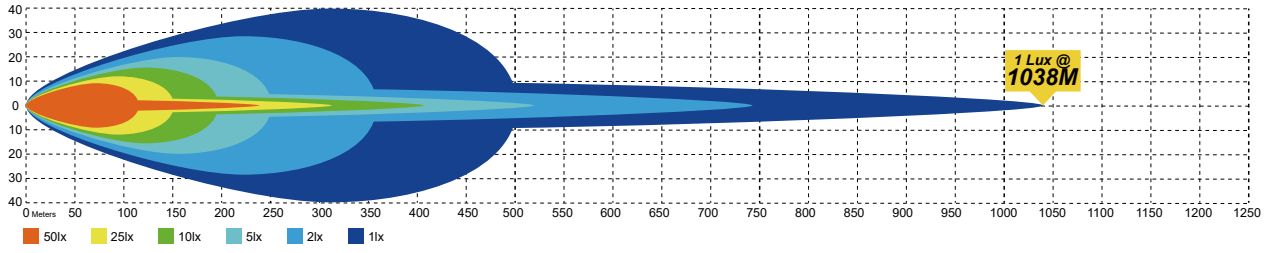

JG-LB037



4" / 80W / 1LUX@624M / IP68 / 80000H	
Chip	SST-40*4 + 3030*12
Raw Lumens	6500LM/Pcs
Operating Voltage	9-32V DC
Housing Material	ADC12 Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Spot Driving Beam + RGB DRL
Color Temperature	6000K
Can Be Spliced Design Modular LightBar	

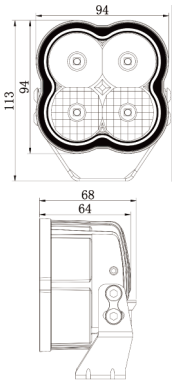





3-Pin DT Conn



Cover






Linkable Light Bar



Self-contained Wire Set




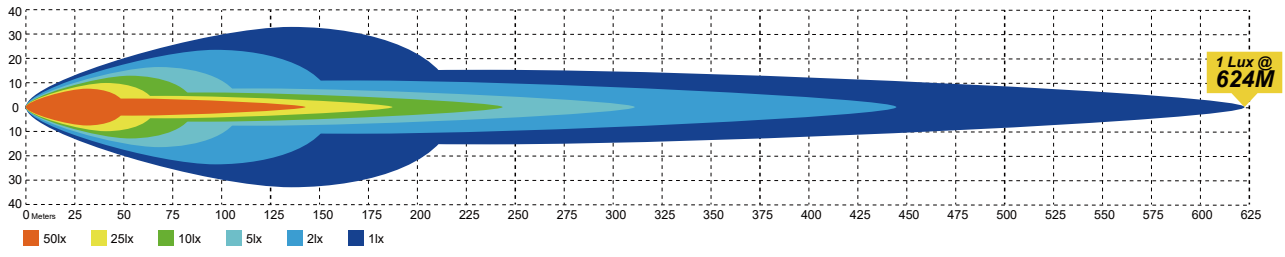



JG-LB040



4" / 40W / 1LUX@548M / IP68 / 80000H	
Chip	3535*14 + 3030*18
Raw Lumens	3200LM/Pcs
Operating Voltage	9-32V DC
Housing Material	ADC12 Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Combo Driving Beam + Amber DRL
Color Temperature	6000K
Can Be Spliced Design Modular Light Bar	

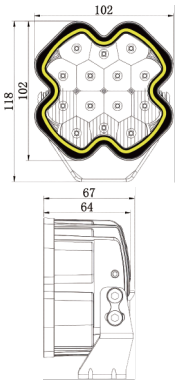



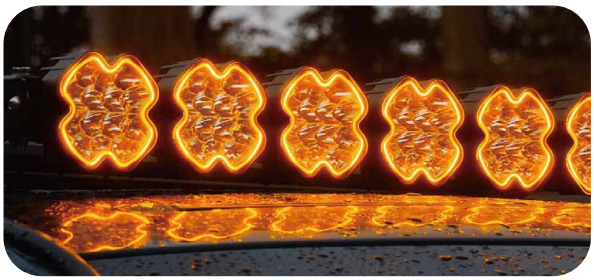




3-Pin DT Conn



Customizable ambient light



Cover




Linkable Light Bar



Self-contained Wire Set



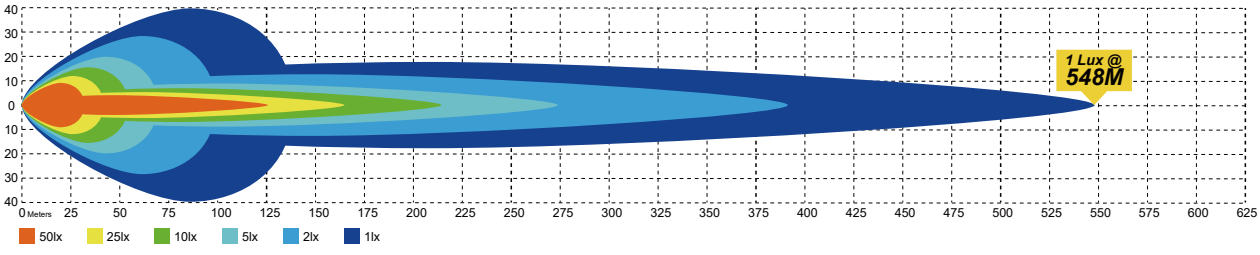


JG-96-LBY030




3" / 35W / 1LUX@1038M / IP68 / 80000H	
Chip	High Intensity Cree LEDs
Raw Lumens	3700LM/Pcs
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Driving Beam
Backlit	Amber/ Red/ Gree/ Blue Customized
Color Temperature	6000K


Linkable at X4, X6, X8, X10, X12 Kit, Black & Yellow Cover

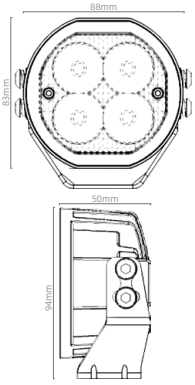



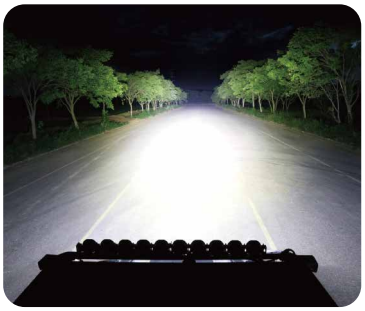





White / Amber Lens Black / Yellow Cover Amber / Red Backlight Option




Linkable Light Bar



Self-contained Wire Set




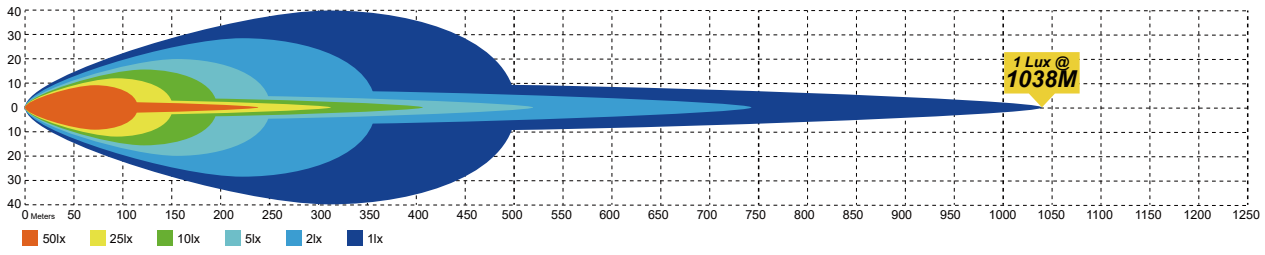


JG-L030-LED



3" / 50W / 1LUX@215M / IP68 / 80000H	
Chip	Osram P7 LEDs + KW3
Raw Lumens	2366LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Combo Driving Beam
Color Temperature	6500K / 3500K
Lens	PC Lens









White / Yellow & Combo / Diffuse Lens Optional

Color




3inch Suitable For Multiple Installation Positions







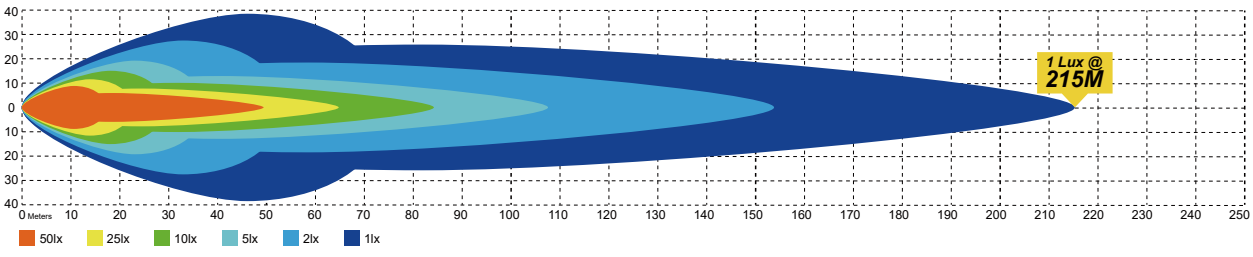

JG-D-W





2" / 25W / 1LUX@200M / IP68&IP69K / 80000H

Chip	Luminus LED
Raw Lumens	5000LM/Pair
Operating Voltage	10-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Reinforced bracket
Beam	Diffuse Flood Beam
CCT	6000K

JG-D-Y






2" / 25W / 1LUX@200M / IP68&IP69K / 80000H

Chip	Luminus LED
Raw Lumens	5000LM/Pair
Operating Voltage	10-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Reinforced bracket
Beam	Spot Driving Beam
CCT	3000K

JG-D-W





2" / 25W / 1LUX@200M / IP68&IP69K / 80000H

Chip	Luminus LED
Raw Lumens	5000LM/Pair
Operating Voltage	10-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Reinforced bracket
Beam	Flood Beam
CCT	6000K

JG-D-Y





2" / 25W / 1LUX@200M / IP68&IP69K / 80000H

Chip	Luminus LED
Raw Lumens	5000LM/Pair
Operating Voltage	10-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Reinforced bracket
Beam	Flood Beam
CCT	3000K

JG-D-W






2" / 25W / 1LUX@200M / IP68&IP69K / 80000H

Chip	Luminus LED
Raw Lumens	5000LM/Pair
Operating Voltage	10-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Reinforced bracket
Beam	Driving Beam
CCT	6000K

JG-D-Y





2" / 25W / 1LUX@200M / IP68&IP69K / 80000H

Chip	Luminus LED
Raw Lumens	5000LM/Pair
Operating Voltage	10-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Reinforced bracket
Beam	Driving Beam
CCT	3000K

JIUGUANG

JG-925-Pro




4" / 35W / 1LUX@400M / IP68 / 50000H	
Chip	Osram P8
Raw Lumens	3850LM
Operating Voltage	9-30V DC
Beam	Spot Driving Beam
Color Temperature	Iron Bracket
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Lens	PC









WIth DRL Two Color Optional







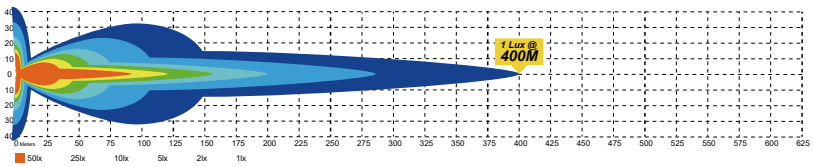

JG-S995C




3" / 40W / 1LUX@310M / 50000H	
Chip	4pcs*10W High Density LEDs
Raw Lumens	4400LM
Operating Voltage	10-30V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Spot Beam
Color Temperature	6000K
Waterproof	IP68







Matching Mask Optional







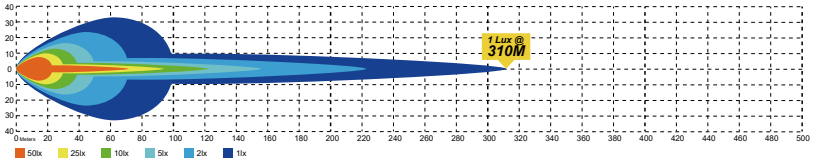

JG-1000Z-WY




4" / 50W / IP67 / 50000H	
Chip	2pcs*25W High Intensity Cree LEDs
Raw Lumens	Low Beam: 4250LM
	High Beam: 4500LM
Operating Voltage	9-30V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Abs Plstic With Stainless
Color Temperature	6500K / 3500K
	Two-color And All-white Optional









Two-color Optional

All-white Light





White&yellow Light



JG-1000Z-45W




4" / 45W / IP68 / 30000H	
Chip	45W High Intensity Cree LEDs
Raw Lumens	4500LM
Operating Voltage	9-60V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Abs Plstic With Stainless
Beam	Driving Beam
Color Temperature	6500K / 3500K
	Yellow And White Optional











Clear / Yellow Lens







JG-954D




3" / 40W / IP68 / 50000H	
Chip	4pcs*10W High Intensity LEDs
Raw Lumens	4400LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	High Low Beam
Color Temperature	6000K & 3500K
Lens	HD Convex Lens









Customized Version







JG-954H




3" / 40W / IP68 / 50000H	
Chip	4pcs*10W CREE XML-5 LEDs
Raw Lumens	4400LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Driving Beam
Color Temperature	6500K / 3500K Optional
Germany Imported Circuit Design	










Customized Version **Matching Mask Optional**



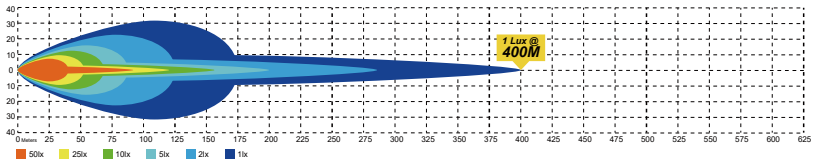

AUXILIARY POD LIGHT

JIUGUANG

JG-1000P



4" / 45W / 1LUX@650M

Osram LEDs
4500LM
9-60V DC
Driving Beam
IP68 30000H
6500K / 3500K Optional



JG-1001-ZC



3" / 30W / 1LUX@320M

CREE LED
2250LM
9-30V DC
Driving Beam
IP68 30000H
6500K / 3000K Optional



JG-914Z



3" / 30W

CREE LEDs
3750LM
9-30V DC
IP67 30000H
Spot / Flood / Wide flood beam
6500K / 3000K Optional



JG-915Z



3" / 30W

CREE LEDs
3750LM
9-30V DC
IP67 30000H
Spot / flood / wide flood beam
6500K / 3000K Optional



JG-926H



3" / 20W

CREE XML LEDs
1900LM
9-32V DC
IP68 50000H
Hi/lo beam
6000K / 3500K Optional



JG-925



6" / 30W

Osram LEDs
3750LM
9-30V DC
IP67 30000H
Combo beam
6500K / 3500K Optional



AUXILIARY POD LIGHT

JIUGUANG

JG-995D-8/DB-8



3" / 24W / IP67 / 30000H

- 8pcs*3w CREE LED
- 2520LM
- 9-32V DC
- Driving beam
- 6500K
- 995D-8/995DB-8 Optional



JG-995TW-BS/-B-BS



3" / 24W / IP67 / 30000H

- High Intensity LED
- 2520LM 9-32V DC
- 6500K Spot / 3000K flood
- Combo beam
- Harness additionally
- 995TW-BS/-B-BS Optional



JG-995R



3" / 20W

- CREE XML LEDs
- 1900LM
- 9-32V DC
- IP68 50000H
- Hi/lo beam
- 6000K / 3500K Optional




JG-996BS



3" / 36W

- 12pcs*3w CREE LEDs
- 4725LM
- 9-32V DC
- IP68 50000H
- Spot beam / Side light / Strobe
- 6500K / 3500K

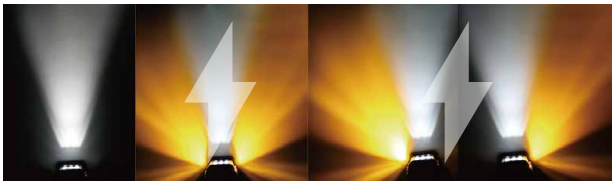

JG-921S



6.3" / 30W

- Osram LED
- 3300LM
- 9-32V DC
- IP67 30000H
- White / Yellow / Yellow+white
- 6500K / 3500K




JG-921T




6.3" / 20W

- Philips LEDs
- 3000LM
- 9-32V DC
- IP67 30000H
- Driving Light
- 6500K

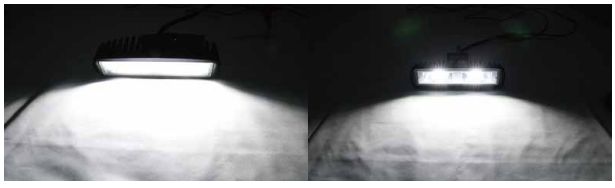

JG-9625F

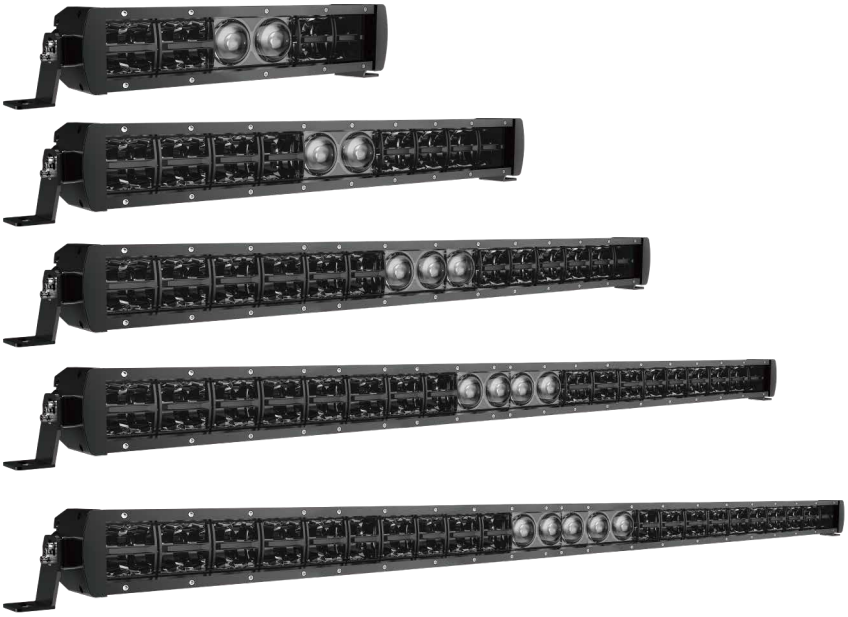




Size	LEDs	Power	Lumen	1LUX	CCT	Voltage	Beam Pattern	Waterproof
12 Inch	OsramP8*16pcs+KW3*2pcs	130W	6432LM	884M	6500K	9-32V DC	Laser Spot Driving Beam	IP68 IP69K
20 Inch	OsramP8*32pcs+KW3*2pcs	210W	6790LM	1051M				
30 Inch	OsramP8*48pcs+KW3*3pcs	290W	9662LM	1163M				
40 Inch	OsramP8*64pcs+KW3*4pcs	420W	13876LM	1395M				
50 Inch	OsramP8*80pcs+KW3*5pcs	525W	19600LM	1486M				

Laser Light



Real Effect




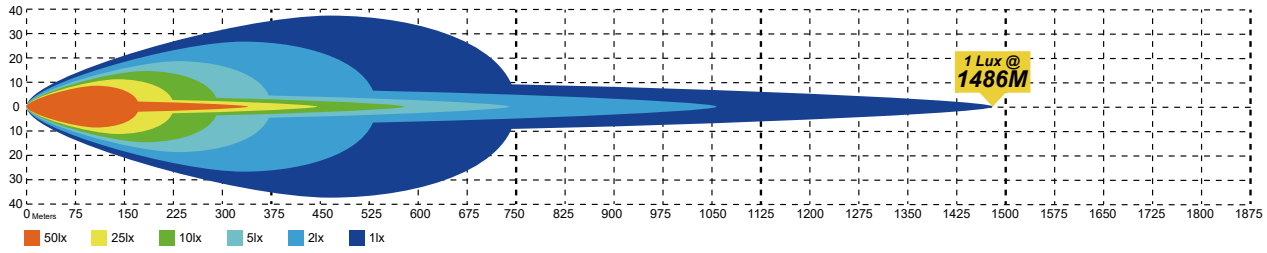

JG-58-ZH

E-MARK ECE R148 ECE R149



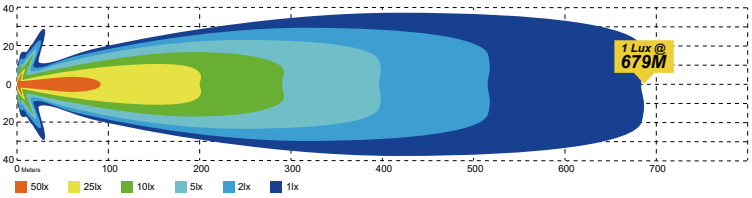

White&Amber DRL Static





Anti-glare





Size	LEDs	Power	Lumen	1LUX	CCT	Voltage	Beam Pattern	DRL	Waterproof
10 Inch	Osram P8 * 4PCS	24W	1690LM	226M	6500K	12-32V DC	Spot Driving Beam	White & Amber	IP68 IP69K
21 Inch	Osram P8 * 10PCS	58W	4080LM	428M					
32 Inch	Osram P8 * 16PCS	95W	6166LM	582M					
40 Inch	Osram P8 * 20PCS	118W	7258LM	611M					
52 Inch	Osram P8 * 26PCS	154W	8965LM	679M					

JG-58PRO-ZH

E-MARK ECE R148 ECE R149



Yellow Low & White High & Combo Beam Anti-Glare Light








Yellow & White 7 Dynamic Modes



Dynamic start(Yellow & White)



Center → sides cyclic flow(Yellow & White)



left → right cyclic flow(Yellow & White)



Strobe (Amber)



Size	LEDs	Power	Lumen	1LUX	CCT	Voltage	Beam Pattern	DRL	Waterproof
10 Inch	Osram P8 * 4PCS	24W	1690LM	226M	3000K 6500K 4300K	12-32V DC	Spot Driving Beam	White Welcome Light 3 Modes White DRL Dynamic 3 Modes Amber DRL Dynamic Amber DRL Warning	IP68 IP69K
21 Inch	Osram P8 * 10PCS	58W	4080LM	428M					
32 Inch	Osram P8 * 16PCS	95W	6166LM	582M					
40 Inch	Osram P8 * 20PCS	118W	7258LM	611M					
52 Inch	Osram P8 * 26PCS	154W	8965LM	679M					


JIUGUANG

JG-33-ZH

E-MARK ECE R148 ECE R149





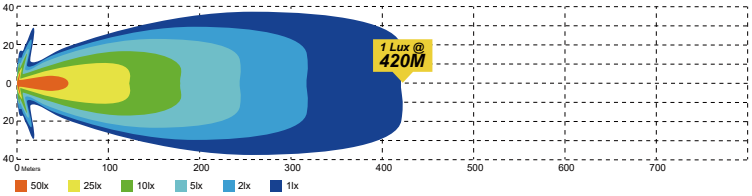

Anti-glare







Size	LEDs	Power	Lumen	1LUX	CCT	Voltage	Beam Pattern	DRL	Waterproof
12 Inch	Osram P8 * 18PCS	40W	3277LM	214M	6000K	9-30V DC	Spot Driving Beam	White & Amber	IP68
22 Inch	Osram P8 * 36PCS	72W	6107LM	302M					
32 Inch	Osram P8 * 54PCS	105W	8727LM	360M					
42 Inch	Osram P8 * 72PCS	134W	10988LM	405M					
52 Inch	Osram P8 * 90PCS	153W	12704LM	420M					

JG-33PRO-ZH

E-MARK ECE R148 ECE R149



Yellow Low & White High & Combo Beam Anti-Glare Light



Yellow & White 7 Dynamic Modes



Dynamic start(Yellow & White)



Center → sides cyclic flow(Yellow & White)



left → right cyclic flow(Yellow & White)



Strobe (Amber)



Size	LEDs	Power	Lumen	1LUX	CCT	Voltage	Beam Pattern	DRL	Waterproof
12 Inch	Osram P8 * 18PCS	40W	3277LM	214M	3000K 6500K 4300K	9-30V DC	Spot Driving Beam	White Welcome Light 3 Modes White DRL Dynamic 3 Modes Amber DRL Dynamic Amber DRL Warning	IP68
22 Inch	Osram P8 * 36PCS	72W	6107LM	302M					
32 Inch	Osram P8 * 54PCS	105W	8727LM	360M					
42 Inch	Osram P8 * 72PCS	134W	10988LM	405M					
52 Inch	Osram P8 * 90PCS	153W	12704LM	420M					

JG-D58

NEW



20" / 120W / 1LUX@480M / IP68&IP69K / 80000H	
Chip	12Pcs *SMD
Raw Lumens	11400LM
Operating Voltage	10-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Reinforced bracket
Beam	Spot Driving Beam + White&Amber DRL Dynamic
CCT	6000K

3D Light Guide Structure





Anti-glare Reflector





White & Amber DRL Dynamic

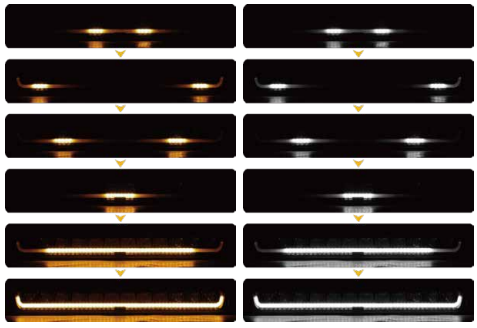

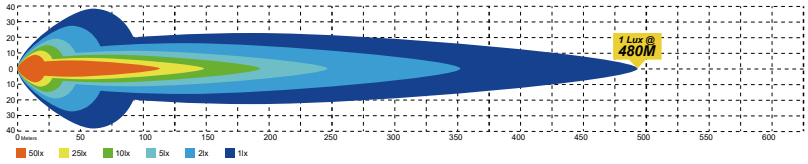

JG-PZD-9610C-20IN

ECE R10 ECE R148 ECE R149



518*112MM / 100W / 1lux@480m / 50000H	
Chip	10Pcs *SMD
Raw Lumens	9500lm
Operating Voltage	10-30V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Spot Driving Beam+White Amber DRL
Color Temperature	5700K
Certification	ECE R10, R148, R149

Seamlessly Integrated Plate + Lightbar






1lux@480m



Apply for EU UK cars



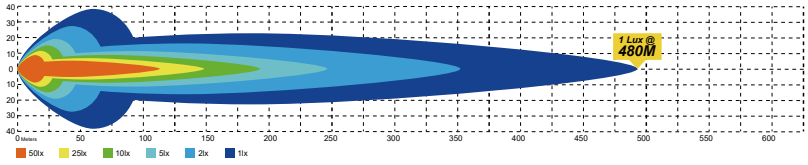



JG-96-954Z





Size	LEDs	Power	Lumen	1LUX	CCT	Voltage	Beam Pattern	Lifespan	Waterproof
22 Inch	CREE 10W * 16PCS	160W	20000LM	600M	6000K / 3000K	9-32V DC	Driving Beam	8000H	IP68 IP69K
32 Inch	CREE 10W * 24PCS	240W	30000LM	800M					
42 Inch	CREE 10W * 32PCS	320W	40000LM	1000M					
52 Inch	CREE 10W * 40PCS	400W	50000LM	1200M					
Hosing Material:Die-cast Aluminum Alloy / Bracket:316 Stainless Steel									





JG-96-LB050





Size	LEDs	Power	Lumen	1LUX	CCT	Voltage	Beam Pattern	Lifespan	Waterproof
22 Inch	Osram P8 * 36PCS	180W	24800LM	600M	6000K / 3000K	9-32V DC	Driving Beam	8000H	IP68 IP69K
32 Inch	Osram P8 * 54PCS	270W	27200LM	700M					
42 Inch	Osram P8 * 72PCS	360W	49600LM	900M					
52 Inch	Osram P8 * 90PCS	450W	62000LM	1038M					
Hosing Material:Die-cast Aluminum Alloy / Bracket:316 Stainless Steel									





JG-96312



Size	Chip	Power	Beam Pattern	CCT	Voltage	Material	Waterproof
31 Inch	Imported LEDs	150W	Combo Driving Beam + RGB Chasing	Multicolor+White	10-36V DC	Aluminum Housing	IP67

Tube Clamo Mount Backet Size	1.5-2 inch round

Side Stand or Roll Bar Mounts







Wiring harness



Breathing, Chasing, Flowing RGB Mode

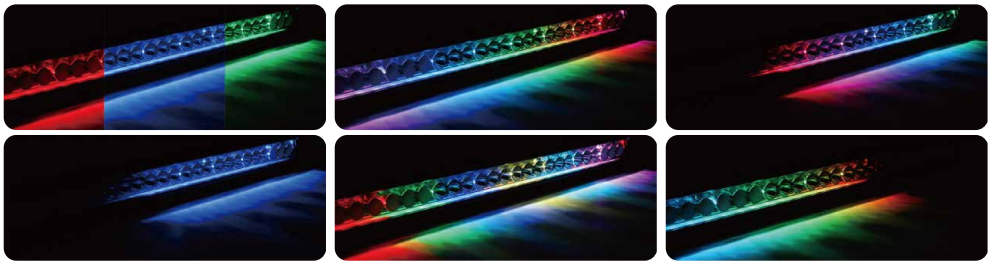


High-power driving light



UTV Application Effects




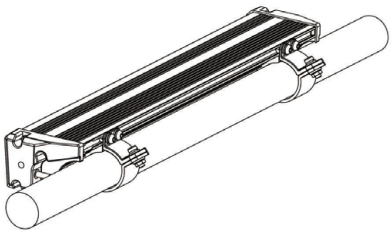



JG-9610G



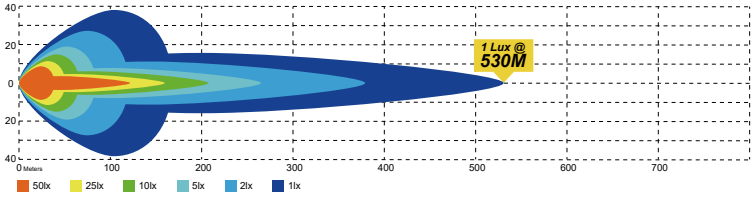

Two reflector options available.



Size	LEDs	Power	Lumen	CCT	Voltage	Beam Pattern	Shape	Waterproof
7 Inch	9PCS	18W	1800LM	6500K	12-32V DC	Combo / Spot Driving Beam	Sraight	IP68 IP69K
14 Inch	18PCS	36W	3600LM					
20 Inch	27PCS	54W	5400LM				Sraight / Curved	
26 Inch	36PCS	72W	7200LM					
32 Inch	45PCS	90W	9000LM					
38 Inch	54PCS	108W	10800LM					
44 Inch	63PCS	126W	12600LM					
50 Inch	72PCS	144W	14400LM					

JG-9610G-PRO-TJ

NEW



Yellow & White 7 Dynamic Modes



Dynamic start(Yellow & White)



Center → sides cyclic flow(Yellow & White)



left → right cyclic flow(Yellow & White)



Strobe(Amber)

Spot Driving Beam with Dual Color DRL Light







Size	LEDs	Power	Lumen	CCT	Voltage	Beam Pattern	DRL	Waterproof
20 Inch	27PCS	54W	5400LM	6500K	12-32V DC	Spot Driving Beam	White Welcome Light 3 Modes White DRL Dynamic 3 Modes Amber DRL Dynamic Amber DRL Warning	IP68 IP69K
26 Inch	36PCS	72W	7200LM					
32 Inch	45PCS	90W	9000LM					
38 Inch	54PCS	108W	10800LM					
44 Inch	63PCS	126W	12600LM					
50 Inch	72PCS	144W	14400LM					

JG-9612Z



Size	8”/14”/20”/26”/32”/38”/44”/50”
Chip	CREE
Wattage	30/60/90/120/150/180/210/240W
Beam Pattern	Driving Beam
Voltage	10-30V DC
Lighting Distance	1LUX@257/305/352/403/452/495/540/582M
Waterproof	IP68

JG-9610B





Size	10”/20”/30”/40”/50”
Chip	CREE
Wattage	26W/52W/78W/104W/130W
Beam Pattern	60° Driving Beam
Voltage	10-30V DC
Lighting Distance	1LUX@95M/118M/140M/162M/189M
Waterproof	IP68


JG-9610L





Size	8”/14”/20”/26”/32”/38”/44”/50”
Chip	CREE
Wattage	18/36/54/72/90/108/126/144W
Beam Pattern	45° Driving Beam
Voltage	10-30V DC
Lighting Distance	1LUX@154/177/200/222/241/265/289/311M
Waterproof	IP68


JG-9632T-4”

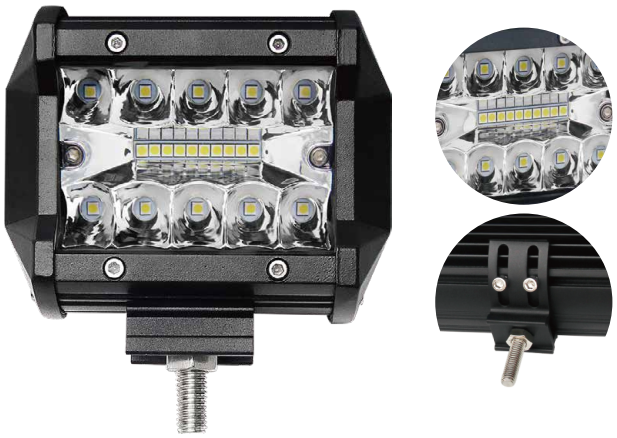

Size	4”
Chip	CREE
Wattage	30W
Beam Pattern	Driving Beam
Voltage	10-30V DC
Waterproof	IP68


JG-9623S



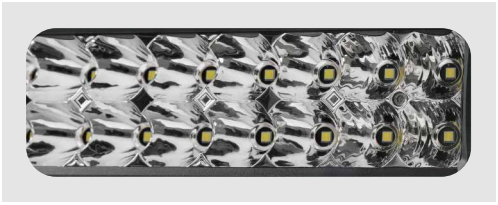

Size	LEDs	Power	Lumen	1LUX	CCT	Voltage	Beam Pattern	Waterproof
12 Inch	Osram P7 *20PCS	60W	8000LM	402M	6500K	12-32V DC	Combo Driving Beam	IP68
22 Inch	Osram P7 * 40PCS	120W	16000LM	492M				
32 Inch	Osram P7 * 60PCS	180W	18000LM	597M				
42 Inch	Osram P7 * 80PCS	240W	19800LM	646M				
52 Inch	Osram P7 * 100PCS	300W	26400LM	722M				



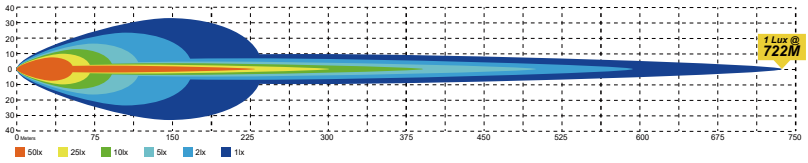

JG-9620A-R





Size	32"/42"/50"
Chip	R3 LEDs
Wattage	180W/252W/288W
Light type	White + Chasing RGB
Voltage	10-30V DC
Controller	RF & APP
Waterproof	IP67

JG-9627





Size	12''/22''/32''/42''/52''
Chip	Osram Chip
Wattage	180W/240W/300W/332W/360W
Beam Pattern	Combo Driving Beam
Voltage	10-30V DC
Lighting Distance	1LUX@248M/295M/353M/398M/412M
Waterproof	IP68


JG-9631T-RQ





Size	LEDs	Power	1LUX	CCT	Voltage	Beam Pattern	Waterproof
22 Inch	Osram * 130PCS	130W	201M	4300K / 6000K	12-32V DC	180° Driving Beam	IP68
32 Inch	Osram * 195PCS	195W	245M				
42 Inch	Osram * 260PCS	260W	283M				
50 Inch	Osram * 312PCS	312W	321M				



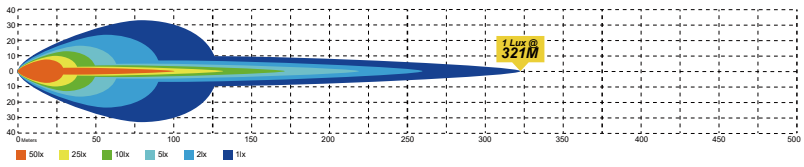

JG-9631T





Size	22"/32"/42"/50"/52"
Chip	Osram
Wattage	130W/195W/260W/312W/325W
Beam Pattern	180° Driving Beam
Voltage	10-30V DC
Lighting Distance	1LUX@201M/245M/283M/321M/330M
Waterproof	IP68

JG-9632T





Size	4"/7"/12"/20"/23"
Chip	Osram Chip
Wattage	20W/40W/80W/140W/160W
Lumens	3000/4400/8800/15400/17600LM
Voltage	10-30V DC
Beam Pattern	Combo Driving Beam
Waterproof	IP68


JG-9610Z-BS






Size	LEDs	Power	1LUX	CCT	Voltage	Beam Pattern	Waterproof
7 Inch	CREE*6PCS	18W	149M	4300K / 6500K	12-32V DC	60° Driving Beam	IP68
14 Inch	CREE*12PCS	36W	168M				
20 Inch	CREE*18PCS	54W	187M				
26 Inch	CREE*24PCS	72W	204M				
32 Inch	CREE*30PCS	90W	227M				
38 Inch	CREE*36PCS	108W	248M				
44 Inch	CREE*42PCS	126W	265M				
50 Inch	CREE*48PCS	144W	286M				



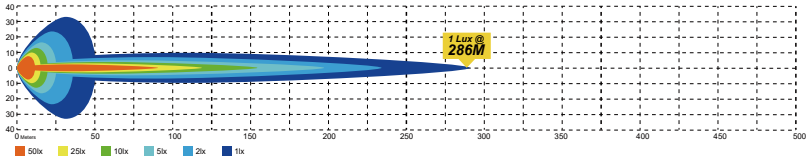


JG-9620BS



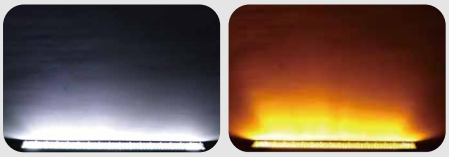

Size	LEDs	Power	1LUX	CCT	Voltage	Beam Pattern	Waterproof
7 Inch	CREE*20PCS	20W	97M	4300K / 6000K	12-32V DC	60° Driving Beam	IP68
14 Inch	CREE*40PCS	40W	116M				
20 Inch	CREE*60PCS	60W	139M				
26 Inch	CREE*80PCS	80W	159M				
32 Inch	CREE*100PCS	100W	182M				
38 Inch	CREE*120PCS	120W	202M				
44 Inch	CREE*140PCS	140W	225M				
50 Inch	CREE*160PCS	160W	250M				



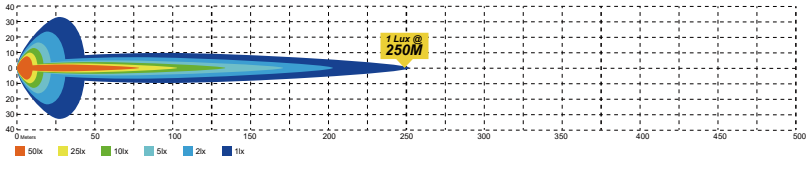

JG-ZWD-01-WY-FS



13mm 17mm 21mm 26mm / 50W / IP68 / Grill Light	
Chip	3535 Dual Color LEDs
Raw Lumens	6000LM
Operating Voltage	9-32V DC
Beam	High Beam, Low Beam, High Low Beam
Light Mode	Yellow, White, White+Yellow, White Flashing
Color Temperature	6000K, 3000K
Housing Material	Die-cast Aluminum Alloy
Cooling	Fan cooling
Bracket	L' shape, Snap-fit both




Easy Install For Specific Grill Non-Destructive Installation







1 Control 4/6/8 Controller Optional

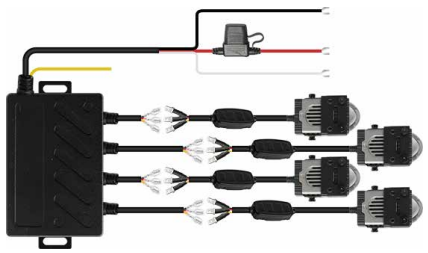





Corner Turn Signals Are Optional



JG-993-CP-PRO



3" / 58W/64W / Dual Lens / IP68 / 50000H	
Chip	2pcs* 30W High Intensity LEDs
Raw Lumens	6380LM, 7040LM Pair
Operating Voltage	9-30V DC
Housing Material	Die-cast Aluminum Alloy
Beam	High Beam, Low Beam, Combo Beam
Lighting Mode	White / Yellow / White+Yellow
Color Temperature	6500K / 3000K



JG-993-CP-PRO-2



3.4" / 65W/88W / Blue Dual Lens / IP68 / 50000H	
Chip	2pcs* 30W High Intensity LEDs
Raw Lumens	7150LM, 9680LM Pair
Operating Voltage	9-30V DC
Housing Material	Die-cast Aluminum Alloy
Beam	High Beam, Low Beam, Combo Beam
Lighting Mode	White / Yellow / White+Yellow
Color Temperature	6500K / 3000K




JG-993-CP-PRO-3



4.8" / 65W/100W / Blue Lens / IP68 / 50000H	
Chip	2pcs* 30W High Intensity LEDs
Raw Lumens	7150LM, 11000LM Pair
Operating Voltage	9-30V DC
Housing Material	Die-cast Aluminum Alloy
Beam	High Beam, Low Beam, Combo Beam
Lighting Mode	White / Yellow / White+Yellow
Color Temperature	6500K / 3000K




JG-993-CP

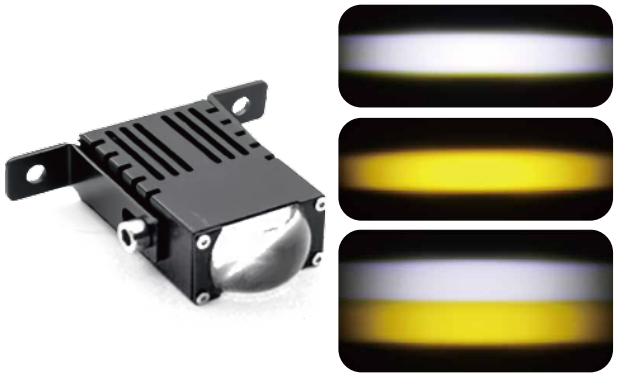

3" / 60W / Ultra Slim / IP68 / 50000H	
Chip	2pcs* 30W High Intensity LEDs
Raw Lumens	5000LM
Operating Voltage	9-30V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Hi /Lo Beam, Strobe mode
Lighting Mode	White / Yellow / White+Yellow
Color Temperature	6500K / 3000K

JG-993C-3Pro

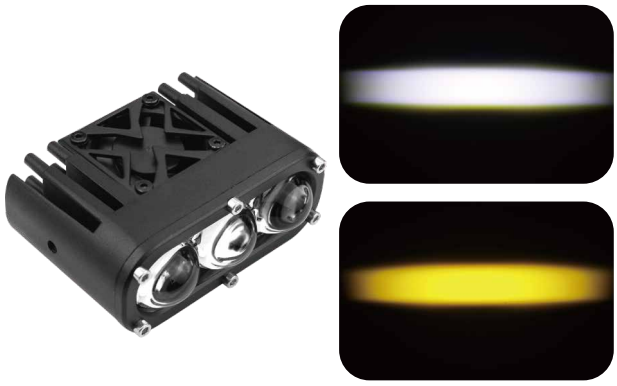

3" / 60W / IP68 / 50000H	
Chip	3pcs* 20W High Intensity LEDs
Raw Lumens	7500LM
Operating Voltage	9-30V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Hi /Lo Beam, Strobe mode
Lighting Mode	White / Yellow
Color Temperature	6500K / 3000K

JG-993C-2-Pro



3" / 40W / IP68 / 50000H	
Chip	2pcs* 20W High Intensity LEDs
Raw Lumens	5000LM
Operating Voltage	9-30V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Hi /Lo Beam, Strobe mode
Lighting Mode	White / Yellow / White+Yellow
Color Temperature	6500K / 3000K




JG-D040-9-C



4.5" / 61W / 1LUX@517M / IP68 / 50000H	
Chip	High-intensity CREE LEDs
Raw Lumens	13200LM Pair
Operating Voltage	9-60V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Low/High Beam+Orange DRL
Color Temperature	6000K
Lens	PC Lens







FOR BMW | HONDA | KAWASAKI | YAMAHA | KTM | INDIAN







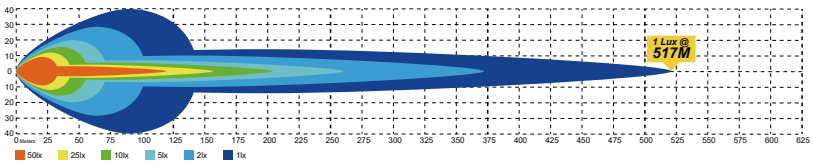
JG-D040-9



4.5" / 61W / 1LUX@517M / IP68 / 50000H	
Chip	High-intensity CREE LEDs
Raw Lumens	13200LM Pair
Operating Voltage	9-60V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Driving Beam+White DRL
Color Temperature	6000K
Lens	PC Lens









FOR BMW | HONDA | KAWASAKI | YAMAHA | KTM | INDIAN






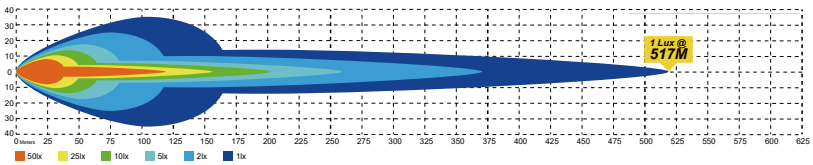


JG-D040-6




4.5"/106W /1LUX@305M /IP68 /50000H	
Chip	High-intensity CREE LEDs
Raw Lumens	11616LM Pair
Operating Voltage	9-60V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Hi & Lo Beam & Combo Beam(6000K)
DRL	White Dynamic Start & Amber DRL
Lens	PC Lens






FOR BMW | HONDA | KAWASAKI | YAMAHA | KTM | INDIAN



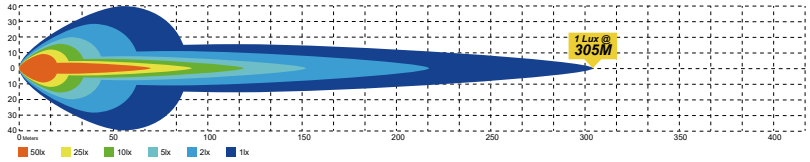


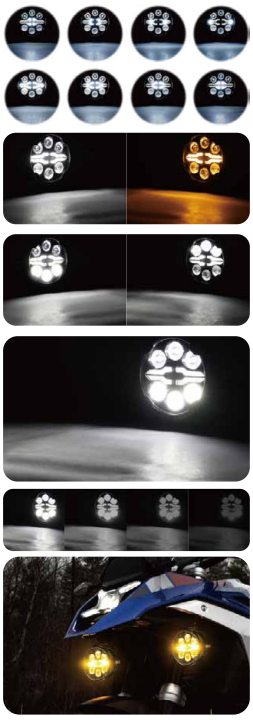


JG-D035-6




3.5"/98W /1LUX@305M /IP68 /50000H	
Chip	High-intensity CREE LEDs
Raw Lumens	10824LM Pair
Operating Voltage	9-60V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Hi & Lo Beam & Combo Beam(6000K)
DRL	Amber DRL
Lens	PC Lens






FOR BMW | HONDA | KAWASAKI | YAMAHA | KTM | INDIAN



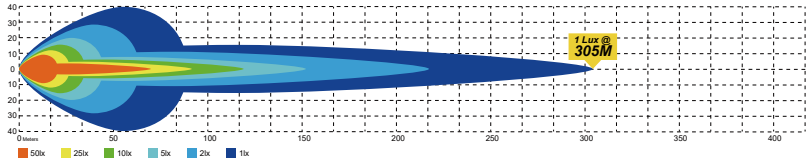

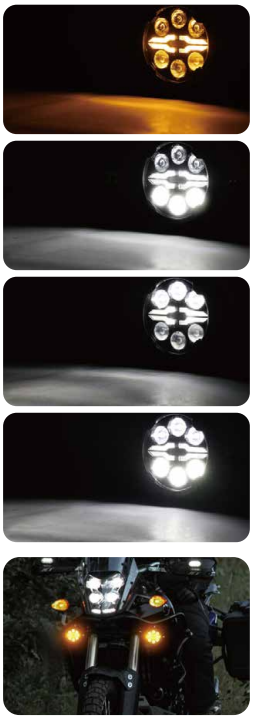


JG-D040-7TJ




4.5"/123W /1LUX@320M 90M /IP68 /50000H	
Chip	High-intensity CREE LEDs
Raw Lumens	13517LM Pair
Operating Voltage	9-60V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Hi & Lo Beam & Combo Beam(6000K)
DRL	White Dynamic Start & Amber DRL
Lens	PC Lens






FOR BMW | HONDA | KAWASAKI | YAMAHA | KTM | INDIAN





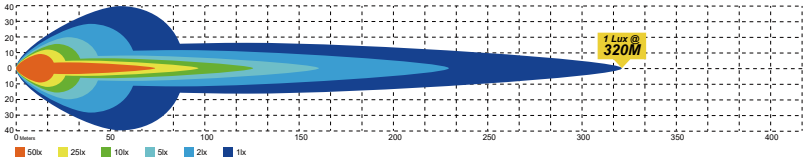


JG-D035-7TJ




3.5"/94W /1LUX@320M /IP68 /50000H	
Chip	High-intensity CREE LEDs
Raw Lumens	10340LM Pair
Operating Voltage	9-60V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Hi & Lo Beam & Combo Beam(6000K)
DRL	Amber DRL
Lens	PC Lens






FOR BMW | HONDA | KAWASAKI | YAMAHA | KTM | INDIAN





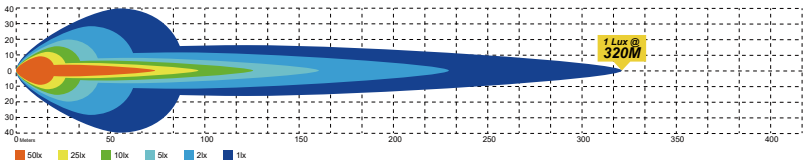

JG-D043





4.5" / 70W / 1LUX@365M / IP68 / 50000H	
Chip	CREE
Raw Lumens	13200LM Pair
Operating Voltage	10-80V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Spot Driving Beam
Color Temperature	6000K / 3000K Optional
Available With Matching Yellow Cover	













Two Colors **Yellow Cover**

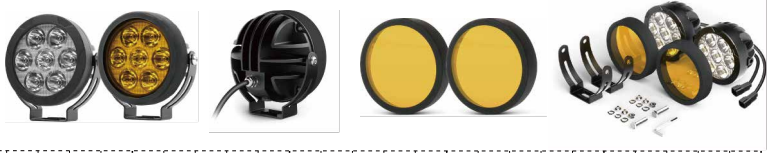

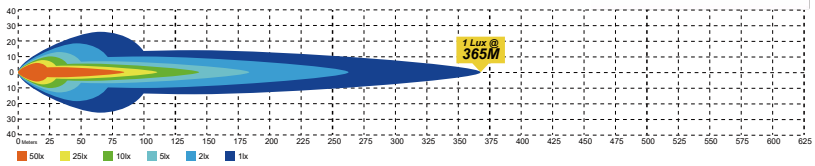

JG-D043-FW





4.5" / 70W / 1LUX@365M / IP68 / 50000H	
Chip	CREE
Raw Lumens	13200LM Pair
Operating Voltage	10-80V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Spot Driving Beam
Color Temperature	6000K / 3000K Optional
Available With Matching Yellow Cover	












Spot Beam & Yellow Cover




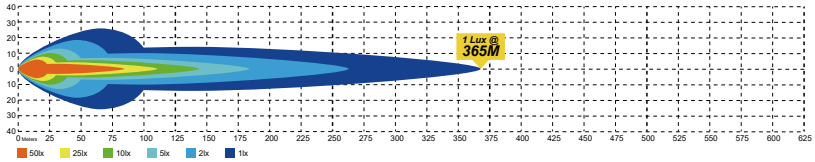


JG-D051-W



4.5" / 80W/160W / 1LUX@520M / IP68 / 50000H	
Chip	P9 Chips
Raw Lumens	8800LM, 17600LM Pair
Operating Voltage	10-60V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Low Beam, High Beam, Combo Beam
Mode	Amber DRL, Strobe Mode
Color Temperature	6000K
Available With Matching Yellow& Black Cover, 4Pin Waterproof	

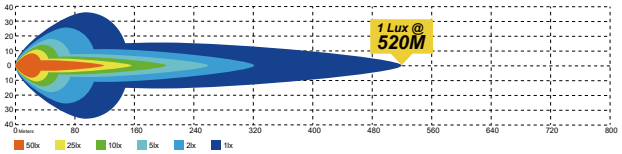


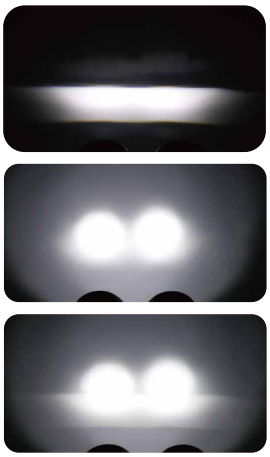


JG-D041



4.5" / 70W / 1LUX@365M / IP68 / 50000H	
Chip	P9 Chips
Raw Lumens	15400LM Pair
Operating Voltage	10-60V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Spot Driving Beam
Color Temperature	6000K
Available With Matching Yellow& Black Cover	

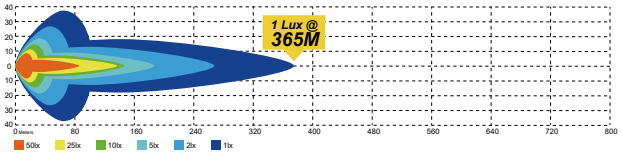


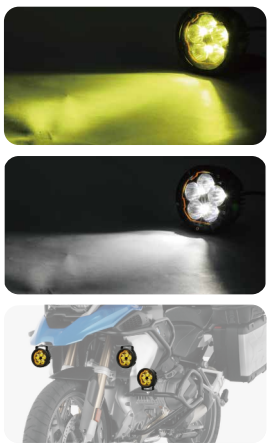


JG-954D-H



3" / 40W/60W / 1LUX@600M / IP68 / 50000H	
Chip	P9 Chips
Raw Lumens	8800LM, 13200LM Pair
Operating Voltage	10-60V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Low Beam, High Beam, Combo High Beam
Color Temperature	6000K,3500K
Available With Matching Yellow Cover	

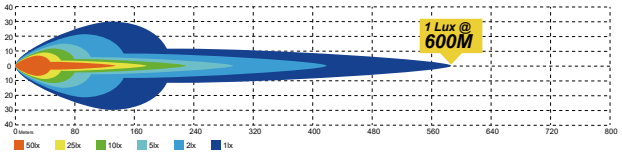

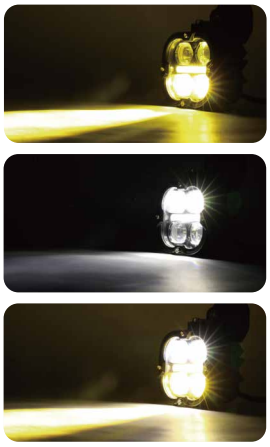

JG-D035-FW





3.5" / 36W / 1LUX@230M / IP68 / 50000H	
Chip	High-intensity CREE LEDs
Raw Lumens	8000LM Pair
Operating Voltage	9-60V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Driving Beam+ Orange Backlit Strobe
Color Temperature	6000K
Lens	PC Lens












FOR BMW | HONDA | KAWASAKI | YAMAHA | KTM | INDIAN



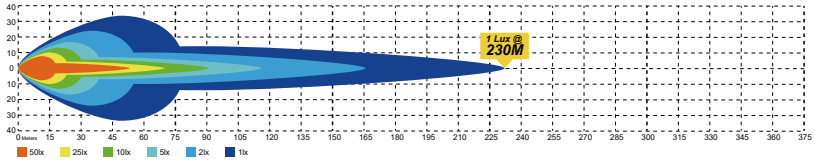

JG-MT-DXZ-S/F




3.5" / 35W / 1LUX@172M / IP68 / 50000H	
Chip	Import LEDs 30W+3030
Raw Lumens	7700LM Pair
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket / Die Cast Aluminum
Beam	Spot / Flood Beam
Color Temperature	6000K / 3000K
Various Off-road / Motorcycle / Fog Light Brackets	












Yellow/White+Spot/Flood beam Optional **Wire Harness**



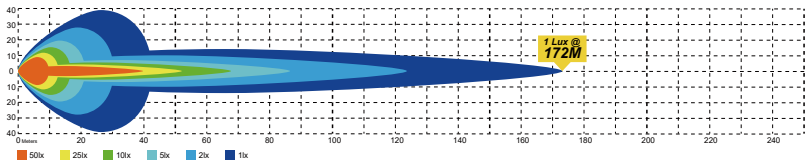







JG-MT01-2TJ



3" / 50W / 1LUX@212M / IP68 / 50000H	
Chip	Import LEDs+3030
Raw Lumens	11000LM/Pair
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket / Die Cast Aluminum
Beam	High Low Beam with Cutt-Off Line
Color Temperature	6000K 3000K/ 6000K
Strobe Warning Function	



Y&W or W&W Optional





360° rotatable universal



Wire Harness



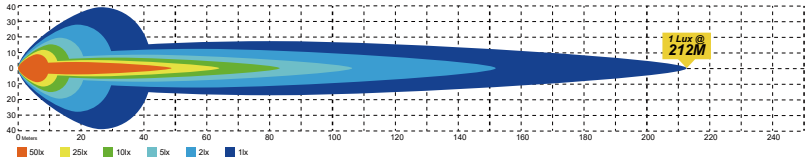


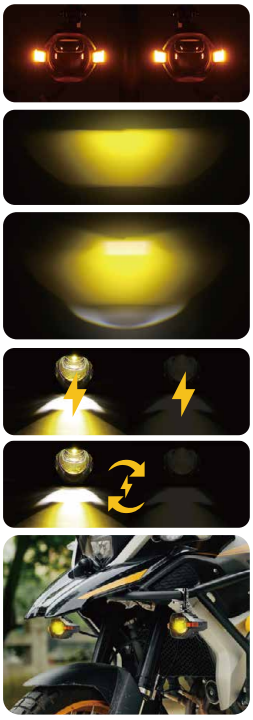

JG-992-K2



3" / 80W / 1LUX@500M / IP68 / 50000H	
Chip	1PC*30W+1PC*50W LEDs
Raw Lumens	8000LM
Operating Voltage	9-80V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket / Die Cast Aluminum
Beam	White High Beam / Yellow Low Beam
Color Temperature	6500K / 3000K
Various Off-road / Motorcycle / Fog Light Brackets	




Motorcycle+multi Fog Light Bracket Optional



Wire Harness



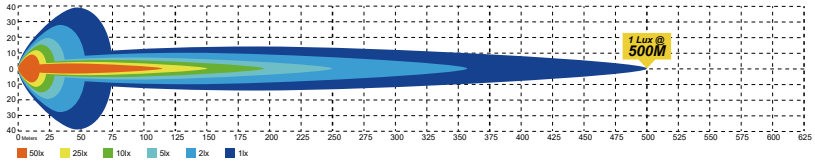





JG-MT05-YX



2.6" / 60W / IP68 / 360° Rotatable	
Chip	30W *2 LEDs
Raw Lumens	7500LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Beam	High Low Beam
Light Mode	Yellow, White, White+Yellow, White Flashing
Color Temperature	6000K, 3000K
Bracket	360 ° adjustable
Bezel	Magnetic frame bezel option



JG-MT05-MINI



2.4" / 35W / IP68 / 360° Rotatable	
Chip	30W *2 LEDs
Raw Lumens	7500LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Beam	High Low Beam
Light Mode	Yellow, White, White+Yellow, White Flashing
Color Temperature	6000K, 3000K
Bracket	360 ° adjustable




JG-MT05-FX



2.6" / 60W / IP68 / 360° Rotatable	
Chip	30W *2 LEDs
Raw Lumens	7500LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Beam	High Low Beam
Light Mode	Yellow, White, White+Yellow
Backlit	Customized Blue, Red, Orange
Color Temperature	6000K, 3000K
Bracket	360 ° adjustable




JG-993-ZH

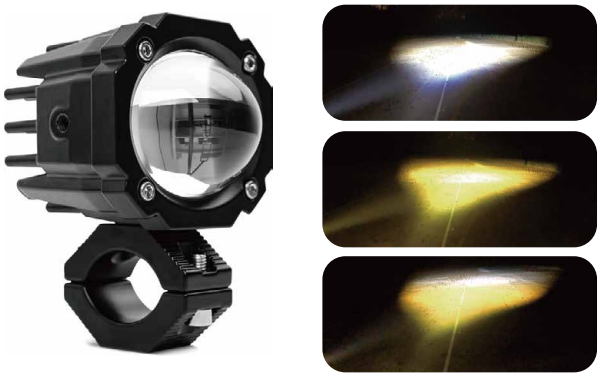

3" / 30W / 3000LM / IP68 / 50000H	
Chip	30W High Intensity LEDs
Operating Voltage	9-36V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Side And Collet Brackets
Beam	Hi/lo Beam Strobe
Lighting Mode	White / Yellow / Yellow+white
Color Temperature	6500K / 3000K

JG-992ZH-ZD

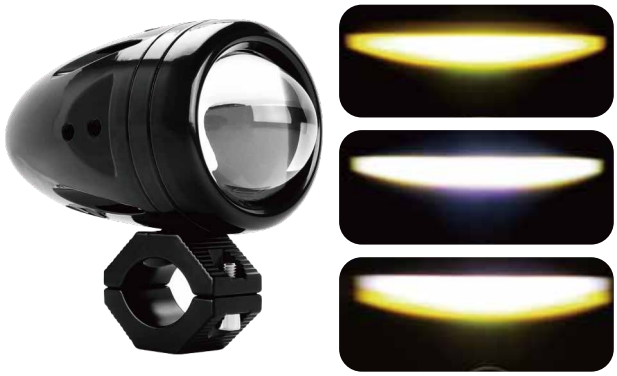

3" / 30W / 3000LM / IP68 / 50000H	
Chip	Dual-Color 7035 LEDs
Operating Voltage	9-36V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Hi/lo Beam Strobe
Lighting Mode	White / Yellow / Yellow+white
Color Temperature	6000K / 3000K

JG-993-3HP



4.2" / 60W / IP68 / 50000H	
Chip	3pcs*20W High Intensity LEDs
Raw Lumens	6000LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Hi/lo Beam
Lighting Mode	White / Yellow / White+Yellow
Color Temperature	6500K / 3000K

JG-993B-RGB




2.6" / 30W / IP68 / 50000H	
Chip	30W Dual-Color High Intensity LEDs
Raw Lumens	3000LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Hi/lo Beam
Lighting Mode	White / Yellow / RGB
Color Temperature	6500K / 3000K

JG-MT-F04



3" / 30W / IP68 / 50000H

- Dual-Color High-intensity LEDs
- 2400LM
- 10-30V DC
- Hi/lo Beam+Combo+Strobe
- White / Yellow / Yellow+white
- 6000K / 3000K

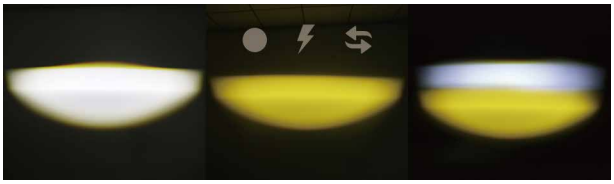


JG-993-3DXZ



3.6" / 20W / IP68 / 50000H

- Dual-Color High-intensity LEDs
- 1600LM
- 10-30V DC
- Hi/lo Beam
- White / Yellow / Yellow+white
- 6000K / 3000K

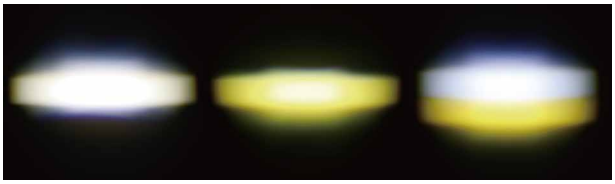


JG-MT-F03-2



2.6" / 20W / IP68 / 50000H

- Dual-Color High-intensity LEDs
- 1600LM
- 9-32V DC
- Hi/lo Beam
- White / Yellow / Yellow+white
- 6500K / 3000K

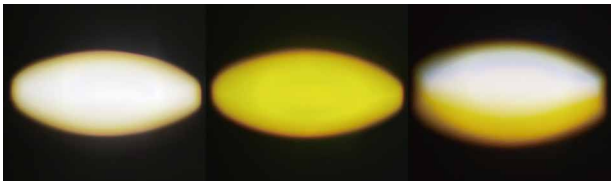


JG-MT-F03-1



2.4" / 20W / IP68 / 50000H

- Dual-Color High-intensity LEDs
- 1600LM
- 10-30V DC
- Hi/lo Beam
- White / Yellow / Yellow+white
- 6000K / 3000K

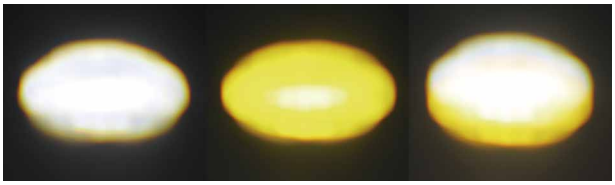

JG-992M



3.5" / 30W / IP68

- CREE LEDs
- 3300LM
- 9-32V DC
- 50000H
- Driving Beam
- 6500K / 3500K Optional



JG-L993D



3" / 40W / 1lux@1000M


- 2pcs*20w LEDs
- 4000LM
- 9-32V DC
- IP68 / 50000H
- Spot Beam
- 6500K



JG-65



4.8" / 43W / IP68 / Built-in Temperature Control	
Chip	Imported LEDs*16
Raw Lumens	4730LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Flood Beam / Spot Beam
Size	123*104*51mm
Color Temperature	5700K
With Amber Warning Light Signal	

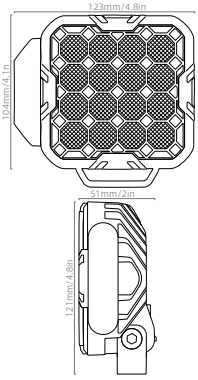

Symmetrical Amber Warning Light Signal Design




Spot /Flood Beam Options Available



JG-63



4.8" / 43W / IP68 / Built-in Temperature Control	
Chip	Imported LEDs*16
Raw Lumens	4730LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Size	104*104*51mm
Beam	Flood Beam / Spot Beam
Color Temperature	5700K

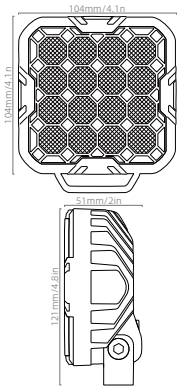

Cellular Matrix Design



Spot /Flood Beam Options Available



JG-2029



5.6" / 60W / IP68 / Built-in Temperature Control	
Chip	Osram 3030, 40*1.5W
Raw Lumens	6600LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Flood Beam
Size	142*91*35MM
Color Temperature	6000K
Bracket	Stainless steel bracket

3 sided luminescent optical structure





JG-2035



4" / 54W / IP68 / Built-in Temperature Control	
Chip	Osram 3030, 36*1.5W
Raw Lumens	5940LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Flood Beam
Size	100*100*35MM
Color Temperature	6000K
Bracket	Stainless steel bracket

3 sided luminescent optical structure





JG-2031



3.3" / 54W / IP68 / Built-in Temperature Control	
Chip	Osram 3030, 36*1.5W
Raw Lumens	5940LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Flood Beam
Size	84*84*37MM
Color Temperature	6000K,
Bracket	Stainless steel bracket

3 sided luminescent optical structure





JG-2027



6.1" / 200W / IP68 / Rotating Base	
Chip	3535， 40*5W
Raw Lumens	22000LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Flood Beam
Size	155*103*63MM
Color Temperature	6000K
Bracket	Stainless steel bracket

3 sided luminescent optical structure




JG-2028



3.7" / 80W / IP68 / Built-in Temperature Control	
Chip	3535, 16*5W
Raw Lumens	8800LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Flood Beam
Size	95*95*63MM
Color Temperature	6000K
Bracket	Stainless steel bracket

3 sided luminescent optical structure

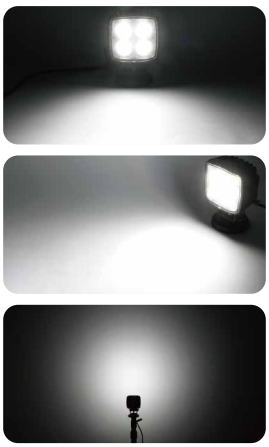


JG-2021



3.8" / 120W / IP68 / Rotating Base/ Amber Light	
Chip	CREE, 8*10W, 4*10W
Raw Lumens	13200LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Flood Beam
Size	98*98*63MM
Color Temperature	6000K
Bracket	Stainless steel bracket


3 sided luminescent optical structure， Built-in Temperature Control

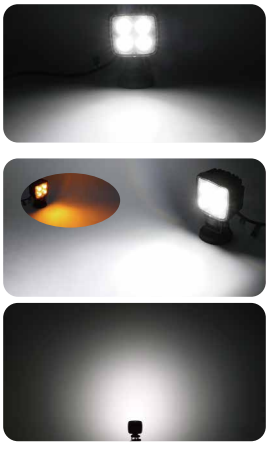

JG-970-ZH-8




5.5" / 40W / 1LUX@80M / IP68&IP69K	
Raw Lumens	2970LM
Operating Voltage	9-32V DC
Housing Material	601 die cast aluminum
Bracket	Stainless Steel
Beam	Wider Flood Beam+Amber Position light
Signal Function	Warning
Color Temperature	6000K
Working temp	-40℃-85℃

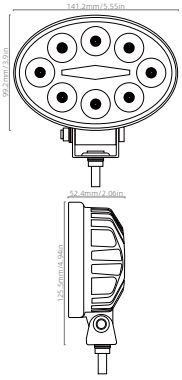

Amber DRL



Strobe Amber Warning

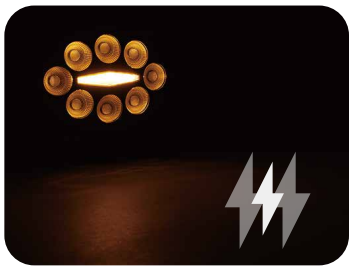


Wider Flood Even Beam



Quality Detail



No Darknots

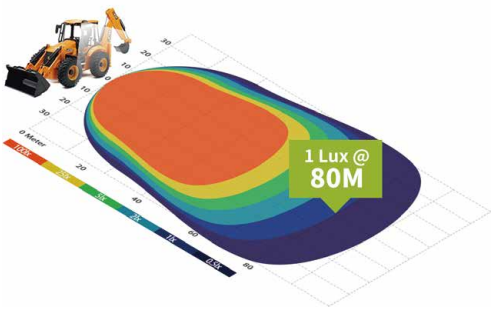

Ftir Wider Flood Beam




Agricultural Tractors



JG-YSD-F-3.3



3.3" / 20W / Amber DRL / IP68	
Chip	2016*4pcs; 2835*36pcs
Raw Lumens	1300LM / 1500LM
Operating Voltage	10-30V DC
Lllumination	505Lx@10M; 33Lx@10M
Housing Material	Aluminum Housing
Beam	Spot Beam/ Flood Beam
Color Temperature	6000K
With Amber Start Light	EMC(R10), CE, RoHs

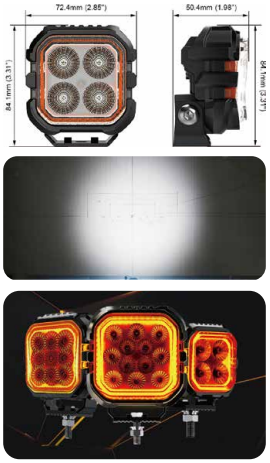

JG-YSD-F-4.5



4.5" / 45W / Amber DRL / IP68	
Chip	2016*9pcs; 2835*54PCS
Raw Lumens	2850LM / 3300LM
Operating Voltage	10-30V DC
Lllumination	1300Lx@10M; 66Lx@10M
Housing Material	Aluminum Housing
Beam	Spot Beam/ Flood Beam
Color Temperature	6000K
With Amber Start Light	EMC(R10), CE, RoHs



JG-YSD-F-5.1



5.1" / 60W / Amber DRL / IP68	
Chip	2016*12pcs; 2835*48PCS
Raw Lumens	3900LM / 4500LM
Operating Voltage	10-30V DC
Lllumination	1860Lx@10M; 92Lx@10M
Housing Material	Aluminum Housing
Beam	Spot Beam/ Flood Beam
Color Temperature	6000K
With Amber Start Light	EMC(R10), CE, RoHs



JG-YSD-Y-3.6



3.6" / 20W / Amber DRL / IP68	
Chip	2016*4pcs; 2835*36pcs
Raw Lumens	1350LM / 1500LM
Operating Voltage	10-30V DC
Lllumination	464Lx@10M; 35Lx@10M
Housing Material	Aluminum Housing
Beam	Spot Beam/ Flood Beam
Color Temperature	6000K
With Amber Start Light	EMC(R10), CE, RoHs



JG-YSD-Y-4.5



4.5" / 35W / Amber DRL / IP68	
Chip	2016*7pcs; 2835*54PCS
Raw Lumens	2250LM / 2550LM
Operating Voltage	10-30V DC
Lllumination	1111Lx@10M; 46Lx@10M
Housing Material	Aluminum Housing
Beam	Spot Beam/ Flood Beam
Color Temperature	6000K
With Amber Start Light	EMC(R10), CE, RoHs



JG-YSD-Y-5.5



5.5" / 60W / Amber DRL / IP68	
Chip	2016*12pcs; 2835*48PCS
Raw Lumens	3950LM / 4650LM
Operating Voltage	10-30V DC
Lllumination	1830Lx@10M; 91Lx@10M
Housing Material	Aluminum Housing
Beam	Spot Beam/ Flood Beam
Color Temperature	6000K
With Amber Start Light	EMC(R10), CE, RoHs



JG-930D-12



4.3" / 22W / 1LUX@130M / IP68	
Chip	3535 LEDs *10
Raw Lumens	1800LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Flood Beam
Color Temperature	5700K
With Amber Start Light	














4 Inch Off-road Light With Amber DRL




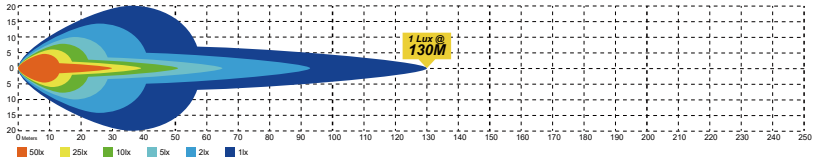

JG-950D-14




4.3" / 30W / 1LUX@150M / IP68	
Chip	3535 LEDs *14
Raw Lumens	2300LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Bracket	Iron Bracket
Beam	Flood Beam
Color Temperature	5700K
With Amber Start Light	














4 Inch Off-road Light With Amber DRL



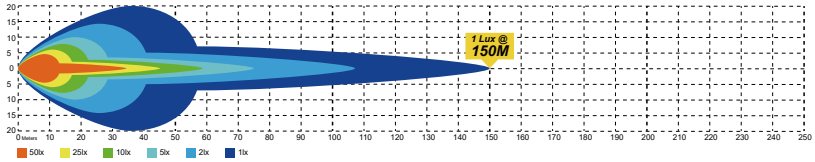

JG-JS-C950



4" / 20W / IP68 / Warning Strobe	
Chip	9 PCS
Raw Lumens	1500LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Flood Beam, Amber Strobe
Color Temperature	5700K, 3500K
Bracket	stainless steel
Installation	Hanging, Standing,Pedestal
Certification	ECE R10 CISP R25

JG-GC-950D-16



4.3" / 32W / IP68 / Wide Flood	
Chip	32 PCS
Raw Lumens	2560LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Flood Beam
Color Temperature	6000K
Bracket	stainless steel
Installation	Hanging, Standing,Pedestal

JG-GC-940D-8



4.4" / 32W / IP68 / Wide Flood	
Chip	32 PCS
Raw Lumens	2560LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Flood Beam
Color Temperature	6000K
Bracket	stainless steel
Installation	Hanging, Standing,Pedestal


JG-GC-930D-8



4" / 31W / IP68 / Wide Flood	
Chip	22 PCS
Raw Lumens	2480LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Flood Beam
Color Temperature	6000K
Bracket	stainless steel
Installation	Hanging, Standing,Pedestal

JG-1390F






ECE R10 CE ROHS

4.4" / 70W / IP68	
Chip	5W *14 PCS
LED Power	70W
Raw Lumens	8100LM
Operating Voltage	10-30V DC
Beam	Flood Beam
Color Temperature	5700K
Housing Material	Die-cast Aluminum Alloy
Bracket	stainless steel
Certification	EMC R10, CE, RoHs

JG-1145F






ECE R10 CE ROHS

3.8"/ 45W / IP68	
Chip	5W * 9 PCS
LED Power	45W
Raw Lumens	4050LM
Operating Voltage	9-32V DC
Beam	Flood Beam
Color Temperature	5700K
Housing Material	Die-cast Aluminum Alloy
Bracket	stainless steel
Certification	EMC R10, CE, RoHs

JG-1245F

ECE R10
CE
ROHS






4.1"/ 45W / 4050LM / IP68	
Chip	5W * 9 PCS
Operating Voltage	9-32V DC
Beam	Flood Beam
Color Temperature	5700K
Housing Material	Die-cast Aluminum Alloy
Bracket	stainless steel
Certification	EMC R10, CE, RoHs

JG-1420F

ECE R10
CE
ROHS






2.8"/ 20W / 1800LM/ IP68	
Chip	5W * 4 PCS
Operating Voltage	9-32V DC
Beam	Flood Beam
Color Temperature	5700K
Housing Material	Die-cast Aluminum Alloy
Bracket	stainless steel
Certification	EMC R10, CE, RoHs

JG-1520F

ECE R10
CE
ROHS





2.8"/ 20W / 1800LM/ IP68	
Chip	5W * 4 PCS
Operating Voltage	9-32V DC
Beam	Flood Beam
Color Temperature	5700K
Housing Material	Die-cast Aluminum Alloy
Bracket	stainless steel
Certification	EMC R10, CE, RoHs

JG-F35-DT



4.5" / 27W / IP68	
Chip	5 PCS
Raw Lumens	3000LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Flood Beam
Color Temperature	5700K
Bracket	stainless steel
Installation	Hanging, Standing,Pedestal
Certification	ECE R10 CISP R25

JG-F28-DT



6.1" / 38W / IP68	
Chip	8 PCS
Raw Lumens	4200LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Flood Beam
Color Temperature	5700K
Bracket	stainless steel
Installation	Hanging, Standing,Pedestal
Certification	ECE R10 CISP R25

JG-GC-T26




5.6" / 35W / IP68 / 360° Rotatable	
Chip	6 PCS
Raw Lumens	3600LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Flood Beam
Color Temperature	5700K
Bracket	stainless steel
Installation	Hanging, Standing,Pedestal
Certification	ECE R10 CISP R25

JG-GC-Y35



4.2" / 28W / IP68	
Chip	5 PCS
Raw Lumens	3000LM
Operating Voltage	9-32V DC
Housing Material	Die-cast Aluminum Alloy
Beam	Flood Beam
Color Temperature	5700K
Bracket	stainless steel
Installation	Hanging, Standing,Pedestal
Certification	ECE R10 CISP R25


JG-930-34





4" / 9-80V DC / IP67 / 30000H	
LED Chip	3030
Chip QTY	34 LEDs
Voltage	9-80V DC
Beam	Spot+DRL
Light Color	White+Yellow
Material	Aluminum+PC

JG-953-35





4" / 9-80V DC / IP67 / 30000H	
LED Chip	3030
Chip QTY	35 LEDs
Voltage	9-80V DC
Beam	Spot+DRL
Light Color	White+Yellow
Material	Aluminum+PC


JG-930-27





4" / 9-80V DC / IP67 / 30000H	
LED Chip	3030
Chip QTY	27 LEDs
Voltage	9-80V DC
Beam	Flood
Light Color	White
Material	Aluminum+PC

JG-950-40





4" / 9-80V DC / IP67 / 30000H	
LED Chip	3030
Chip QTY	40 LEDs
Voltage	9-80V DC
Beam	Flood
Light Color	White
Material	Aluminum+PC

JG-930-MINI-21





3.3" / 9-80V DC / IP65 / 30000H	
LED Chip	2835
Chip QTY	21 LEDs
Voltage	9-80V DC
Beam	Spot + Flood
Light Color	White
Material	Aluminum+PC

JG-950-MINI-28





3.3" / 9-80V DC / IP65 / 30000H	
LED Chip	2835
Chip QTY	28 LEDs
Voltage	9-80V DC
Beam	Spot + Flood
Light Color	White
Material	Aluminum+PC


JG-KZ-CP-8-WX-YK-APP



Working Voltage	DC12/24V
Circuit Allocation	30A*2, 20A*2, 15A*2, 10A*2
ACC Included	ACC
Max Operating Total Current	60A
Max Total Operating Power	12V@720W,24V@1440W
Control Function	On-Off / Strobe
Upgrade version	Flash & Strobe speed adjustable
Control Distance	70M/230FT
Controller	Panel key & Remote & APP Control
Panel Back Lighting	Single Color, RGB Color
Panel Light Brightness Function	On-Off







JG-KZ-CP-6-WX-YK-APP



Working Voltage	DC12/24V
Circuit Allocation	30A*1, 20A*2, 15A*2, 10A*1
ACC Included	ACC
Max Operating Total Current	60A
Max Total Operating Power	12V@720W,24V@1440W
Control Function	On-Off / Strobe
Upgrade version	Flash & Strobe speed adjustable
Control Distance	70M/230FT
Controller	Panel key & Remote & APP Control
Panel Back Lighting	Single Color, RGB Color
Panel Light Brightness Function	On-Off








JG-KZ-CP-8-WX-YK



Working Voltage	DC12/24V
Circuit Allocation	30A*2, 20A*2, 15A*2, 10A*2
ACC Included	ACC
Max Operating Total Current	60A
Max Total Operating Power	12V@720W,24V@1440W
Control Function	On-Off / Strobe
Upgrade version	Flash & Strobe speed adjustable
Control Distance	70M/230FT
Controller	Panel key & Remote Control
Panel Back Lighting	Single Color, RGB Color
Panel Light Brightness Function	On-Off







JG-KZ-CP-6-WX-YK



Working Voltage	DC12/24V
Circuit Allocation	30A*1, 20A*2, 15A*2, 10A*1
ACC Included	ACC
Max Operating Total Current	60A
Max Total Operating Power	12V@720W,24V@1440W
Control Function	On-Off / Strobe
Upgrade version	Flash & Strobe speed adjustable
Control Distance	70M/230FT
Controller	Panel key & Remote Control
Panel Back Lighting	Single Color, RGB Color
Panel Light Brightness Function	On-Off








JG-KZ-CP-8-HP-APP



Working Voltage	DC12/24V
Circuit Allocation	40A*1, 30A*2, 20A*2, 15A*2, 10A*1, 2A*6
DRL Circuit	6 gang
ACC Included	ACC
Max Operating Total Current	120A
Max Total Operating Power	12V@1440W,24V@2880W
Control Function	On-Off / Strobe
Upgrade version1	One click DRL operation
Upgrade version2	Flash & Strobe speed adjustable
Controller	Panel key & APP Control
Panel Back Lighting	Single Color, RGB Color
Panel Light Brightness Function	On-Off








KZ-CP-8-1-2/1-4

NEW



Working Voltage	DC12/24V
Circuit Allocation	10A*1, 20A*1, 30A*2
ACC Included	ACC
Max Operating Total Current	60A
Max Total Operating Power	12V@720W, 24V@1440W
Control Panel Function	Toggle, Momentary, Strobe, Flash
Controller	Pannel Button, APP
Panel Back Lighting	RGB, Dimmable
Panel Light Brightness Function	On-Off
Working Temperature	-40℃~85℃
Charging	Type-C, Magnetic charging



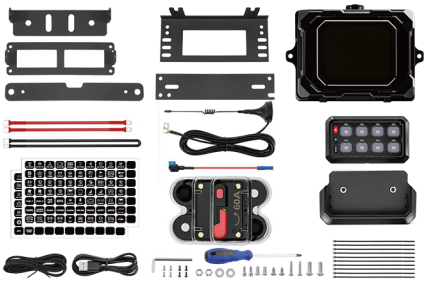



JG-KZ-CP-6-WX-YX



Working Voltage	DC12/24V
Circuit Allocation	30A*1, 20A*2, 15A*2, 10A*1
ACC Included	ACC
Max Operating Total Current	60A
Max Total Operating Power	12V@720W,24V@1440W
Control Function	On-Off/Strobe/Flash/Toggle/Momentory
Upgrade version	Flash & Strobe
Connect Method(Control box&Panel)	Wireless
Controller	Panel key
Panel Back Lighting	Single Color, RGB Color
Panel Light Brightness Function	On-Off







JG-KZ-CP-4-WX-YX



Working Voltage	DC12/24V
Circuit Allocation	30A*1, 20A*1, 15A*1, 10A*1
ACC Included	ACC
Max Operating Total Current	60A
Max Total Operating Power	12V@720W,24V@1440W
Control Function	On-Off/Strobe/Flash/Toggle/Momentory
Upgrade version	Flash & Strobe
Connect Method(Control box&Panel)	Wireless
Controller	Panel key
Panel Back Lighting	Single Color, RGB Color
Panel Light Brightness Function	On-Off







JG-KZ-CP-4-WX-ZC



Working Voltage	DC12/24V
Circuit Allocation	10A*1, 20A*1, 30A*2
ACC Included	ACC
Relay Mode	/
Max Operating Total Current	60A
Max Total Operating Power	12V@720W, 24V@1440W
Control Function	On-Off / Strobe
Controller	Key & Wireless Control
Panel Back Lighting	Single Color
Panel Light Brightness Function	On-Off
Working Temperature	-40℃~85℃







JG-KZ-CP-6-WX-ZC



Working Voltage	DC12/24V
Circuit Allocation	10A*2, 15A*1, 20A*1, 30A*2
ACC Included	ACC
Relay Mode	/
Max Operating Total Current	80A
Max Total Operating Power	12V@1080W, 24V@2160W
Control Function	On-Off / Strobe
Controller	Key & Wireless Control
Panel Back Lighting	Single Color
Panel Light Brightness Function	On-Off
Working Temperature	-40℃~85℃







JG-KZ-CP-8-RGB-ACC-WX



Working Voltage	DC12/24V
Circuit Allocation	10A*2, 15A*2, 20A*2, 30A*2
ACC Included	ACC
Relay Mode	Solid State Relay
Max Operating Total Current	60A
Max Total Operating Power	12V@720W, 24V@1440W
Control Function	On-Off / Mementary / Flicker
Controller	Key & Wireless Control
Panel Back Lighting	RGB 11 Colors
Panel Light Brightness Function	5-Speed Dimming/APP Infinite Dimming
Working Temperature	-40℃~85℃







JG-KZ-CP-12-RGB-ACC-WX



Working Voltage	DC12/24V
Circuit Allocation	10A*4, 15A*2, 20A*2, 30A*4
ACC Included	ACC
Relay Mode	Solid State Relay
Max Operating Total Current	80A
Max Total Operating Power	12V@960W, 24V@1920W
Control Function	On-Off / Mementary / Flicker
Controller	Key & Wireless Control
Panel Back Lighting	RGB 11 Colors
Panel Light Brightness Function	5-Speed Dimming/APP Infinite Dimming
Working Temperature	-40℃~85℃








JG-KZ-CP-8-RGB-ACC-APP



Working Voltage	DC12/24V
Circuit Allocation	10A*2, 15A*2, 20A*2, 30A*2
ACC Included	ACC
Relay Mode	Solid State Relay
Max Operating Total Current	80A
Max Total Operating Power	12V@720W, 24V@1440W
Control Function	On-Off / Mementary / Flicker
Controller	Key, APP
Panel Back Lighting	RGB 11 Colors
Panel Light Brightness Function	5-Speed Dimming
Working Temperature	-40℃~85℃





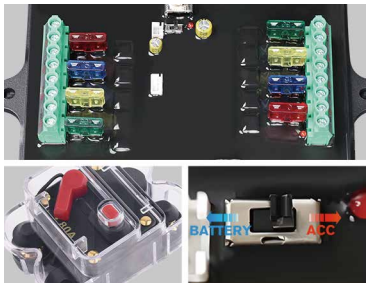


JG-KZ-CP-12-RGB-ACC-APP



Working Voltage	DC12/24V
Circuit Allocation	10A*4, 15A*2, 20A*2, 30A*4
ACC Included	ACC
Relay Mode	Solid State Relay
Max Operating Total Current	100A
Max Total Operating Power	12V@960W, 24V@1920W
Control Function	On-Off / Mementary / Flicker
Controller	Key, APP
Panel Back Lighting	RGB 11 Colors
Panel Light Brightness Function	5-Speed Dimming
Working Temperature	-40℃~85℃





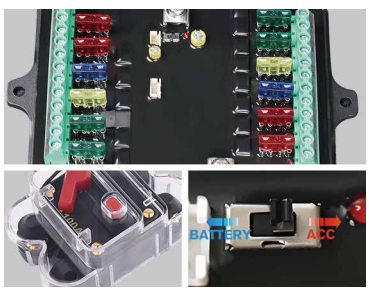

JIUGUANG

KZ-CP-6-JK



Working Voltage	DC12/24V
Circuit Allocation	10A*2, 15A*1, 20A*1, 30A*2
ACC Included	ACC
Max Operating Total Current	95A
Max Total Operating Power	12V@720W, 24V@1440W
Control Function	On-Off / Strobe
Controller	Key & Wireless Control
Panel Back Lighting	Single Color
Panel Light Brightness Function	On-Off
Working Temperature	-40℃~85℃
CNC Integrated Molding Process	













KZ-CP-6-JL



Working Voltage	DC12/24V
Circuit Allocation	10A*2, 15A*1, 20A*1, 30A*2
ACC Included	ACC
Max Operating Total Current	95A
Max Total Operating Power	12V@720W, 24V@1440W
Control Function	On-Off / Strobe
Controller	Key & Wireless Control
Panel Back Lighting	Single Color
Panel Light Brightness Function	On-Off
Working Temperature	-40℃~85℃
CNC Integrated Molding Process	















JG-L992-RGB



Controller	Remote & Bluetooth APP
Beam	Whipless Laser beam
Voltage	12-24V DC
Color	RGBW / 24 color combinations
Lumen	8000LM
Waperproof	IP67
Material	Aluminum + PC
Bracket	Stainless Steel and Adjustable Angle

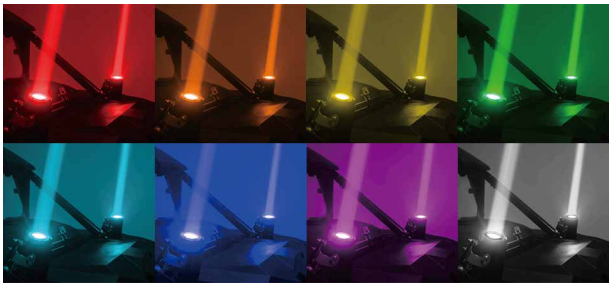






JG-ZJ-DDFZ-DK



Voltage	12V-24V
Power	10W
Bearing capacity	15-20KG
Single side motor size	10*4.5*3.8 cm
Single sideband motor size	41 cm
Middle horizontal bar min	56 cm
Middle horizontal bar max	133 cm
Suitable temperature	80 °C -40 °C (176 °F -40°F)
Material	white steel+anti rust coating
Single box size	64*37*12 cm
Individual weight	5KG



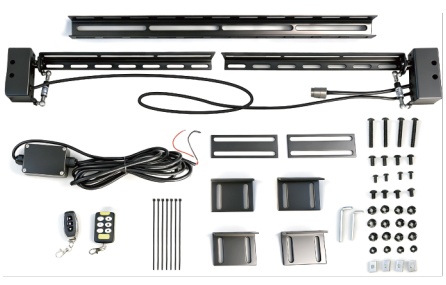



XZ-PT-16-1-2-MY





VOLTAGE:12V
LENGTH:2.5M
XZ-PT-16-1-1-MY / XZ-PT-16-1-2-MY Option

XZ-DT-16-1-2-MY





VOLTAGE:12V
LENGTH:3M
XZ-DT-16-1-1-MY / XZ-DT-16-1-2-MY Option

XZ-DT-16-1-2-SD





VOLTAGE:12V
LENGTH:3M
XZ-DT-16-1-1-SD / XZ-DT-16-1-2-SD Option

XZ-3KDT-16-1-2-MY





VOLTAGE:12V
LENGTH:2.5M
XZ-3KDT-16-1-1-MY / XZ-3KDT-16-1-2-MY Option

XZ-PT-3X20-1-2-MY





VOLTAGE:12V
LENGTH:3M
1 CONTAIN 2 lights


XZ-DT-16-1-2-TG





Dimmable Horn Strobe ACC

Dimmable Wire Harness

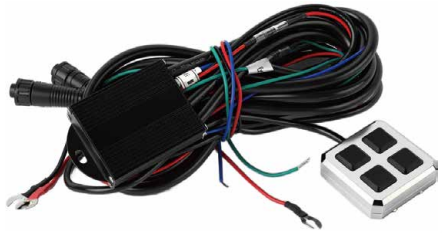



Dimmable Horn Strobe ACC Waterproof

XZ-DT/FS-16-1-2-LB





Horn ACC Strobe DT / Waterproof Option

XZ-FS-D043-FW/D040





Horn Overtake Strobe ACC Waterproof

XZ-FS-D040-9-C





Horn Overtake Strobe ACC Waterproof

For Universal / Ford / Bronco / RZR / Jeep / Dodger


TY-004


TY-005


TY-006


TY-007


TY-001


TY-013


TY-019


FT-001


FT-006


FT-007


LM-04


LM-13


LM-14


LM-18


LM-19


LM-32


RZR-001


RZR-003


RZR-009


RZR-010


JP-001


JP-002


JP-003


JP-004


JP-029


JP-048


MQ-004


MQ-009


MQ-010


MQ-013


DQ-006


DQ-009


DQ-012


YQ-003A


ZJ-PZ01

JG-BZS829F-JG




Controller	Remote & Bluetooth APP & Switch
Beam Angel	360°Glowing Spiral Illumination, Laser Beam
LEDs	1FT-180/2FT-600/3FT-900 LEDS
Voltage	12V DC
Waterproof	IP67
Size	1FT, 2FT, 3FT
Base	Quick Release Base
Function (APP)	RGB Chasing (300colors& 200moles)
	Music sync, Sound sync;
	Brake & Reserve & Turning Singal
Function (Remot+Switch)	Laser Beam
Pack	Pair Pack

APP Control-Spiral Whip




RF& Skipping-off Switch Control-Laser whip

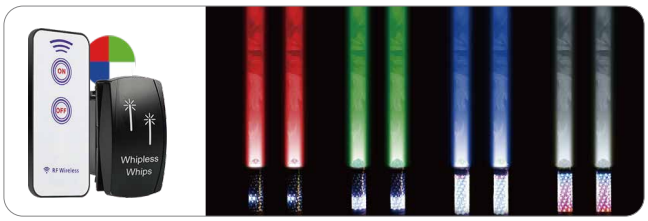

Spring Base




1-control 2-waterproof wiring harness

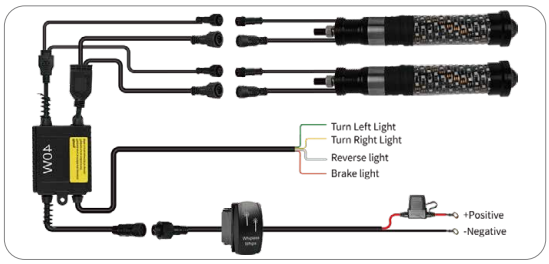

40W Laser



Music Dyna Function

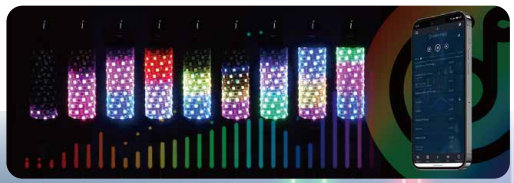

Turn Left/Right Light

Brake light

Reverse light







JG-BZS829F-JG-SS



Control	Remote + BT App + Switch
Beam Angel	360° Spiral Glow + Dual-Color Laser
LED Count	240 (1FT) / 600 (2FT) / 900 (3FT)
Voltage	2V DC, 60W, 5050 SMD
Waterproof	IP67
Size	1FT, 2FT, 3FT
Base	Quick Release Base
Function (APP)	RGB Chasing (300 colors, 200 modes)
Function (Remote+Switch)	Music/Sound Sync;
	Brake/Reverse/Turn Signal;
	Laser Beam (2 or 3 Colors)
Pack	Pair Pack

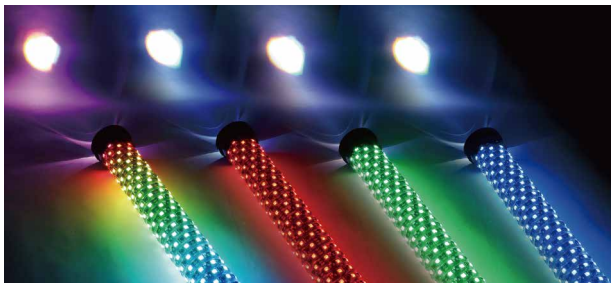

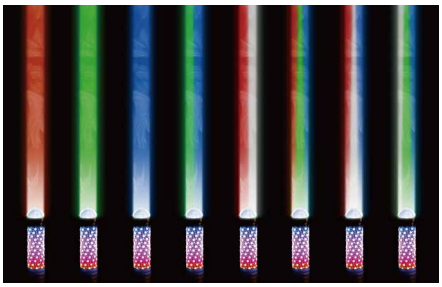




JG-829F PRO+RF-2.2"



Controller	Remote / Remote&Bluetooth APP
Beam Angel	360°Glowing Spiral Illumination
LEDs	1FT-150/2FT-345/3FT-594 LEDS
Voltage	12V DC
Waterproof	IP67
Size	1FT, 2FT, 3FT, 4FT, 5FT
Base	Quick Release Base
Function(RF&APP)	RGB Chasing (300colors& 200moles)
	Music sync, Sound sync, Timing function;
	Brake & Turning Singal
Pack	Pair Pack

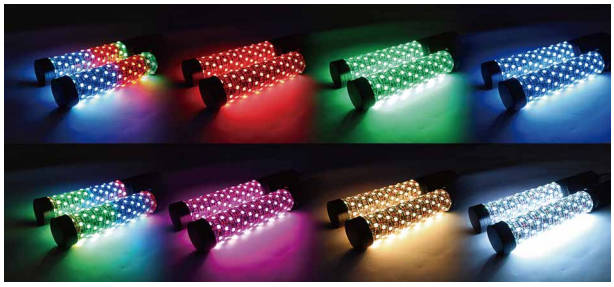







JG-849F-RF-2.2''



Controller	Remote&Bluetooth APP
Beam Angel	360°Gloing Spiral Illumination
Voltage	12V DC
Waterproof	IP67
Size	1FT, 2FT, 3FT
Material	Aluminum Housing
Base	Quick Release Base
Function(RF&APP)	RGB Chasing (300colors& 200moles)
	Music sync, Sound sync, Timing function;
	Brake & & Reserve & Turning Singal
Pack	Pair Pack

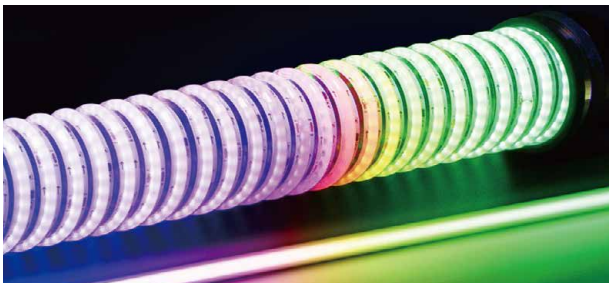






JG-8291



Controller	Remote & APP
Beam Angel	360°Gloing Spiral Illumination
Voltage	12V DC
Power	10W
LEDs	135 LED
Waterproof	IP67
Size	30 Inch
Material	Aluminum Housing
Base	Quick Release Base
Function(RF&APP)	RGB Chasing (300colors& 200moles)
Pack	Whip Light, Pair Adjustable Clam Backet(1.5inch)

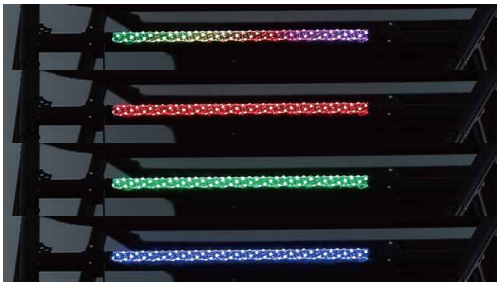






JG-8290



Controller	Remote / Remote&Bluetooth APP
Beam Angel	360°Glowing Spiral Illumination
LEDs	RGB 5050SMD
Voltage	12V DC
Waterproof	IP67
Size	3FT, 4FT, 5FT, 6FT & Customized
Base	Quick Release Base
Function(RF&APP)	SIngle Color, RGB Chasing (300colors& 200modes)
	Timing Function, Music&sound Sync,
	Brake & Turning Singal(Only Pair)
Pack	Single Piece Pack / Pair Pack

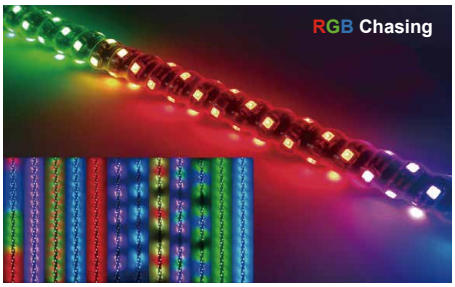







BASE OPTION (Customized Color)













JG-ZJ-8003-A-1.75-2in



JG-ZJ-RZR-014



JG-ZJ-RZR-038



JG-ZJ-RZR-0



JG-ZJ-RZR-C




JG-SCD-LED



Size	7 inch
Current	0.9A
Wattage	45W
Raw Lumens	3600LM
Lens	PMMA
Operating Voltage	DC 9-24V
Housing Material	Diecasting Aluminum Alloy Housing
Color Mode	Reverse, Running, Brake, Strobe, Curtesy Mode
Halo Color	Red / Blue

Five Lighting Modes to Suit Different Situations



Reverse Mode



Running Mode


Curtesy Mode


Brake Mode / Strobe Mode










JG-JS-BS-L08-5



Size	30 / 36 inch
LED QTY	30/pcs
Raw Lumens	30000LM
Color	Red White Amber
Housing Material	Diecast Aluminum Housing +PC
Operating Voltage	9-32V DC
Beam	120° Flood Beam
Waterproof	IP 68
Wireless	Plug-N-Play Wiring Harnes

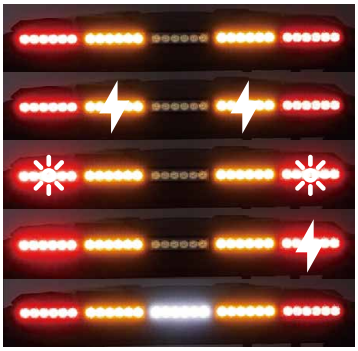
Running Light
8 Strobe Modes
Brake Light
Turn Signal
Reverse Light





JG-R002P-ZS



210° Beam Angle	
Voltage	9-16V DC
Power	16W/4Pods, 24W/6Pods
	32W/8Pods; 48W/12Pods
Light Source	Super Bright 3528 SMD
Waterproof	IP67
Functions	16 Million Colors 188+ Chasing RGB Combination Adjustable Speed / Brightness DIY Color / Chasing Mode Music / Voice Mode Passing Word Setting

JG-R002



Voltage	9-32V DC
Power	16W/4Pods, 24W/6Pods
	32W/8Pods; 48W/12Pods
Light Source	Super Bright 3528 SMD
Waterproof	IP68
Functions	16 Million Colors Adjustable Speed / Brightness DIY Color / RGB Color Music / Voice Mode

JG-R002W



Voltage	9-32V DC
Power	16W/4Pods, 24W/6Pods
	32W/8Pods; 48W/12Pods
Light Source	Super Bright 3528 SMD
Waterproof	IP68
Color	White, Yellow, Blue, Red,
	Purple, Green
Functions	16 Million Colors DIY Color / RGB Color Music / Voice Mode

JG-JZD-996




Beam Angel	White Light, Amber Side Shooter
Control mode	W/harness Switch control
Wattage	45W
Voltage	9-15V DC
Waterproof	IP68
Mirror surface	Convex glass mirror for wide angle view
Materials	Low weight High strength cast Aluminum housing
Feature	Clamp 360°&mirror 120° roration / Folds in on impact
Bracket Optional	Rro-fit cage clamp / 1.75"to 2" Round Tube Clamp
lifeSpan	Over 50,000 hours
Pack	Sold in pairs







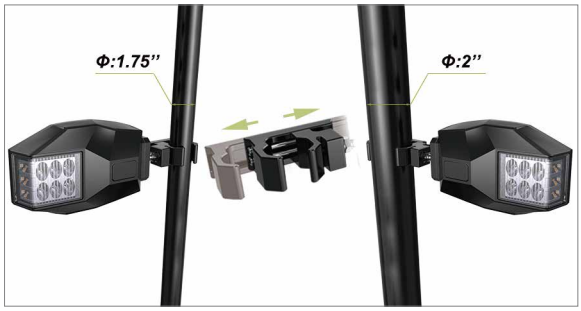





JZD-01-GWY



Beam Angel	Green light/ White light/Wide angle turn signal Yellow light
Control mode	W/harness Switch control
Wattage	45W
Voltage	9-15V DC
Waterproof	IP68
Mirror surface	Convex glass mirror for wide angle view
Materials	Low weight High strength cast Aluminum housing
Feature	Clamp 360°&mirror 120° roration / Folds in on impact
Bracket Optional	Rro-fit cage clamp / 1.5"to 2" Round Tube Clamp
lifeSpan	Over 50,000 hours
Pack	Sold in pairs

JZD-01-WWY



JZD-02-GWY



JZD-02-WWY




JZD-02-WW



JZD-12L



Beam Angel	High Intensity RGBW Programmable Lights
	RGB Has Memory Functions
Control Mode	Body W/ Light Switch
Waterproof	IP67
Mirror Surface	Anti-scratch PC Lens
Materials	Low Weight High Strength Cast Aluminum Housing
Bracket	Clamp 360°& Mirror 120° Roration
	Fit For1.5"to 2" Round Tube
Feature	W/ USB Port
Pack	Sold In Single W/3M Wiring Harness
Catalog	Mirrors without lights are also available

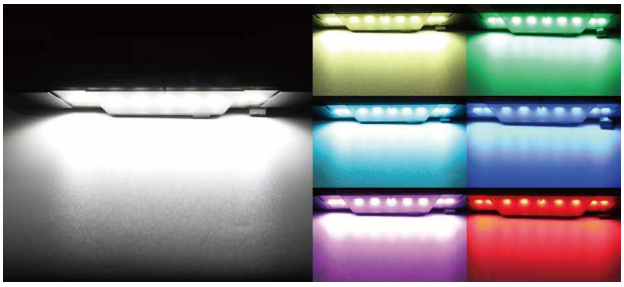



JZD-12



JG-769802



JG-768802



JG-7698-RW



JG-7698-GW



JG-7698-AW



JG-DL-W



JG-DL-WR



JG-W32






Toyota Honda Universal



3inch / 17600LM/Pair / IP68	
Lamp Cup	Dual lamp cups
Voltage	12V
LED Chip	4575chips +1+1+1 chips(5050)
Rated Power	Low: 50W/Pc; High: 80W/Pc
Color Temperature	3000K&4300&6000K+Fill light
Material	Aluminum Alloy
Copper	Have Cooling Copper
Cooling	Turbo Cooling Fan

JG-W20




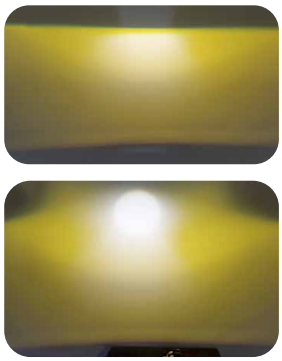

2inch / IP68	
Lamp Cup	Dual lamp cups
Voltage	12V
LED Chip	4575Chip +1chips(5050)
Rated Power	Low: 35W/Pc; High: 45W/Pc
Lumens	6000Lumen/Lens
Color Temperature	6000K&6000K
Material	Aluminum Alloy
EMC	EMC Separate driver

JG-W30




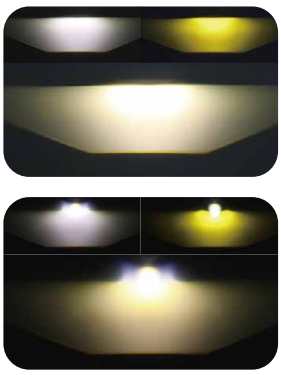

3inch / 13200LM/Pair / IP68	
Lamp Cup	Dual lamp cups
Voltage	12V
LED Chip	4575Chip +1chips(5050)
Rated Power	Low: 50W/Pc; High: 60W/Pc
Color Temperature	3000K&4300&6000K+Fill light
Material	Aluminum Alloy
Copper	Have Cooling Copper
Cooling	Turbo Cooling Fan

JG-W2C





2inch / IP68	
Lamp Cup	Dual lamp cups
Voltage	12V
LED Chip	4575Chip +1chips(5050)
Rated Power	Low: 45W/Pc; High: 60W/Pc
Lumens	13200LM pair
Color Temperature	3000K&4300&6000K+fill light
Material	Aluminum Alloy
EMC	Turbo Cooling Fan