




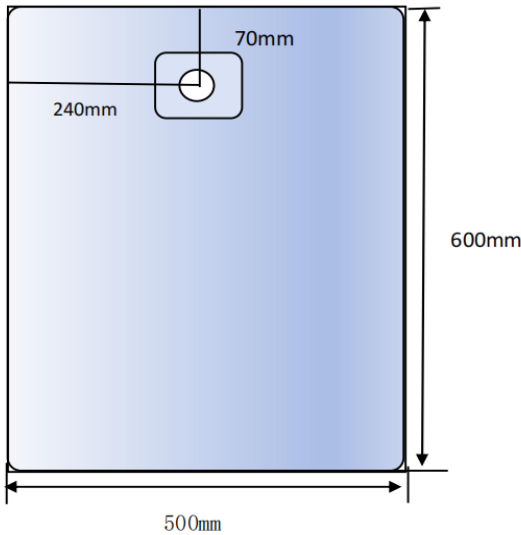

Technical Specification		Bag Code	RBBPE-20LFH
<b>Bag Capacity</b> 3# 20Lt	<b>Barrier</b> Normal	<b>Filling Spout</b> 1"Flat Head	<b>Irradiation</b> No
<b>Dimensional Illustration</b>		<b>Spout &amp; Structure</b>	
		 <p>1"flatHead</p>	
		<p><b>Outer Layer</b></p> 	
		<p><b>Inner Layer</b></p> 	
<p>Spout Orientation:  Any</p> <p>Spout out of box: No</p>			
Packaging			
<b>Shipped without Pallets</b>		<b>Shipped with Pallets</b>	
<p>Bag Weight: 88 g ± 8%</p> <p>Box size: 630 x380 x 400 mm</p> <p>Box Net Weight: 26.40 kg</p> <p>Box Gross Weight: 28.21 kg</p>	<p>Pallet size: 1200 x 1000 x 2040 mm</p> <p>Pallet Net Weight: 705kg</p> <p>Pallet Gross Weight: 765kg</p> <p>Bags/box: 300 pcs</p> <p>Boxes/pallet: 25 boxes</p> <p>Bags/pallet: 7500 pcs</p>		
<p>Box/20'FCL: 250 boxes → 75,000 pcs</p> <p>Box/40'FCL: 500 boxes → 150,000 pcs</p>	<p>Pallets/20'FCL: 10 pallets → 75,000 pcs</p> <p>Pallets/40'FCL: 20 pallets → 150,000 pcs</p>		
Inner dimensions:	500 x 600 mm		
Tolerance on size:	±6mm		
Oxygen Transmission Rate	cm <sup>3</sup> / ( m <sup>2</sup> .24h.0.1Mpa ) ≤50		
Seal Strength:	N/15mm> 40		
Irradiation level:			
Neckband:			