


Dimensions in “mm”



Quantity	Price
1pc	79usd/pc
10pcs	72usd/pc
50pcs	66usd/pc

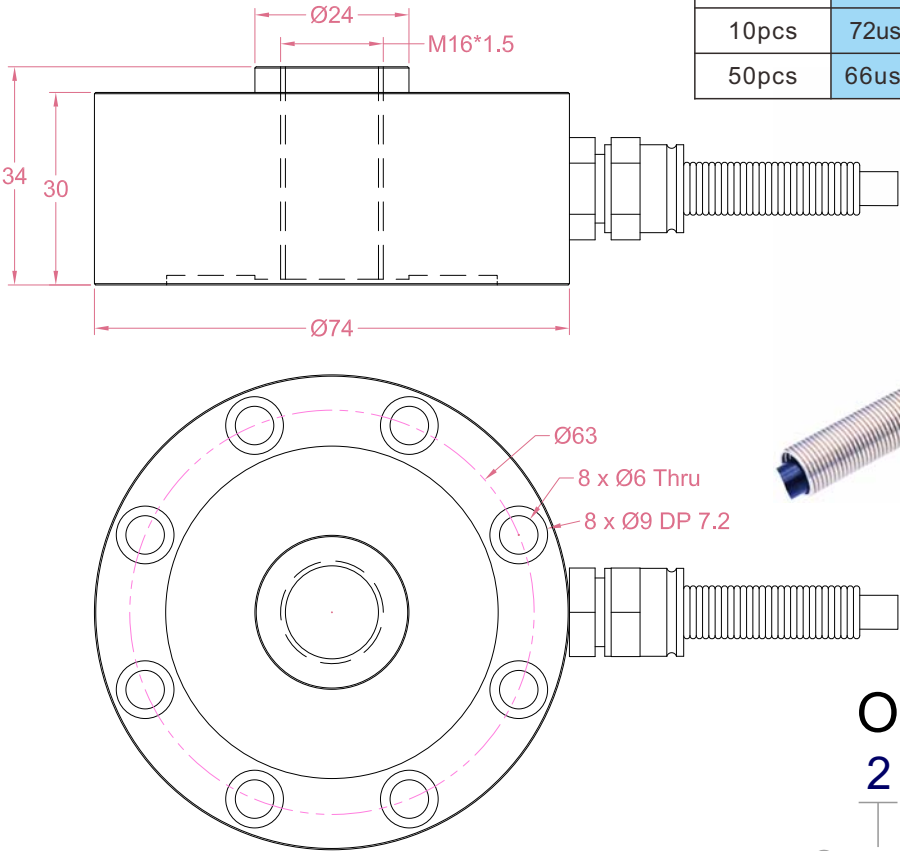

Order example:

2 x LCP03 - 500kg


Quantity Model Capacity
Email to sales@loadcellsensor.com for a quote

Specifications			
Rated Capacity	50/100/200/300/500/1000 kg		
Rated Output	2.0 mV/V	Compensated Temp.	0...+40°C
Excitation	3~15V	Operating Temp.	-20...+60°C
Zero Balance	±0.05 mV/V	Temp. Coeff. of Zero	±0.005% F.S./°C
Nonlinearity	±0.1% F.S.	Temp. Coeff. of Span	±0.005% F.S./°C
Hysteresis	±0.1% F.S.	Input Resistance	750±100 Ohms
Nonrepeatability	±0.05% F.S.	Output Resistance	700±100 Ohms
Creep(5min)	±0.05% F.S.	Insulation Resistance	>2000M Ohms(50V)
Safe Load Limit	150% F.S.	IP Rating	IP65
Breaking Load	200% F.S.	Element Material	Alloy steel
Cable	Ø5.5*2000mm 4-conductor shielded cable		


• LCS reserves the right to modify its design and specifications without notice

P:1/2

Load direction

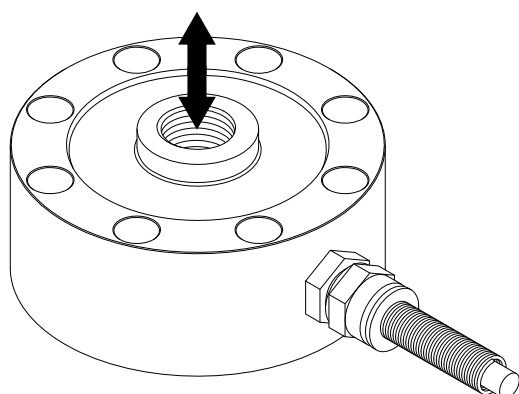


Wiring Code@Compression

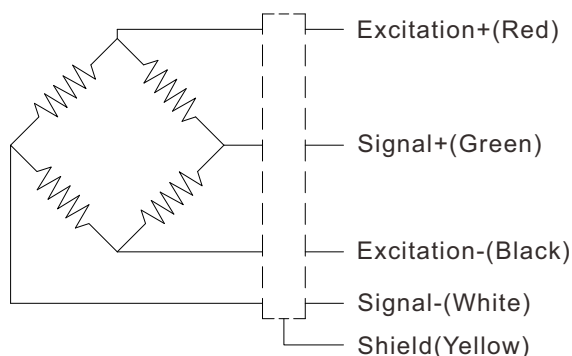


Shield is NOT connected to the sensor body

Load button

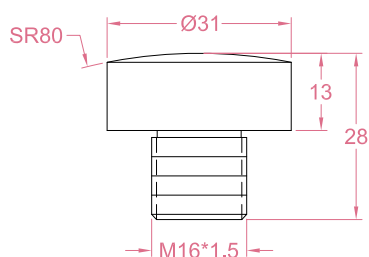


Material: Alloy steel
Item No.: LCP03-LB

Load flange

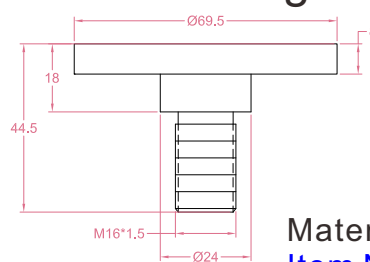

Material: Alloy steel
Item No.: LCP03-LF



Sensor/Amplifier/Indicator

Items	Power supply	Output/Function
LCP03	3-15V (Constant)	-30mV...+30mV (Depending on the power supply)
LCP03 + Analog amplifier	12~24V DC	0-3.3V, 0-5V, 0-10V, -5-5V, -10-10V, 0-5-10V 0-20mA, 4-20mA, 4-12-20mA...
LCP03 + Digital amplifier	12~24V DC	RS485 or RS232 output
LCP03 + Indicator	12~24V DC	Display force value Switch/Relay output Peak holding RS485/RS232 interface 0-5V/0-10V/4-20mA output
Email us for datasheet of amplifier and indicator		

P:2/2