

COMPANY PROFILE



SHANDONG INCHOI MACHIN-
ERY CO., LTD. is a supplier
specializing in the research
and development and man-
ufacturing of food vacuum
packaging equipment. The
company has formed a complete
operating system integrat-

ing product research and development, process design, production and manufacturing, product inspection, and technical services. The company's main products include thermoforming packaging machines, bag-feeding packaging machines, automatic continuous modified atmosphere packaging machines, continuous vacuum packaging machines, double-chamber vacuum packaging machines, tilting adjustable vacuum packaging machines, and skin vacuum packaging machines, which can meet customers' special customization needs. The company's equipment has passed CE and EAC certifications and has been exported to more than 40 coun-tries including the United States, Russia, Tajikistan, Uzbekistan, Kazakhstan, Iraq, Yemen, Mexico, Italy, Spain, Romania, Switzerland, Peru, Chile, Algeria, South Korea, Thailand, Vietnam, Singapore, Indonesia, etc. Pay attention to the needs of each customer, adhere to the spirit of craftsmanship, and let customers get a satisfactory experience.

CONTINUOUS VACUUM PACKER

>>> DZ-1000 连续式真空包装机

НЕПРЕРЫВНЫЙ ВАКУУМНЫЙ УПАКОВЩИК
ENVASADORA AL VACÍO CONTINUA



VACUUM PACKING MACHINE

>>> DZ600/2S 全自动真空包装机

ВАКУУМНАЯ УПАКОВОЧНАЯ МАШИНА
MÁQUINA DE ENVASADO AL VACÍO



MODIFIED ATMOSPHERE PACKING MACHINE

>>> 气调锁鲜包装机

МАШИНА ДЛЯ УПАКОВКИ С МОДИФИЦИРОВАННОЙ АТМОСФЕРОЙ
MÁQUINA DE ENVASADO EN ATMÓSFERA MODIFICADA



SKIN VACUUM PACKING MACHINE

>>> 贴体真空包装机


МАШИНА ДЛЯ ВАКУУМНОЙ СКИН-УПАКОВКИ
MÁQUINA DE ENVASADO AL VACÍO CON PIEL



SOME CUSTOMER CASES



CERTIFICATE

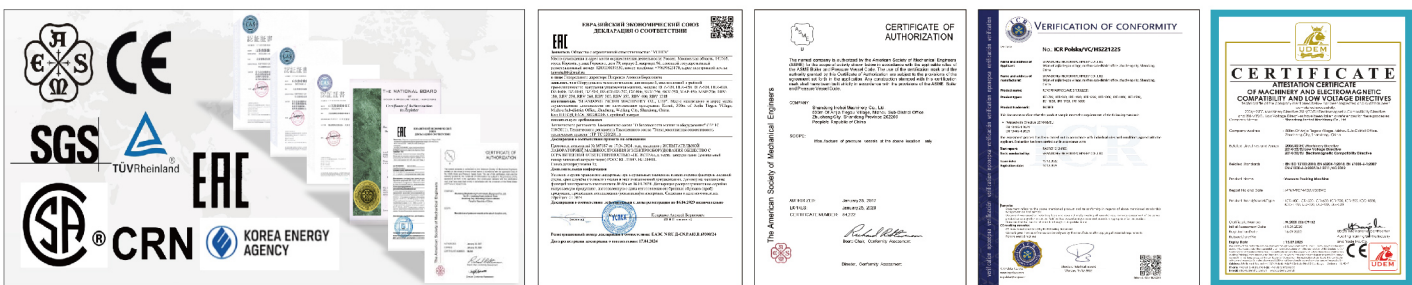

SOCIAL MEDIA




Service call:
+86 18866776186

SHANDONG INCHOI MACHINERY CO.,LTD.

Address:High teach Industrial Park,Mizhou Street,
Zhucheng City,Shandong Province,China

Tel:+86 0536-2161898
Fax:+86 0536-2161898
E- mail:admin@inchoimachine.com
www.inchoipack.com

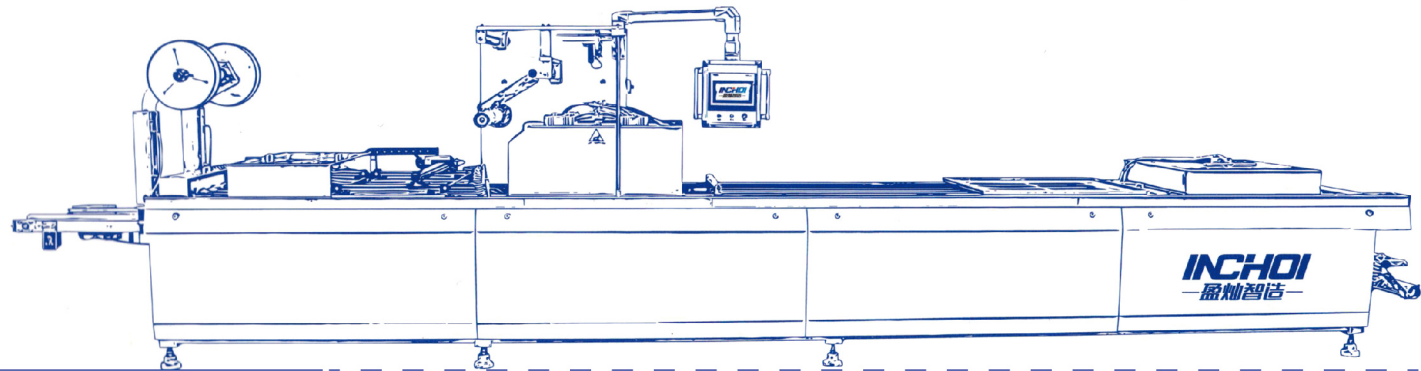

THERMOFORMING PACKAGING MACHINE

ТЕРМОФОРМОВОЧНАЯ УПАКОВОЧНАЯ МАШИНА
MÁQUINA DE ENVASADO TERMOFORMADORA

FOOD PACKING MACHINE ONE-STOP SOLUTION

SHANDONG INCHOI MACHINERY CO.,LTD
www.inchoipack.com

FLEXIBLE/RIGID FILM THERMOFORMING PACKAGING MACHINE

软膜/硬盒热成型包装机

ТЕРМОФОРМОВЧАЯ УПАКОВЧНАЯ МАШИНА ДЛЯ ГИБКОЙ/ЖЕСТКОЙ ПЛЕНКИ
MÁQUINA DE ENVASADO TERMOFORMADORA PARA PELÍCULA FLEXIBLE/RÍGIDA



Conveyor

Longitudinal cutting

Film trim removal system

Cross-cutting

Servo coding device

Top film&feeding system

Sealing area

Touching screen panel

Loading area

Heating and Forming area

Bottom film unwind system

TECHNICAL PARAMETERS

Model Модель Modelo	Top film width Ширина верхней пленки Ancho de película superior	Bottom film width Ширина нижней пленки Ancho de la película inferior	Vacuum degree Степень вакуума Grado de vacío	Compressed air Сжатый воздух Aire comprimido	Voltage Напряжение Voltaje	Power Власть Potencia	Total Weight Общий вес Peso total	Dimensions Размеры Dimensiones
DLZ-320	296mm	324mm	≤200pa	≥0.6MPa	380V50HZ	12KW	1100kg	3600×1100×1950mm
DLZ-420	397mm	424mm	≤200pa	≥0.6MPa	380V50HZ	14KW	1500kg	6600×1100×1950mm
DLZ-520	497mm	524mm	≤200pa	≥0.6MPa	380V50HZ	16KW	1800kg	7600×1200×1950mm

AUTOMATIC CONTINUOUS MODIFIED ATMOSPHERE PACKAGING MACHINE

全自动连续气调包装机

АВТОМАТИЧЕСКАЯ НЕПРЕРЫВНАЯ МАШИНА ДЛЯ УПАКОВКИ С МОДИФИЦИРОВАННОЙ АТМОСФЕРОЙ
MÁQUINA AUTOMÁTICA CONTINUA DE ENVASADO EN ATMÓSFERA MODIFICADA



THERMOFORMING PACKAGING MACHINE PROVIDES AUTOMATIC AND VERSATILE PACKAGING SOLUTIONS FOR FOOD AND NONFOOD PRODUCTS, IN THE BELOW 4 TYPES OF PACKAGES.(DIFFERENT PACKAGING TYPES ON 1 MACHINE IS AN OPTIONAL FUNCTION):



- 1.Packaging type: Vacuum pack
- 2.Bottom film: Flexible
- 3.Top film: Flexible
- 4.Top film: printed/transparent



- 1.Packaging type : MAP pack / Gas pack
- 2.Bottom film: Flexible/rigid
- 3.Top film: Flexible
- 4.Top film: printed/transparent



- 1.Packaging type : VSP vacuum skin pack
- 2.Bottom film: Rigid
- 3.Top film: Flexible
- 4.Top film: Special skin pack film



- 1.Packaging type : Form and seal
- 2.Bottom film: Flexible/rigid
- 3.Top film: Flexible
- 4.Top film: printed/transparent

Durable transmission chain can clip the film more than 2 million times. Servo motor provides precise and fast forward. Multi-lingual PLC touch screen. The machine is able to be integrated with an automatic filling machine, metal detector, date inkjet, water cooling machine, etc. Simple, easy changeover for die sets (toolings); Custom die (tooling) size. High-speed production can reduce considerable labor costs. It can be used to package paste, solid and liquid products. We also offer a variety of options for this machine.

AUTOMATIC ROTARY POUCH VACUUM PACKAGING MACHINE

全自动给袋式真空包装机

АВТОМАТИЧЕСКАЯ РОТАЦИОННАЯ МАШИНА ДЛЯ ВАКУУМНОЙ УПАКОВКИ ПАКЕТОВ
MÁQUINA AUTOMÁTICA ROTATIVA DE ENVASADO AL VACÍO EN BOLSAS



70-80 包/分钟
Bags/min
包装速度 Packaging speed



TECHNICAL PARAMETERS ----YC-12S-180 Automatic rotary pouch vacuum packaging machine

Touch system	Simers Germany	Pneumatic components	Festo Germany
Drive way	Mechanical transmission (cam gear lever full mechanical mode)	Vacuum pump	German BUSCH/Shanghai ZD(optional)
Equipment material	304 stainless steel (food contact part)	Sealing method	Instant heating and sealing, instant cooling after sealing to ensure smooth and beautiful sealing
Packing speed	70-80 bags/min (determined by the product's own characteristics and feeding method)	Packaging bag specifications	Bag width:80~180mm Bag length:with in 300mm
Size of the host	2700*2150*1650mm (without auxiliary equipment)	Fill Range	10~1000g
Main engine power	≈15KW	Air consumption	1.2m³/min
Drive power	Three-phase power 380V 50Hz	Host weight	3t
Using the environment	Room temperature 10°C~40°C 30~90%RH, no dew, no corrosive gas, no dust and other harsh environment		
For the material	Products such as kelp shreds, duck feet, spicy strips, braised eggs, peanuts, etc		
Packaging material	Aluminum foil bags, high temperature cooking bags and other pre-made bags		

AUTOMATIC ROTARY POUCH PACKAGING MACHINE

全自动给袋式包装机

АВТОМАТИЧЕСКАЯ РОТАЦИОННАЯ МАШИНА ДЛЯ УПАКОВКИ ПАКЕТОВ
MÁQUINA AUTOMÁTICA ROTATIVA DE ENVASADO EN BOLSAS

TECHNICAL PARAMETERS ----YC-8S-230 Automatic rotary pouch packaging machine

Touch system	Simers Germany	Pneumatic components	Festo Germany
Drive way	Mechanical transmission (cam gear lever full mechanical mode)	Vacuum pump	German BUSCH/Shanghai ZD(optional)
Equipment material	304 stainless steel (food contact part)	Sealing method	According to the product, two sealing steps can be used to ensure the sealing is smooth and firm
Packing speed	30-60 bags/min (determined by the product's own characteristics and feeding method)	Packaging bag specifications	Bag width:80~230mm Bag length:with in 350mm
Size of the host	1700*1570*1650mm (without auxiliary equipment)	Fill Range	10~2000g
Main engine power	≈3.75KW	Air consumption	0.4m³/min
Drive power	Three-phase power 380V 50Hz	Host weight	1.7t
Using the environment	Room temperature 10°C~40°C 30~90%RH, no dew, no corrosive gas, no dust and other harsh environment		
For the material	Nuts, peanuts, melon seeds, dates, walnuts, fungus, rice water, chili sauce and other products		
Packaging material	Pre-made bags such as stand-up bags, aluminum foil bags, paper bags (with surface coating), nylon bags, etc		

