GMBPOW®

BATTERY EXPERT FROM CHINA

ER BATTERY

Lithium Thionyl Chloride Battery

ER48660M

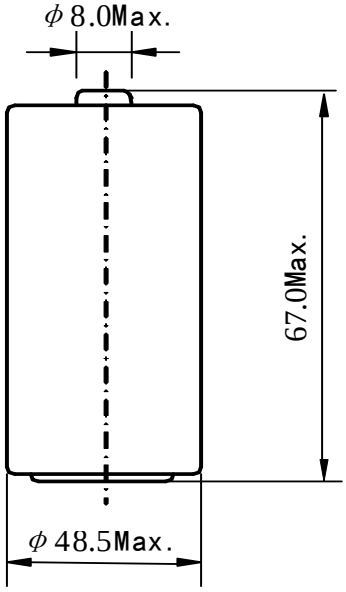

S: Standard termination

Notes:

Dimension: mm

Special terminations can be made as requested.

T: Solder tabs

P: Axial pins

Important Notes

Do not short or charge the battery.

Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.

Do not heat/use the battery beyond the permitted temperature range.

SPECIFICATION:（23±2℃）

Nominal capacity (10mA～2V):	30.0Ah
Rated voltage:	3.6 V
Max constant current of discharge:	2000mA
Max discharge current(pulse):	5000mA
Weight:	300g
Operating temperature range:	-55～85℃

Discharge characteristics at 23±2℃

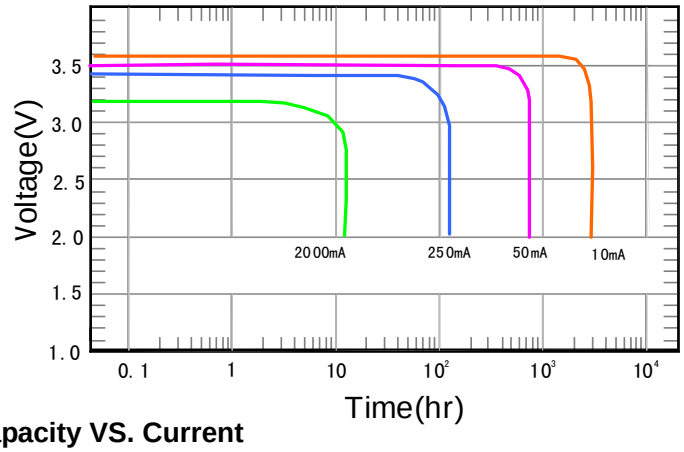

Capacity VS. Current

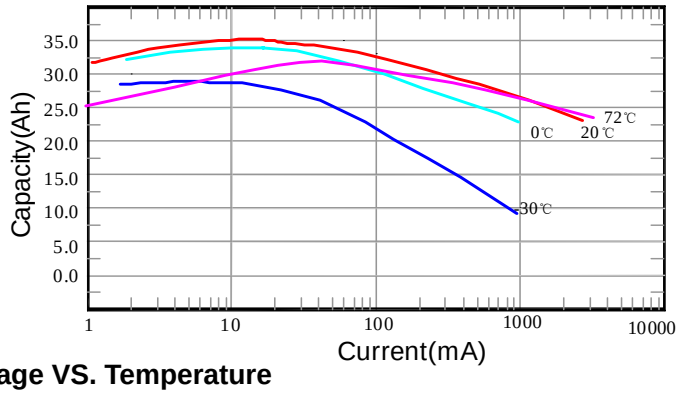

Voltage VS. Temperature

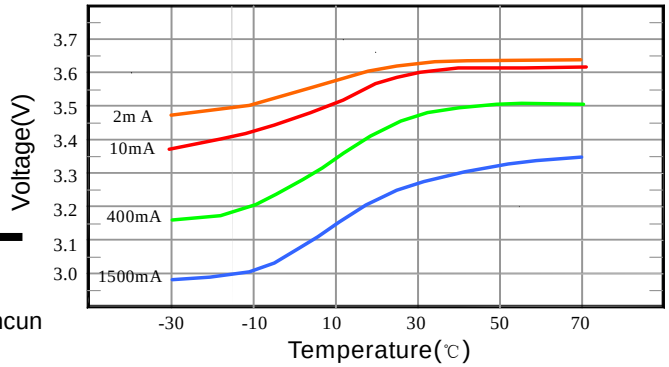

U.L. Component Recognition MH 45782

Guangzhou Markyn Battery Co., Ltd.

YiJia Industrial Park , Shixin Road 1100 ,Nancun Town,Panyu District, Guangzhou P.R.C

Tel:(86)20 — 8456 0852Fax:(86)20 — 3476 7936

Email:sale s@gmbattery.com