



YAOXING
ALUMINUM

WINDOWS & DOORS

Specialized in
windows & doors for villas and residences

COMPANY PROFILE

公司简介

Founded in 1993, Yaoxing Aluminum stands as a trusted name in the global door & window aluminum profile industry, boasting over three decades of expertise in manufacturing high-quality aluminum profiles. Our products have been exported to more than 50 countries and regions, securing strong trust from clients worldwide with consistent quality and reliability.

We own a 40,000-square-meter modern production base, equipped with 6 advanced extrusion lines, 1 anodizing line, 1 powder coating line, 2 wood grain transfer lines, and 1 sandblasting line. With a monthly output exceeding 1,500 tons, we possess robust production capacity to ensure on-time delivery even for large-volume, time-sensitive orders—laying a solid foundation for stable cooperation with global partners.

Adhering to a customer-centric and forward-thinking philosophy, we integrate quality control into every link from R&D to pre-sales and after-sales services. Focusing on the core demands of door & window applications, our profiles are meticulously designed to enhance energy efficiency, safety, sound insulation, comfort, durability, and intelligence. We continuously pursue technological breakthroughs to fully meet the personalized needs of high-performance customized system doors and windows.





CONTENTS

目 / 录

I ENERGY-EFFICIENT THERMAL BREAK WINDOW SERIES 节能隔热窗系列

1 . 70 Series Casement System Window 70平开系统窗	04
2 . 75 Series Tilt-and-Turn System Window 75内开内倒系统窗	05
3 . 75 Series Outward Opening System Window 75外开系统窗	06
4 . 95 Series Double Inward Opening System Window 95双内开系统窗	07
5 . 113 Series Thermal Break Casement System Window 113断桥系统平开窗	08
6 . 120 Series Thermal Break Casement System Window 120断桥系统平开窗	09
7 . American Style 120 Series Thermal Break Panoramic System Window 美式120断桥全景系统窗	10
8 . 75 Series 2-Track Sliding Window / 110 Series 3-Track Thermal Break Sliding Window 75双轨推拉窗/110三轨断桥推拉窗	11
9 . 128 Series Panoramic Thermal Break Sliding Window 128全景断桥推拉窗	12
10. 128 Series Panoramic Floating Sliding Window 128全景悬浮推拉窗	13
11. 158 Series Electric Vertical Sliding Window 158电动升降窗	14

II ENERGY-EFFICIENT THERMAL BREAK DOOR SERIES 节能隔热门系列

1 . 75 swing door 75平开门	19
2 . 133 Series Thermal Break Sliding Door 133隔热断桥推拉门	20
3 . 200 Series Thermal Break Sliding Door 200隔热断桥推拉门	21
4 . 73 Series Thermal Break Folding Door 73隔热断桥折叠门	22

III STANDARD ALUMINUM WINDOW & DOOR SERIES 普铝门窗

1 . 50 Series Casement Window 50平开窗	25
2 . 78 Series Non-Thermal Break Casement Window with Integrated Insect Screen 78非断桥窗纱一体平开窗	26
3 . 68 Series 2-Track Sliding Window / 100 Series 3-Track Sliding Window 68双轨推拉窗 / 100 三轨推拉窗	27
4 . 100 Series 3-Track Sliding Window with Trim Frame 100三轨推拉窗(带包套)	28
5 . 50 Series French Casement Window 50法式平开窗	29
6 . 70 Series French Casement Window 70法式平开窗	30
7 . 130 Series French Casement Window 130法式平开窗	31
8 . 65 Series Slim-Frame Sliding Door 65中窄推拉门	32
9 . 70 Series Heavy-Duty Slim-Frame Sliding Door 70重型中窄推拉门	33
10. 100 Series Heavy-Duty Sliding Door 100重型推拉门	34
11. 120 Series Panoramic Sliding Door 120天境全景推拉门	35
12. 150 Series Panoramic Sliding Door 150天境全景推拉门	36
13. 73 Series Non-Thermal Break Folding Door 73非断桥折叠门	37

30MM ULTRA-WIDE THERMAL BREAK STRIP

Exceptional thermal
insulation and heat retention

30mm ultra wide insulation strip


30mm 超宽隔热条


The joints between the window
frame and glass are filled with insulation
cotton to reduce gaps, retain heat,
and improve sealing performance.

窗框和玻璃接缝填充隔热棉，以减少缝隙，
保持热量，增加密封性。

Ultra-Wide Duckbill Rubber Gasket

超宽鸭嘴胶条

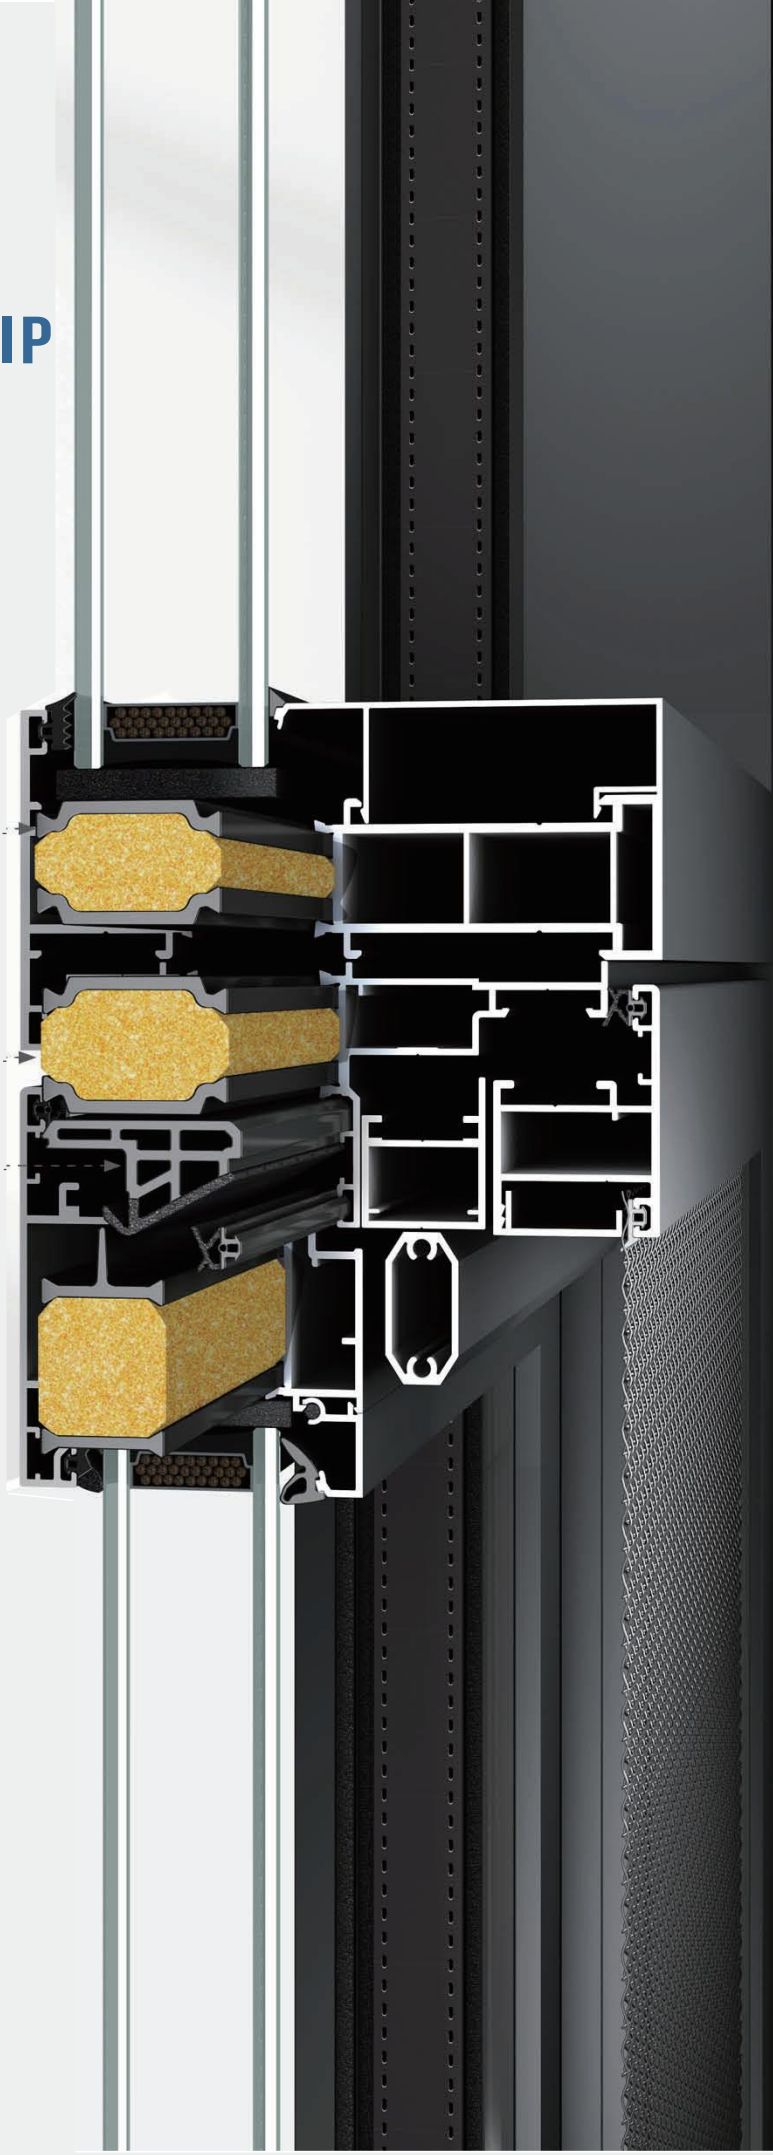

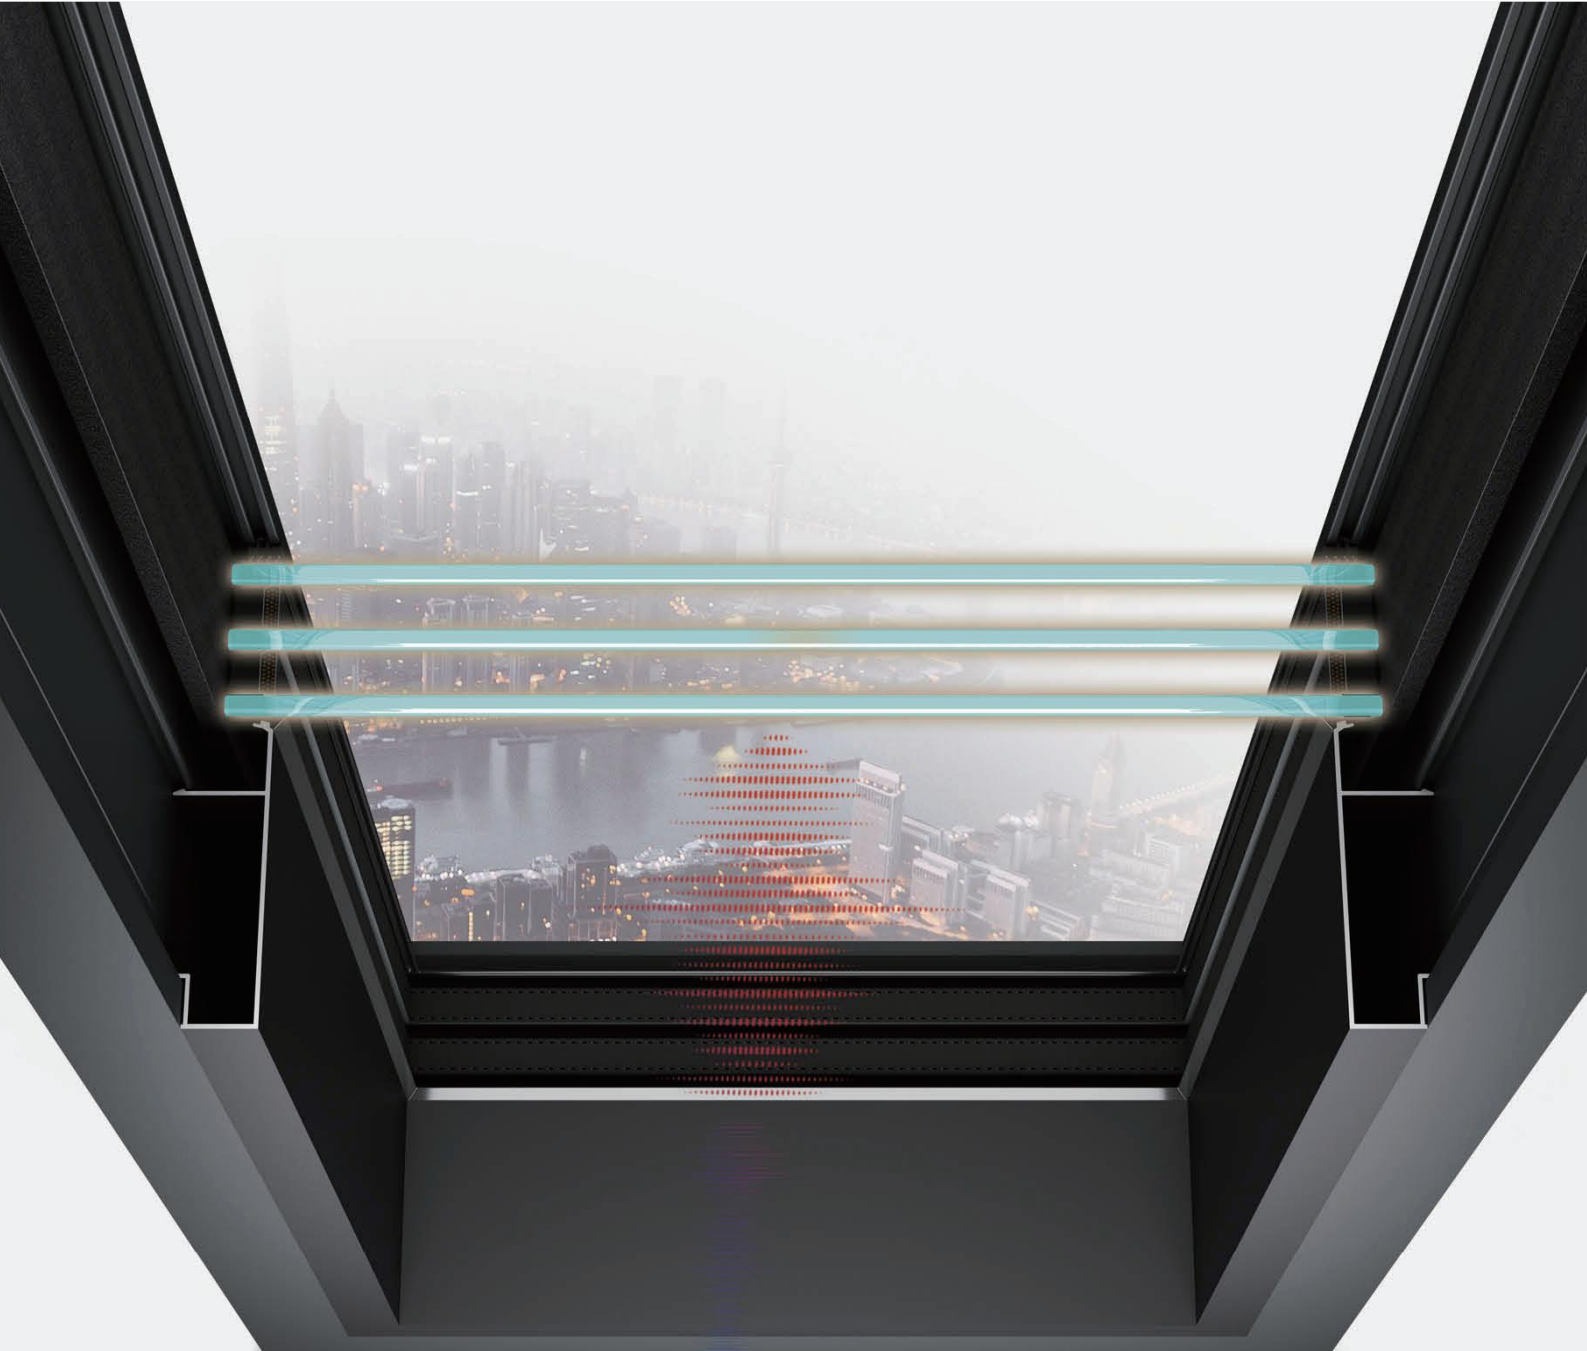

TRIPLE GLAZING WITH DUAL AIR CHAMBERS

三玻两腔体设计

Adopting a 5mm + 12A + 5mm + 12A + 5mm triple glazing with dual air chambers, the large insulated glass unit (large IGU) is filled with inert gas, effectively reducing heat transfer and outside noise to create a quieter, more comfortable indoor environment.

采用 5+12A+5+12A+5 三玻两腔体设计超大中空玻璃, 内充性气体, 有效减少热量传递以及噪音的骚扰, 打造舒适安逸环境。



ENERGY-EFFICIENT THERMAL BREAK WINDOW SERIES

节能隔热窗系列

70 SERIES CASEMENT SYSTEM WINDOW

70平开系统窗 ▶▶ -----



PERFORMANCE DATA 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+20A+5mm	2.6(W/m²·k)	35 (3级 level)	450Pa	≤ 1.5 (8级 level)	3.6 (6级 level)
5mm+20Ar+5Low-E	1.5(W/m²·k)	35 (3级 level)	450Pa	≤ 1.5 (8级 level)	3.6 (6级 level)
5+12Ar+5+12Ar+5Low-E	1.1(W/m²·k)	45 (5级 level)	450Pa	≤ 1.5 (8级 level)	3.6 (6级 level)
5+12Ar+5+12A+5Low-E Double silver	0.9(W/m²·k)	45 (5级 level)	450Pa	≤ 1.5 (8级 level)	3.6 (6级 level)

PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 70mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Wall Thickness: 1.4mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- 边框宽度: 70mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.4mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修) 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

HARDWARE OPTIONS 产品五金



OPENING OPTIONS 开启方式



Outward Opening with
Top-Hung Ventilation
外开下悬



Top-Hung Opening
外下悬



Outward Casement Opening
外平开

75 SERIES TILT-AND-TURN SYSTEM WINDOW

75 内开内倒系统窗 ▶▶ -----



PERFORMANCE DATA 产品性能

玻璃配置 GLASS CONFIGURATION	 隔热性能 THERMAL INSULATION	 隔音性能 SOUND INSULATION	 水密性能 WATERPROOF	 气密性能 AIR TIGHTNESS	 抗风压性能 WIND RESISTANT
5mm+22A+5mm	2.6(W/m²·K)	36 (3级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5mm+22Ar+5Low-E	1.5(W/m²·K)	36 (3级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5+12Ar+5+12Ar+5Low-E	1.1(W/m²·K)	48 (5级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5+12Ar+5+12A+5Low-E Double silver	0.9(W/m²·K)	48 (5级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)

PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 75mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Wall Thickness: 1.8mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- 边框宽度: 75mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.8mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

HARDWARE OPTIONS 产品五金



OPENING OPTIONS 开启方式



Inward Opening
内平开



Tilt-and-Turn Opening
内开内倒

75 SERIES OUTWARD OPENING SYSTEM WINDOW

75 外开系统窗 ▶▶ -----



PERFORMANCE DATA 产品性能

玻璃配置 GLASS CONFIGURATION	 隔热性能 THERMAL INSULATION	 隔音性能 SOUND INSULATION	 水密性能 WATERPROOF	 气密性能 AIR TIGHTNESS	 抗风压性能 WIND RESISTANT
5mm+22A+5mm	2.6(W/m²·K)	36 (3级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5mm+22Ar+5Low-E	1.5(W/m²·K)	36 (3级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5+12Ar+5+12Ar+5Low-E	1.1(W/m²·K)	48 (5级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5+12Ar+5+12A+5Low-E Double silver	0.9(W/m²·K)	48 (5级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)

PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 75mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Wall Thickness: 1.8mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- 边框宽度: 75mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.8mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修) 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

HARDWARE OPTIONS 产品五金



OPENING OPTIONS 开启方式



Outward Opening with
Top-Hung Ventilation
外开下悬



Top-Hung Opening
外下悬



Outward Casement Opening
外平开

95 SERIES DOUBLE INWARD OPENING SYSTEM WINDOW

95 双内开系统窗 ▶▶ -----



PERFORMANCE DATA 产品性能

玻璃配置 GLASS CONFIGURATION	 隔热性能 THERMAL INSULATION	 隔音性能 SOUND INSULATION	 水密性能 WATERPROOF	 气密性能 AIR TIGHTNESS	 抗风压性能 WIND RESISTANT
5mm+22A+5mm	2.6(W/m²·K)	36 (3 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)
5mm+22Ar+5Low-E	1.5(W/m²·K)	36 (3 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)
5+12Ar+5+12Ar+5Low-E	1.1(W/m²·K)	48 (5 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)
5+12Ar+5+12A+5Low-E Double silver	0.9(W/m²·K)	48 (5 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)


PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 95mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Wall Thickness: 1.8mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- 边框宽度: 95mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.8mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)


HARDWARE OPTIONS 产品五金



OPENING OPTIONS 开启方式



Double Inward Opening
双内开



Tilt-and-Turn Opening
内开内倒

113 SERIES THERMAL BREAK CASEMENT SYSTEM WINDOW

113 断桥系统平开窗 ▶▶-----



PERFORMANCE DATA 产品性能

玻璃配置 GLASS CONFIGURATION	 隔热性能 THERMAL INSULATION	 隔音性能 SOUND INSULATION	 水密性能 WATERPROOF	 气密性能 AIR TIGHTNESS	 抗风压性能 WIND RESISTANT
5mm+20Ar+5mm	2.6(W/m²·k)	36 (3 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)
5mm+20Ar+5Low-E	1.5(W/m²·k)	36 (3 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)
5+9Ar+5+9Ar+5Low-E	1.2(W/m²·k)	48 (5 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)
5+9Ar+5+9A+5Low-E Double silver	1.0(W/m²·k)	48 (5 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)

OPTIONAL PRESSURE LINE 可选压线



OPTIONAL STAINLESS STEEL GUARDRAIL 选配不锈钢护栏



PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 113mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Wall Thickness: 2.0mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- 边框宽度: 113mm
- 型材: 6063-T5 原铝材料
- 壁厚: 2.0mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

HARDWARE OPTIONS 产品五金



OPENING OPTIONS 开启方式



120 SERIES THERMAL BREAK CASEMENT SYSTEM WINDOW

120 断桥系统平开窗 ▶▶ -----




PERFORMANCE DATA 产品性能

玻璃配置 GLASS CONFIGURATION	 隔热性能 THERMAL INSULATION	 隔音性能 SOUND INSULATION	 水密性能 WATERPROOF	 气密性能 AIR TIGHTNESS	 抗风压性能 WIND RESISTANT
5mm+27A+5mm	2.5(W/m²·k)	38 (3 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)
5mm+27Ar+5Low-E	1.4(W/m²·k)	38 (3 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)
5+12Ar+5+12Ar+5Low-E	1.1(W/m²·k)	49 (5 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)
5+12Ar+5+12A+5Low-E Double silver	0.9(W/m²·k)	49 (5 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)

OPTIONAL PRESSURE LINE 可选压线



OPTIONAL STAINLESS STEEL GUARDRAIL 选配不锈钢护栏




PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 120mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Wall Thickness: 2.0mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- 边框宽度 : 120mm
- 型材 : 6063-T5 原铝材料
- 壁厚 : 2.0mm
- 颜色处理 : 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色 : 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)


HARDWARE OPTIONS 产品五金



OPENING OPTIONS 开启方式



Double Inward Opening
双内开



Tilt-and-Turn Opening
内开内倒

AMERICAN STYLE 120 SERIES THERMAL BREAK PANORAMIC SYSTEM WINDOW

美式120断桥全景系统窗 ▶▶ -----



PERFORMANCE DATA 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+18A+5mm	2.6(W/m²·K)	36 (3级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5mm+18Ar+5Low-E	1.5(W/m²·K)	36 (3级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5+9Ar+5+9Ar+5Low-E	1.2(W/m²·K)	48 (5级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)
5+9Ar+5+9A+5Low-E Double silver	1.0(W/m²·K)	48 (5级 level)	700Pa	≤ 0.8 (8级 level)	5.0 (9级 level)


PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 120mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Wall Thickness: 1.8mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- 边框宽度：120mm
- 型材：6063-T5 原铝材料
- 壁厚：1.8mm
- 颜色处理：阿克苏 T1010 粉末（全球 10 年保修）
- 可选颜色：黑色、白色、氟碳灰、金属咖啡（自定义颜色）


HARDWARE OPTIONS 产品五金



OPENING OPTIONS 开启方式



Outward Casement Opening
平开窗



Outward Opening with
Top-Hung Ventilation
外开下悬

75 SERIES 2-TRACK SLIDING WINDOW / 110 SERIES 3-TRACK THERMAL BREAK SLIDING WINDOW

75 双轨推拉窗 / 110 三轨断桥推拉窗 ▶▶ -----



PERFORMANCE DATA 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+12A+5mm	3.0(W/m²·K)	30 (2级 level)	300Pa	≤ 7.2 (4级 level)	1.0 (1级 level)
5mm+12Ar+5Low-E	1.8(W/m²·K)	30 (2级 level)	300Pa	≤ 7.2 (4级 level)	1.0 (1级 level)

PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 75/110mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Wall Thickness: 1.4mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- 边框宽度: 75/110mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.4mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

HARDWARE OPTIONS 产品五金




OPENING OPTIONS 开启方式



128 SERIES PANORAMIC THERMAL BREAK SLIDING WINDOW

128全景断桥推拉窗 ▶▶ -----

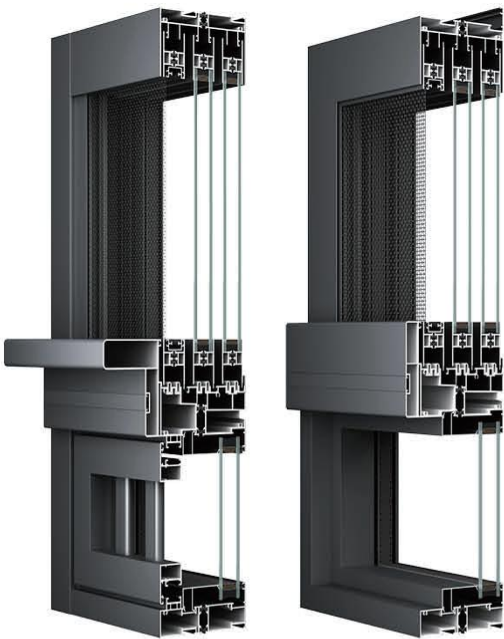

PERFORMANCE DATA 产品性能

玻璃配置 GLASS CONFIGURATION	 隔热性能 THERMAL INSULATION	 隔音性能 SOUND INSULATION	 水密性能 WATERPROOF	 气密性能 AIR TIGHTNESS	 抗风压性能 WIND RESISTANT
5mm+15A+5mm	2.8(W/m²·K)	36 (3级 level)	480Pa	≤ 3.5 (6级 level)	2.3 (3级 level)
5mm+15Ar+5Low-E	1.8(W/m²·K)	36 (3级 level)	480Pa	≤ 3.5 (6级 level)	2.3 (3级 level)

PRODUCT SPECIFICATIONS 产品参数


- Frame Depth: 128mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Wall Thickness: 1.4mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)

- 边框宽度: 128mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.4mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)


HARDWARE OPTIONS 产品五金




OPENING OPTIONS 开启方式



3-Track 3-Panel
三轨三扇



3-Track 2+1 with
Screen Panel
三轨 2+1 纱扇



3-Track 4+2 with
Screen Panels
三轨 4+2 纱扇

128 SERIES PANORAMIC FLOATING SLIDING WINDOW

128全景悬浮推拉窗 ▶▶-----



PERFORMANCE DATA 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+15A+5mm	2.8(W/m²·k)	36 (3级 level)	480Pa	≤ 3.5 (6级 level)	2.3 (3级 level)
5mm+15Ar+5Low-E	1.8(W/m²·k)	36 (3级 level)	480Pa	≤ 3.5 (6级 level)	2.3 (3级 level)


PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 128mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Wall Thickness: 1.4mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- 边框宽度: 128mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.4mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)


HARDWARE OPTIONS 产品五金




OPENING OPTIONS 开启方式



3-Track 3-Panel
三轨三扇



3-Track 2+1 with
Screen Panel
三轨 2+1 纱扇



3-Track 4+2 with
Screen Panels
三轨 4+2 纱扇

158 SERIES ELECTRIC VERTICAL SLIDING WINDOW

158 电动升降窗 ▶▶ -----



PERFORMANCE DATA 产品性能

玻璃配置 GLASS CONFIGURATION	 隔热性能 THERMAL INSULATION	 隔音性能 SOUND INSULATION	 水密性能 WATERPROOF	 气密性能 AIR TIGHTNESS	 抗风压性能 WIND RESISTANT
5mm+20A+5mm	2.8(W/m²·K)	38 (3级 level)	480Pa	≤ 3.5 (6级 level)	3.2 (5级 level)
5mm+20Ar+5Low-E	1.8(W/m²·K)	38 (3级 level)	480Pa	≤ 3.5 (6级 level)	3.2 (5级 level)


PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 158mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Wall Thickness: 5.0mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- 边框宽度 : 158mm
- 型材 : 6063-T5 原铝材料
- 壁厚 : 5.0mm
- 颜色处理 : 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色 : 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

HARDWARE OPTIONS 产品五金



OPENING OPTIONS 开启方式



Vertical Sliding Opening /
Up-and-Down Sliding
上下降



Flexible space configuration;
opens without occupying indoor space.

自由切换空间模式
开放，不占用室内空间


When opened, the sash can
function as a balcony-style opening.

当窗扇打开时，
它被用作阳台




Up to 50% opening area for a
wider view and better ventilation.

50%开口面积视野开阔，通风透气

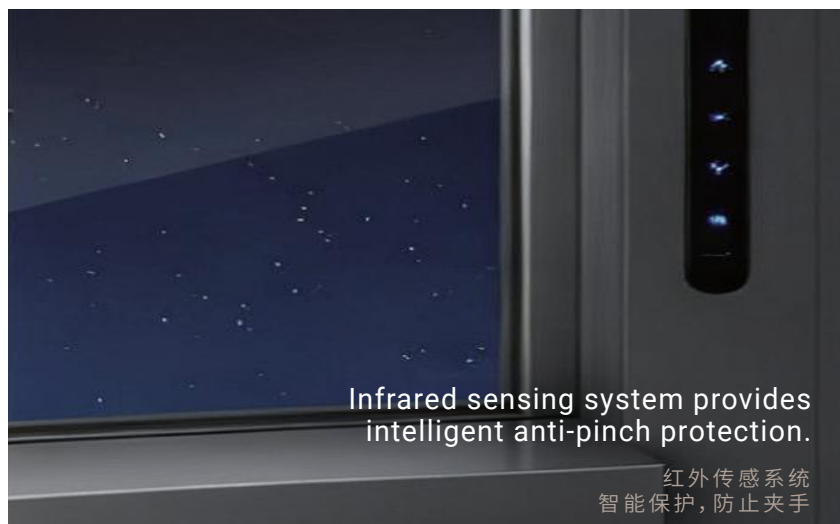

Infrared sensing system provides
intelligent anti-pinch protection.

红外传感系统
智能保护，防止夹手

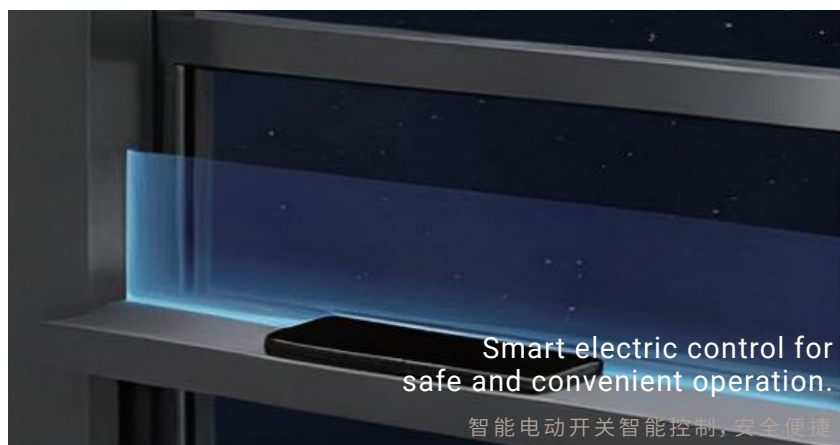

Smart electric control for
safe and convenient operation.


智能电动开关智能控制，安全便捷

MULTI-CHANNEL WOOL PILE SEALING SYSTEM

多道毛条密封设计

Embedded siliconized sealing strips effectively prevent dust, mosquitoes, and insects from entering. Equipped with high-performance PA66 thermal break strips from Ronghai, it reduces energy loss and delivers excellent thermal insulation.

嵌入式硅化密封条有效防止灰尘、蚊子和昆虫进入房间。
配备融海高性能 PA66 隔热条，减少能量损失，实现超强隔热性能。

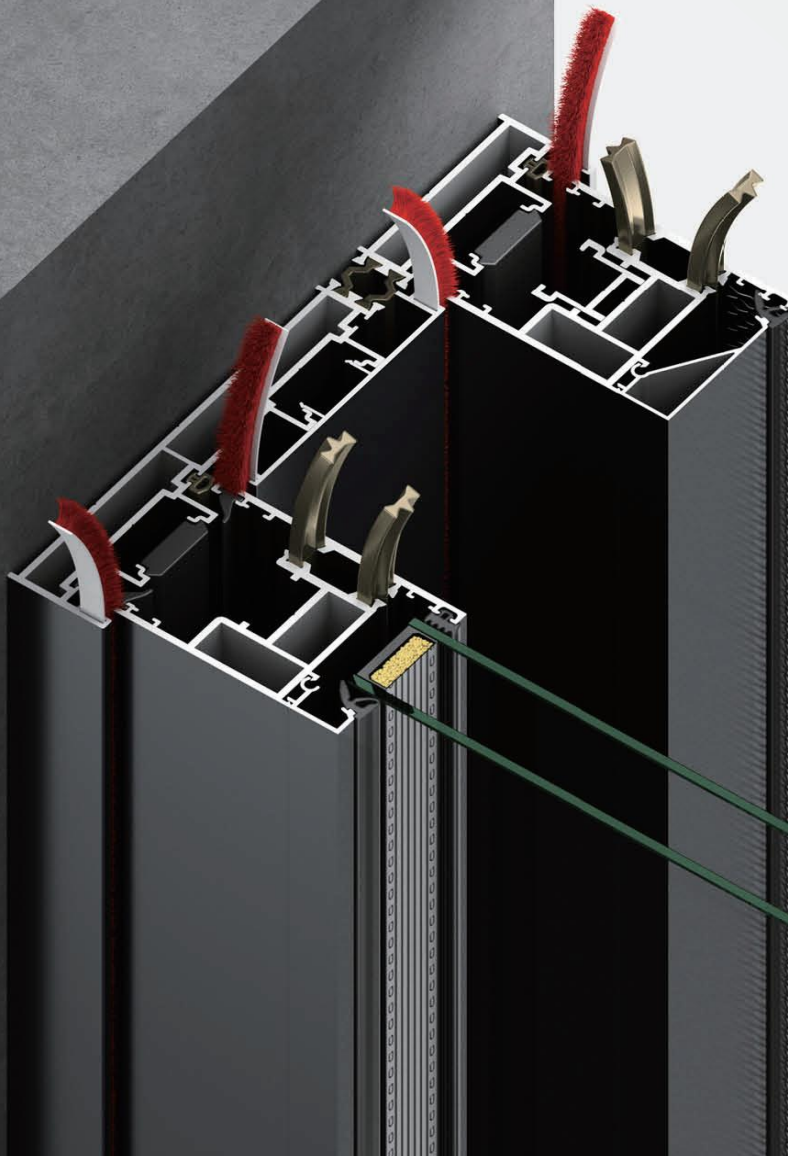


MULTICHANNEL SEALING HOOK STRUCTURE

多道密封结构

On the basis of traditional sealing, adding multiple sealing strips on the basis of traditional sealing effectively improves airtightness and watertightness.

在传统密封的基础上, 增加多条密封条, 有效提高了气密性和水密性能。

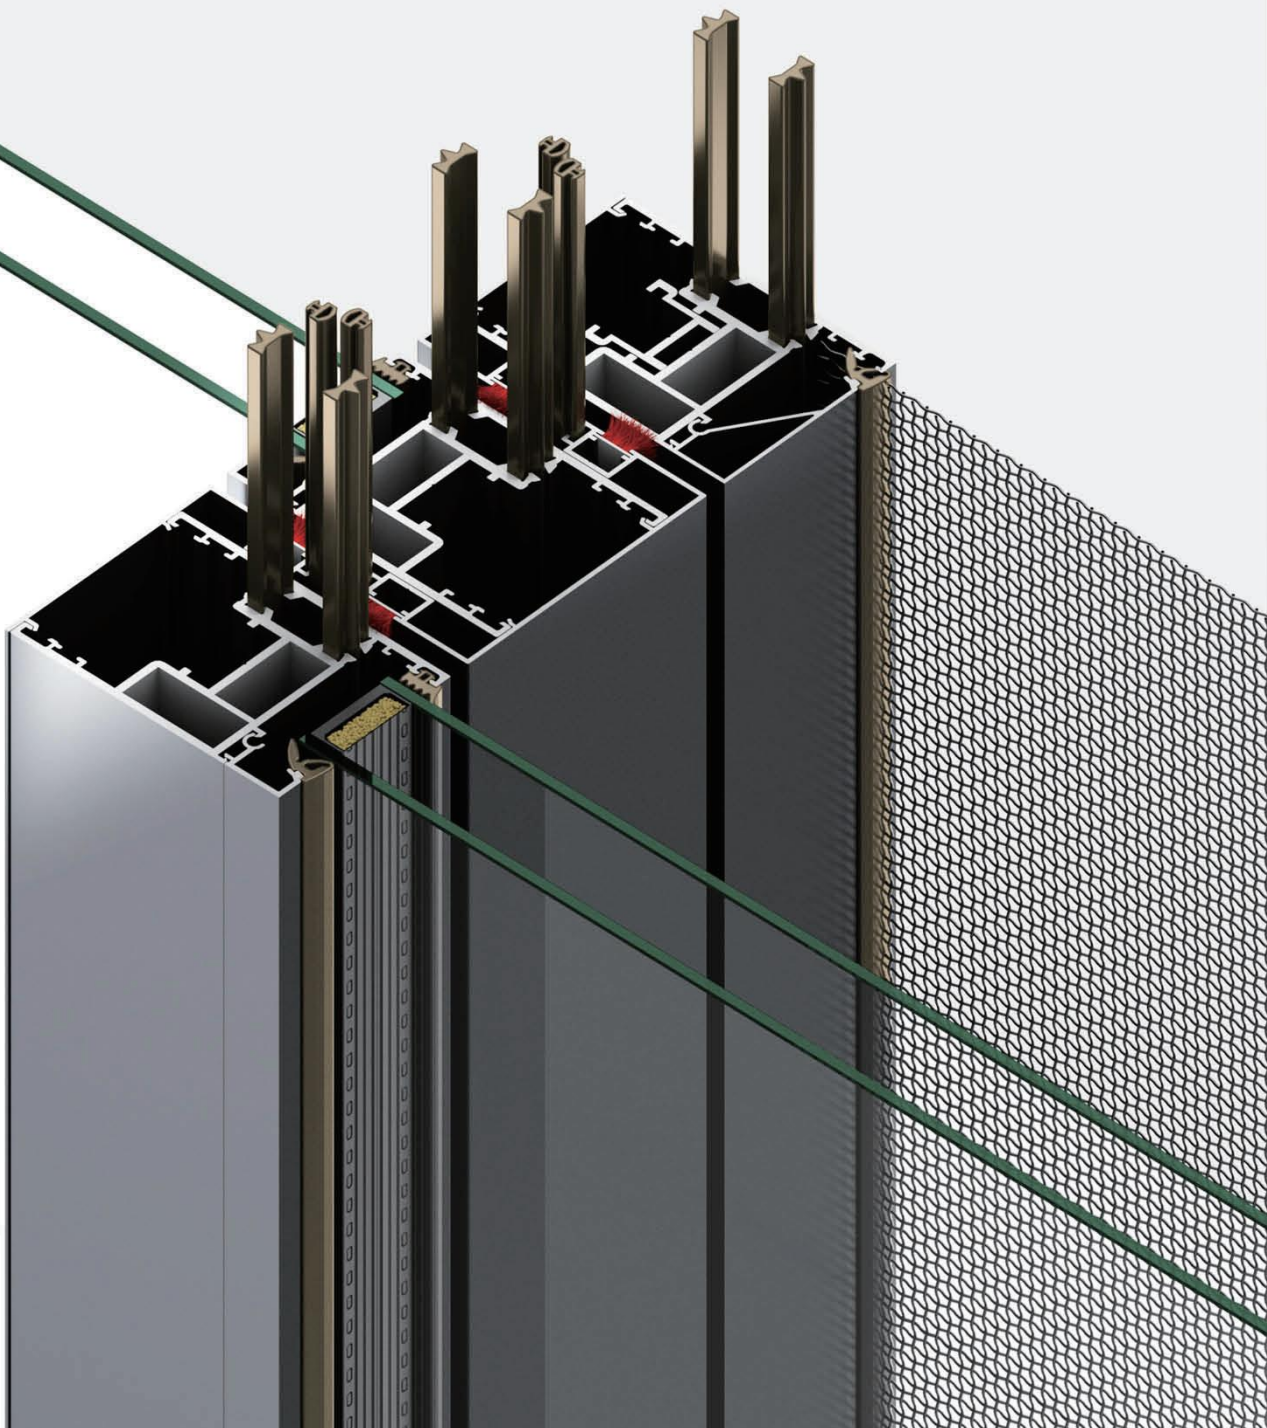

ENERGY-EFFICIENT THERMAL BREAK DOOR SERIES

节能隔热门系列



75 SWING DOOR

75 平开门




PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 75mm
 - Profile Material: 6063-T5 Primary Aluminum Alloy
 - Wall Thickness: 1.8mm
 - Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
 - Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- 边框宽度 : 75mm
 - 型材 : 6063-T5 原铝材料
 - 壁厚 : 1.8mm
 - 颜色处理 : 阿克苏 T1010 粉末 (全球 10 年保修)
 - 可选颜色 : 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

PERFORMANCE DATA 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+22A+5mm	2.6(W/m²k)	36 (3 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)
5mm+22Ar+5Low-E	1.5(W/m²k)	36 (3 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)
5+12Ar+5+12Ar+5Low-E	1.1(W/m²k)	48 (5 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)
5+12Ar+5+12A+5Low-E Double silver	0.9(W/m²k)	48 (5 级 level)	700Pa	≤ 0.8 (8 级 level)	5.0 (9 级 level)

OPENING OPTIONS 开启方式

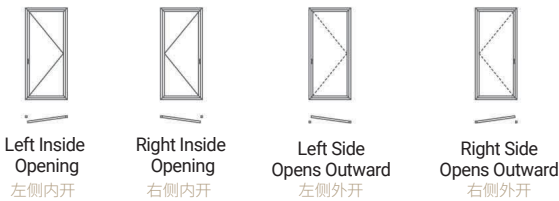

HARDWARE OPTIONS 产品五金



133 SERIES THERMAL BREAK SLIDING DOOR

133 隔热断桥推拉门




PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 133mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Wall Thickness: 2.0-2.5mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- 边框宽度: 133mm
- 型材: 6063-T5 原铝材料
- 壁厚: 2.0-2.5mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

PERFORMANCE DATA 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+22A+5mm	2.6(W/m ² ·K)	35 (3级 level)	500Pa	≤ 5.8 (5级 level)	3.8 (5级 level)
5mm+22Ar+5Low-E	1.5(W/m ² ·K)	35 (3级 level)	500Pa	≤ 5.8 (5级 level)	3.8 (5级 level)
5+12Ar+5+12Ar+5Low-E	1.1(W/m ² ·K)	46 (5级 level)	500Pa	≤ 5.8 (5级 level)	3.8 (5级 level)
5+12Ar+5+12A+5Low-E Double silver	0.9(W/m ² ·K)	46 (5级 level)	500Pa	≤ 5.8 (5级 level)	3.8 (5级 level)

OPENING OPTIONS 开启方式

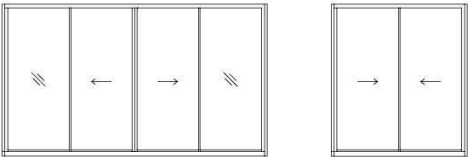

HARDWARE OPTIONS 产品五金



200 SERIES THERMAL BREAK SLIDING DOOR

200 隔热断桥推拉门




PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 200mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Wall Thickness: 2.0mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- 边框宽度: 200mm
- 型材: 6063-T5 原铝材料
- 壁厚: 2.0mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)


PERFORMANCE DATA 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+22A+5mm	2.6(W/m²k)	35 (3 级 level)	500Pa	≤ 5.8 (5 级 level)	3.8 (5 级 level)
5mm+22Ar+5Low-E	1.5(W/m²k)	35 (3 级 level)	500Pa	≤ 5.8 (5 级 level)	3.8 (5 级 level)
5+12Ar+5+12Ar+5Low-E	1.1(W/m²k)	46 (5 级 level)	500Pa	≤ 5.8 (5 级 level)	3.8 (5 级 level)
5+12Ar+5+12A+5Low-E Double silver	0.9(W/m²k)	46 (5 级 level)	500Pa	≤ 5.8 (5 级 level)	3.8 (5 级 level)


OPENING OPTIONS 开启方式



3-Track 3-Panel
三轨三扇



3-Track 2+1 with
Screen Panel
三轨 2+1 纱扇



3-Track 4+2 with
Screen Panels
三轨 4+2 纱扇

HARDWARE OPTIONS 产品五金



73 SERIES THERMAL BREAK FOLDING DOOR

73 隔热断桥折叠门




PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 73mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Wall Thickness: 1.8mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)

- 边框宽度: 73mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.8mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

OPENING OPTIONS 开启方式

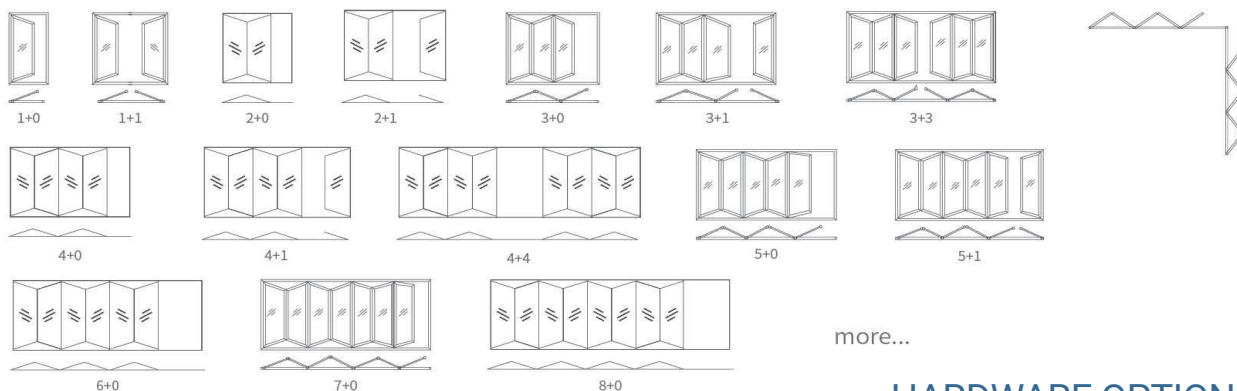

more...

HARDWARE OPTIONS 产品五金







STANDARD ALUMINUM WINDOW & DOOR SERIES

普铝门窗

50 SERIES CASEMENT WINDOW

50 平开窗 ▶▶ -----



PERFORMANCE DATA 产品性能

玻璃配置 GLASS CONFIGURATION	 隔热性能 THERMAL INSULATION	 隔音性能 SOUND INSULATION	 水密性能 WATERPROOF	 气密性能 AIR TIGHTNESS	 抗风压性能 WIND RESISTANT
5mm 单玻	5.6(W/m²·K)	28 (1 级 level)	460Pa	≤ 4.2 (6 级 level)	1.8 (2 级 level)
5mm+9A+5mm	3.6(W/m²·K)	33 (2 级 level)	460Pa	≤ 4.2 (6 级 level)	1.8 (2 级 level)
5mm+9Ar+5Low-E	2.8(W/m²·K)	33 (2 级 level)	460Pa	≤ 4.2 (6 级 level)	1.8 (2 级 level)

PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 150mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Wall Thickness: 1.4mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- 边框宽度: 50mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.4mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

HARDWARE OPTIONS 产品五金



OPENING OPTIONS 开启方式



Outward Opening with
Top-Hung Ventilation
外开下悬



Top-Hung Opening
外下悬



Outward Casement Opening
外平开

78 SERIES NON-THERMAL BREAK CASEMENT WINDOW WITH INTEGRATED INSECT SCREEN

78 非断桥窗纱一体平开窗




PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 78mm
 - Profile Material: 6063-T5 Primary Aluminum Alloy
 - Wall Thickness: 1.4mm
 - Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
 - Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- 边框宽度: 78mm
 - 型材: 6063-T5 原铝材料
 - 壁厚: 1.4mm
 - 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
 - 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

PERFORMANCE DATA 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm 单玻	5.6(W/m²k)	28 (1 级 level)	460Pa	≤ 4.2 (6 级 level)	1.8 (2 级 level)
5mm+9A+5mm	3.6(W/m²k)	33 (2 级 level)	460Pa	≤ 4.2 (6 级 level)	1.8 (2 级 level)
5mm+9Ar+5Low-E	2.8(W/m²k)	33 (2 级 level)	460Pa	≤ 4.2 (6 级 level)	1.8 (2 级 level)

OPENING OPTIONS 开启方式

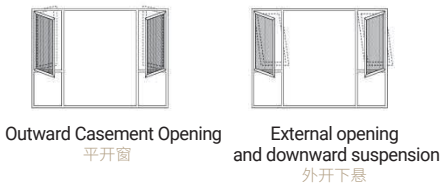

HARDWARE OPTIONS 产品五金




68 SERIES 2-TRACK SLIDING WINDOW / 100 SERIES 3-TRACK SLIDING WINDOW

68 双轨推拉窗 / 100 三轨推拉窗 ▶▶ -----



OPTIONAL TRACKS 可选轨道



PERFORMANCE DATAE 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm 单玻	5.6(W/m²·k)	28 (1 级 level)	300Pa	≤ 7.2 (4 级 level)	1.0 (1 级 level)
5mm+9A+5mm	3.6(W/m²·k)	33 (2 级 level)	300Pa	≤ 7.2 (4 级 level)	1.0 (1 级 level)
5mm+9Ar+5Low-E	2.8(W/m²·k)	33 (2 级 level)	300Pa	≤ 7.2 (4 级 level)	1.0 (1 级 level)


PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 106/161mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Wall Thickness: 1.4mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- 边框宽度: 68/100mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.4mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

HARDWARE OPTIONS 产品五金



OPENING OPTIONS 开启方式

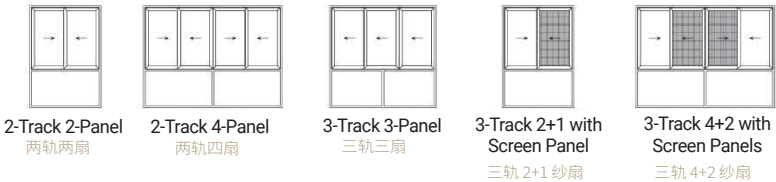

100 SERIES 3-TRACK SLIDING WINDOW WITH TRIM FRAME

100 三轨推拉窗 (带包套)




PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 106/161mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Wall Thickness: 1.4mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- 边框宽度: 68/100mm
- 型材: 6063-T5 原铝材料
- 壁厚: 1.4mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)


PERFORMANCE DATA 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm 单玻	5.6(W/m²k)	28 (1 级 level)	300Pa	≤ 7.2 (4 级 level)	1.0 (1 级 level)
5mm+9A+5mm	3.6(W/m²k)	33 (2 级 level)	300Pa	≤ 7.2 (4 级 level)	1.0 (1 级 level)
5mm+9Ar+5Low-E	2.8(W/m²k)	33 (2 级 level)	300Pa	≤ 7.2 (4 级 level)	1.0 (1 级 level)


OPENING OPTIONS 开启方式



3-Track 3-Panel
三轨三扇



3-Track 2+1 with
Screen Panel
三轨 2+1 纱扇



3-Track 4+2 with
Screen Panels
三轨 4+2 纱扇

HARDWARE OPTIONS 产品五金



50 SERIES FRENCH CASEMENT WINDOW

50 法式平开窗 ▶▶ -----



PERFORMANCE DATA 产品性能

 隔热性能 THERMAL INSULATION 5 级 level	 隔音性能 SOUND INSULATION 4 级 level	 水密性能 WATERPROOF 4 级 level	 气密性能 AIR TIGHTNESS 5 级 level	 抗风压性能 WIND RESISTANT 6 级 level
--	--	--	---	---

PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 50mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Wall Thickness: 2.0mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- Glass configuration: 8mm Single Tempered Glass
- 边框宽度 : 50mm
- 型材 : 6063-T5 原铝材料
- 壁厚 : 2.0mm
- 颜色处理 : 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色 : 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)
- 玻璃配置 : 8mm 单层钢化玻璃

HARDWARE OPTIONS 产品五金



OPENING OPTIONS 开启方式



70 SERIES FRENCH CASEMENT WINDOW

70 法式平开窗



PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 70mm
 - Profile Material: 6063-T5 Primary Aluminum Alloy
 - Wall Thickness: 2.0mm
 - Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
 - Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
 - Glass configuration: 5mm + 27a + 5mm
- 边框宽度: 70mm
 - 型材: 6063-T5 原铝材料
 - 壁厚: 2.0mm
 - 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
 - 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)
 - 玻璃配置: 5mm + 27A + 5mm

PERFORMANCE DATA 产品性能



隔热性能
THERMAL
INSULATION

5 级 level



隔音性能
SOUND
INSULATION

4 级 level



水密性能
WATERPROOF

4 级 level



气密性能
AIR TIGHTNESS

5 级 level



抗风压性能
WIND RESISTANT

6 级 level

OPENING OPTIONS 开启方式



Top-Hung Opening 外下悬



外平开

HARDWARE OPTIONS 产品五金



130 SERIES FRENCH CASEMENT WINDOW

130 法式平开窗 ▶▶ -----



PERFORMANCE DATA 产品性能

 隔热性能
THERMAL
INSULATION
5 级 level

 隔音性能
SOUND
INSULATION
4 级 level

 水密性能
WATERPROOF
4 级 level

 气密性能
AIR TIGHTNESS
5 级 level

 抗风压性能
WIND RESISTANT
6 级 level

PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 130mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Wall Thickness: 2.0mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- Glass configuration: 5mm+27A+5mm
- 边框宽度: 130mm
- 型材: 6063-T5 原铝材料
- 壁厚: 2.0mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)
- 玻璃配置: 5mm+27A+5mm

HARDWARE OPTIONS 产品五金



OPENING OPTIONS 开启方式



Top-Hung Opening 外下悬



外平开

65 SERIES SLIM-FRAME SLIDING DOOR

65 中窄推拉门



OPTIONAL TRACKS 可选轨道



PERFORMANCE DATA 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+16A+5mm	3.0(W/m²·K)	30 (2级 level)	300Pa	≤ 7.2 (4级 level)	1.8 (2级 level)
5mm+16Ar+5Low-E	1.8(W/m²·K)	30 (2级 level)	300Pa	≤ 7.2 (4级 level)	1.8 (2级 level)

PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 106/161mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Frame Profile Wall Thickness: 1.4mm
- Sash Profile Wall Thickness: 3.0mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- 边框宽度: 106/161mm
- 型材: 6063-T5 原铝材料
- 门框厚度: 1.4mm
- 玻扇型材厚度: 3.0mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

HARDWARE OPTIONS 产品五金



OPENING OPTIONS 开启方式




70 SERIES HEAVY-DUTY SLIM-FRAME SLIDING DOOR

70 重型中窄推拉门 ▶▶ -----



OPTIONAL TRACKS 可选轨道



PERFORMANCE DATA 产品性能

玻璃配置 GLASS CONFIGURATION	 隔热性能 THERMAL INSULATION	 隔音性能 SOUND INSULATION	 水密性能 WATERPROOF	 气密性能 AIR TIGHTNESS	 抗风压性能 WIND RESISTANT
5mm+20A+5mm	3.0(W/m²k)	33 (2 级 level)	300Pa	≤ 7.2 (4 级 level)	2.5 (4 级 level)
5mm+20Ar+5Low-E	1.8(W/m²k)	33 (2 级 level)	300Pa	≤ 7.2 (4 级 level)	2.5 (4 级 level)

PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 126/190mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Frame Profile Wall Thickness: 1.8mm
- Sash Profile Wall Thickness: 3.0mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- 边框宽度: 126/190mm
- 型材: 6063-T5 原铝材料
- 门框厚度: 1.8mm
- 玻璃型材厚度: 3.0mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

HARDWARE OPTIONS 产品五金



OPENING OPTIONS 开启方式



100 SERIES HEAVY-DUTY SLIDING DOOR

◀◀ 100 重型推拉门



OPTIONAL TRACKS 可选轨道



PERFORMANCE DATA 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+20A+5mm	3.0(W/m²·K)	33 (2级 level)	300Pa	≤ 7.2 (4级 level)	2.5 (4级 level)
5mm+20Ar+5Low-E	1.8(W/m²·K)	33 (2级 level)	300Pa	≤ 7.2 (4级 level)	2.5 (4级 level)

PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 126/190mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Frame Profile Wall Thickness: 1.8mm
- Sash Profile Wall Thickness: 2.0mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- 边框宽度: 126/190mm
- 型材: 6063-T5 原铝材料
- 门框厚度: 1.8mm
- 玻璃型材厚度: 2.0mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)

HARDWARE OPTIONS 产品五金



OPENING OPTIONS 开启方式




120 SERIES PANORAMIC SLIDING DOOR

120天境全景推拉门 ▶▶ -----



OPTIONAL TRACKS 可选轨道



PERFORMANCE DATA 产品性能

玻璃配置 GLASS CONFIGURATION	 隔热性能 THERMAL INSULATION	 隔音性能 SOUND INSULATION	 水密性能 WATERPROOF	 气密性能 AIR TIGHTNESS	 抗风压性能 WIND RESISTANT
5mm+27Ar+5mm	2.5(W/m²k)	36 (3级 level)	550Pa	≤ 4.2 (6级 level)	4.2 (7级 level)
5mm+27Ar+5Low-E	1.8(W/m²k)	36 (3级 level)	550Pa	≤ 4.2 (6级 level)	4.2 (7级 level)
5+12Ar+5+12Ar+5Low-E	1.4(W/m²k)	46 (5级 level)	550Pa	≤ 4.2 (6级 level)	4.2 (7级 level)
5+12Ar+5+12A+5Low-E Double silver	1.1(W/m²k)	46 (5级 level)	550Pa	≤ 4.2 (6级 level)	4.2 (7级 level)

PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 112/173mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Frame Profile Wall Thickness: 1.8mm
- Sash Profile Wall Thickness: 3.0mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- 边框宽度: 112/173mm
- 型材: 6063-T5 原铝材料
- 门框厚度: 1.8mm
- 玻璃型材厚度: 3.0mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)


HARDWARE OPTIONS 产品五金



OPENING OPTIONS 开启方式



2-Track 2-Panel
两轨两扇




2-Track 4-Panel
两轨四扇

150 SERIES PANORAMIC SLIDING DOOR

150 天境全景推拉门



OPTIONAL TRACKS 可选轨道



PERFORMANCE DATA 产品性能

玻璃配置 GLASS CONFIGURATION	隔热性能 THERMAL INSULATION	隔音性能 SOUND INSULATION	水密性能 WATERPROOF	气密性能 AIR TIGHTNESS	抗风压性能 WIND RESISTANT
5mm+27A+5mm	2.5(W/m²·k)	36 (3 级 level)	600Pa	≤ 4.2 (6 级 level)	4.6 (8 级 level)
5mm+27Ar+5Low-E	1.5(W/m²·k)	36 (3 级 level)	600Pa	≤ 4.2 (6 级 level)	4.6 (8 级 level)
5+12Ar+5+12Ar+5Low-E	1.3(W/m²·k)	46 (5 级 level)	600Pa	≤ 4.2 (6 级 level)	4.6 (8 级 level)
5+12Ar+5+12A+5Low-E Double silver	1.1(W/m²·k)	46 (5 级 level)	600Pa	≤ 4.2 (6 级 level)	4.6 (8 级 level)


PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 150/218mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Frame Profile Wall Thickness: 2.0mm
- Sash Profile Wall Thickness: 3.0mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- 边框宽度: 150/218mm
- 型材: 6063-T5 原铝材料
- 门框厚度: 2.0mm
- 玻璃型材厚度: 3.0mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)


HARDWARE OPTIONS 产品五金



OPENING OPTIONS 开启方式



2-Track 2-Panel
两轨两扇



2-Track 4-Panel
两轨四扇

73 SERIES NON-THERMAL BREAK FOLDING DOOR

73 非断桥折叠门 ▶▶ -----




PRODUCT SPECIFICATIONS 产品参数

- Frame Depth: 73mm
- Profile Material: 6063-T5 Primary Aluminum Alloy
- Wall Thickness: 2.0mm
- Surface Finish: AkzoNobel T1010 Powder Coating (global 10-year warranty)
- Available colors: Black, White, Fluorocarbon Gray, Metallic Coffee (custom color)
- Glass configuration: 5mm+15A+5mm
- 边框宽度: 73mm
- 型材: 6063-T5 原铝材料
- 壁厚: 2.0mm
- 颜色处理: 阿克苏 T1010 粉末 (全球 10 年保修)
- 可选颜色: 黑色、白色、氟碳灰、金属咖啡 (自定义颜色)
- 玻璃配置: 5mm+15A+5mm


HARDWARE OPTIONS 产品五金



OPTIONAL LOWER TRACK 可选下轨

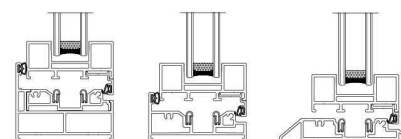

OPENING OPTIONS 开启方式

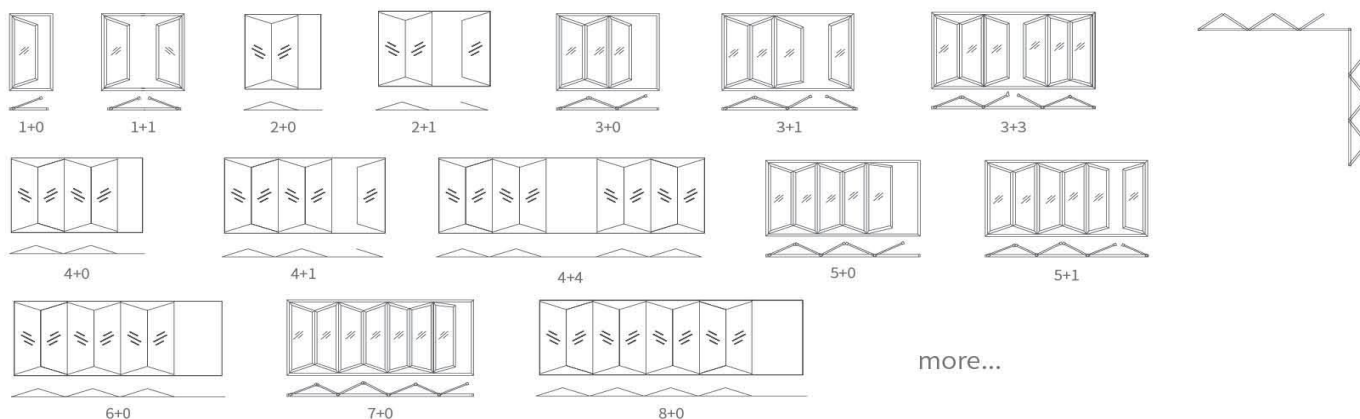

Premium aluminum alloy windows and doors, combining timeless design with modern craftsmanship, every window and door reflects quality, elegance, and reliability, and every extraordinary supporter is writing a life chapter with nobility and elegance.

非凡梦幻的铝合金门窗，秉承百年经典注重品质，每一扇门窗都是传统工艺与现代工艺的结合，每一位非凡的支持者都在书写高贵典雅的人生篇章。



