

Ground Washer C series

Application

They are ideal for applications such as in hotels, houses, gardens, parks, plazas for the ground washer decoration illumination of path or wall.

PLAYLITE®
ULED



CE


IK10 IP67

SS316 cover


3 Years Warranty

One IP67 lamp body is compatible with 6 covers

Recessed luminaire with washer emission, equipped with frosted diffuser and covers with different open holes, ensuring good washer light, the washer light for the wall or ground is even and smooth, ideal for the places where should be designed with anti-glare and good washer decoration lighting.

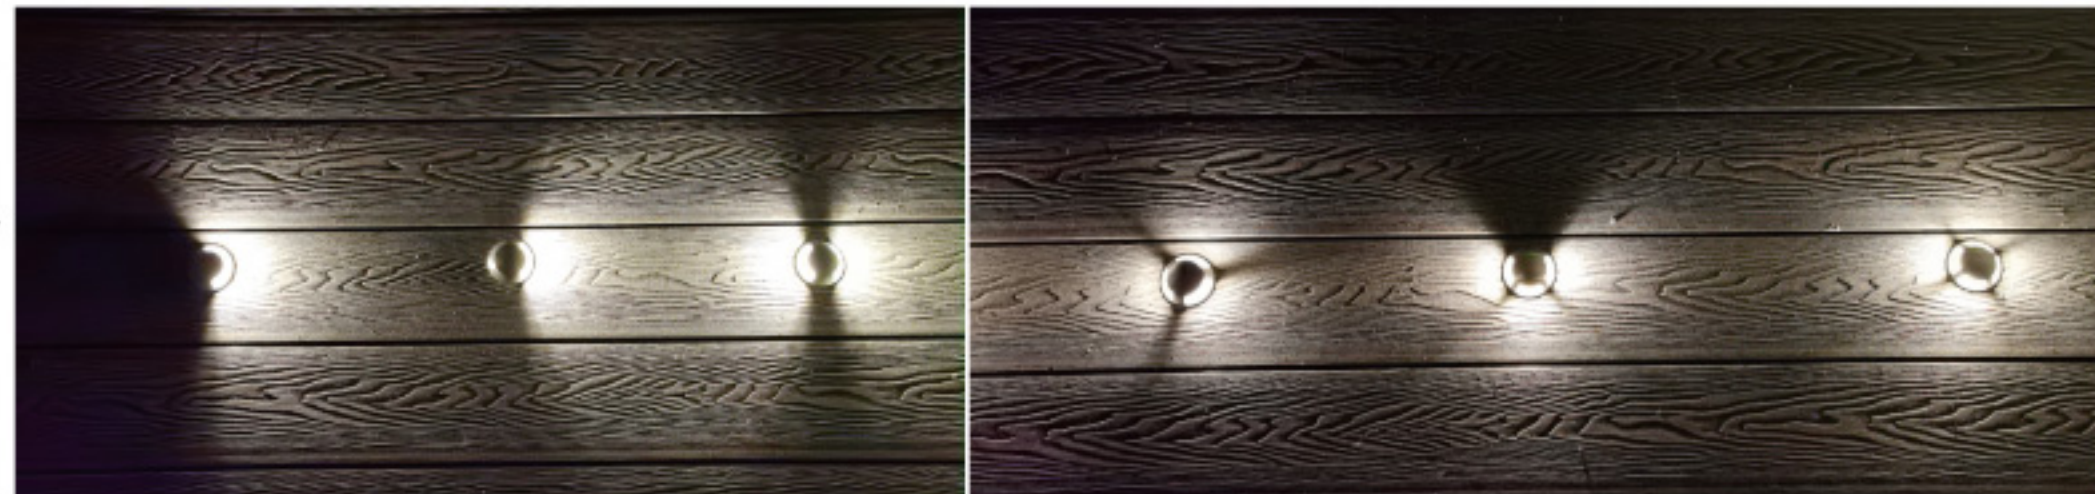

With clip , recessed in the wall or deck.

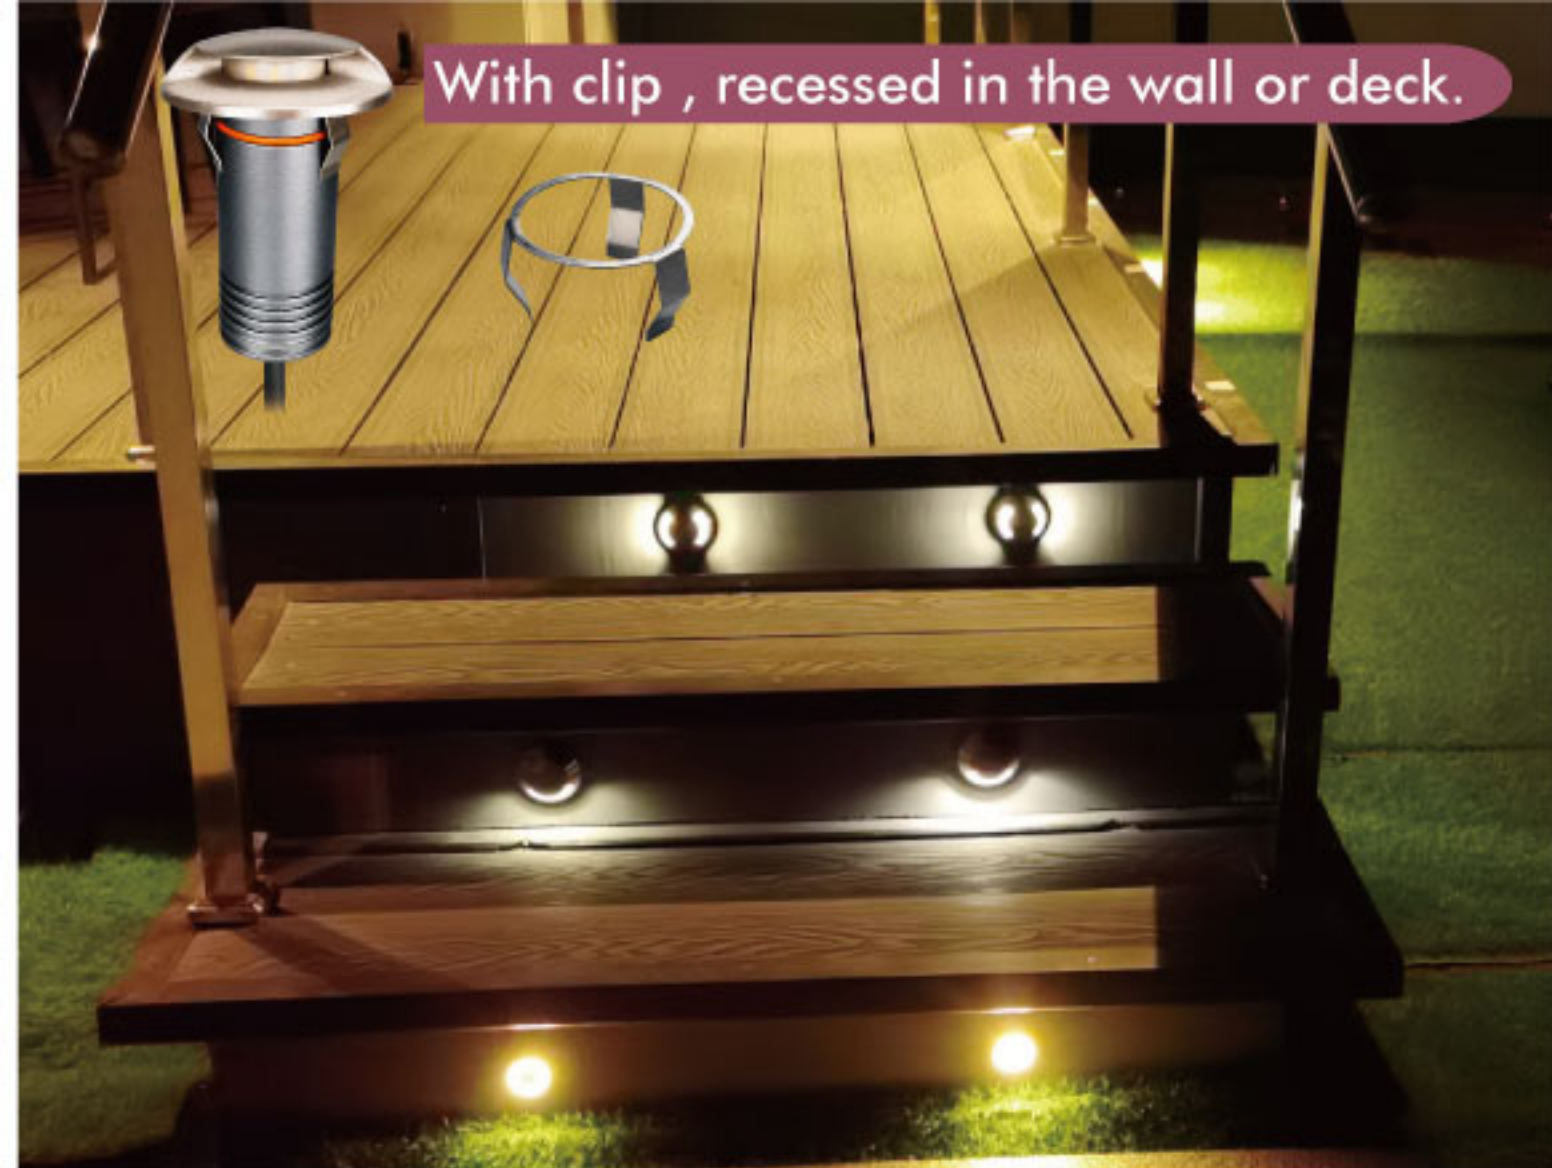

Light can reach around 20 cm distance



LED attached to the side directly for more lumen output




IP67 lamp body

With mounting sleeve ,recessed in ground.




IP67 waterproof

PLAYLITE® **Ground Washer C/CH-180D**

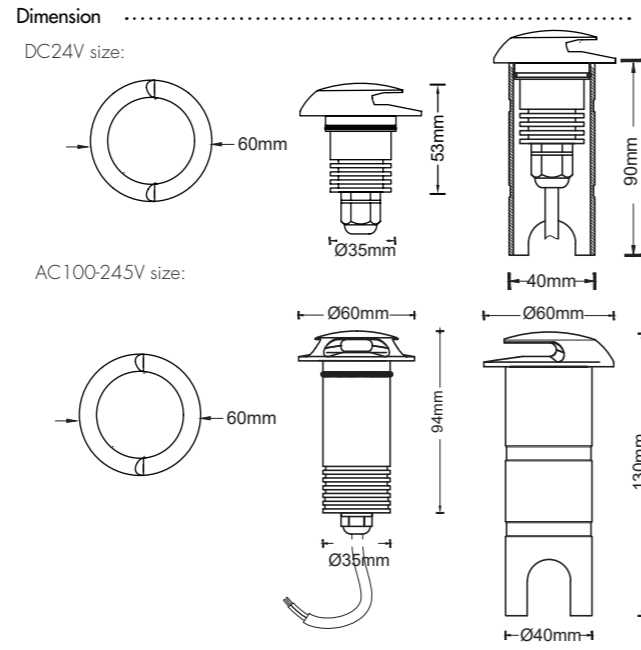


Light Distribution Curve (3000K, 180D)

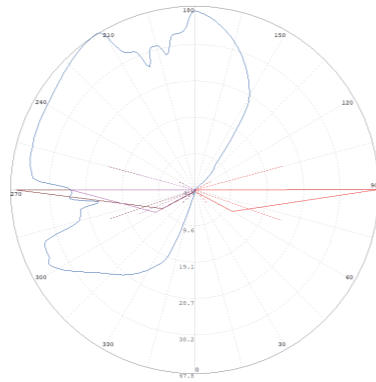


Illumination Picture (180D)




PLAYLITE® **Ground Washer C/CH-1WAY**

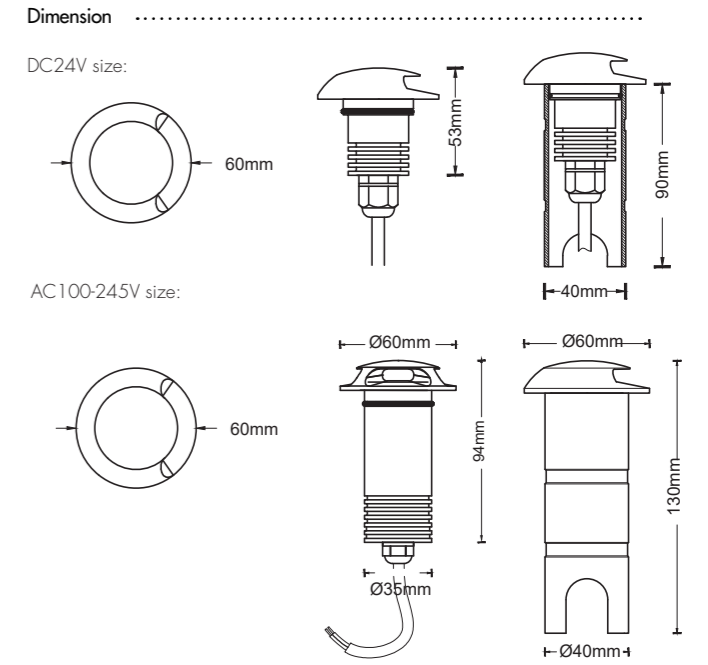

Light Distribution Curve (3000K, 1 WAY)

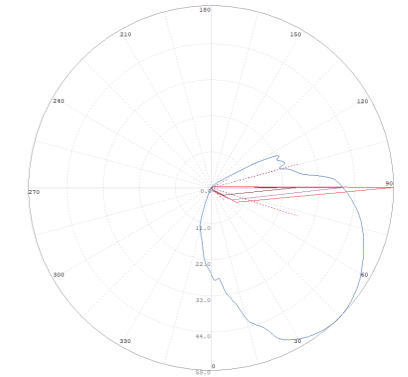

Illumination Picture (1 WAY)

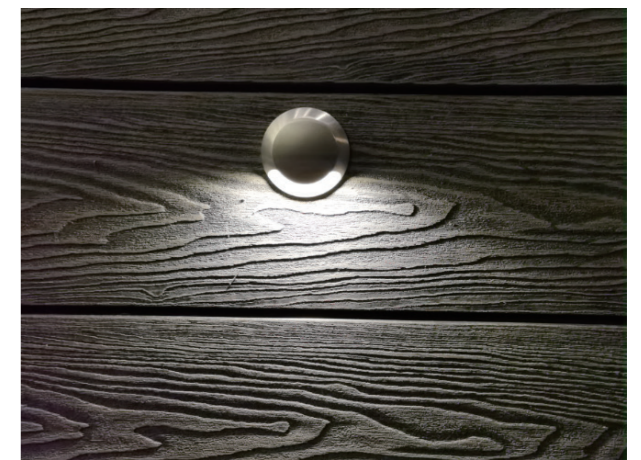

CE RoHS IP67 IK10

3 Years Warranty

Parameter

General Data	
Item No.	DC24V: UL-1006-0300-C-180D / AC100-245V: UL-1006-0300-CH-180D
Power	3 watts +10%
LED type	10PCS LUMILEDS 2835 SMD LED
Luminous flux	75 lm+10% with cover (200lm+10% tested without cover)
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	180°
Dimension	DC24V: Ø60 x 53 (mm) Diameter x Height AC100-245V: Ø60 x 94 (mm) Diameter x Height
Cut out	Ø40mm
Net weight	0.55 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V for C version, AC100-245V for CH version
Insulation class	Class III
Cable	1PC 1M H05RN-F 2 or 3*1mm ² rubber cable
Driver	constant current driver DC24V input or AC100-245V
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK10
Housing	Aluminium
Protection finishing	Passivated in dark grey
Trim	SS 316
Loading capacity	300 kgs
Cable Gland	PG7
Gasket	Silicone gasket
Accessories	
Mounting Sleeve	Aluminium tube for ground recessed mounting
Clip	Optional clip for wall or deck recessed mounting
Packaging	
Inner box size	145*115*75 mm
Carton size	46*37*17.5 cm (18PCS/CTN)

CE RoHS IP67 IK10

3 Years Warranty



Parameter

General Data	
Item No.	DC24V: UL-1006-0300-C(1) / AC100-245V: UL-1006-0300-CH(1)
Power	3 watts +10%
LED type	10PCS LUMILEDS 2835 SMD LED
Luminous flux	50 lm+10% with cover (200lm+10% tested without cover)
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	1 way
Dimension	DC24V: Ø60 x 53 (mm) Diameter x Height AC100-245V: Ø60 x 94 (mm) Diameter x Height
Cut out	Ø40mm
Net weight	0.55 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V for C version, AC100-245V for CH version
Insulation class	Class III
Cable	1PC 1M H05RN-F 2 or 3*1mm ² rubber cable
Driver	constant current driver DC24V input or AC100-245V
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK10
Housing	Aluminium
Protection finishing	Passivated in dark grey
Trim	SS 316
Loading capacity	300 kgs
Cable Gland	PG7
Gasket	Silicone gasket
Accessories	
Mounting Sleeve	Aluminium tube for ground recessed mounting
Clip	Optional clip for wall or deck recessed mounting
Packaging	
Inner box size	145*115*75 mm
Carton size	46*37*17.5 cm (18 PCS/CTN)



PLAYLITE® Ground Washer C/CH-2WAY


PLAYLITE® Ground Washer C/CH-3WAY-3A

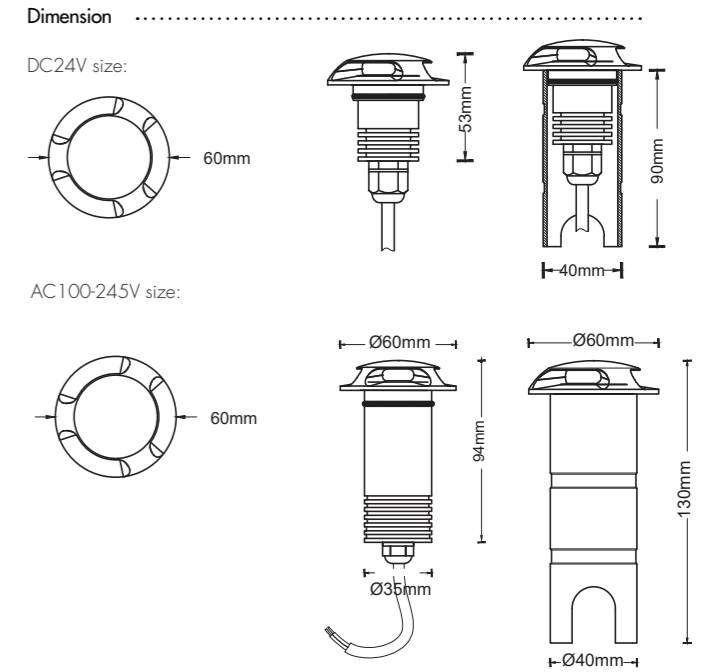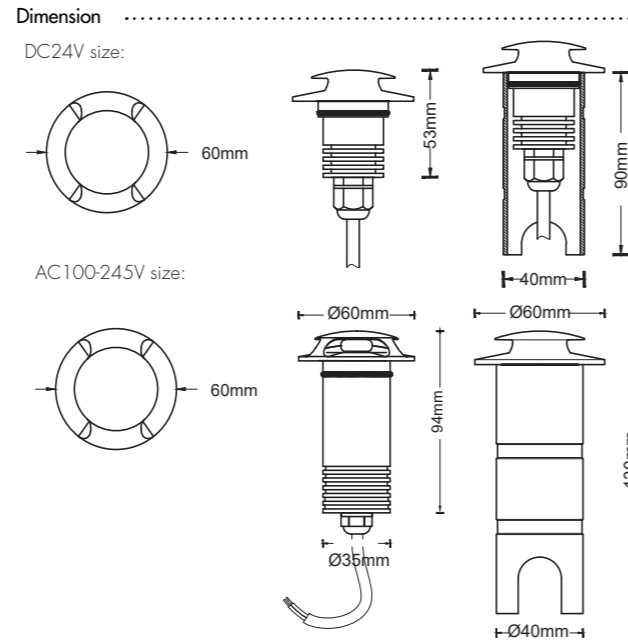


CE RoHS IP67 IK10

3 Years Warranty

Light Distribution Curve (3000K, 2 WAY)

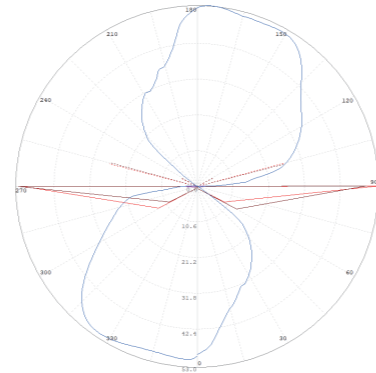


Illumination Picture (2 WAY)

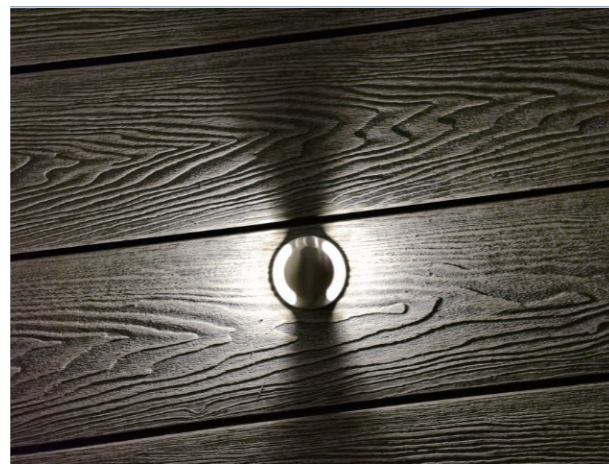

CE RoHS IP67 IK10

3 Years Warranty

Light Distribution Curve (3000K,3 WAY)

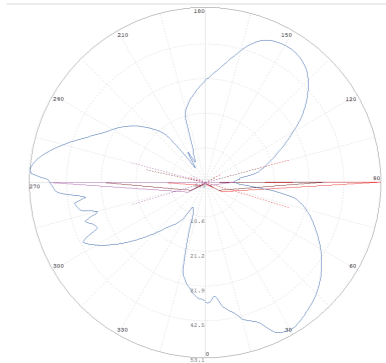

Illumination Picture (3 WAY)




Parameter	
General Data	
Item No.	DC24V: UL-1006-0300-C(2) / AC100-245V: UL-1006-0300-CH(2)
Power	3 watts +10%
LED type	10PCS LUMILEDS 2835 SMD LED
Luminous flux	100 lm+10% with cover (200lm+10% tested without cover)
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	2 way
Dimension	DC24V: Ø60 x 53 (mm) Diameter x Height AC100-245V: Ø60 x 94 (mm) Diameter x Height
Cut out	Ø40mm
Net weight	0.51 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V for C version, AC100-245V for CH version
Insulation class	Class III
Cable	1PC 1M H05RN-F 2 or 3*1mm ² rubber cable
Driver	constant current driver DC24V input or AC100-245V
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK10
Housing	Aluminium
Protection finishing	Passivated in dark grey
Trim	SS 316
Loading capacity	300 kgs
Cable Gland	PG7
Gasket	Silicone gasket
Accessories	
Mounting Sleeve	Aluminium tube for ground recessed mounting
Clip	Optional clip for wall or deck recessed mounting
Packaging	
Inner box size	145*115*75 mm
Carton size	46*37*17.5 cm (18PCS/CTN)


Parameter	
General Data	
Item No.	DC24V: UL-1006-0300-C(3A) / AC100-245V: UL-1006-0300-CH(3A)
Power	3 watts +10%
LED type	10PCS LUMILEDS 2835 SMD LED
Luminous flux	110 lm+10% with cover (200lm+10% tested without cover)
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	3 way
Dimension	DC24V: Ø60 x 53 (mm) Diameter x Height AC100-245V: Ø60 x 94 (mm) Diameter x Height
Cut out	Ø40mm
Net weight	0.51 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V for C version, AC100-245V for CH version
Insulation class	Class III
Cable	1PC 1M H05RN-F 2 or 3*1mm ² rubber cable
Driver	constant current driver DC24V input or AC100-245V
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK10
Housing	Aluminium
Protection finishing	Passivated in dark grey
Trim	SS 316
Loading capacity	300 kgs
Cable Gland	PG7
Gasket	Silicone gasket
Accessories	
Mounting Sleeve	Aluminium tube for ground recessed mounting
Clip	Optional clip for wall or deck recessed mounting
Packaging	
Inner box size	145*115*75 mm
Carton size	46*37*17.5 cm (18 PCS/CTN)

PLAYLITE® Ground Washer C/CH-3WAY-3B




PLAYLITE® Ground Washer C/CH-4WAY

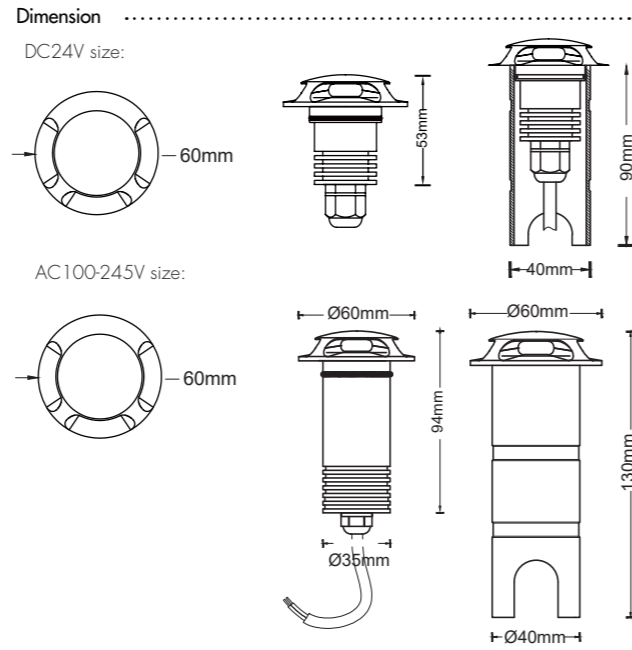


Light Distribution Curve (3000K, 3 WAY)

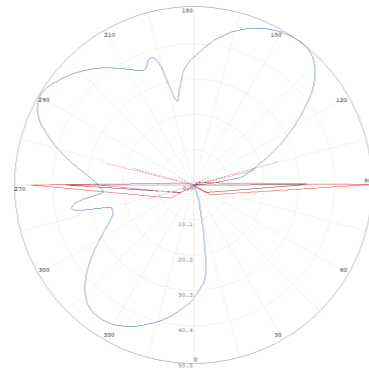


Illumination Picture (3 WAY)

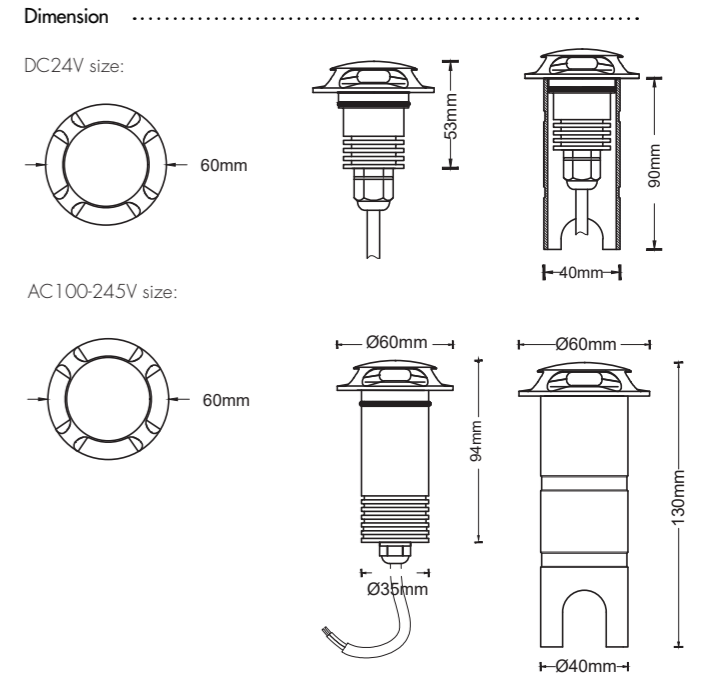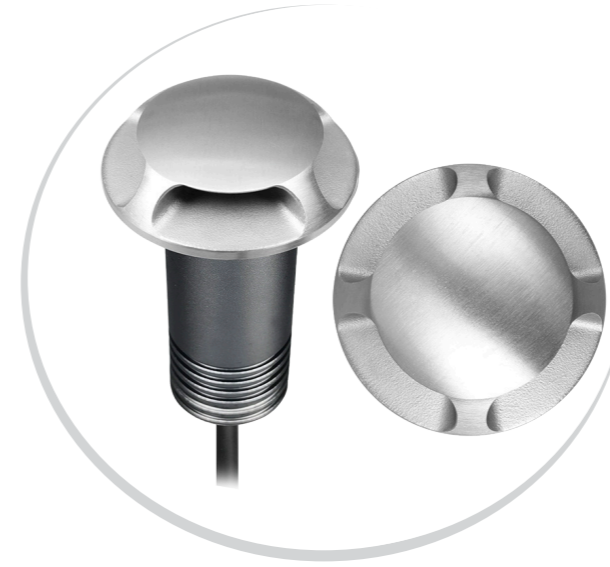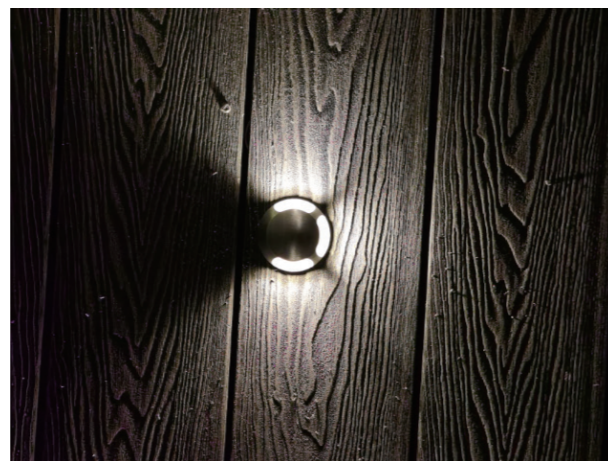

Light Distribution Curve (3000K,4 WAY)

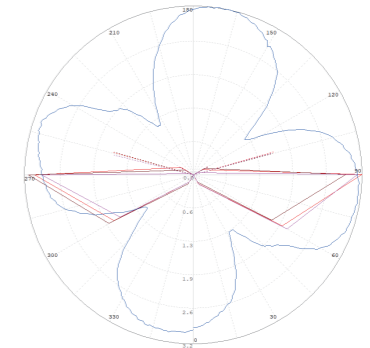

Illumination Picture (4 WAY)

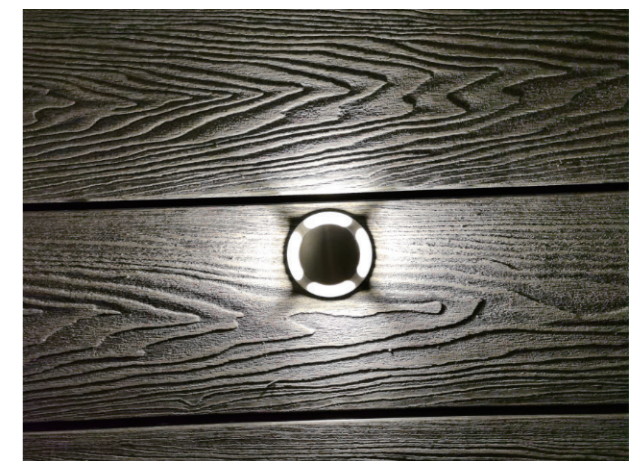

CE RoHS IP67 IK10
3 Years Warranty

CE RoHS IP67 IK10
3 Years Warranty

Parameter

General Data	
Item No.	DC24V: UL-1006-0300-C(3B)/ AC100-245V: UL-1006-0300-CH(3B)
Power	3 watts +10%
LED type	10PCS LUMILEDS 2835 SMD LED
Luminous flux	100 lm+10% with cover (200lm+10% tested without cover)
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	3 way
Dimension	DC24V: Ø60 x 53 (mm) Diameter x Height AC100-245V: Ø60 x 94 (mm) Diameter x Height
Cut out	Ø40mm
Net weight	0.53 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V for C version, AC100-245V for CH version
Insulation class	Class III
Cable	1PC 1M H05RN-F 2 or 3*1mm ² rubber cable
Driver	constant current driver DC24V input or AC100-245V
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK10
Housing	Aluminium
Protection finishing	Passivated in dark grey
Trim	SS 316
Loading capacity	300 kgs
Cable Gland	PG7
Gasket	Silicone gasket
Accessories	
Mounting Sleeve	Aluminium tube for ground recessed mounting
Clip	Optional clip for wall or deck recessed mounting
Packaging	
Inner box size	145*115*75 mm
Carton size	46*37*17.5 cm (18PCS/CTN)

Parameter

General Data	
Item No.	DC24V: UL-1006-0300-C(4)/ AC100-245V: UL-1006-0300-CH(4)
Power	3 watts +10%
LED type	10PCS LUMILEDS 2835 SMD LED
Luminous flux	110 lm+10% with cover (200lm+10% tested without cover)
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	4 way
Dimension	DC24V: Ø60 x 53 (mm) Diameter x Height AC100-245V: Ø60 x 94 (mm) Diameter x Height
Cut out	Ø40mm
Net weight	0.50 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V for C version, AC100-245V for CH version
Insulation class	Class III
Cable	1PC 1M H05RN-F 2 or 3*1mm ² rubber cable
Driver	constant current driver DC24V input or AC100-245V
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK10
Housing	Aluminium
Protection finishing	Passivated in dark grey
Trim	SS 316
Loading capacity	300 kgs
Cable Gland	PG7
Gasket	Silicone gasket
Accessories	
Mounting Sleeve	Aluminium tube for ground recessed mounting
Clip	Optional clip for wall or deck recessed mounting
Packaging	
Inner box size	145*115*75 mm
Carton size	46*37*17.5 cm (18 PCS/CTN)

