

Dawn Mini series

Application

They are idea to be used as wall light, stair step light, for stair steps, hallway, walkway etc..




Mini trim 70x55 mm

Painted in white or black
Plated in nickel satin or chrome

3 Years Warranty

CE RoHS COMPLIANT
IK06 IP65

PLAYLITE®

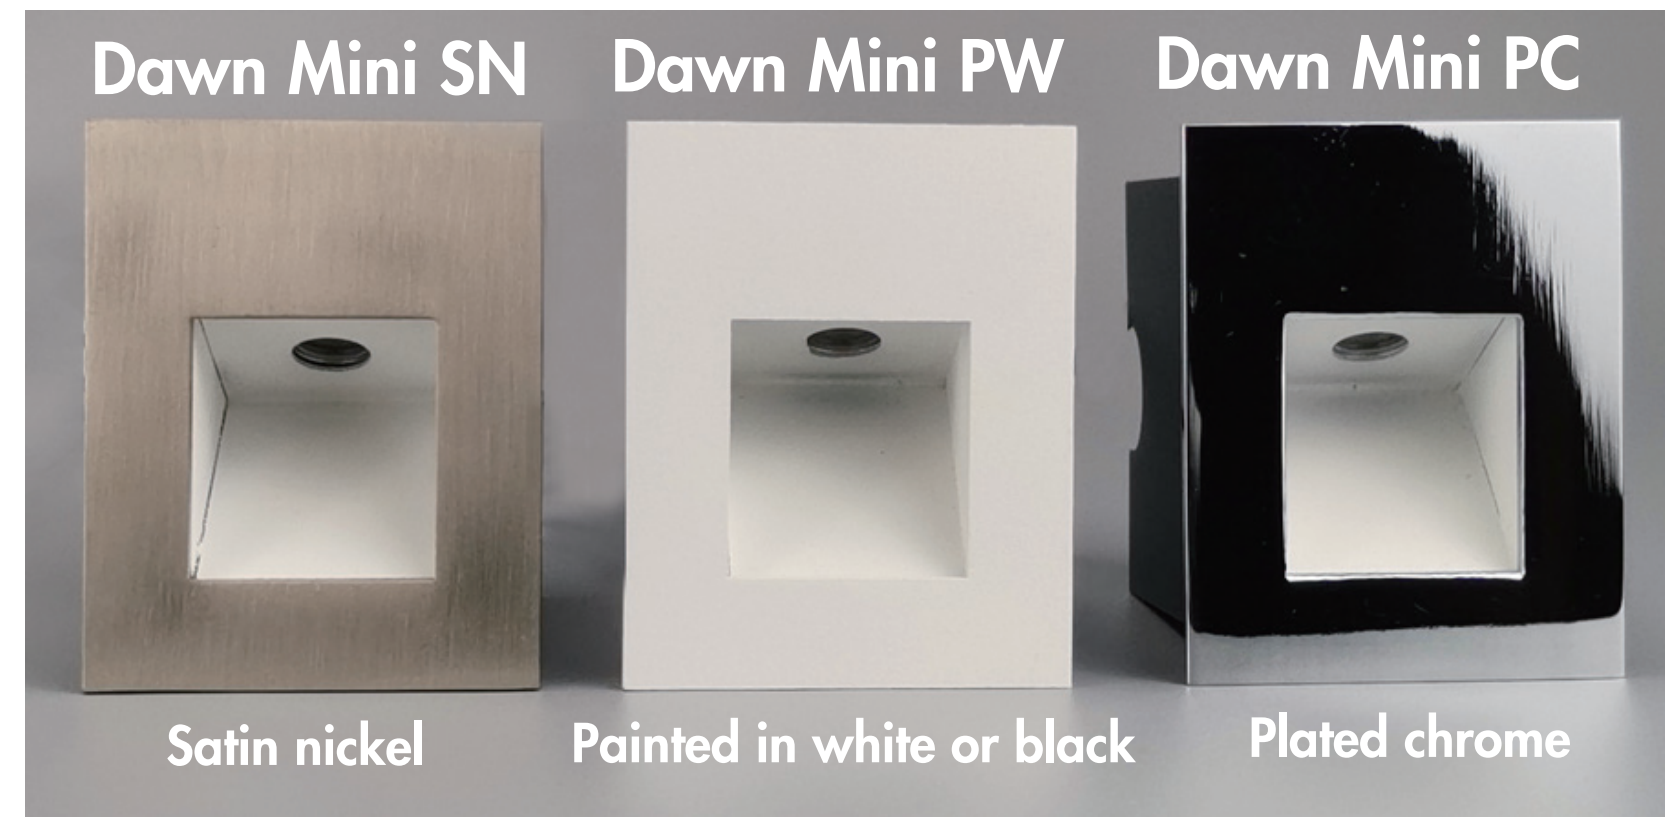

Asymmetric downward
super visual comfort





PLAYLITE®


Dawn Mini PC

PLAYLITE®


Dawn Mini PW




Dimension

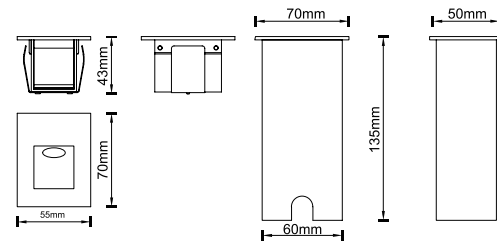


Light Distribution Curve (3000K, 40°x45°)

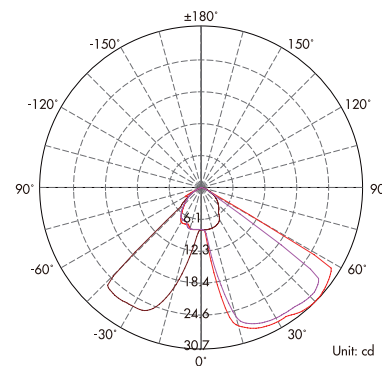

Lux distance Curve (3000K, 40°x45°)

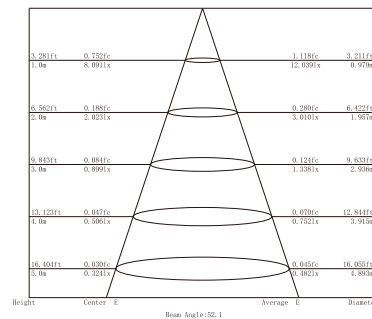

Illumination Picture (40°x45°)

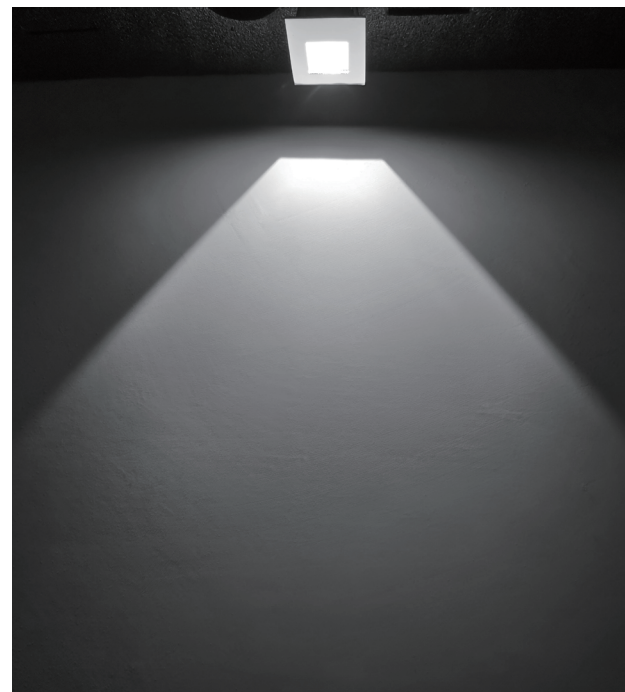

CE RoHS COMPLIANT IP65 IK06

3 Years Warranty


Personally customized !

Parameter


General Data	
Item No.	SP015-0100-AH PC
Power	1 Watts +10%
LED type	1 PC OSRAM 3030 LED
Luminous flux	40 lm +10%
CCT	2700K, 3000K, 4000K, 4500K, 5700K, 6500K
CRI	80+
Beam angle	Asymmetrical 40°x 45°
Dimension	70*55*43 mm (Length x Width x Height)
Cut out	60*50*135 mm (Length x Width x Height)
Net weight	0.35 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-265V (DC12-24V optional)
Insulation class	Class I
Cable	PVC cable 0.5M 2x0.34 mm square
Driver	constant current driver
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK06
Housing	Aluminium
Protection finishing	Powder coated painted in white for housing
Trim	polished chrome Aluminium
Glass	Tempered glass
Loading capacity	/
Cable Gland	Aluminium part IP65
Gasket	silicone ring + silicone glue seal
Accessories	
Mounting box	Aluminium mounting box
Packaging	
Inner box size	/ mm
Carton size	/ cm (/ PCS/carton)




Dimension

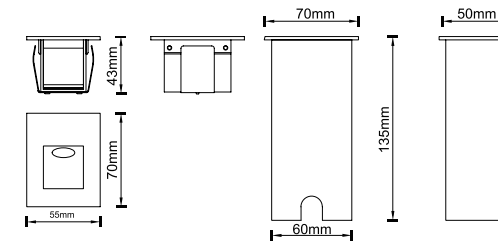


Light Distribution Curve (3000K, 40°x45°)

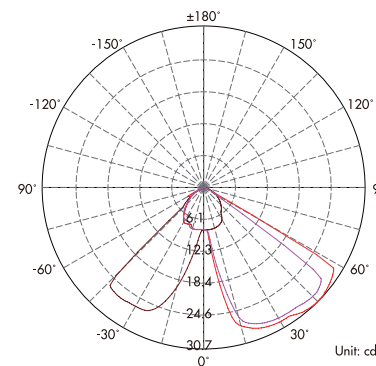

Lux distance Curve (3000K, 40°x45°)

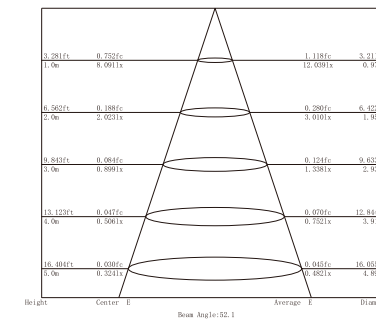

Illumination Picture (40°x45°)

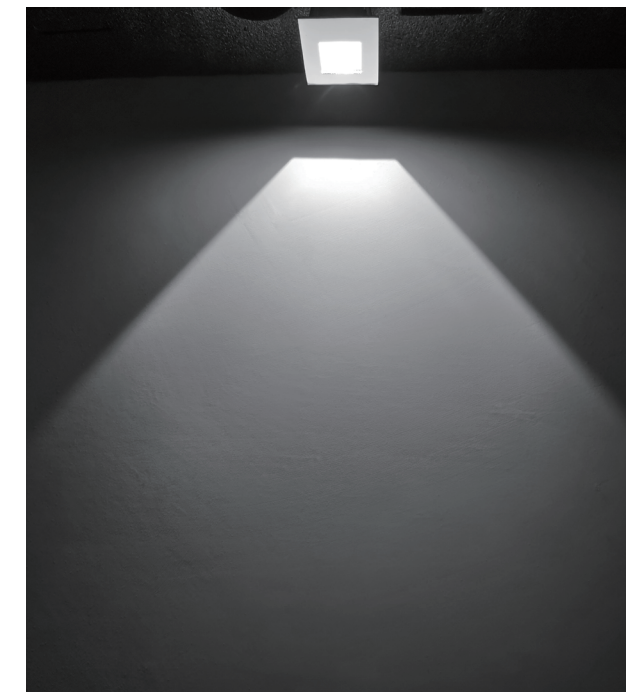

CE RoHS COMPLIANT IP65 IK06

3 Years Warranty

Personally customized !

Parameter

General Data	
Item No.	SP015-0100-AH PW
Power	1 Watts +10%
LED type	1 PC OSRAM 3030 LED
Luminous flux	40 lm +10%
CCT	2700K, 3000K, 4000K, 4500K, 5700K, 6500K
CRI	80+
Beam angle	Asymmetrical 40°x 45°
Dimension	70*55*43 mm (Length x Width x Height)
Cut out	60*50*135 mm (Length x Width x Height)
Net weight	0.35 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-265V (DC12-24V optional)
Insulation class	Class I
Cable	PVC cable 0.5M 2x0.34 mm square
Driver	constant current driver
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK06
Housing	Aluminium
Protection finishing	Powder coated painted in white for housing
Trim	Powder coated painted in white Aluminium (Black as options)
Glass	Tempered glass
Loading capacity	/
Cable Gland	Aluminium part IP65
Gasket	silicone ring + silicone glue seal
Accessories	
Mounting box	Aluminium mounting box
Packaging	
Inner box size	/ mm
Carton size	/ cm (/ PCS/carton)

WALL LIGHTS SERIES

WALL LIGHTS SERIES



PLAYLITE®

Dawn Mini SN

PLAYLITE®



IP65 IK06


3 Years Warranty

Personally customized !


Parameter

General Data	
Item No.	SP-015-0100-AH SN
Power	1 Watts +10%
LED type	1 PC OSRAM 3030 LED
Luminous flux	40 lm +10%
CCT	2700K, 3000K, 4000K, 4500K, 5700K, 6500K
CRI	80+
Beam angle	Asymmetrical 40°x 45°
Dimension	70*55*43 mm (Length x Width x Height)
Cut out	60*50*135 mm (Length x Width x Height)
Net weight	0.35 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-265V (DC12-24V optional)
Insulation class	Class I
Cable	PVC cable 0.5M 2x0.34 mm square
Driver	constant current driver
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK06
Housing	Aluminium
Protection finishing	Powder coated painted in white for housing
Trim	satın nickel plating Aluminium
Glass	Tempered glass
Loading capacity	/
Cable Gland	Aluminium part IP65
Gasket	silicone ring + silicone glue seal
Accessories	
Mounting box	Aluminium mounting box
Packaging	
Inner box size	/ mm
Carton size	/ cm (/ PCS/carton)


Dimension

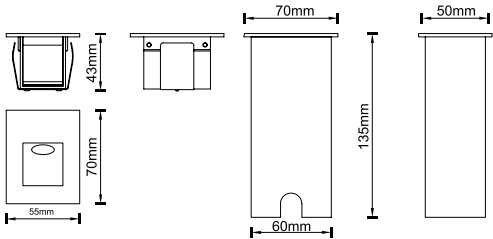

Light Distribution Curve (3000K, 40°x45°)

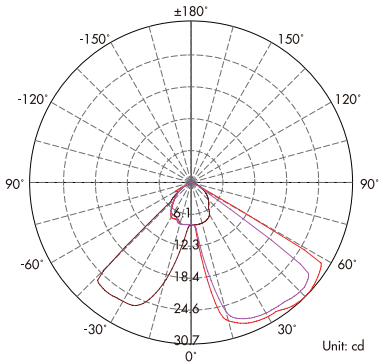

Lux distance Curve (3000K, 40°x45°)

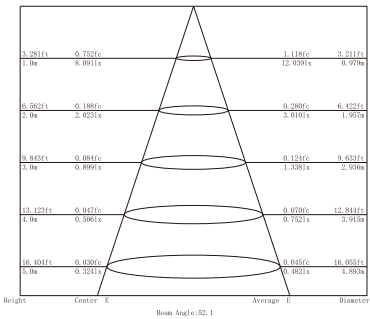

Illumination Picture (40°x45°)



WALL LIGHTS SERIES

