

Diameter 150 mm (2W),300 mm (10W),400 mm (12W),500 mm (15W) available !


Playball series

Application


They are idea to be used on the lawn,sidewalk, or as decoration balls in the garden.



- PE shield
- Passivated+planting housing
- 3 Years Warranty

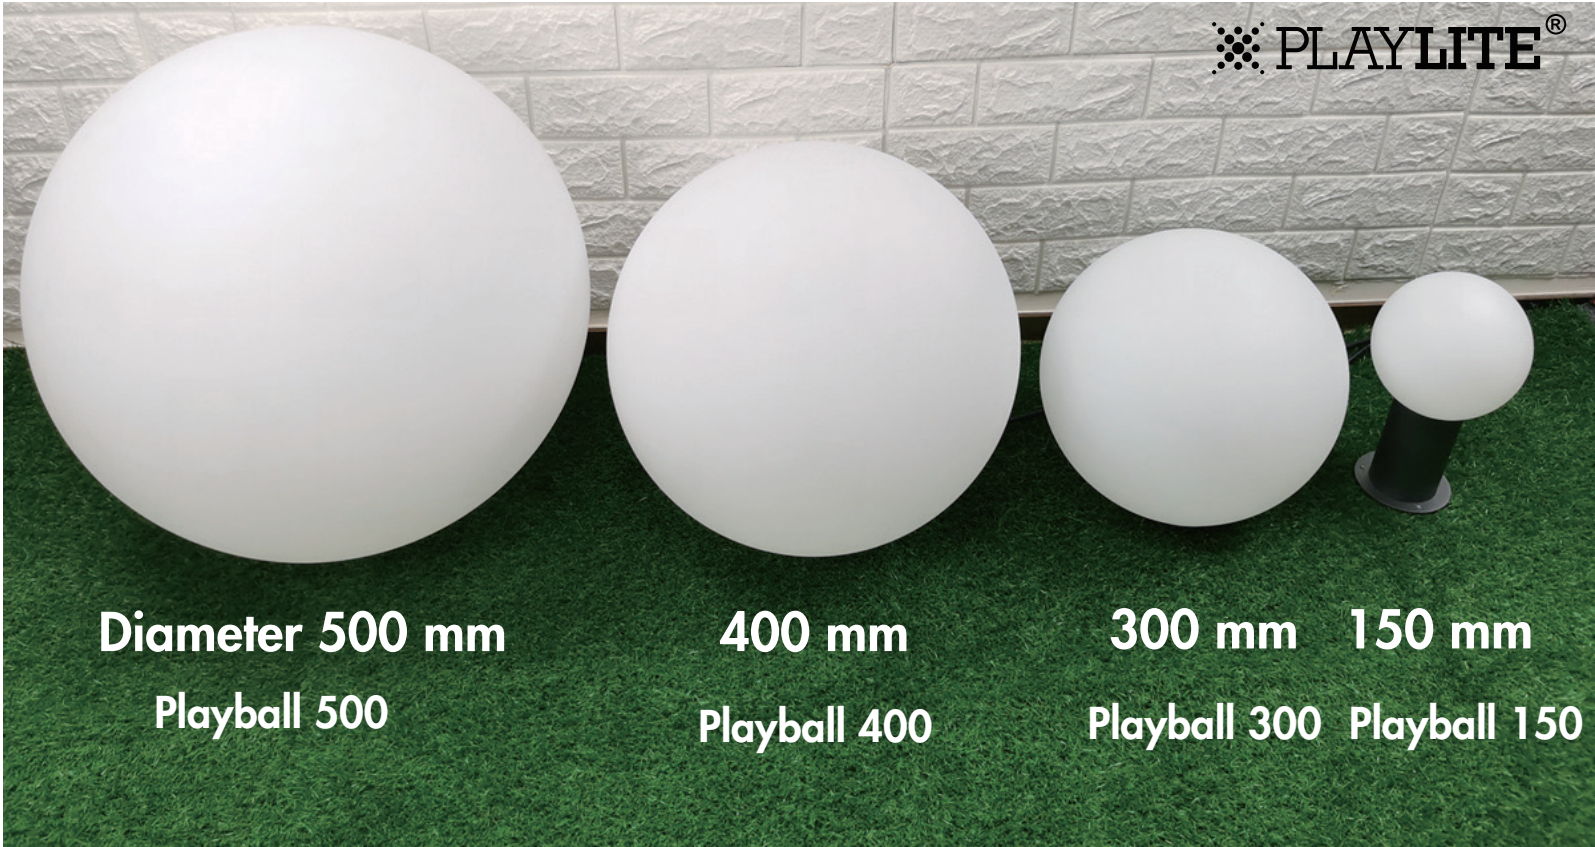


Playball 150


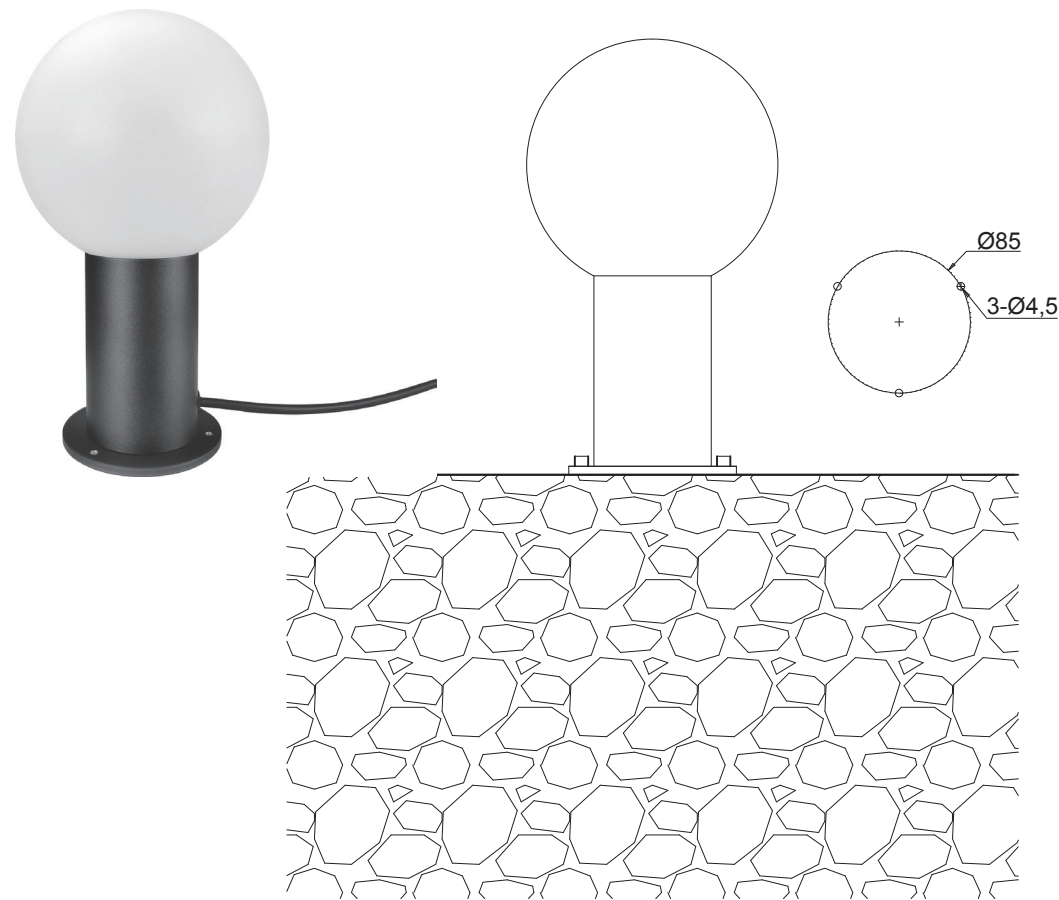


With mounted base
for surface mounting

Playball 300/400/500

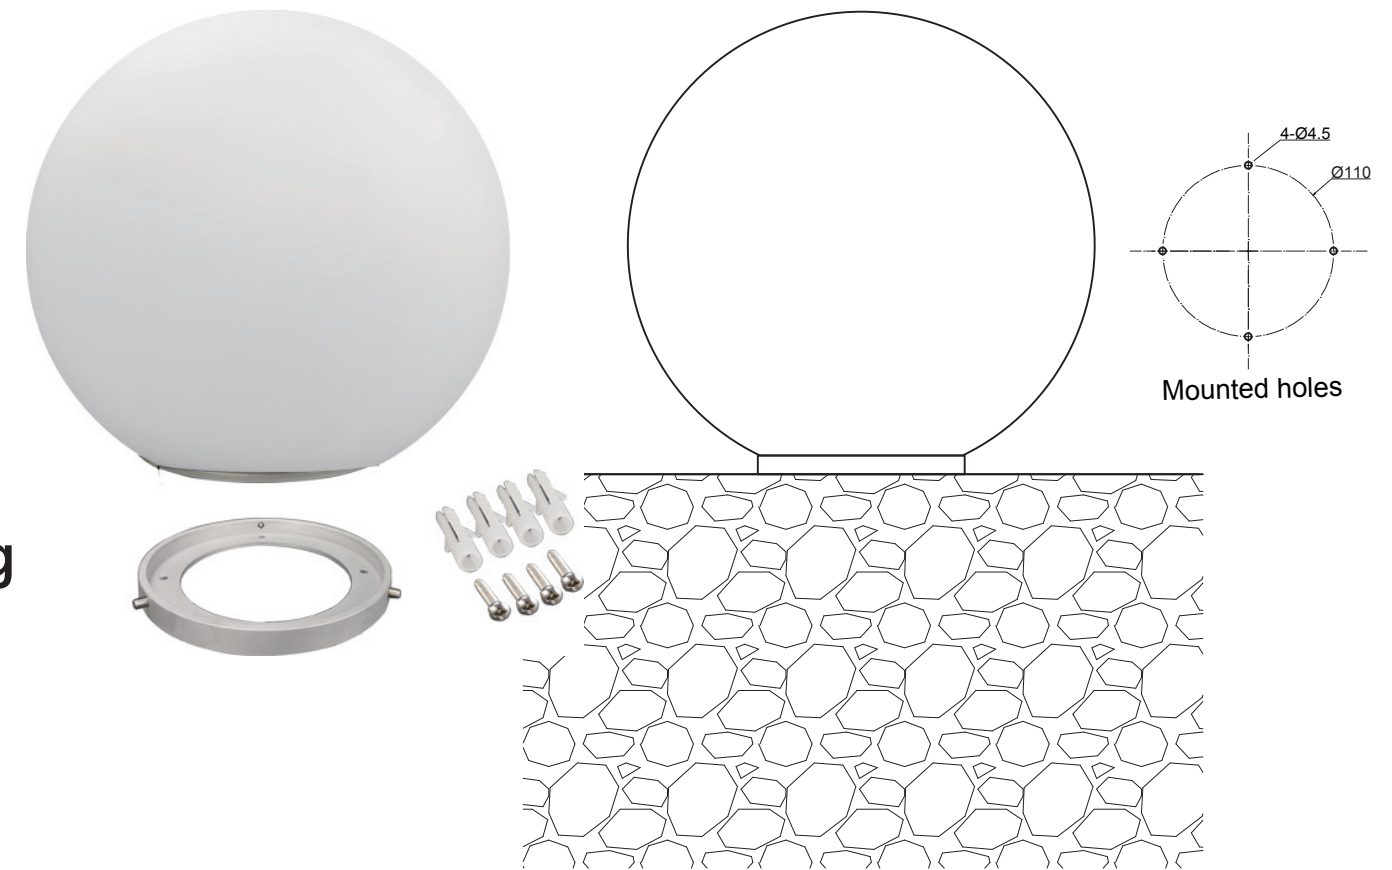

With spike
for earth mounting

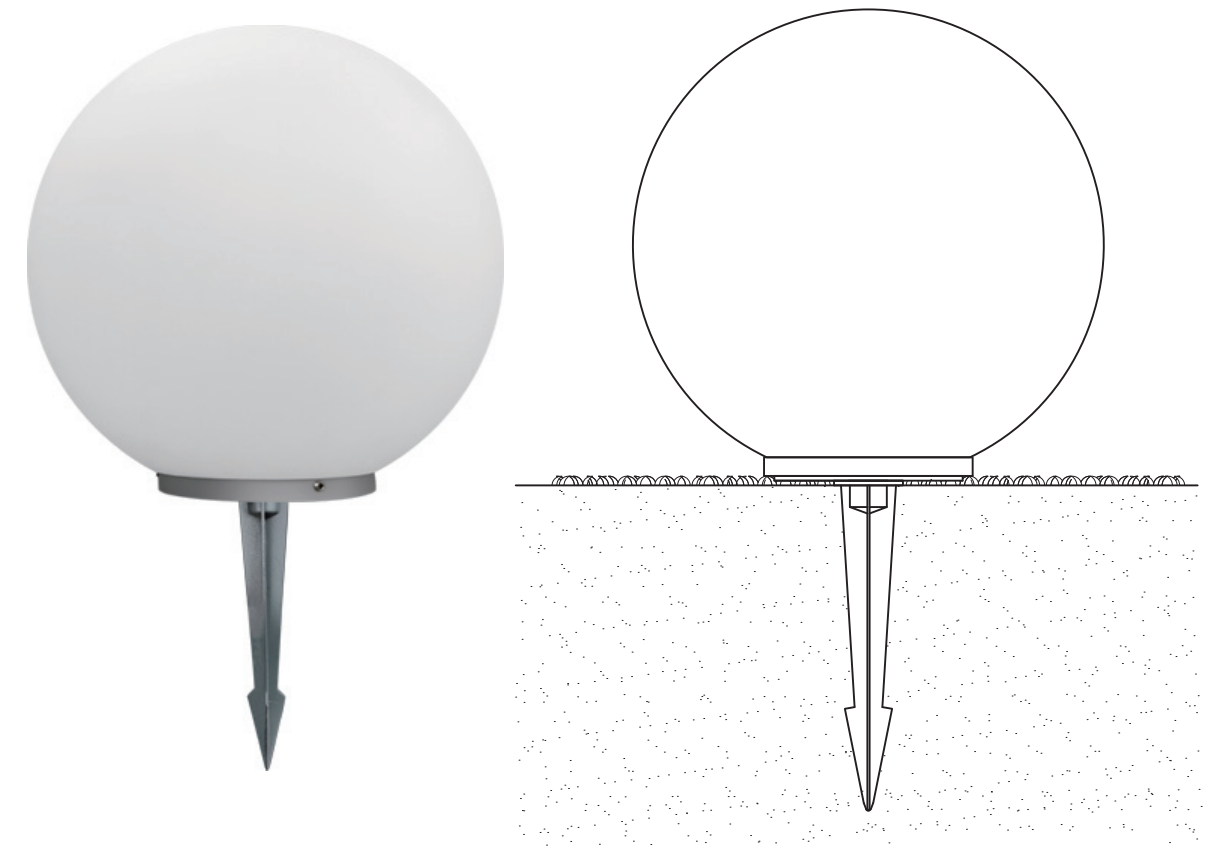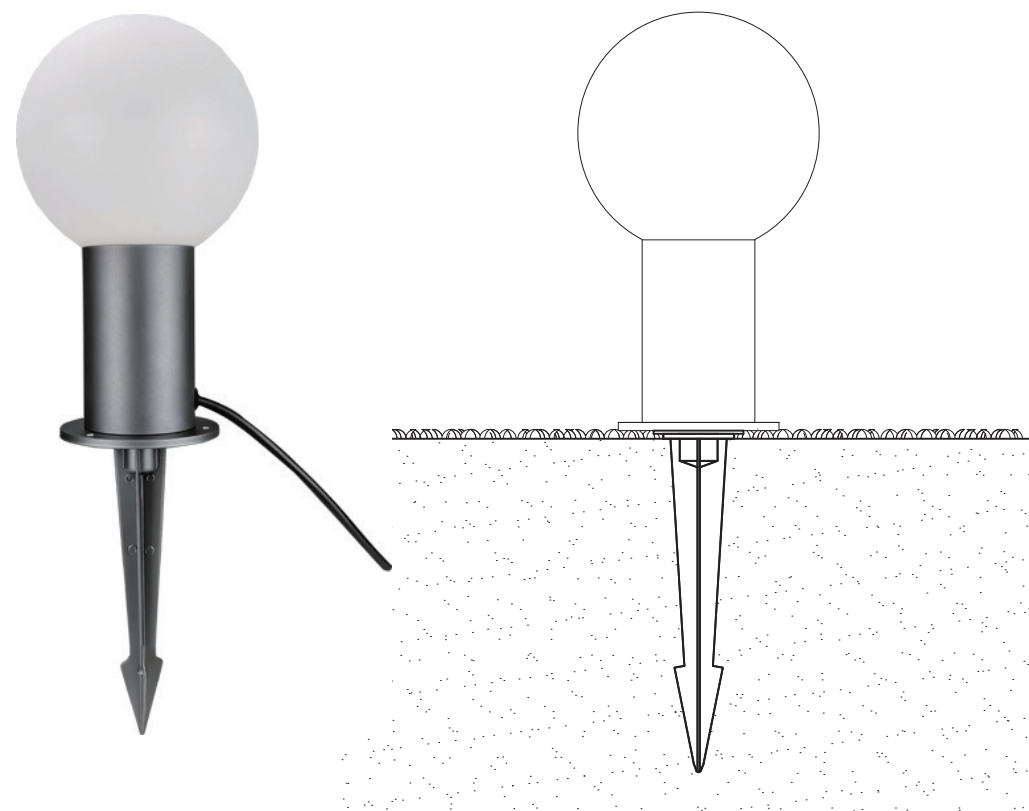





CE RoHS COMPLIANT IP65 IK07
Passivated 3 Years Warranty

Parameter	
General Data	
Item No.	LL-Ø150-0200-A
Power	2 Wwatts +10%
LED type	18 PCS OSRAM 2835 LED
Luminous flux	200lm +10%
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	300°
Dimension	Ø150*438 (mm) Diameter x length
Cut out	/ mm
Net weight	0.78kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V
Insulation class	Class III
Cable	1PC rubber cable 1m H05RN-F 2 x 1mm square
Driver	low constant voltage input, constant current output for LEDs
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK07
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	Anodized +Powder coated painting in dark grey
Trim	PE shield
Glass	/
Loading capacity	/
Cable Gland	PG gland
Gasket	silicone ring + silicone glue seal
Accessories	
Spike	With spike for earth mounting
Round base	With round base for surface mounting
Packaging	
Inner box size	200*200*300 mm
Carton size	42*42*32 cm (2PCS / carton)


Dimension

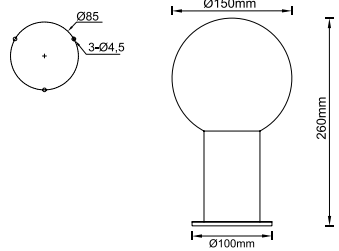

Light Distribution Curve (3000K,300°)

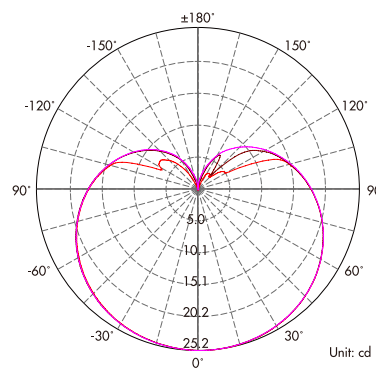

Lux distance Curve (3000K,300°)

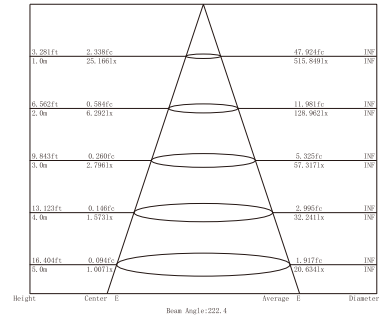


Illumination Picture (300°)







Dimension

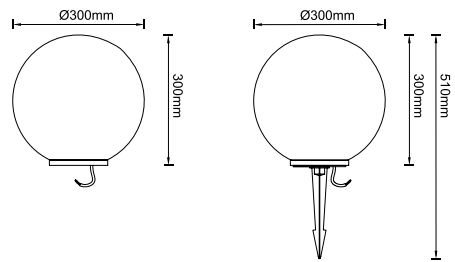


Light Distribution Curve (3000K, 300°)

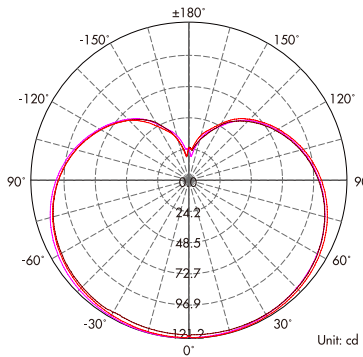


Lux distance Curve (3000K, 300°)

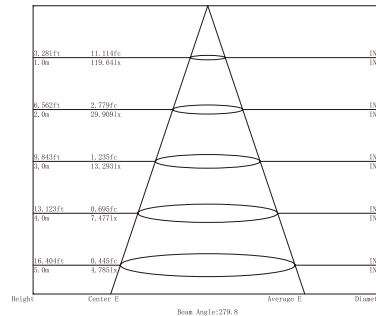


Illumination Picture (300°)

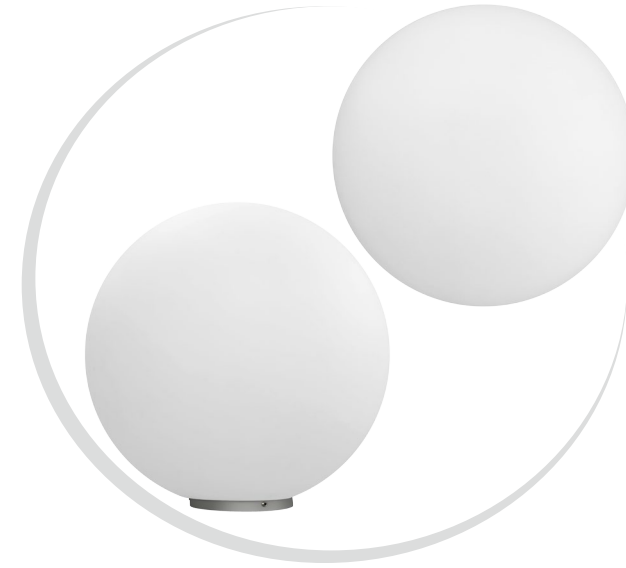


Dimension

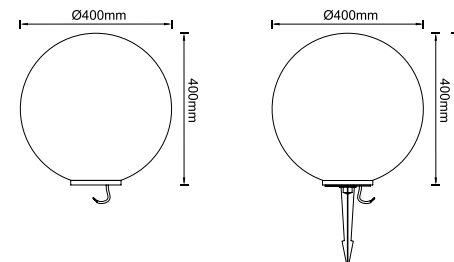

Light Distribution Curve (3000K, 300°)

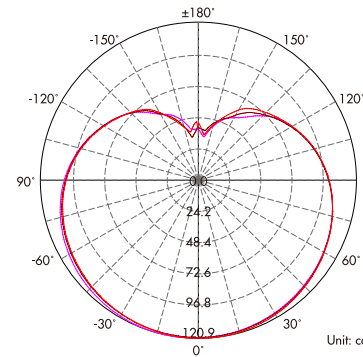

Lux distance Curve (3000K, 300°)

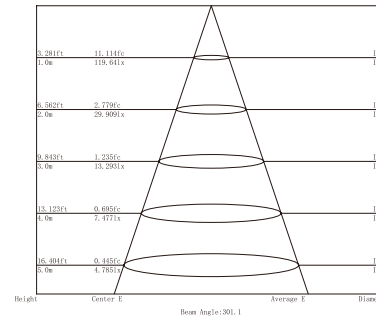

Illumination Picture (300°)



Passivated

3 Years Warranty

Parameter

General Data	
Item No.	LL-Ø300-1000-A
Power	1.0 Watts +10%
LED type	66 PCS OSRAM 2835 LED
Luminous flux	900lm +10%
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	300°
Dimension	Ø300*300 (mm) Diameter x length
Cut out	/ mm
Net weight	1.65kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC 24V
Insulation class	Class III
Cable	1PC rubber cable 1m H05RN-F 2 x 1mm square
Driver	low constant voltage input, constant current output for LEDs
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK07
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	Anodized +Powder coated painting in dark grey
Trim	white PMMA shield
Glass	/
Loading capacity	/
Cable Gland	PG gland
Gasket	silicone ring + silicone glue seal
Accessories	
Spike	With spike for earth mounting
Round base	With round base part for surface mounting
Packaging	
Inner box size	/ mm
Carton size	32*32*35 cm (1 PC / carton)



Passivated


3 Years Warranty

Parameter

General Data	
Item No.	LL-Ø400-1200-A
Power	1.2 Watts +10%
LED type	66 PCS OSRAM 2835 LED
Luminous flux	1050lm +10%
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	300°
Dimension	Ø400*400 (mm) Diameter x length
Cut out	/ mm
Net weight	2.3kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V
Insulation class	Class III
Cable	1PC rubber cable 1m H05RN-F 2 x 1mm square
Driver	low constant voltage input, constant current output for LEDs
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK07
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	Anodized +Powder coated painting in dark grey
Trim	white PMMA shield
Glass	/
Loading capacity	/
Cable Gland	PG gland
Gasket	silicone ring + silicone glue seal
Accessories	
Spike	With spike for earth mounting
Round base	With round base part for surface mounting
Packaging	
Inner box size	/ mm
Carton size	42*42*45 cm (1 PC / carton)



PLAYLITE® Playball 500

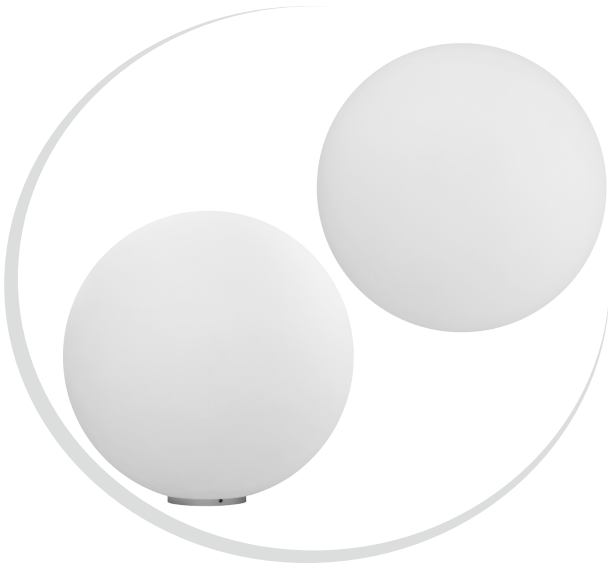


CE RoHS COMPLIANT IP65 IK07
Passivated 3 Years Warranty


Parameter

General Data	
Item No.	LL-Ø500-1500-A
Power	1.5 Watts +10%
LED type	66 PCS OSRAM 2835 LED
Luminous flux	1200lm +10%
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	300°
Dimension	Ø500*500 (mm) Diameter x length
Cut out	/ mm
Net weight	3.5kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V
Insulation class	Class III
Cable	1PC rubber cable 1m H05RN-F 2 x 1mm square
Driver	low constant voltage input, constant current output for LEDs
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK07
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	Anodized +Powder coated painting in dark grey
Trim	white PMMA shield
Glass	/
Loading capacity	/
Cable Gland	PG gland
Gasket	silicone ring + silicone glue seal
Accessories	
Spike	With spike for earth mounting
Round base	With round base part for surface mounting
Packaging	
Inner box size	/ mm
Carton size	52*52*55 cm (1 PC / carton)


Dimension

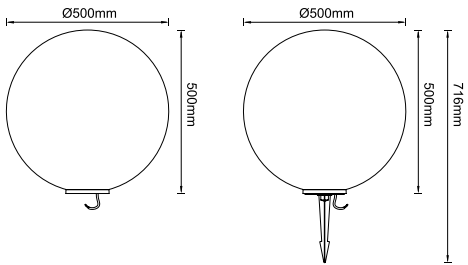

Light Distribution Curve (3000K, 300°)

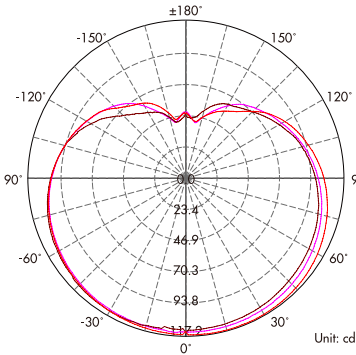

Lux distance Curve (3000K, 300°)

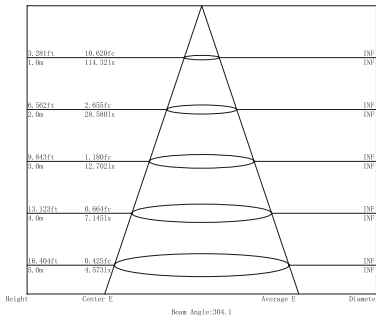

Illumination Picture (300°)



