

Cone series

PLAYLITE®

Application

They are ideal for applications such as in hotels, houses, gardens, parks, plazas for the illumination of wall, column or trees.





Surface mounting luminaire with varies of optics from 6° to 58°
1W,3W,6W are available ,
With a fixing plate for easy and fast surface mounting on ground,
ideal for the places where are with limited
depth, and only need to make small holes for cables.

CE IK04 IK06 IP67


3 years warranty as standard, 5 years as options

Passivated + powder coated paint

Surface mounted.

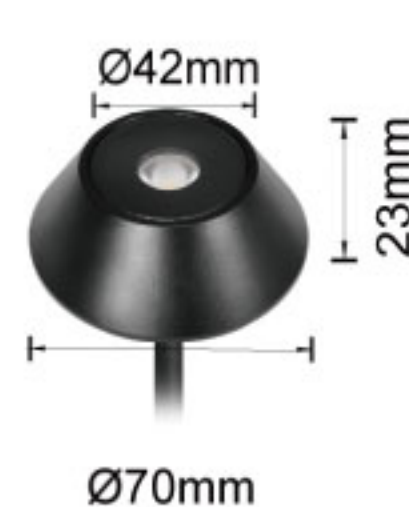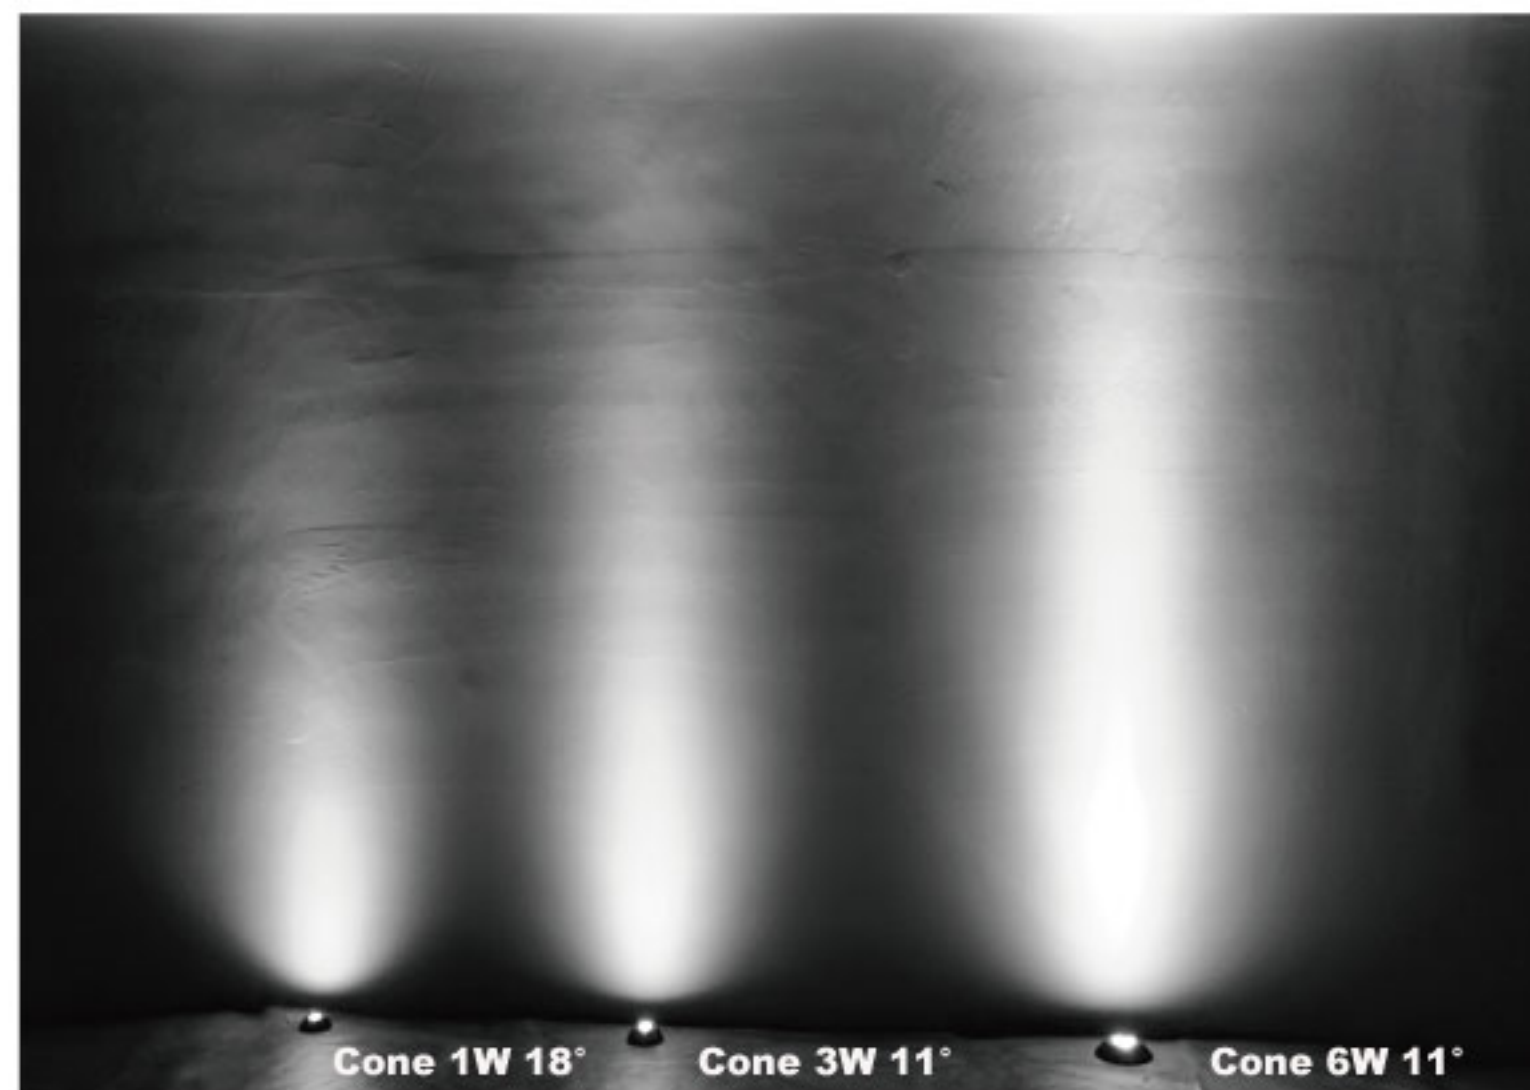

Cone 1W


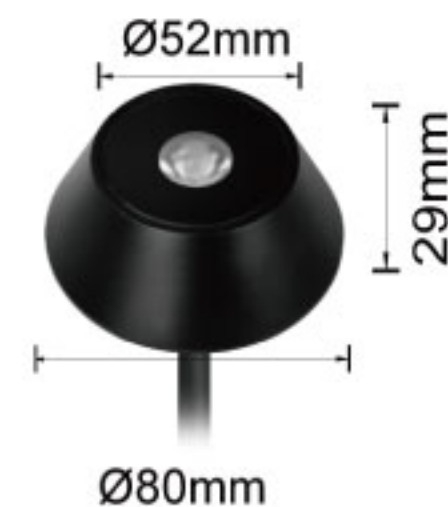


Cone 3W




Cone 6W

With round base, screws, and silicone O-ring for surface mounting

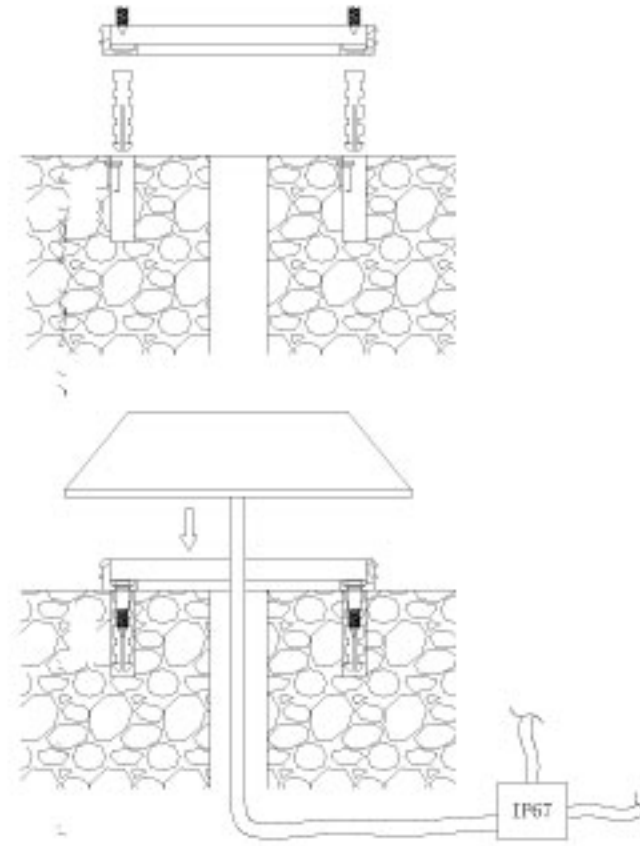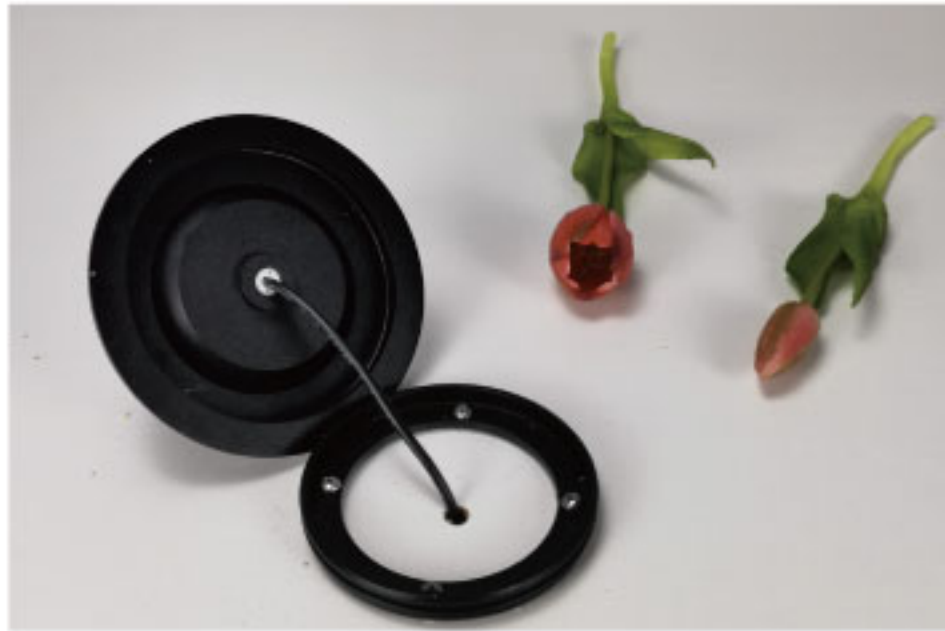

IP67 waterproof

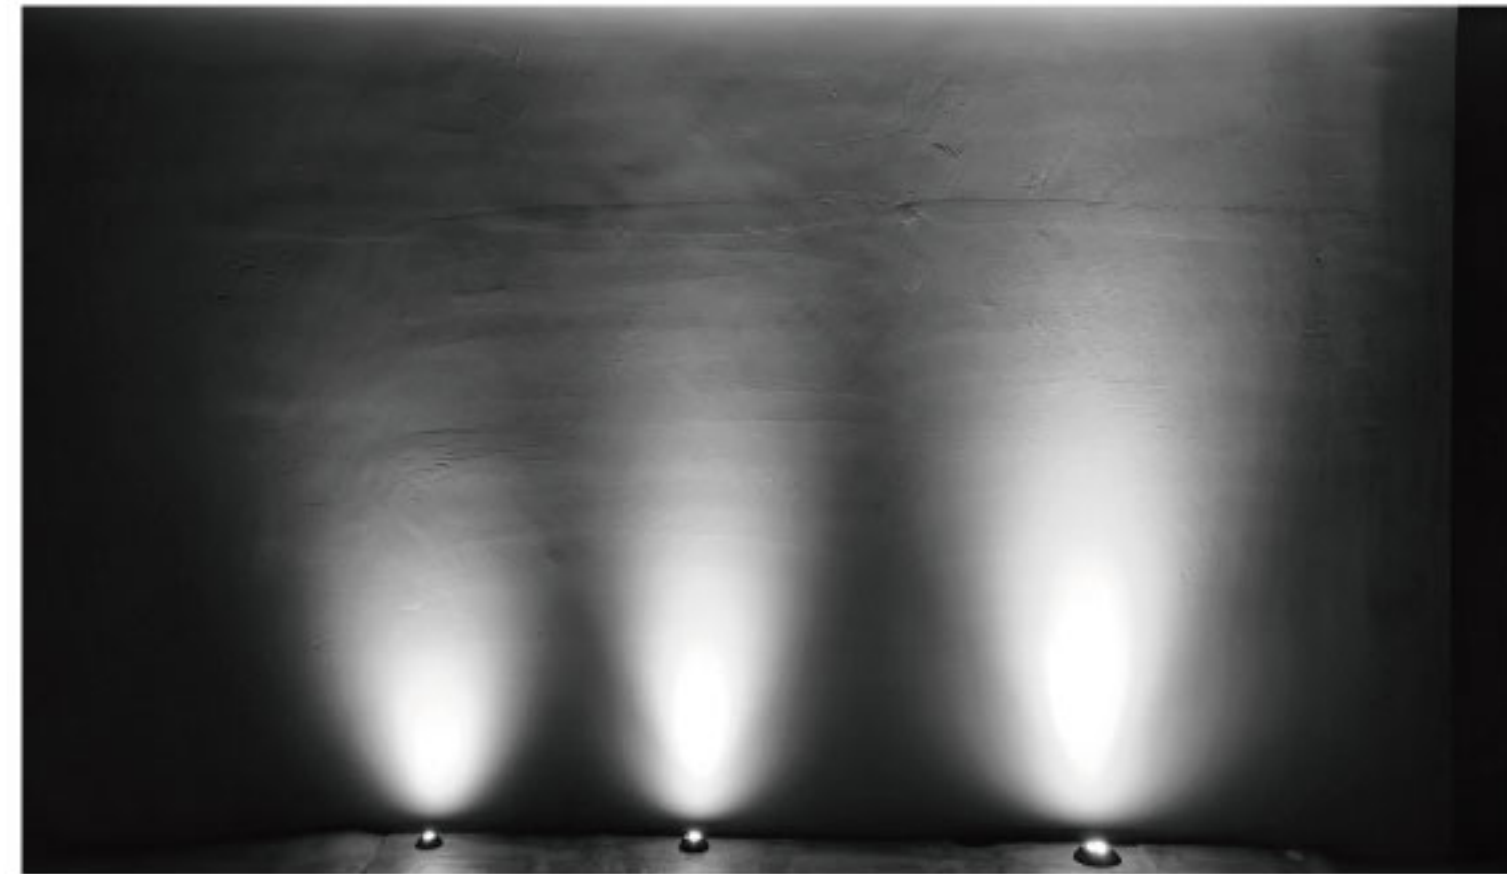

Cone 1W 30° Cone 3W 28° Cone 6W 28°



Cone 1W 45° Cone 3W 43° Cone 6W 43°



PLAYLITE® Cone 1W




CE IP67 IK04

3 Years Warranty as standard,5 Years as options


Surface mounted

Parameter	
General Data	
Item No.	UL-D001-0100H2
Power	1.2 watts +-10%
LED type	1 PC LUMILEDS 2835 SMD LED
Luminous flux	70 lm+-10%
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	18°,30°,45°,60°,90°
Dimension	Φ70 x 23 (mm) Diameter x Height
Cut out	/
Net weight	0.23 kgs
Warranty	3 years as standard, 5 years as options
Certifications	CE
Electrical Data	
Input voltage	DC24V
Insulation class	Class III
Cable	1PC 1M 2 *0.35mm2 PVC cable
Driver	constant current driver DC24V input
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK04
Housing	Aluminium
Protection finishing	Passivated +powder coated painted in black colour
Trim	Tempered glass with black silkscreen
Loading capacity	80 kgs
Cable Gland	Aluminium
Gasket	Silicone gasket
Accessories	
Mounting base	Aluminium mounting base with screws
Packaging	
Inner box size	75*75*55 mm
Carton size	32.5*25*24.5 cm (48PCS/CTN)


Dimension

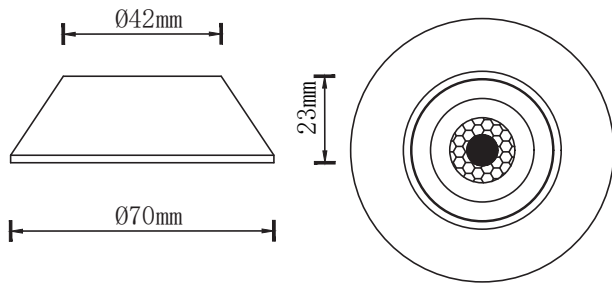

Light Distribution Curve (2700K, 45°)

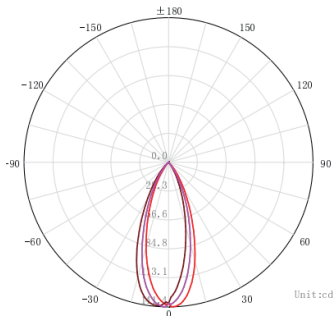

Lux distance Curve (2700K, 45°)

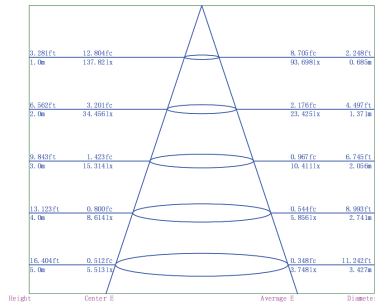

Illumination Picture (45°)



PLAYLITE® Cone 3W



CE IP67 IK06


3 Years Warranty as standard,5 Years as options

Surface mounted


Parameter	
General Data	
Item No.	UL-D001-0300H2
Power	3 watts +-10%
LED type	1 PC 3W CREE XPE2 LED
Luminous flux	150 lm+-10%
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	Symmetric: 6°,11°,17°,23°,28°,43°,58° or Asymmetric: 15 °x15°,15 °x30°,15 °x60°
Dimension	Φ80 x 29 (mm) Diameter x Height
Cut out	/
Net weight	0.3 kgs
Warranty	3 years as standard, 5 years as options
Certifications	CE
Electrical Data	
Input voltage	DC12V-DC24V
Insulation class	Class III
Cable	1PC 1M 2 *0.35mm2 PVC cable
Driver	constant current driver DC24V input
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK06
Housing	Aluminium
Protection finishing	Passivated +powder coated painted in black colour
Trim	Tempered glass in black silkscreen
Loading capacity	100 kgs
Cable Gland	Aluminium
Gasket	Silicone gasket
Accessories	
Mounting Base	Aluminium mounting base with screws
Packaging	
Inner box size	85*85*60 mm
Carton size	36.5*28*26.5 cm (48 PCS/CTN)




Dimension

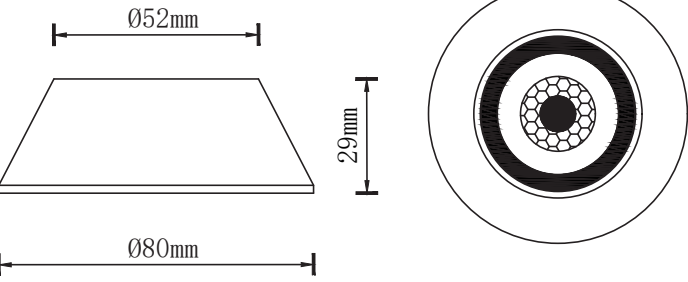

Light Distribution Curve (2700K,,11°)

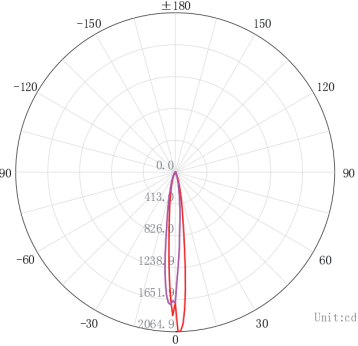

Lux distance Curve (2700K, 11°)

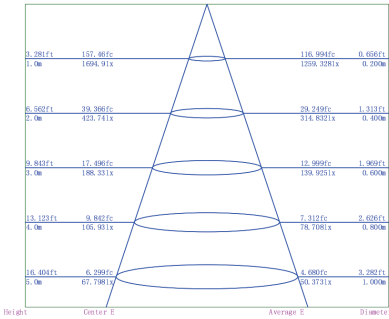

Illumination Picture (11°)



Cone 6W 6°

Cone 3W 6°



PLAYLITE® Cone 6W



CE IP67 IK06


3 Years Warranty as standard, 5 Years as options

Surface mounted


Parameter

General Data	
Item No.	UL-D003-0600H2
Power	6 watts +10%
LED type	3 PCS 2W CREE XPE2 LED
Luminous flux	400 lm±10%
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	Symmetric: 6°, 11°, 17°, 23°, 28°, 43°, 58° or Asymmetric: 15 °x15°, 15 °x30°, 15 °x60°
Dimension	
Cut out	/mm
Net weight	0.5 kgs
Warranty	3 years as standard, 5 years as options
Certifications	CE
Electrical Data	
Input voltage	DC12V-DC24V
Insulation class	
Cable	1PC 1M 2 *0.35mm2 PVC cable
Driver	constant current driver DC24V input
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK06
Housing	Aluminium
Protection finishing	Passivated +powder coated painted in black colour
Trim	Tempered glass with black silkreen
Loading capacity	
Cable Gland	Aluminium
Gasket	Silicone gasket
Accessories	
Mounting Base	Aluminium mounting base with screws
Packaging	
Inner box size	125*125*60 mm
Carton size	27*27*26.5 cm (16PCS/CTN)


Dimension

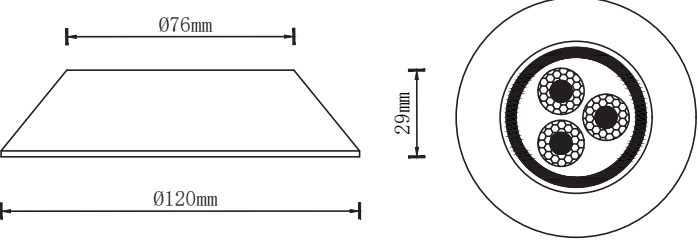


Light Distribution Curve (2700K, 28°)

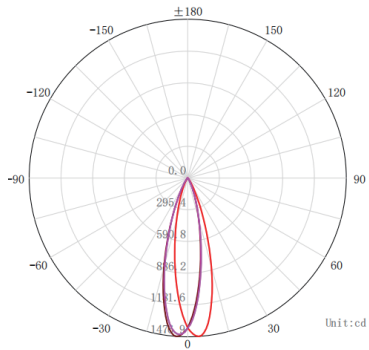

Lux distance Curve (2700K, 28°)

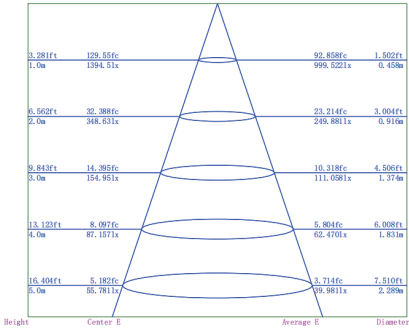

Illumination Picture (28°)

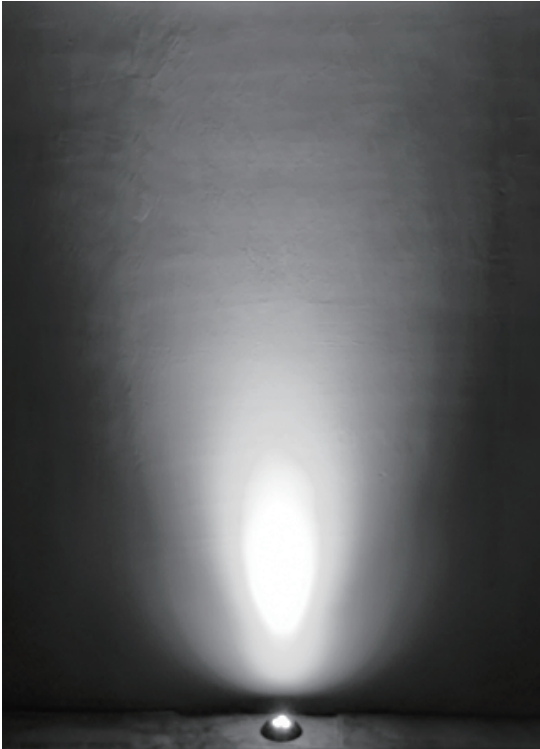

PLAYLITE®

