

UWasher Asy series

PLAYLITE®

Application


They are ideal for applications such as in hotels, houses, gardens, parks, plazas for the illumination of wall as wall washer light, as well as for ground washer light while recessed in the wall.



CE
IK07 IK06 IP67
SS316L cover

3 Years Warranty as standard, 5 years optional

Recessed luminaire with asymmetric wall washer emission, equipped with thin flange and eyelid reflector, ensuring a high level visual comfort! Silver reflector with high luminous efficiency as standard, black reflector as options. Asymmetrical beam $20^\circ \times 45^\circ$ for 8W, and $20^\circ \times 50^\circ$ for 15W, $20^\circ \times 35^\circ$ for 23W, the wide washer light for the wall or ground is even and smooth, ideal for the places where should be designed with anti-glare and good washer lighting.

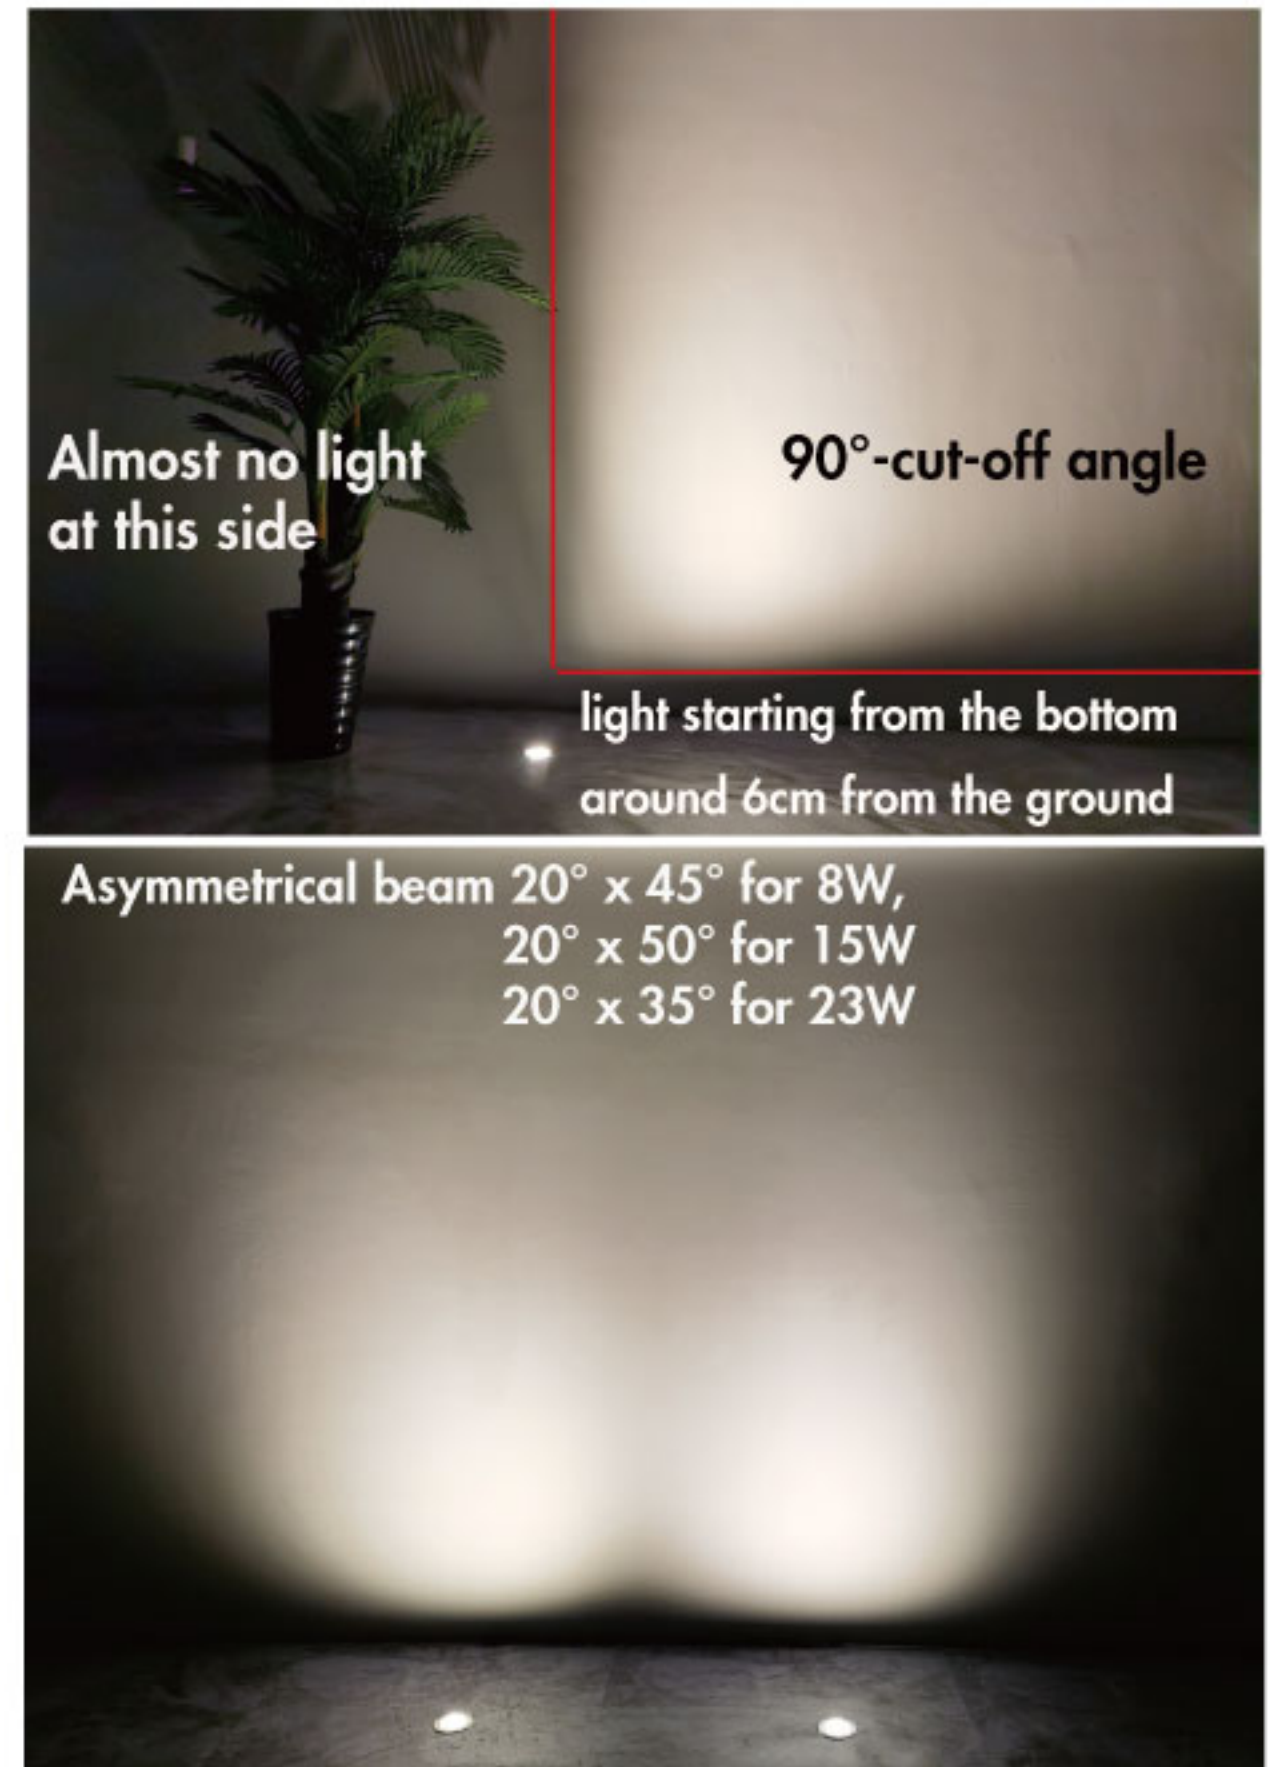

UWasher Asy Mini -8W

UWasher Asy Midi -15W

UWasher Asy Maxi -23W



Silver reflector with high luminous efficiency as standard

black reflector with low UGR<18 as options



Aluminium cover version of 8W as wall light is available .



IP67 waterproof



Light can reach a height of 5 meters

Recommend 1 meter between two items

Regular COB uplight

UWasher Asy

6cm

Light starting from the bottom around 6cm away from the ground

Recommend 0.5m away from the wall

Recommend 0.3m away from the ground



Regular step light with a distance of 1m

Light can reach a distance of 5 meters




PLAYLITE® UWasher Asy Mini



PLAYLITE® UWasher Asy Midi

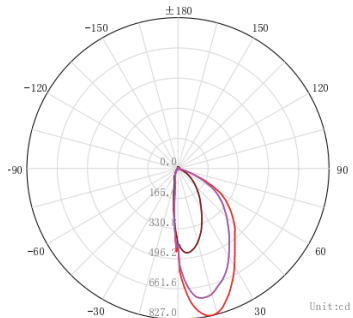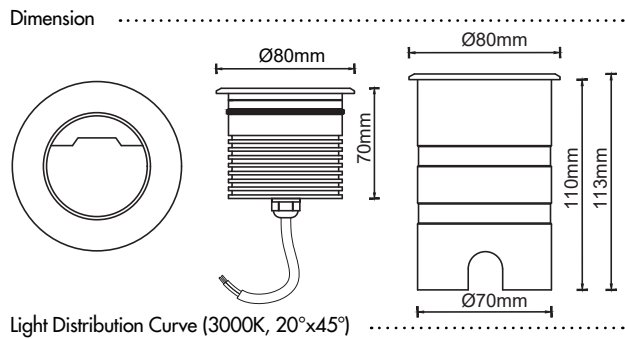


Lux distance Curve (3000K, 20°x45°)

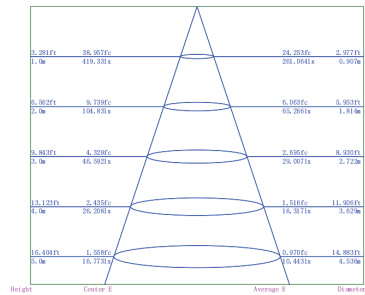

Illumination Picture (20°x45°)

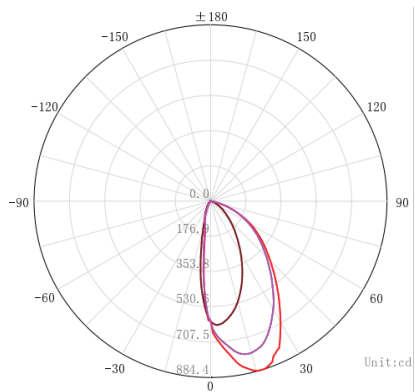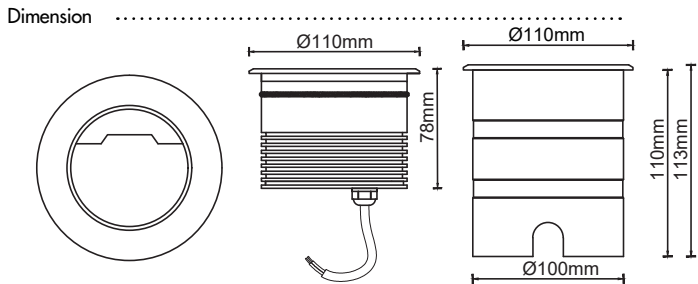

Lux distance Curve (3000K, 20°x50°)

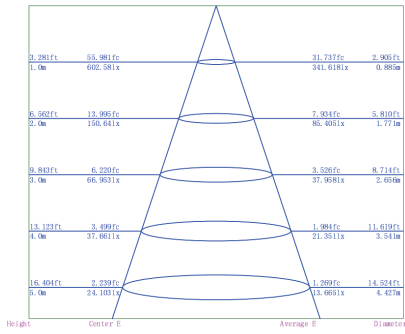


Illumination Picture (20°x50°)



CE RoHS IP67 IK06

3 or 5 Years Warranty

90°-cut-off angle.
Almost no light at this side.
Super visual comfort !
Light go up from bottom.



Parameter


General Data	
Item No.	DC24V: UL-8W-COB-0800L / AC100-245V: UL-8W-COB-0800LH
Power	7.5 watts +10%
LED type	1PC 8V CREE CXA1304 COB LED
Luminous flux	DC24V: 430 lm±10% AC100-245V: 600 lm±10%(Silver reflector)
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	Anti-glare Asymmetrical 20° x 45 °
Dimension	Ø80*70 mm (Diameter x Height)
Cut out	Ø70mm
Net weight	0.6 kgs
Warranty	3 years as standard, 5 years as options
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V for L version, AC100-245V for LH version
Insulation class	Class III
Cable	1PC 1M H05RN-F 2 or 3*1mm ² rubber cable
Driver	constant current driver DC24V input or AC100-245V
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK06
Housing	Aluminium
Protection finishing	Passivated in dark grey
Trim	SS 316L
Reflector	Silver colour as standard, black colour as options
Loading capacity	150 kgs
Cable Gland	PG7
Gasket	Silicone gasket
Accessories	
Mounting Sleeve	Aluminium tube in dark grey

Packaging	
Inner box size	105*105*130 mm
Carton size	34*34*28.5 cm (18PCS/CTN)

CE RoHS IP67 IK07

3 or 5 Years Warranty

90°-cut-off angle.
Almost no light at this side.
Super visual comfort !
Light go up from bottom.



Parameter

General Data	
Item No.	UL-15W-COB-1500L
Power	15 watts +10%
LED type	1PC 15W CREE CMB1304F COB LED
Luminous flux	660 lm±10% (Silver reflector)
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	Anti-glare Asymmetrical 20° x 50 °
Dimension	Ø110*78 mm (Diameter x Height)
Cut out	Ø100mm
Net weight	1.5kgs
Warranty	3 years as standard, 5 years as options
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V
Insulation class	Class III
Cable	1PC 1M H05RN-F 2*1mm ² rubber cable
Driver	constant current driver DC24V input
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK07
Housing	Aluminium
Protection finishing	Passivated in dark grey
Trim	SS 316L
Reflector	Silver colour as standard, black colour as options
Loading capacity	250 kgs
Cable Gland	PG7
Gasket	Silicone gasket
Accessories	
Mounting Sleeve	Aluminium tube in dark grey

Packaging	
Inner box size	130*130*130mm
Carton size	43*43*15cm (9 PCS/CTN)

PLAYLITE® UWasher Asy Maxi

PLAYLITE®



IP67 IK08

3 or 5 Years Warranty

90°-cut-off angle.
Almost no light at this side.
Super visual comfort !
Light go up from bottom.




Parameter


General Data	
Item No.	UL-25W-COB-2500-LH
Power	23 watts $\pm 10\%$
LED type	1PC CREE CMB1306N COB LED
Luminous flux	1400 lm $\pm 10\%$ (Silver reflector)
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	Anti-glare Asymmetrical 20° x 35°
Dimension	Ø150*137 mm (Diameter x Height)
Cut out	Ø139mm
Net weight	3 kgs
Warranty	3 years as standard, 5 years as options
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-245V
Insulation class	Class I
Cable	1PC 1M H05RN-F 3*1mm ² rubber cable
Driver	constant current driver input AC100-245V
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK08
Housing	Aluminium
Protection finishing	Passivated in dark grey
Trim	SS 316L
Reflector	Silver colour as standard
Loading capacity	250 kgs
Cable Gland	PG7
Gasket	Silicone gasket
Accessories	
Mounting Sleeve	Aluminium tube in dark grey

Packaging	
Inner box size	180*180*170 mm
Carton size	38*38*19.5 cm [4PCS/CTN]


Dimension

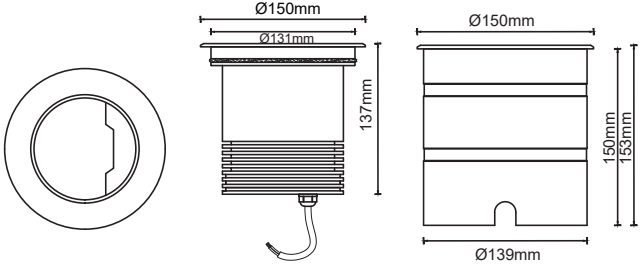

Light Distribution Curve (3000K, 20°x35°)

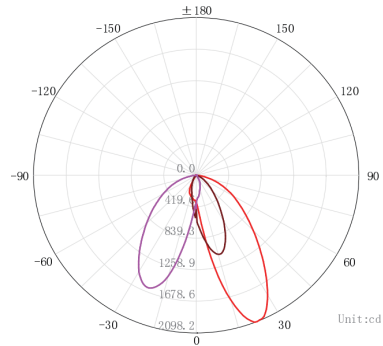

Lux distance Curve (3000K, 20°x35°)



Illumination Picture (20°x35°)










PLAYLITE®

UWasher Asy Mini Alu


PLAYLITE®




Dimension

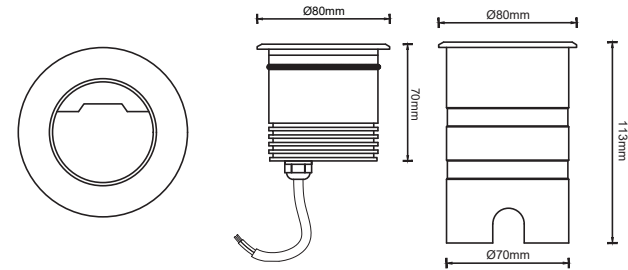

Light Distribution Curve (3000K, 20°x45°)

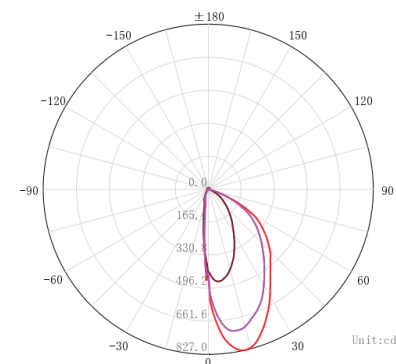

Lux distance Curve (3000K, 20°x45°)

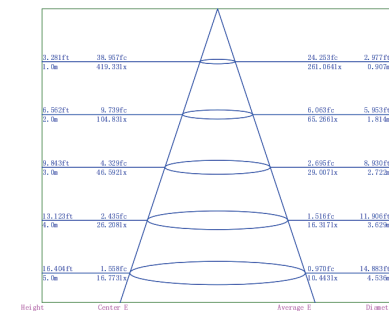

Illumination Picture (20°x45°)



Recommend 30cm height from the ground
Light can reach 5 meters away



IP65 IK06


3 or 5 Years Warranty

90°-cut-off angle.

Almost no light at this side.

Super visual comfort !

Light go up from bottom.



Parameter

General Data

Item No.	SP-8VW-COB-0800-AH
Power	7.5 watts +10%
LED type	1PC 8V CREE CXA1304 COB LED
Luminous flux	550 lm±10% (Silver reflector)
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	Anti-glare Asymmetrical 20° x 45 °
Dimension	Ø80*70 mm (Diameter x Height)
Cut out	Ø70mm
Net weight	0.6 kgs
Warranty	3 years as standard, 5 years as options
Certifications	CE, RoHS

Electrical Data

Input voltage	DC24V
Insulation class	Class III
Cable	1PC 1M H05RN-F 2*1mm ² rubber cable
Driver	constant current driver DC24V input

Construction Data


IP rating	IP65 Waterproof
IK rating	IK06
Housing	Aluminium
Protection finishing	Passivated in dark grey
Trim	SS 316L
Reflector	Silver colour as standard, black colour as options
Loading capacity	150 kgs
Cable Gland	PG7
Gasket	Silicone gasket

Accessories

Mounting Sleeve	Aluminium tube in dark grey
-----------------	-----------------------------

Packaging

Inner box size	105*105*130 mm
Carton size	34*34*28.5 cm (18PCS/CTN)

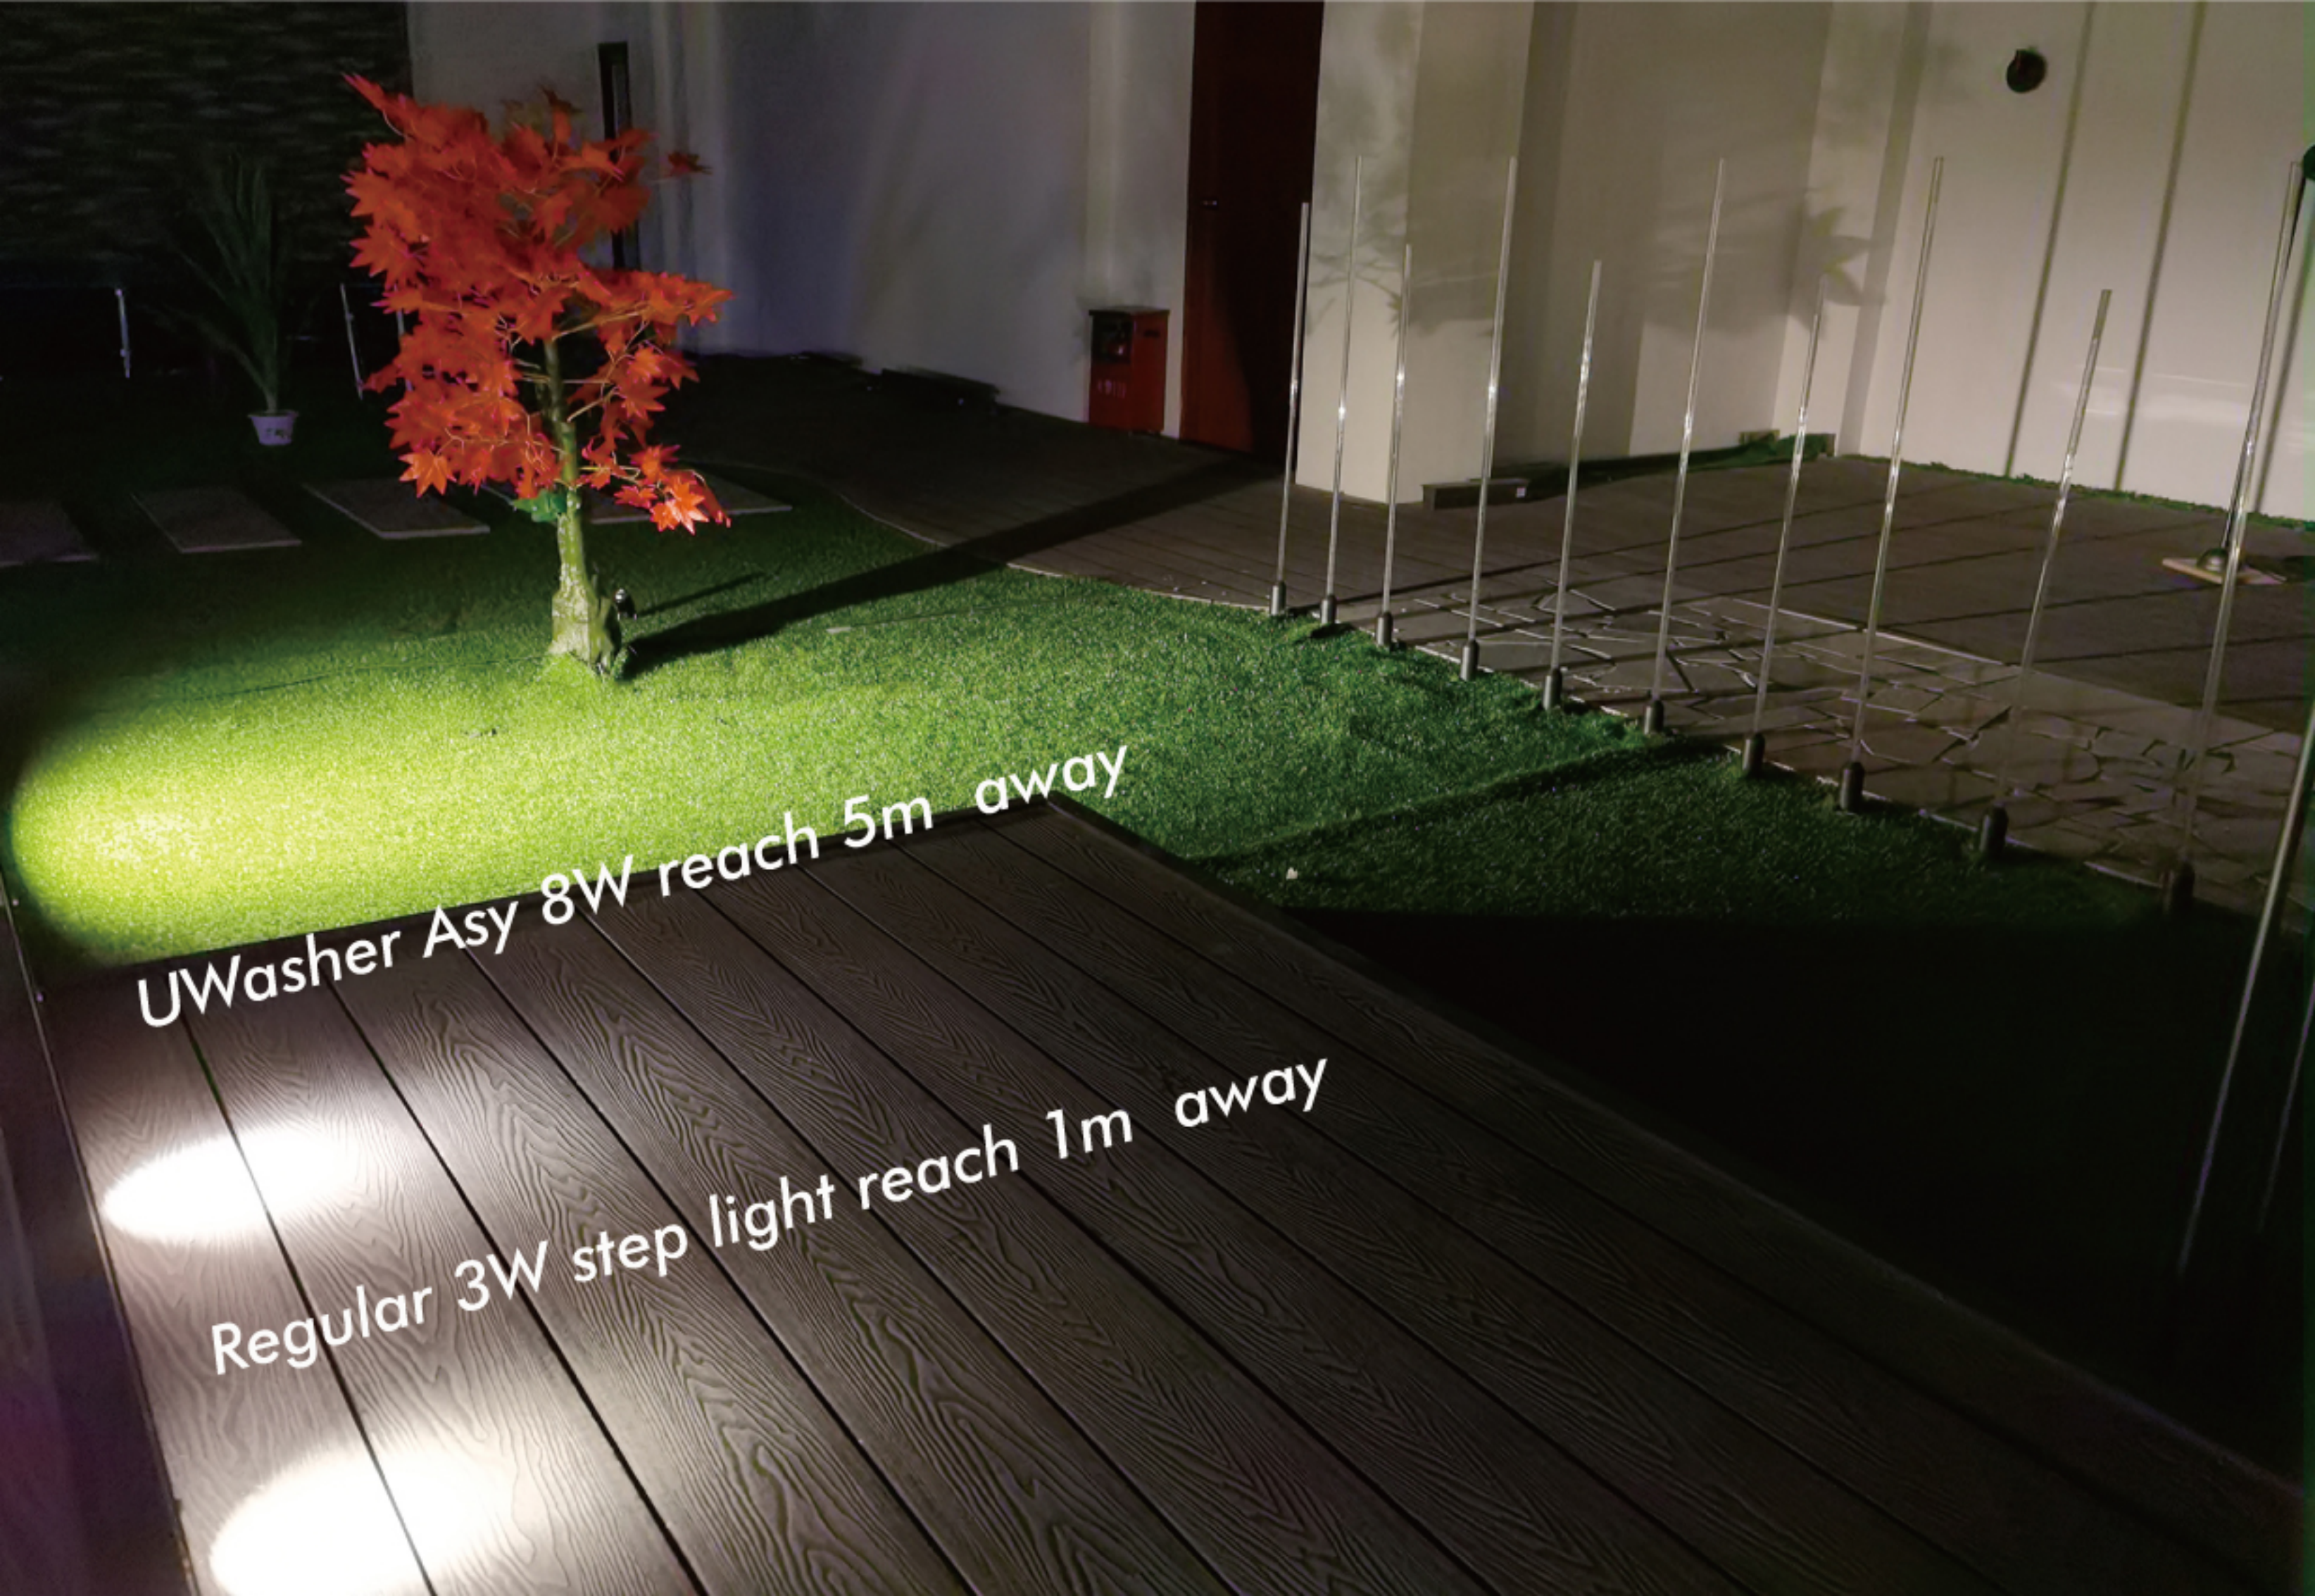

UWasher Asy 8W reach 5m away

Regular 3W step light reach 1m away