




PLAYLITE®




CE RoHS COMPLIANT IP65 IK06
3 Years Warranty

Parameter	
General Data	
Item No.	LL-12W-COB-1200-AH(1)0.3M / LL-12W-COB-1200-AH(1)0.6M
Power	12 Watts +10%
LED type	1 PC CREE CXA1512 COB LED
Luminous flux	230 lm +10%
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	60°x60°
Dimension	60*600 mm or 60*300 mm (Diameter x Height)
Cut out	/ mm
Net weight	2.2 kgs for 0.6M version
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-245V 50/60Hz
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1.0mm square (including the length in the tube)
Driver	built-in constant current driver
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK06
Housing	Aluminium
Protection finishing	Powder coated painted in black or dark grey
Trim	Aluminium
Glass	/
Loading capacity	/
Cable Gland	PG gland
Gasket	silicone ring + silicone glue seal
Accessories	
Spike	mounting parts with screws
Packaging	
Inner box size	65*65*630mm for 0.6M
Carton size	15*15*65 cm (4PCS / carton) for 0.6M


Dimension



Light Distribution Curve (3000K,60°x60°)

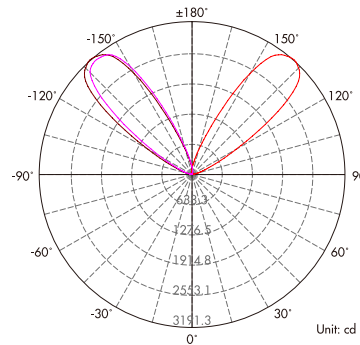

Lux distance Curve (3000K,60°x60°)

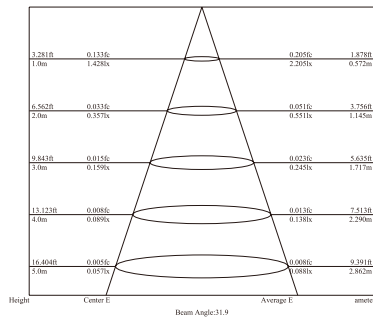

Illumination Picture (60°x60°)




PLAYLITE®




CE RoHS COMPLIANT IP65 IK06
3 Years Warranty

Parameter	
General Data	
Item No.	LL-12W-COB-1200-AH(2)0.3M / LL-12W-COB-1200-AH(2)0.6M
Power	12 Watts +10%
LED type	1 PC CREE CXA1512 COB LED
Luminous flux	350 lm +10%
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	2x60°x60°
Dimension	60*600 mm or 60*300 mm (Diameter x Height)
Cut out	/ mm
Net weight	2.2 kgs for 0.6M version
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-245V 50/60Hz
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1.0mm square (including the length in the tube)
Driver	built-in constant current driver
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK06
Housing	Aluminium
Protection finishing	Powder coated painted in black or dark grey
Trim	Aluminium
Glass	/
Loading capacity	/
Cable Gland	PG gland
Gasket	silicone ring + silicone glue seal
Accessories	
Spike	mounting parts with screws
Packaging	
Inner box size	65*65*630mm for 0.6M
Carton size	15*15*65 cm (4PCS / carton) for 0.6M


Dimension




Light Distribution Curve (3000K,2x60°x60°)

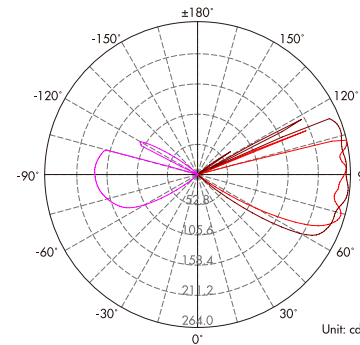

Lux distance Curve (3000K,2x60°x60°)

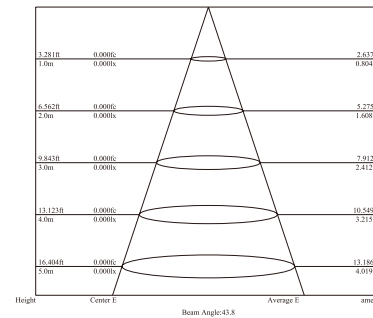

Illumination Picture (2x60°x60°)

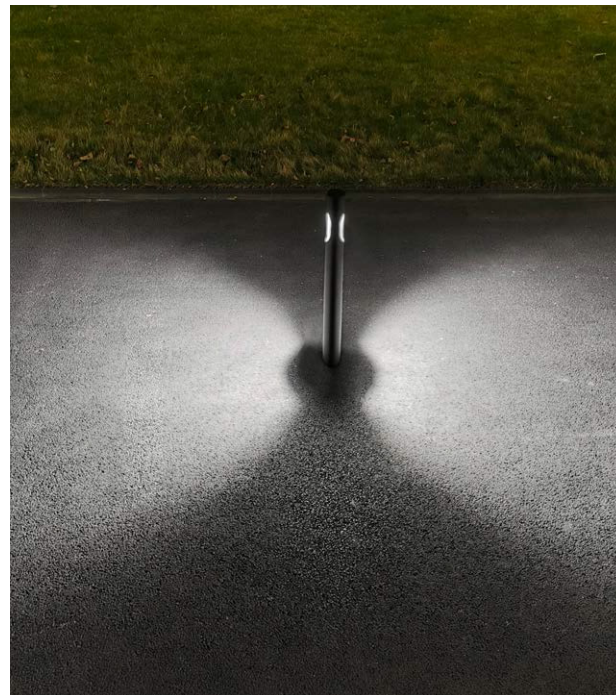

GARDEN LIGHTS SERIES

GARDEN LIGHTS SERIES



PLAYLITE®



CE RoHS COMPLIANT IP65 IK04
3 Years Warranty

Parameter	
General Data	
Item No.	LL-3001-0700-AH
Power	7 Watts +10%
LED type	30 PCS OSRAM 2835 LED
Luminous flux	400 lm +10%
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	Assymetrical 30° x 120°
Dimension	165*148*500 mm (Length x Width x Height)
Cut out	/ mm
Net weight	1.5 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-245V 50/60Hz
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1.0mm square (including the length in the tube)
Driver	built-in constant current driver
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK04
Housing	Aluminium
Protection finishing	Powder coated painted in black or dark grey
Trim	Aluminium
Glass	Tempered glass frosted
Loading capacity	/
Cable Gland	PG gland
Gasket	silicone ring + silicone glue seal
Accessories	
Spike	mounting parts with screws
Packaging	
Inner box size	155*550*60 mm
Carton size	57*33*20.5 cm (6PCS / carton)

