




PLAYLITE®


Palmi N1-3



Dimension

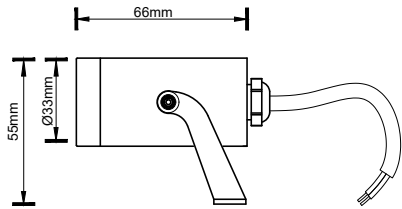

Light Distribution Curve (3000K,30°)

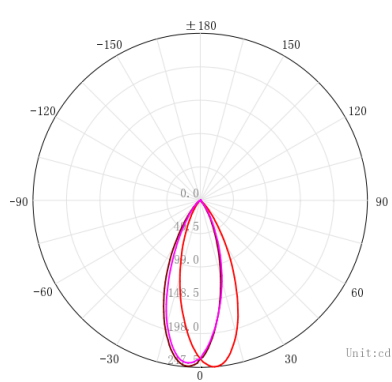

Passivated+ painted available colour for housing:



Illumination Picture (30°)



IP67

IK05

3 Years Warranty as standard,5 Years as options

With step tempered glass that is flat with the cover!

Parameter

General Data	
Item No.	UL-1004-0300-AH(N)
Power	3 Watts ±10%
LED type	1 PC 3V CREE XPE2 LED (CREE XPG2 LED as options)
Luminous flux	XPE2 LED: 120lm ±10% XPG2 LED: 190lm±10%
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	11°, 15°, 25°, 30°, 45°, 60°
Dimension	Φ35x65 mm (Diameter x Height)
Cut out	/
Net weight	0.2 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-245V 50/60Hz
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1.0mm square
Driver	builtin constant current driver
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK05
Housing	Aluminium
Protection finishing	Anodizing +Powder coated painted in cafe silver or other colours
Trim	Aluminium
Glass	Step tempered Glass. T=5mm.
Loading capacity	/
Cable Gland	PG gland
Gasket	silicone ring + silicone glue seal
Accessories	
Spike	With spike as spike spot lights (optional)
Round base	With SS304 round base or Aluminium round base for wall mounting (optional)
Shield	With anti-glare shield as options
Honeycomb	With anti-glare honeycomb as options
Packaging	
Inner box size	95*60*55 mm
Carton size	32*31*24.5 cm (60 PCS / carton)






PLAYLITE®


Palmi N1-5



Dimension

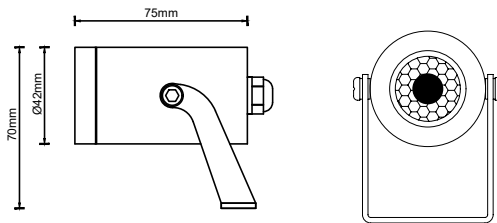

Light Distribution Curve (3000K,15°)

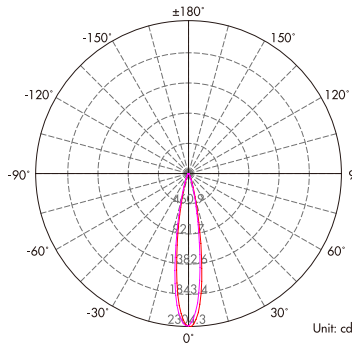

IP67 IK05

3 Years Warranty as standard,5 Years as options

With step tempered glass that is flat with the cover!

Parameter	
General Data	
Item No.	UL-1010-0500-BH(IN)
Power	5 Watts ±10%
LED type	1 PC 5W CREE CXA1304 COB LED
Luminous flux	350lm ±10%
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	lens 15°,24°,36° , 60°
Dimension	42*75(mm) (Diameter x Length)
Cut out	/
Net weight	0.315 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-245V 50/60Hz
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1.0mm square
Driver	builtin constant current driver
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK05
Housing	Aluminium
Protection finishing	Anodizing +Powder coated painted in cafe silver or other colours
Trim	Aluminium
Glass	Step tempered Glass. T=5mm.
Loading capacity	/
Cable Gland	PG gland
Gasket	silicone ring + silicone glue seal
Accessories	
Spike	With spike as spike spot lights (optional)
Round base	With SS304 round base or Aluminium round base for wall mounting (optional)
Shield	With anti-glare shield as options
Honeycomb	With anti-glare honeycomb as options
Packaging	
Inner box size	116*95*48 mm
Carton size	49*25*16 cm (30 PCS / carton)

Passivated+ painted available colour for housing:



Illumination Picture (15°)




PLAYLITE®


Palmi N1-8



Dimension

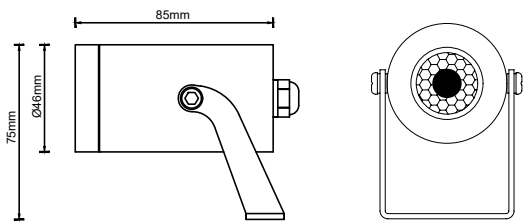

Light Distribution Curve (3000K,15°)

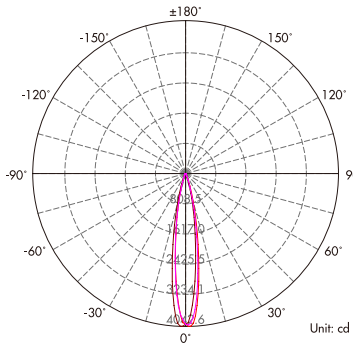

IP67 IK05

3 Years Warranty as standard,5 Years as options

With step tempered glass that is flat with the cover!

Parameter	
General Data	
Item No.	UL-1010-0800-AH(IN)
Power	8 Watts ±10%
LED type	1 PC 8W CREE CXA1304 COB LED
Luminous flux	500lm ±10%
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	lens 15°,24°,36° , 60°
Dimension	46*85(mm) (Diameter x Length)
Cut out	/
Net weight	0.38 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-245V 50/60Hz
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1.0mm square
Driver	builtin constant current driver
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK05
Housing	Aluminium
Protection finishing	Anodizing +Powder coated painted in cafe silver or other colours
Trim	Aluminium
Glass	Step tempered Glass. T=5mm.
Loading capacity	/
Cable Gland	PG gland
Gasket	silicone ring + silicone glue seal
Accessories	
Spike	With spike as spike spot lights (optional)
Round base	With SS304 round base or Aluminium round base for wall mounting (optional)
Shield	With anti-glare shield as options
Honeycomb	With anti-glare honeycomb as options
Packaging	
Inner box size	130*97*50 mm
Carton size	51*28*17 cm (30 PCS / carton)

Passivated+ painted available colour for housing:



Illumination Picture (15°)






PLAYLITE®


Palmi N1-15



Dimension

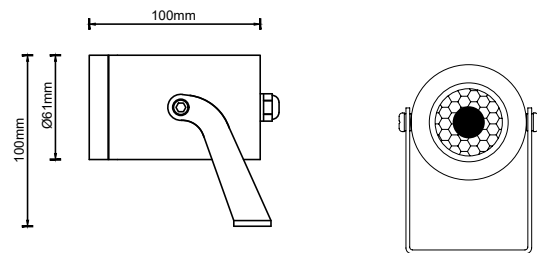

Light Distribution Curve (3000K,10°)

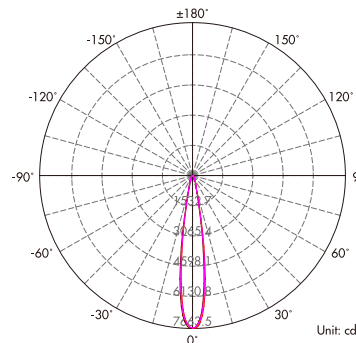

IP67 IK06

3 Years Warranty as standard,5 Years as options

With step tempered glass that is flat with the cover!

Parameter	
General Data	
Item No.	UL-15W-COB-1500-BH(N)
Power	15 Watts ±10%
LED type	1 PC 15W CREE COB LED
Luminous flux	1060lm +10%
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	lens 10° ,23° , 36°
Dimension	61*100(mm) (Diameter x Length)
Cut out	/
Net weight	0.66 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-245V 50/60Hz
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1.0mm square
Driver	built-in constant current driver
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK06
Housing	Aluminium
Protection finishing	Anodizing +Powder coated painted in cafe silver or other colours
Trim	Aluminium
Glass	Step tempered Glass. T=6mm.
Loading capacity	/
Cable Gland	PG gland
Gasket	silicone ring + silicone glue seal
Accessories	
Spike	With spike as spike spot lights (optional)
Round base	With SS304 round base or Aluminium round base for wall mounting (optional)
Shield	With anti-glare shield as options
Honeycomb	With anti-glare honeycomb as options
Packaging	
Inner box size	130*115*80 mm
Carton size	36.5*28*26cm (18PCS / carton)

Passivated+ painted available colour for housing:



Illumination Picture (10°)




PLAYLITE®


Palmi N1-25



Dimension

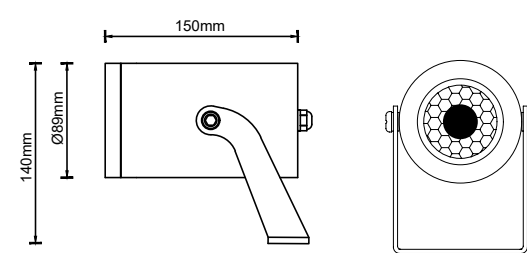

Light Distribution Curve (3000K,10°)

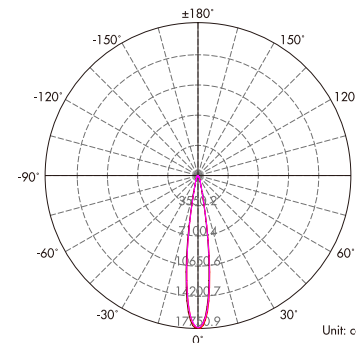

IP67 IK06

3 Years Warranty as standard,5 Years as options

With step tempered glass that is flat with the cover!

Parameter	
General Data	
Item No.	UL-25W-COB-2500-BH(N)
Power	25 Watts ±10%
LED type	1 PC 25W CREE COB LED
Luminous flux	2200lm +10%
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	lens 10° ,23° , 36°
Dimension	89*150(mm) (Diameter x Length)
Cut out	/
Net weight	1.62 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-245V 50/60Hz
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1.0mm square
Driver	built-in constant current driver
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK06
Housing	Aluminium
Protection finishing	Anodizing +Powder coated painted in cafe silver or other colours
Trim	Aluminium
Glass	Step tempered Glass. T=6mm.
Loading capacity	/
Cable Gland	PG gland
Gasket	silicone ring + silicone glue seal
Accessories	
Spike	With spike as spike spot lights (optional)
Round base	With SS304 round base or Aluminium round base for wall mounting (optional)
Shield	With anti-glare shield as options
Honeycomb	With anti-glare honeycomb as options
Packaging	
Inner box size	140*115*80 mm
Carton size	39.5*28*26cm (18PCS / carton)

Passivated+ painted available colour for housing:



Illumination Picture (10°)

