



Playwall S18
2x9W





Playwall S9
1x9W



Playwall Deep S18
2x9W



Playwall Deep S9
1x9W

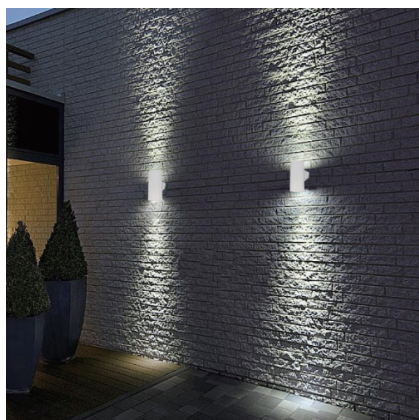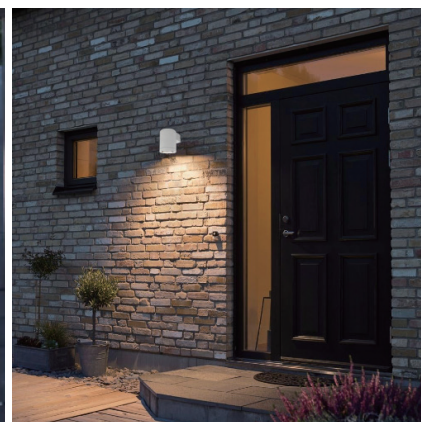




PLAYLITE®


Playwall S9




Dimension




Light Distribution Curve (3000K, 23°)

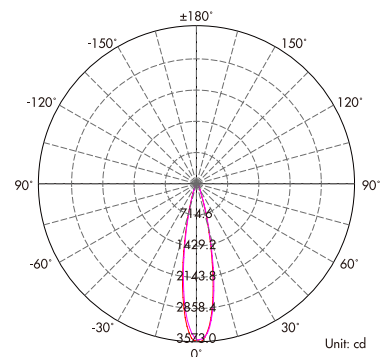

Lux distance Curve (3000K, 23°)

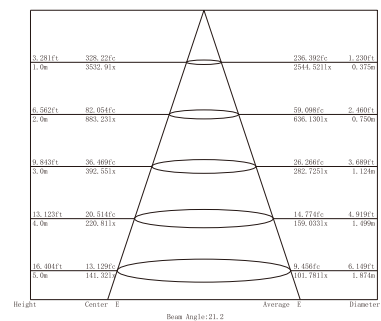

Illumination Picture (23°)

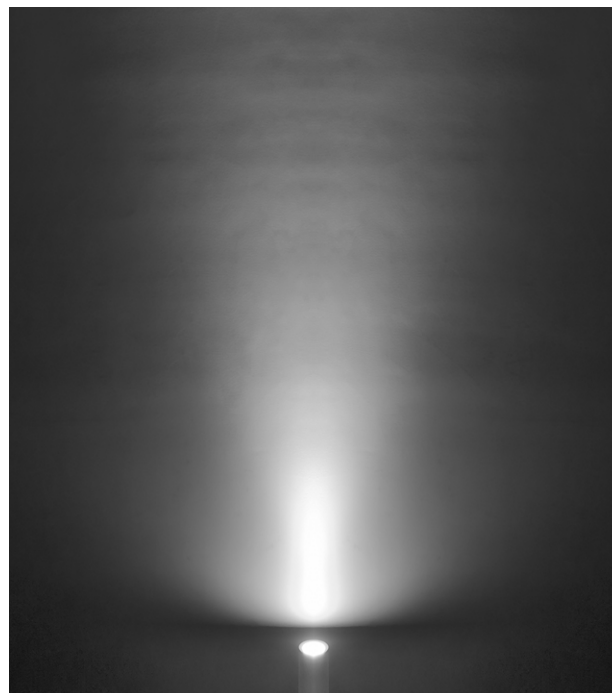

CE RoHS COMPLIANT IP65 IK04
3 Years Warranty

Parameter

General Data

Item No.	WL-9W-COB-0900-BH
Power	9W±10%
LED type	1 PC 9W CREE CXA1507 COB LED
Luminous flux	750lm ±10%
CCT	2700K, 3000K, 4000K, 5700K, 6500K
CRI	80+
Beam angle	Lens: 10°, 23°, 36°. Reflector: 15°, 23°, 38°, 45°, 60°
Dimension	85*98*Ø65 (mm) (Length x Width x Diameter)
Cut out	/ mm
Net weight	0.55 kgs
Warranty	3 years
Certifications	CE, RoHS

Electrical Data

Input voltage	AC100-245V 50/60Hz
Insulation class	Class I
Cable	1PC rubber cable 20 cm H05RN-F 3 x 1mm square
Driver	builtin constant current driver

Construction Data

IP rating	IP65 Waterproof
IK rating	IK04
Housing	Aluminum
Protection finishing	Powder coated painting Aluminum in white or dark grey or black colour
Trim	Aluminum
Glass	Tempered glass T=2mm
Loading capacity	/
Cable Gland	PG gland
Gasket	silicone ring + silicone glue seal

Accessories

Round base	Wall mounted base with screws
------------	-------------------------------

Packaging

Inner box size	130*105*70 mm
Carton size	55*28*16.5 cm (20PCS/ carton)

WALL LIGHTS SERIES



PLAYLITE®

Playwall S18




IP65 IK04

3 Years Warranty


Parameter

General Data	
Item No.	WL-18W-COB-1800-BH
Power	18W+10%
LED type	2 PCS 9W CREE CXA1507 COB LED
Luminous flux	1500lm+10%
CCT	2700K, 3000K, 4000K, 5700K, 6500K
CRI	80+
Beam angle	Lens: 10°, 23°, 36°. Reflector: 15°, 23°, 38°, 45°, 60°
Dimension	170*98*Ø65 (mm) (Length x Width x Diameter)
Cut out	/ mm
Net weight	0.87 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-245V 50/60Hz
Insulation class	Class I
Cable	1PC rubber cable 20 cm H05RN-F 3 x 1mm square
Driver	builtin constant current driver
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK04
Housing	Aluminum
Protection finishing	Powder coated painting Aluminum in white or dark grey or black colour
Trim	Aluminum
Glass	Tempered glass T=2mm
Loading capacity	/
Cable Gland	PG gland
Gasket	silicone ring + silicone glue seal
Accessories	
Round base	Wall mounted base with screws
Packaging	
Inner box size	215*105*70 mm
Carton size	45.5*44.5*16.5 cm (16PCS / carton)


Dimension

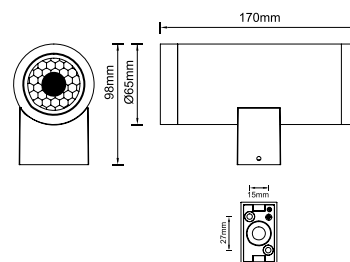


Light Distribution Curve (3000K, 2x23°)

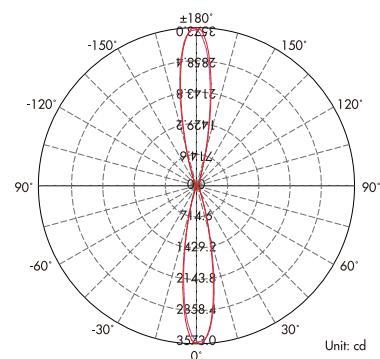

Lux distance Curve (3000K, 2x23°)

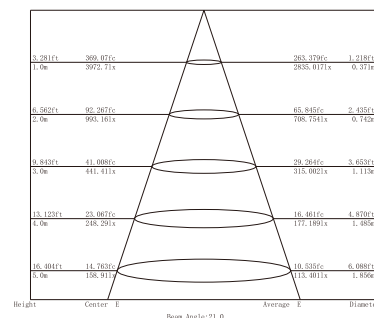

Illumination Picture (2x23°)

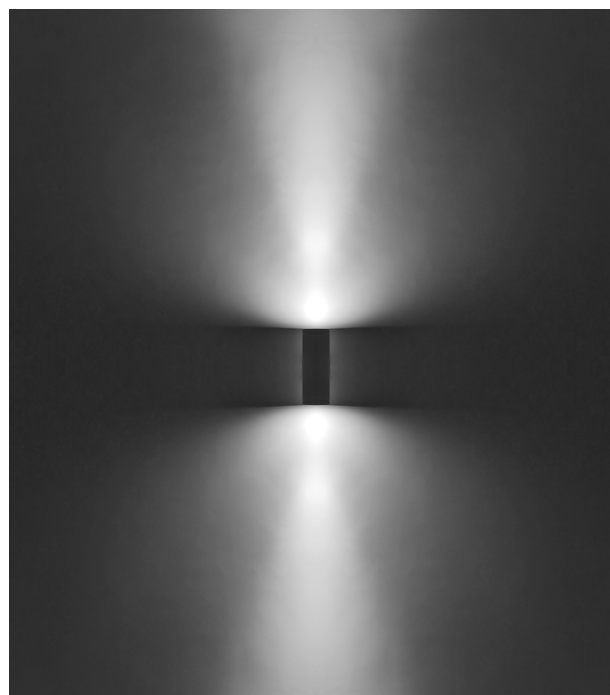

WALL LIGHTS SERIES






PLAYLITE®


Playwall S9 deep




Dimension




Light Distribution Curve (3000K, 23° reflector)

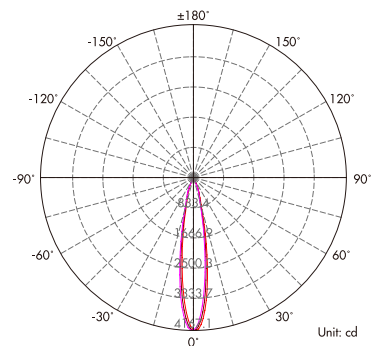

Lux distance Curve (3000K, 23° reflector)

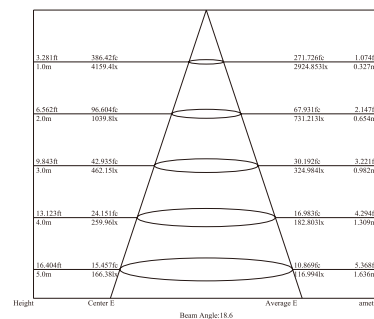

Illumination Picture (23° reflector)

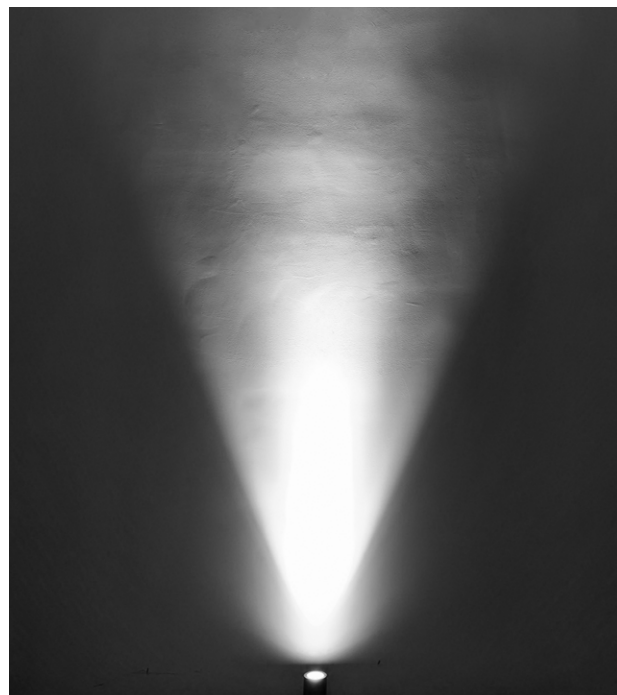

CE RoHS COMPLIANT IP65 IK04
3 Years Warranty

Parameter


General Data	
Item No.	WL9W-COB-0900-BH (deep)
Power	9 Watts +10%
LED type	1 PC 9W CREE CXA1507 COB LED
Luminous flux	600 lm +10%
CCT	2700K, 3000K, 4000K, 4500K, 5700K, 6500K
CRI	80+
Beam angle	Lens: 10°, 23°, 36°, Reflector: 15°, 23°, 38°
Dimension	105.5*98*65 (mm) (Length x Width x Diameter)
Cut out	/
Net weight	0.68 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-245V 50/60Hz
Insulation class	Class I
Cable	1PC 20 cm H05RN-F 3*1mm ² rubber cable
Driver	builtin constant current driver
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK04
Housing	Aluminium
Protection finishing	Powder coated painted in white or dark grey
Trim	Powder coated painted in white or dark grey
Glass	Tempered glass
Loading capacity	/
Cable Gland	Aluminium part IP65
Gasket	silicone ring + silicone glue seal
Accessories	
Mounting Part	Aluminium surface mounted part with screws
Packaging	
Inner box size	130*105*70 mm
Carton size	55*28*16.5 cm (20PCS/CTN)

Playwall S18 deep**IP65 IK04****3 Years Warranty**


Parameter

General Data	
Item No.	WL-18W-COB-1800-BH (deep)
Power	18 Watts +10%
LED type	2 PCS 9W CREE CXA1507 COB LED
Luminous flux	1200 lm +10%
CCT	2700K, 3000K, 4000K, 4500K, 5700K, 6500K
CRI	80+
Beam angle	Lens: 10°, 23°, 36°, Reflector: 15°, 23°, 38°
Dimension	209*98*65 (mm) (Length x VWidth x Diameter)
Cut out	/
Net weight	1.25 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-245V 50/60Hz
Insulation class	Class I
Cable	1PC 20 cm H05RN-F 3*1mm ² rubber cable
Driver	builtin constant current driver
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK04
Housing	Aluminium
Protection finishing	Powder coated painted in white or dark grey
Trim	Powder coated painted in white or dark grey
Glass	Tempered glass
Loading capacity	/
Cable Gland	Aluminium part IP65
Gasket	silicone ring + silicone glue seal
Accessories	
Mounting Part	Aluminium surface mounted part with screws
Packaging	
Inner box size	215*105*70 mm
Carton size	45.5*44.5*16.5 cm (16PCS/CTN)


Dimension

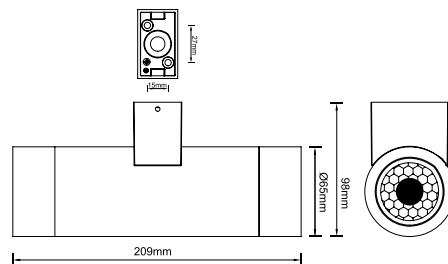

Light Distribution Curve (3000K, 36° lens)

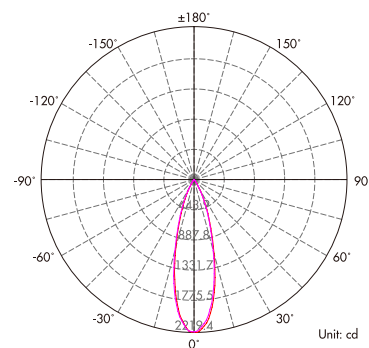

Lux distance Curve (3000K, 36° lens)

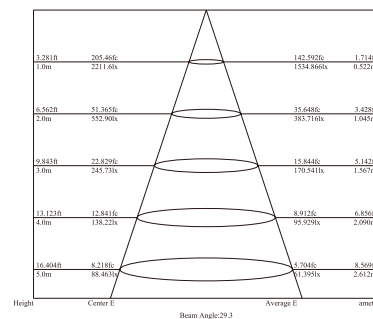

Illumination Picture (36° lens)

