


Slim Deep Series

Low glare index with super visual comfort !


Slim Deep 6W



Slim Deep 12W

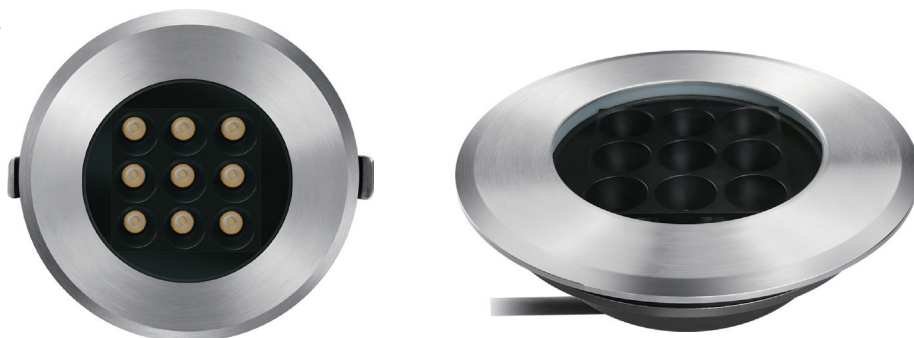

With clips as ceiling light or deck light or With mounting sleeve as inground light

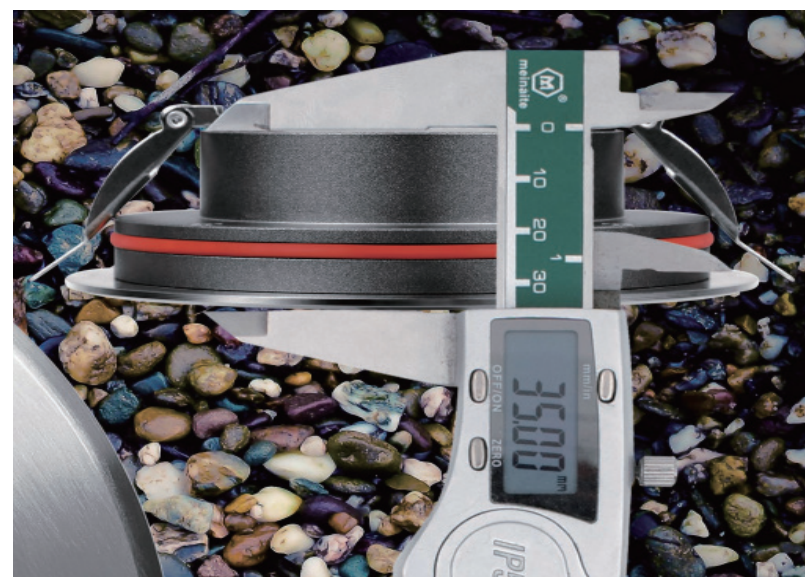


**Ultra slim 35mm height
IP67 waterproof**

Slim Deep 6W



With mounting sleeve as inground light

Anti-glare
UGR<5 when 15°
UGR<11 when 24°
UGR < 20 when 40°




Ultra slim 35mm height

With clips as downlight or deck light



Anti-glare inground light near the path

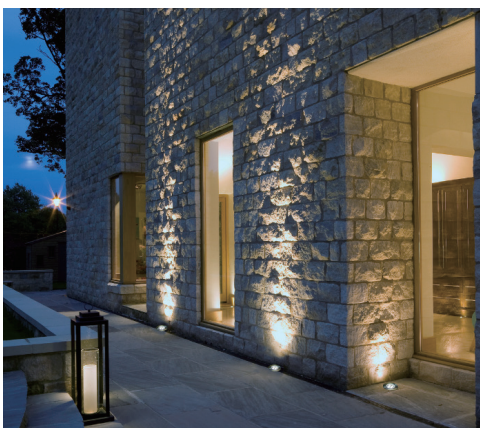



Anti-glare inground light near the door



outdoor downlight

Dimension

Light Distribution Curve (3000K,40°)

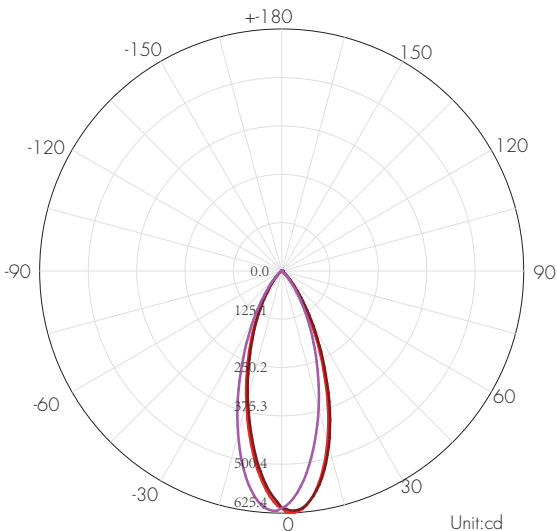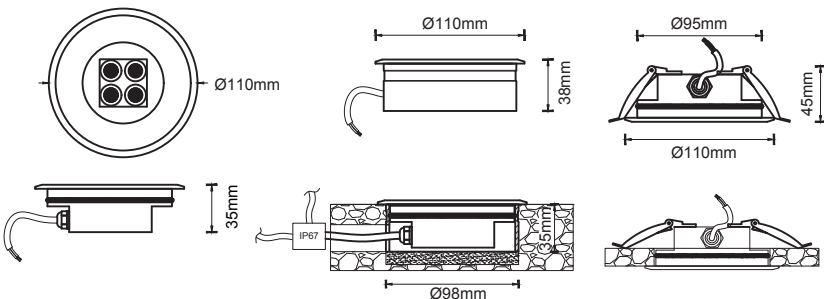

IP67 IK08

SSS 316

3 Years Warranty

Parameter

General Data

| | |
|----------------|-------------------------------------|
| Item No. | UL-4001-0600-E |
| Power | 6W +10% |
| LED type | 4 PCS 1.5W OSRAM 3030 LED |
| Luminous flux | 500 lm +10% |
| CCT | 2700K, 3000K, 4000K, 6000K |
| CRI | 80+ |
| Beam angle | 15°, 24°, 40° |
| Dimension | Φ110x35 (mm) Diameter x length |
| Cut out | Φ98 mm with sleeve, Φ95mm with clip |
| Net weight | 0.58 kgs |
| Warranty | 3 years |
| Certifications | CE, RoHS |

Electrical Data

| | |
|------------------|--|
| Input voltage | DC24V as standard (AC100-245V as options with longer body) |
| Insulation class | Class III |
| Cable | 1PC rubber cable 1M H05RN-F 2x1mm square |
| Driver | Low voltage constant voltage input , constant current output for LED |

Construction Data

| | |
|----------------------|--|
| IP rating | IP67 Waterproof |
| IK rating | IK08 |
| Housing | Passivated(Anodizing) Aluminum |
| Protection finishing | 20~25μm thickness anodized film for housing. Dark grey |
| Trim | Stainless steel 316 |
| Glass | Step tempered Glass, T=8mm. |
| Loading capacity | 500 kgs |
| Cable Gland | PG gland |
| Gasket | PMQ silicone seal |

Accessories

| | |
|-----------------|--|
| Mounting Sleeve | Passivated (Anodizing) Aluminum. Dark grey |
|-----------------|--|


Packaging

| | |
|----------------|-----------------------------------|
| Inner box size | 120*120*60 mm |
| Carton size | 38.5*26.5*20.5 cm (18 PCS/carton) |


Features

- . Anti-glare optics design with UGR<5 @15°, UGR<11 @24°, UGR<20 @40° , super visual comfort !
- . Ideal for the application of places where are with limited depth that can only be installed with the ultra slim inground light, such as corridor of hotel, outdoor ground uplight.
- . With clip optional for application of outdoor slim deck light , outdoor Slim downlight on the roof, waterproof downlight in the bathroom etc..
- . No screws on the trim for beautiful appearance
- . Excellent design of heat-conducting housing ensure long life time of LED
- . Aluminum housing CNC machined
- . 20~25μm thickness of anti-corrosion protective passivated film for housing.
- . Waterproof IP67.
- . OSRAM 3030 LED with LM80 approval.
- . 3 years warranty.
- . Structure silicone seal+ glue seal for IP67.
- . Professional sales and technicians to serve you.

Installation Drawing

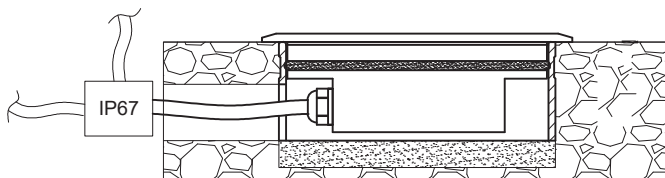


With mounting sleeve as inground light

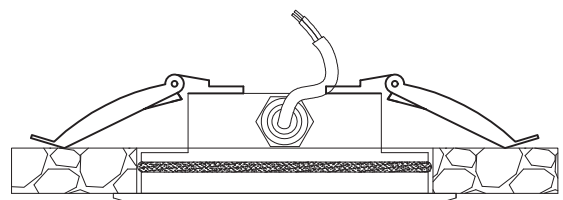


With clips as downlight or deck light



Lux distance Curve (3000K,40°)

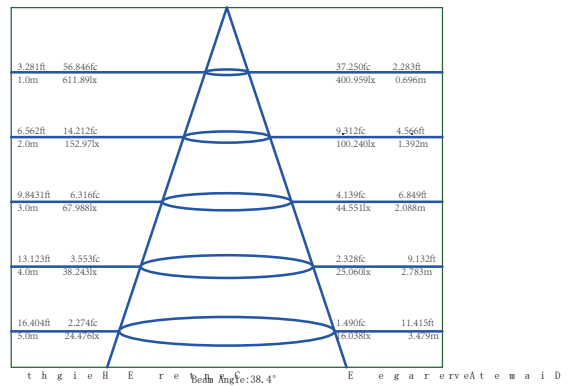

Illumination Picture (40°)

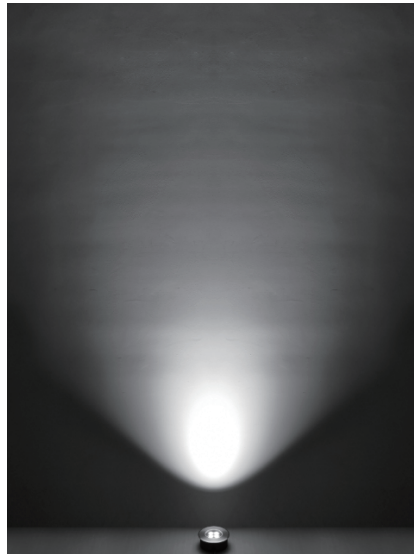


Slim Deep 12W



With mounting sleeve as inground light

Anti-glare
UGR<5 when 15°
UGR<10 when 24°
UGR < 20 when 40°




Ultra slim 35mm height

With clips as downlight or deck light



Plaza illumination
where the anti-glare light is necessary
35mm height is able to be used in places with limited installed depth

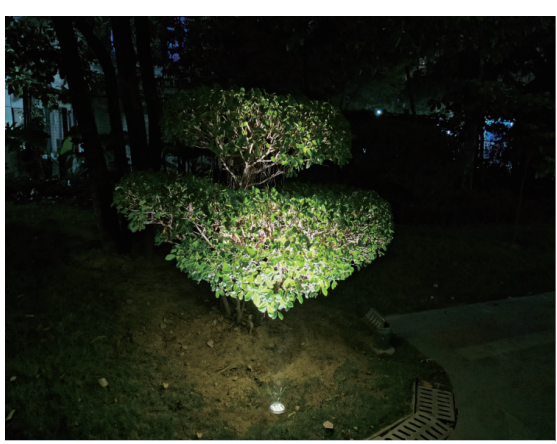



outdoor uplight for the tree



Outdoor downlight

Dimension

Light Distribution Curve (3000K,24°)

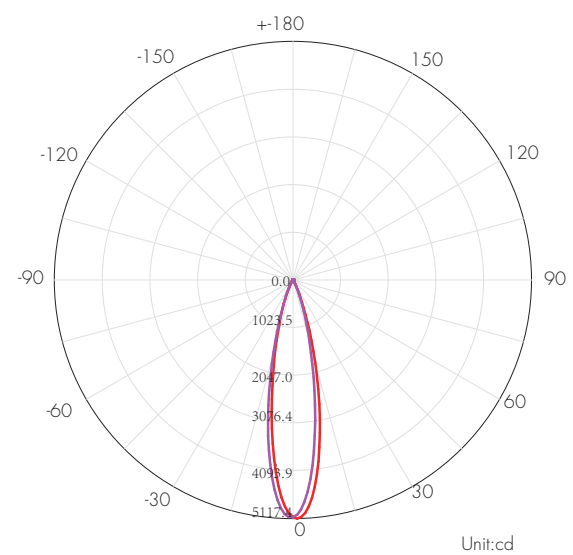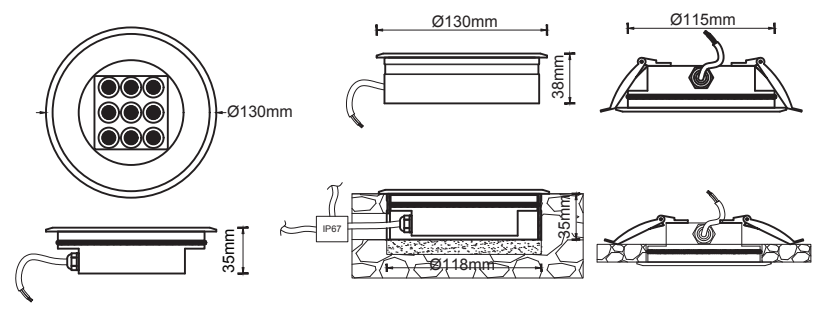

Unit:cd

CE RoHS COMPLIANT IP67 IK08

SSS 316 3 Years Warranty

Parameter

General Data

| | |
|----------------|---------------------------------------|
| Item No. | UL-9001-1200-E |
| Power | 12W +10% |
| LED type | 9 PCS 1.3V OSRAM 3030 LED |
| Luminous flux | 1000 lm +10% |
| CCT | 2700K, 3000K, 4000K, 6000K |
| CRI | 80+ |
| Beam angle | 15°, 24°, 40° |
| Dimension | Φ130x35 (mm) Diameter x length |
| Cut out | Φ118 mm with sleeve, Φ115mm with clip |
| Net weight | 0.75 kgs |
| Warranty | 3 years |
| Certifications | CE, RoHS |

Electrical Data

| | |
|------------------|--|
| Input voltage | DC24V as standard, AC100-245V as options with longer body |
| Insulation class | Class III |
| Cable | IPC rubber cable 1M HO5RN-F 2x1mm square |
| Driver | Low voltage constant voltage input , constant current output for LED |

Construction Data

| | |
|----------------------|--|
| IP rating | IP67 Waterproof |
| IK rating | IK08 |
| Housing | Passivated(Anodizing) Aluminum |
| Protection finishing | 20~25μm thickness anodized film for housing. Dark grey |
| Trim | Stainless steel 316 |
| Glass | Step tempered Glass, T=8mm. |
| Loading capacity | 500 kgs |
| Cable Gland | PG gland |
| Gasket | PMQ silicone seal |

Accessories

| | |
|-----------------|--|
| Mounting Sleeve | Passivated (Anodizing) Aluminum. Dark grey |
|-----------------|--|


Packaging

| | |
|----------------|-----------------------------------|
| Inner box size | 140*140*60 mm |
| Carton size | 30.5*30.5*20.5 cm (12 PCS/carton) |


Features

- . Anti-glare optics design with UGR<5 @15°, UGR<10 @24°, UGR<20 @40°, super visual comfort !
- . Ideal for the application of places where are with limited depth that can only be installed with the ultra slim inground light, such as corridor of hotel, outdoor ground uplight.
- . With clip optional for application of outdoor slim deck light, outdoor Slim downlight on the roof, waterproof downlight in the bathroom etc..
- . No screws on the trim for beautiful appearance
- . Excellent design of heat-conducting housing ensure long life time of LED
- . Aluminum housing CNC machined
- . 20~25μm thickness of anti-corrosion protective passivated film for housing.
- . Waterproof IP67.
- . OSRAM 3030 LED with LM80 approval.
- . 3 years warranty.
- . Structure silicone seal+ glue seal for IP67.
- . Professional sales and technicians to serve you.

Installation Drawing

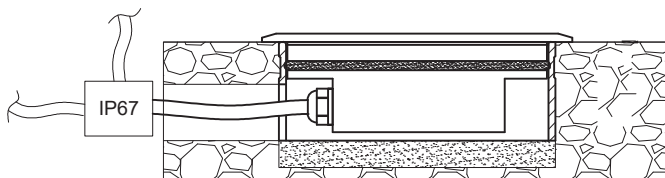


With mounting sleeve as inground light

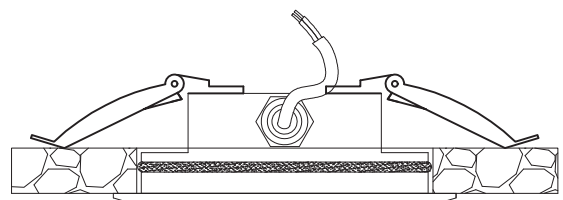

With clips as downlight or deck light



Lux distance Curve (3000K,24°)

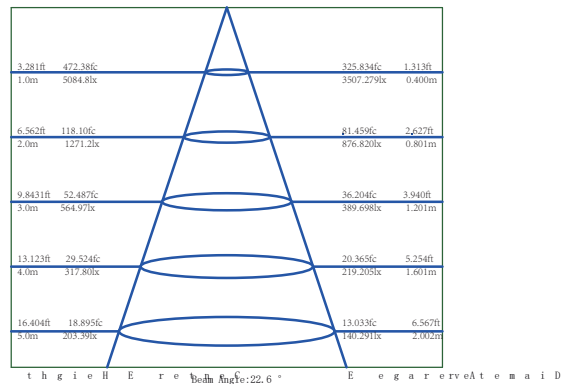

Illumination Picture (24°)

