


# Trans 15W

Anti-glare  
UGR<5 when 10°  
With honeycomb,super visual comfort!  
**IP67**



60° max. beam direction adjustable at this side,  
and 15° max. adjustable at another side.

**Patent !**



**Used as outdoor spot light**



**Used as ground uplight for wall**





**Used as ground uplight for tree**



**Used as outdoor spot light**

Dimension .....

Light Distribution Curve(3000K,10°) .....

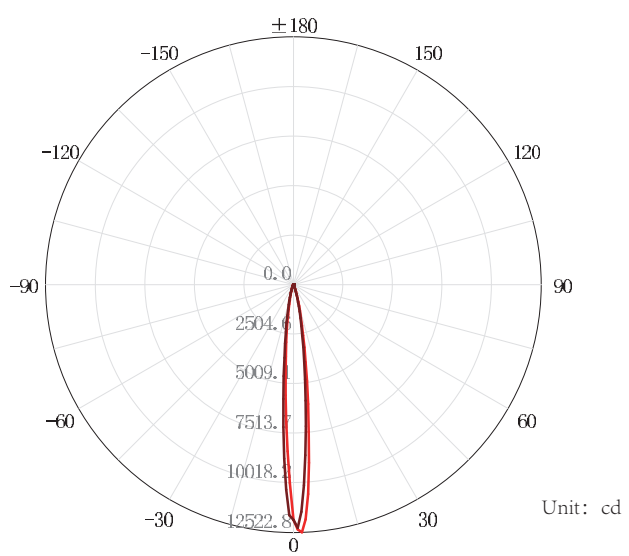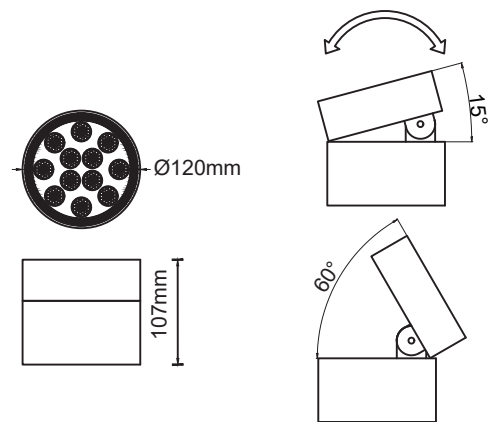

**IP67 IK06**

**3 Years Warranty**

Parameter .....

#### General Data

Item No.	UL-1205-1500-AH
Power	15W +-10%
LED type	12 PCS OSRAM 3030 LED
Luminous flux	800 lm +-10%
CCT	2700K, 3000K, 4000K\4500K\5700K\6500K
CRI	80+
Beam angle	5°, 10°, 17°, 23°, 28°, 43°, 58°, 95° (Beam direction adjustable -15° to 60°)
Dimension	Φ120x107 (mm) Diameter x length
Cut out	/ surface mounted
Net weight	2.75 kgs
Warranty	3 years
Certifications	CE, RoHS

#### Electrical Data

Input voltage	AC100~265V
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1mm square
Driver	Built-in constant current driver

#### Construction Data

IP rating	IP67 Waterproof
IK rating	IK06
Housing	Passivated(Anodizing) Aluminum
Protection finishing	20~25μm thickness anodized film for housing. Dark grey
Trim	Tempered glass
Glass	Step tempered Glass. T=3mm.
Loading capacity	/
Cable Gland	PG gland
Gasket	silicone seal

#### Accessories

Spike	Dark grey Aluminium spike for earth installation
Screws	Screws for surface mounted on ground



#### Packaging

Inner box size	140*140*135 mm
Carton size	30*30*29 cm (4 PCS/carton)

#### Features

- Beam direction adjustable 60° max. at one side and 15° max. at another side.
- Anti-glare honeycomb design with UGR<5 @10°, super visual comfort !
- Ideal for the application of places where requires surface mounting uplight or spot light, such as wall, trees, plants in the garden, carving etc..
- With spike for earth installation, and with screws for surface mounted on ground.
- Beautiful appearance
- Excellent design of heat-conducting housing ensure long life time of LED
- Aluminum housing CNC machined
- 20~25um thickness of anti-corrosion protective passivated film for housing.
- Waterproof IP67.
- OSRAM 3030 LED with LM80 approval.
- 3 years warranty.
- Structure silicone seal+ glue seal for IP67.
- Professional sales and technicians to serve you.




#### Installation Drawing .....




**With screws for surface mounted on ground**

**With spike for earth installation**

#### Beam direction adjustable steps



Lux distance Curve (3000K,10°) .....

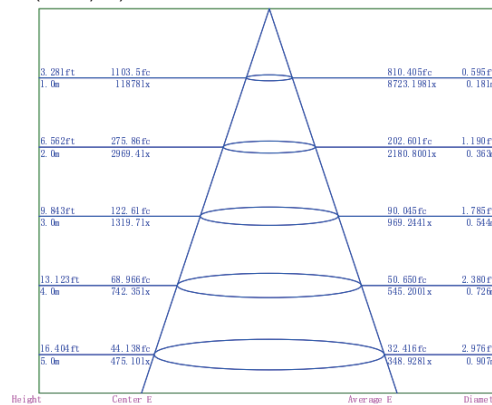

Illumination Picture (10°) .....

