

SlimP series

PLAYLITE®

Application

They are ideal for applications such as in hotels, houses, gardens, parks, building facade for washing walls or objects that develop horizontally, or for a tree or wall grazing effect on tall and narrow columns.

3 Years Warranty as standard, 5 years optional

Luminaire with three different optics as options for different places, with or without anti-glare shield as options.

SlimPA is with lens with anti-glare louver design that are ideal for the places where should be designed with anti-glare lighting, especially the beam angles 8°, 10°, 15°, 30° are with UGR < 10, and 8° can reach 20 meters high.

SlimPB is with COB lens, that are with smooth light, and angles are available in 10°, 15°, 24°, 36°, 60°.

SlimPC is with 90° white reflector with 140lm/W high lumen LED design.



CE IK06 IP65 With or without shield as options





Bracket adjustable 0-90°



Foldable bracket for smaller packaging



With pole as bollard light
500 or 750 mm height of pole



IP65 waterproof



SlimPC 90°



With screws or spikes for ground or lawn mounting

With screws for wall mounting



SlimPA 15°

SlimPB 36° COB lens



SlimPA 45°




for a wall grazing effect on tall and narrow columns
light can reach 12m high at 10°, and 20m high at 8°



SlimPA 10°



With screws or spike for ground or lawn mounting

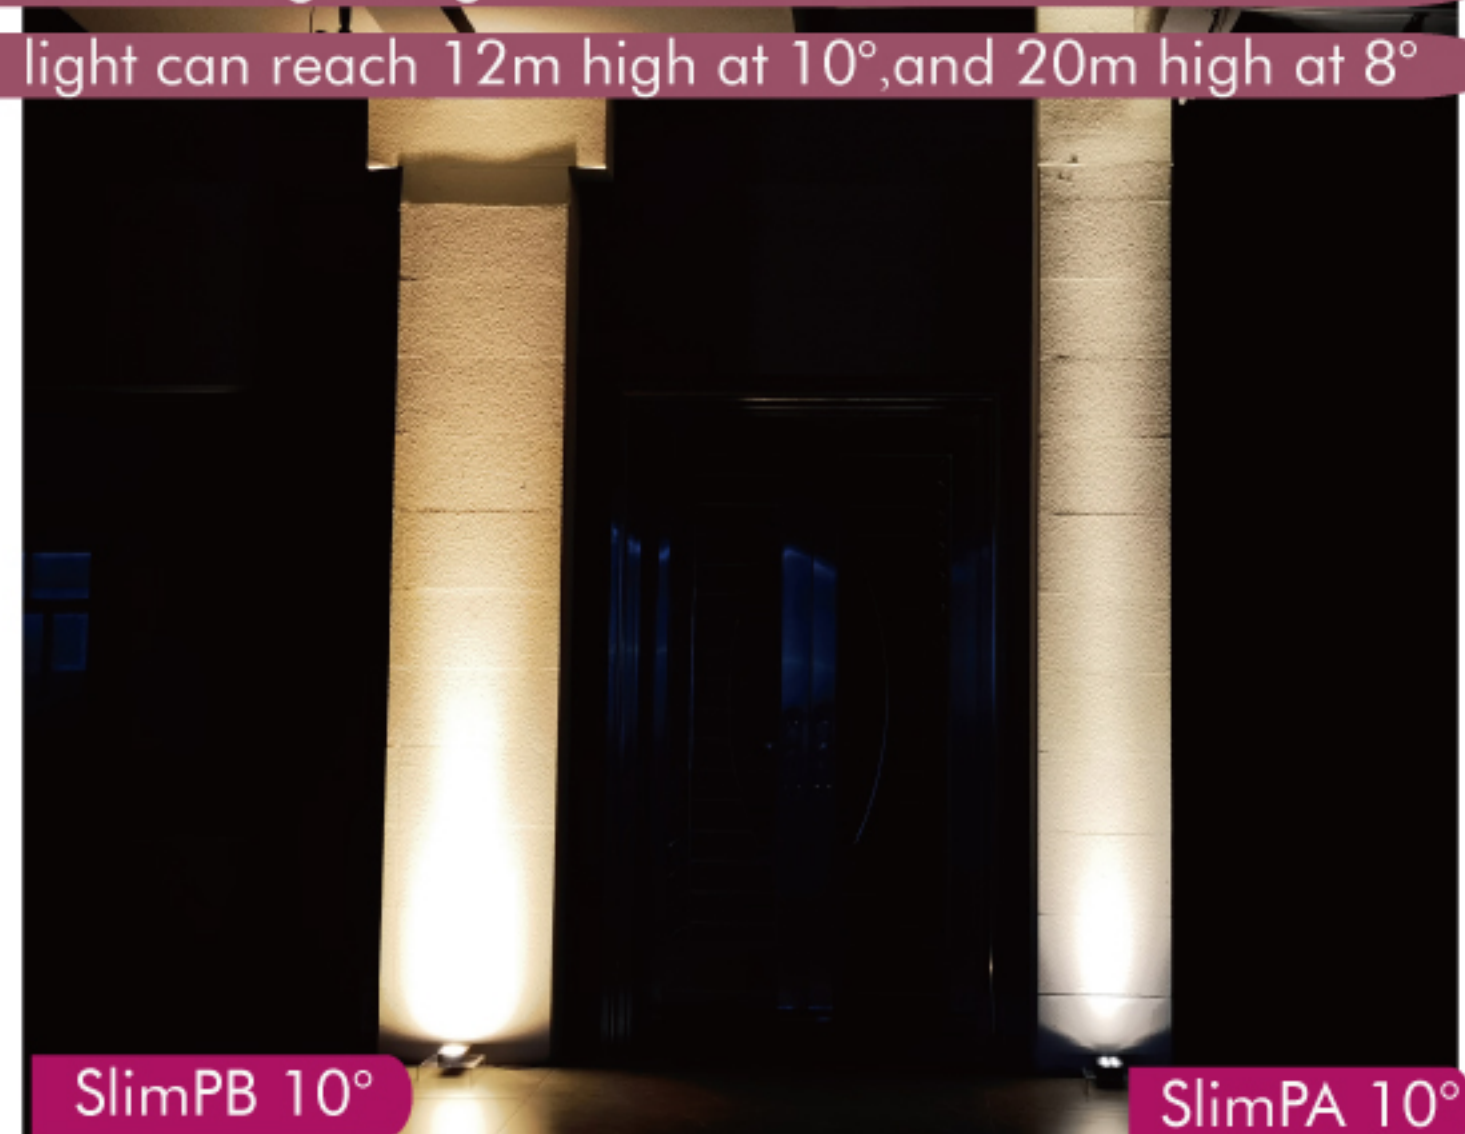

SlimPB 10°


SlimPA 10°

PLAYLITE®


SlimPA / SlimPA-S

PLAYLITE®


SlimPB/SlimPB-S

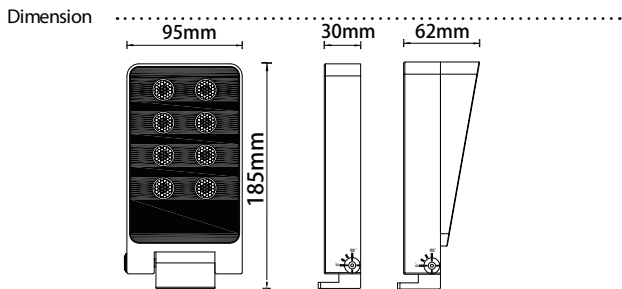

Light Distribution Curve (3000K, 10°)

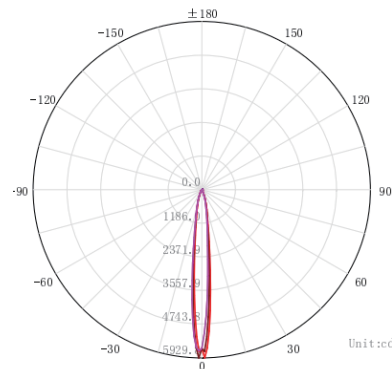

Lux distance Curve (3000K, 10°)

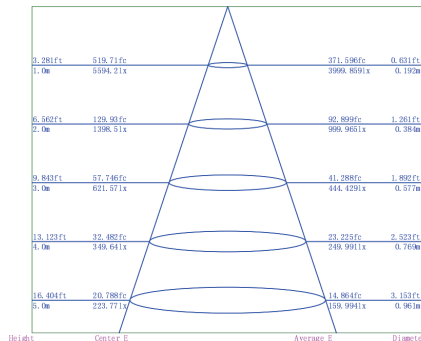

Illumination Picture (10°)




Parameter


General Data	
Item N.o.	FL-8001-1500-IH (With shield: FL-8001-1500-IH-S)
Power	15 watts +10%
LED type	8PCS CREE XPE2 or OSRAM LED
Luminous flux	820 lm±10% (tested at 8°,3000K)
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	8°,10°,15°,30°,45°, or oval lens 10°x60°
Dimension	185*95*30 or 62 with shield (mm) Length x Width x Height
Cut out	/
Net weight	0.9 kgs (1 kgs with shield)
Warranty	3 years as standard, 5 years as options
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-245V (50/60Hz)
Insulation class	Class I
Cable	1PC 1M H05RN-F 3*1mm ² rubber cable
Driver	constant current driver AC100-245V input
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK06
Housing	Aluminium
Protection finishing	Powder coated painted in black
Trim	Glass
Lens	PMMA lens with anti-glare louver
Loading capacity	150 kgs
Cable Gland	Aluminium part
Gasket	Silicone gasket
Accessories	
Screws	Mounting screws 2PCS
spike	205mm Aluminium spike as options
Pole	500mm or 750mm pole with spikes or without spikes as options

Packaging


Inner box size	250*120*45mm/with shield: 250*120*80mm
Carton size	38.5*27*26.5CM (16PCS/CTN)/42.5*27*26.5CM (10PCS/CTN)

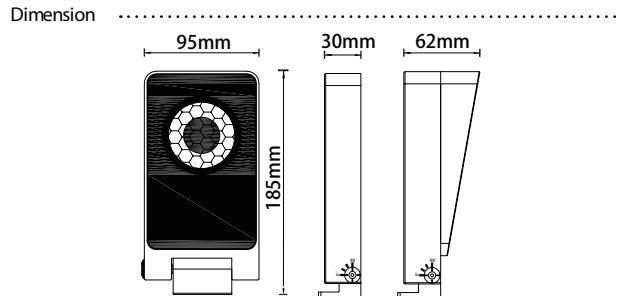


Light Distribution Curve (3000K, 36°)

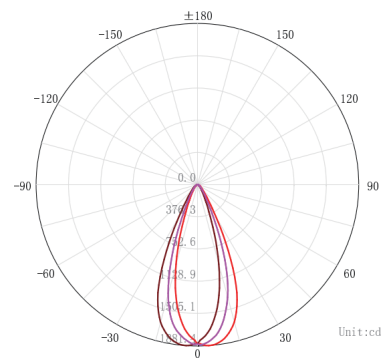

Lux distance Curve (3000K, 36°)

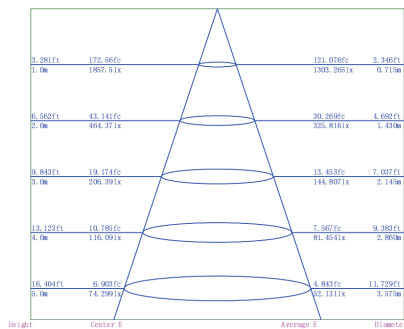

Illumination Picture (36°)

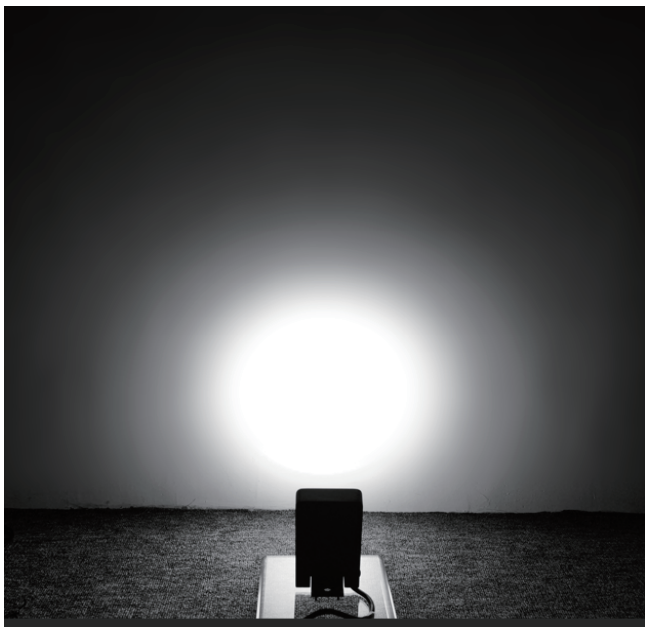

Parameter

General Data	
Item N.o.	FL-15W-COB-1500-IH (With shield: FL-15W-COB-1500-IH-S)
Power	15 watts +10%
LED type	1PC 15W CREE1512 COB LED
Luminous flux	1280 lm±10% (tested at 15°, 3000K)
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	10°,15°,24°,36°,60°
Dimension	185*95*30 or 62 with shield (mm) Length x Width x Height
Cut out	/
Net weight	0.9 kgs (1 kgs with shield)
Warranty	3 years as standard, 5 years as options
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-245V (50/60Hz)
Insulation class	Class I
Cable	1PC 1M H05RN-F 3*1mm ² rubber cable
Driver	Constant current driver AC100-245V input
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK06
Housing	Aluminium
Protection finishing	Powder coated painted in black
Trim	Glass
Reflector	PMMA COB lens
Loading capacity	150 kgs
Cable Gland	Aluminium part
Gasket	Silicone gasket
Accessories	
Screws	Mounting screws 2PCS
spike	205mm Aluminium spike as options
Pole	500mm or 750mm pole with spikes or without spikes as options

Packaging

Inner box size	250*120*45mm/with shield: 250*120*80mm
Carton size	38.5*27*26.5CM (16PCS/CTN)/42.5*27*26.5CM (10PCS/CTN)



PLAYLITE®

SlimPC/SlimPC-S

PLAYLITE®




IP65 IK06

3 or 5 Years Warranty


Parameter

General Data	
Item No.	FL-1201-1500-IH (With shield: FL-1201-1500-IH-S)
Power	15 watts $\pm 10\%$
LED type	12 PCS 5050 SMD LED
Luminous flux	2100 lm $\pm 10\%$ (tested at 3000K)
CCT	2700K/3000K/4000K/5700K/6500K
CRI	80+
Beam angle	90°
Dimension	185*95*30 or 62 with shield (mm) Length x Width x Height
Cut out	/mm
Net weight	0.9 kgs (1 kgs with shield)
Warranty	3 years as standard, 5 years as options
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-245V (50/60Hz)
Insulation class	Class I
Cable	1PC 1M H05RN-F 3*1mm ² rubber cable
Driver	Constant current driver AC100-245V input
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK06
Housing	Aluminium
Protection finishing	Powder coated painted in black
Trim	Glass
Reflector	PMMA white reflector
Loading capacity	150 kgs
Cable Gland	Aluminium part
Gasket	Silicone gasket
Accessories	
Screws	Mounting screws 2PCS
spike	205mm Aluminium spike as options
Pole	500mm or 750mm pole with spikes or without spikes as options
Packaging	
Inner box size	250*120*45mm/with shield: 250*120*80mm
Carton size	38.5*27*26.5CM (16PCS/CTN)/42.5*27*26.5CM (10PCS/CTN)


Dimension

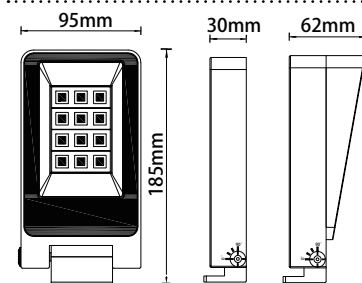

Light Distribution Curve (3000K, 90°)

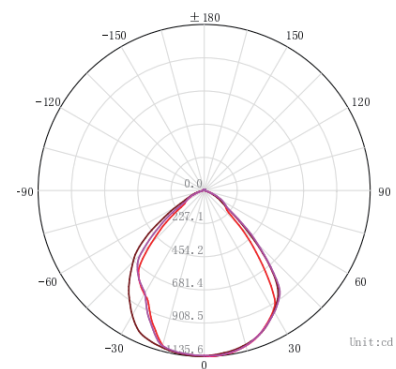

Lux distance Curve (3000K, 90°)

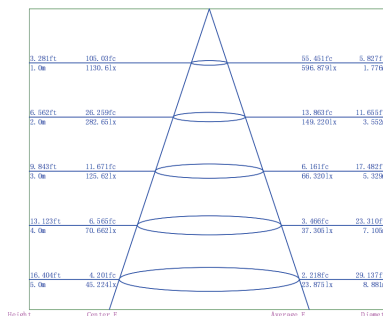

Illumination Picture (90°)



PLAYLITE®




SlimPC 90°

SlimPA 15°



SlimPA 30°

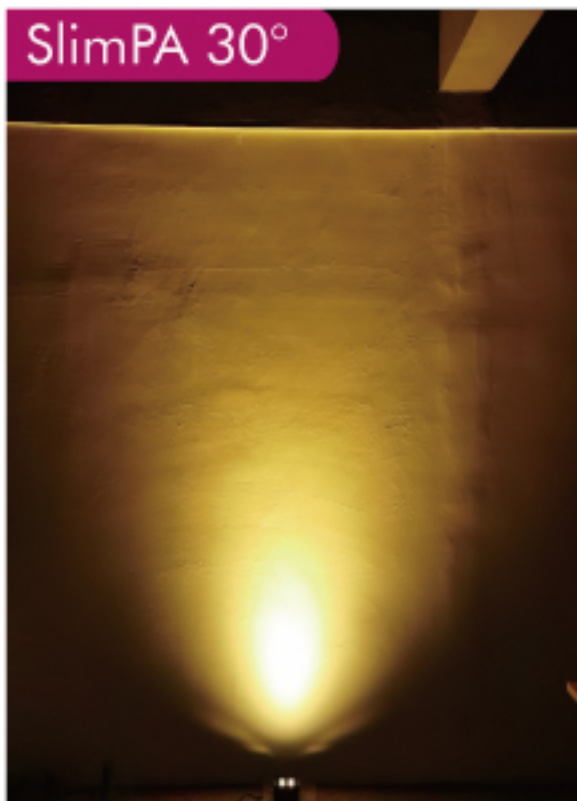


SlimPA 45°





SlimPA 10°x60°



SlimPB 10°

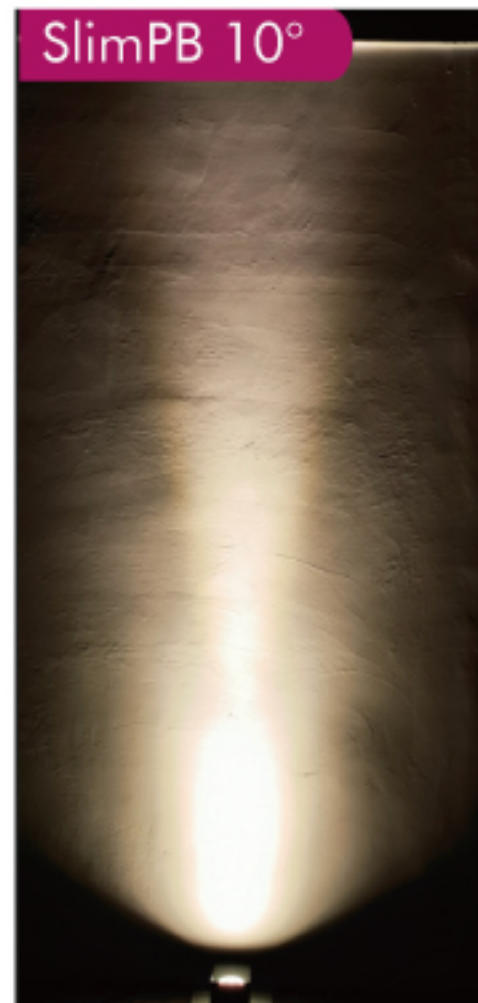

SlimPB 36°

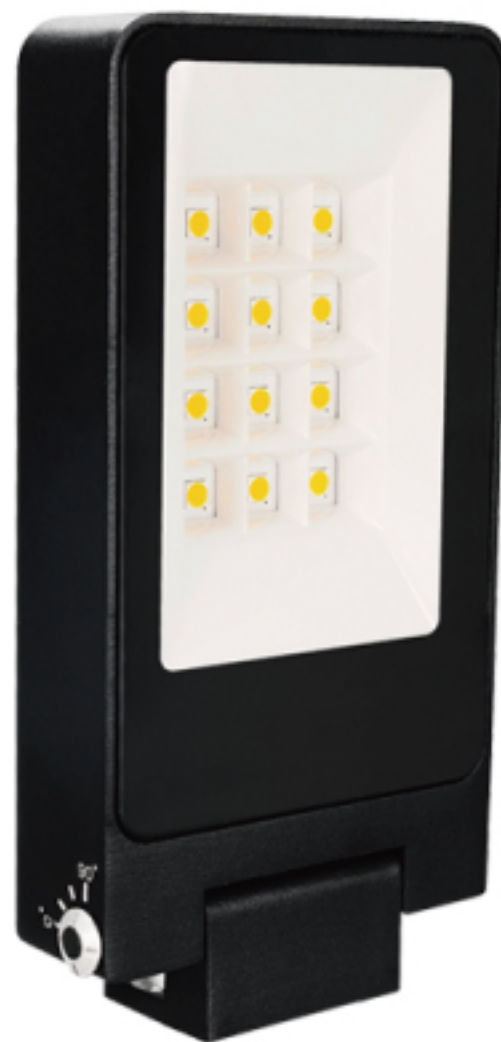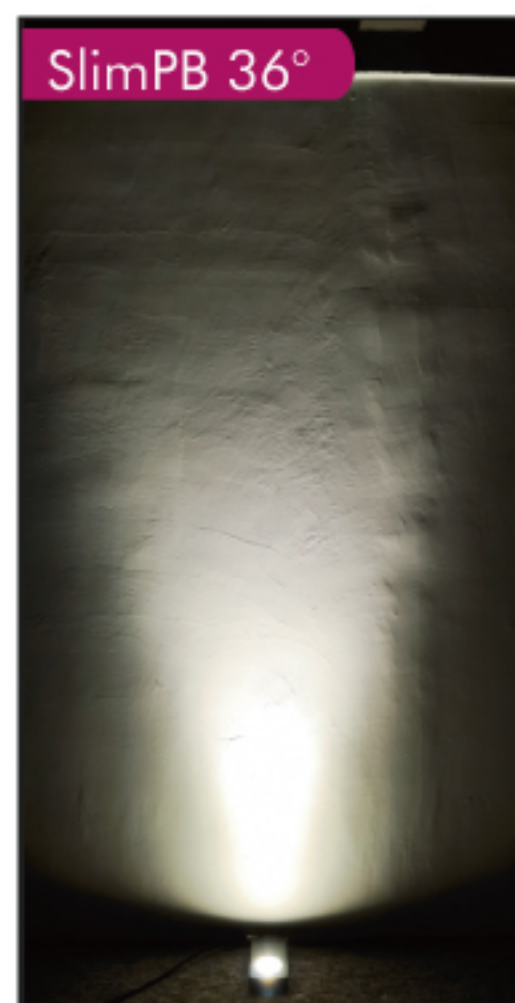

SlimPC 90°