Smart Pedestration Access Control Gate

Specification

Model: TD-PG-302

Main Material
Aluminum Alloy
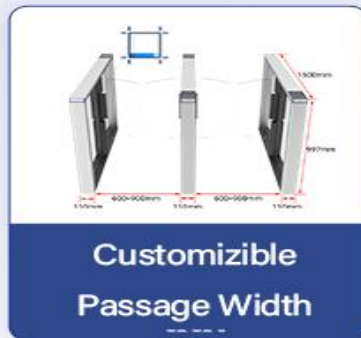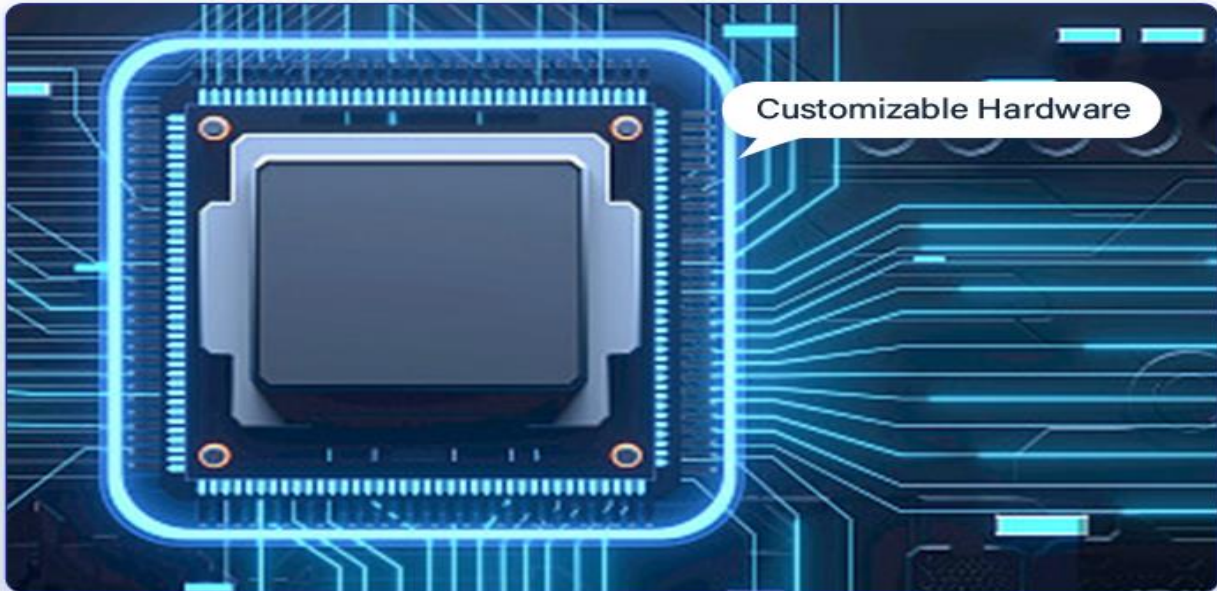
Brief information

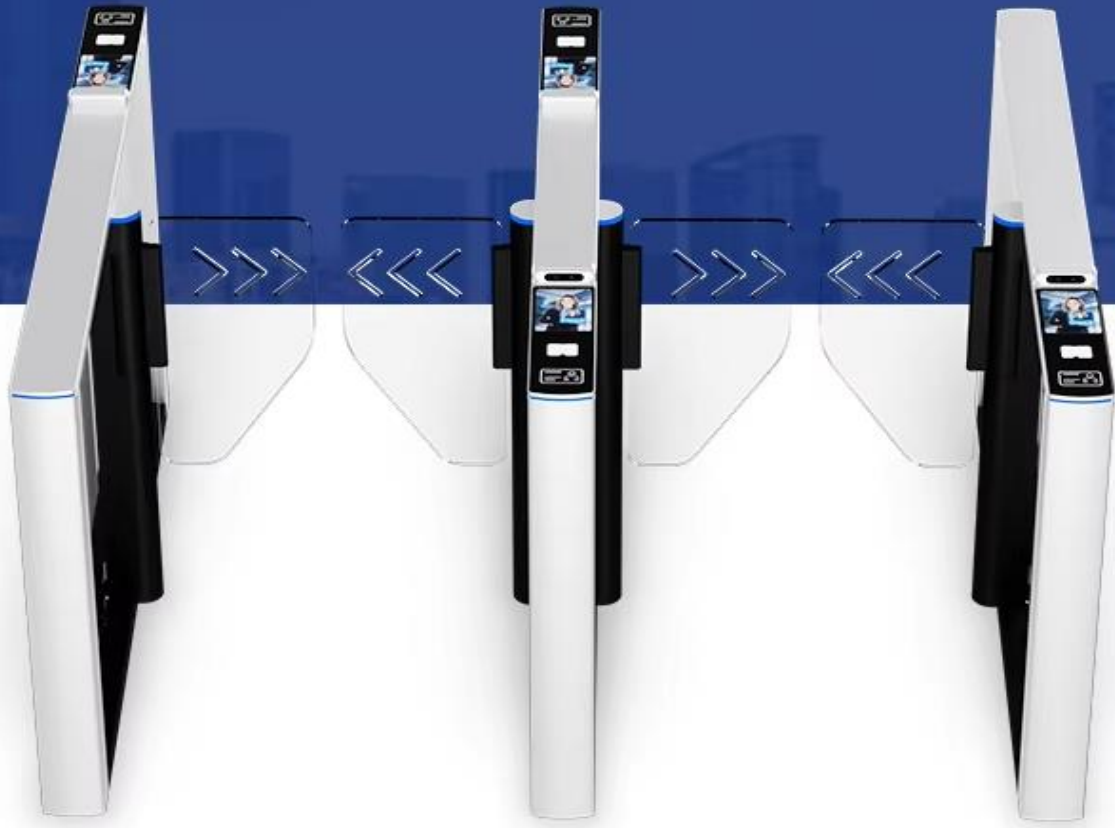|		
Hardware Parameters	Measurement	1500(L)*110(W)*990(H)mm (Customizable)
	Passage Width	600-900mm (Customizable)
	Passing Efficiency	40 person/min
	Drive Motor	Servo Motor
	Post Material	Aircraft-grade Aluminum Alloy
	Baffle Material	8mm Toughened Glass
	Swing Door Material	10mm Acrylic /Toughened Glass
	Door Opening Speed	<0.5s
	Infrared Senor	6 Pairs
	Audio	30,000 Stereo Speakers
	Voltage	Input AC220V, Working Voltage DC24V
Communication Method	Ethernet	Support
	WIFI	Support

Features
1. It is convenient for customers to maintain as it includes self-test and alarming functions that detect and indicate faults.
2. It can be controlled by signals, buttons or remote control output via any control equipment to achieve single and two-way controlled passage.
3. During the process of swing gate resetting, if external forces try to reverse the gate, the swing gate will automatically activate reverse thrust and sound the alarm. Once the external forces disappear, the swing gate will return to its original position.
4. The speed of swing gate opening and closing can be adjusted according to customers' preferences.
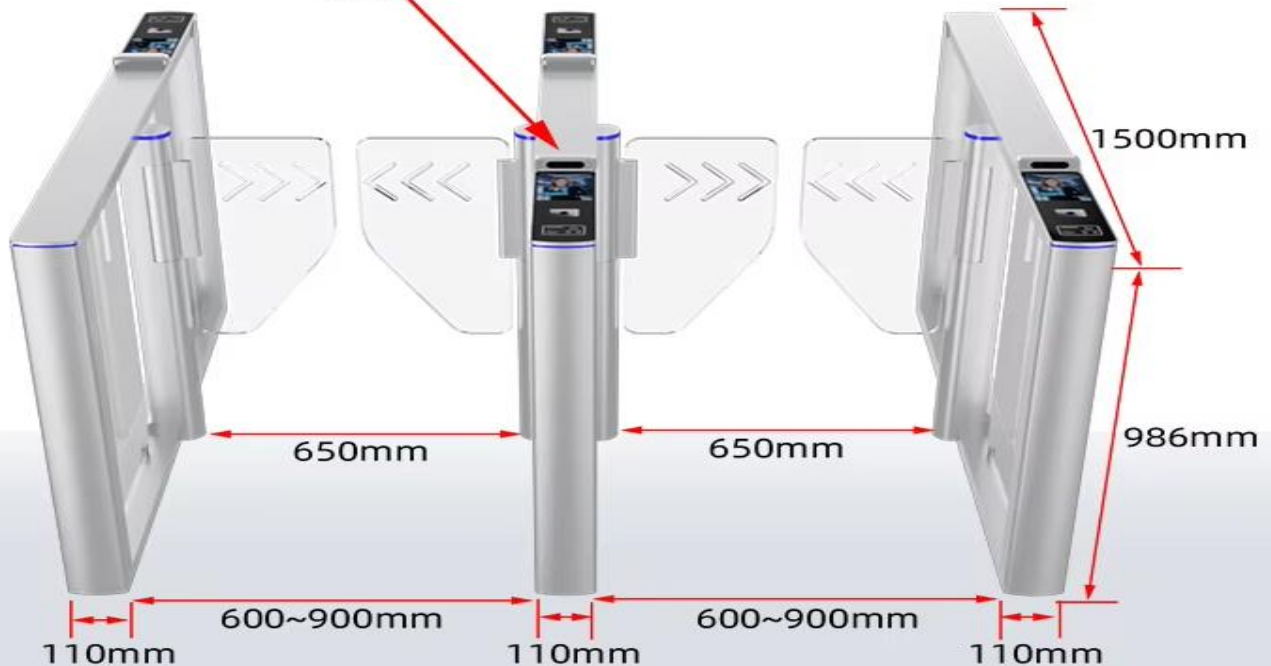
Service Description

Customizable Hardware

OEM

Customizable Baffle Pattern

Customizable Baffle Material

Customizible Passage Width

Customizable Appearance

Android Speed Gate

Binocular live recognition camera

1500mm

986mm

650mm   650mm

600~900mm   600~900mm

110mm   110mm   110mm

6 Pairs
Of Infrared Induction
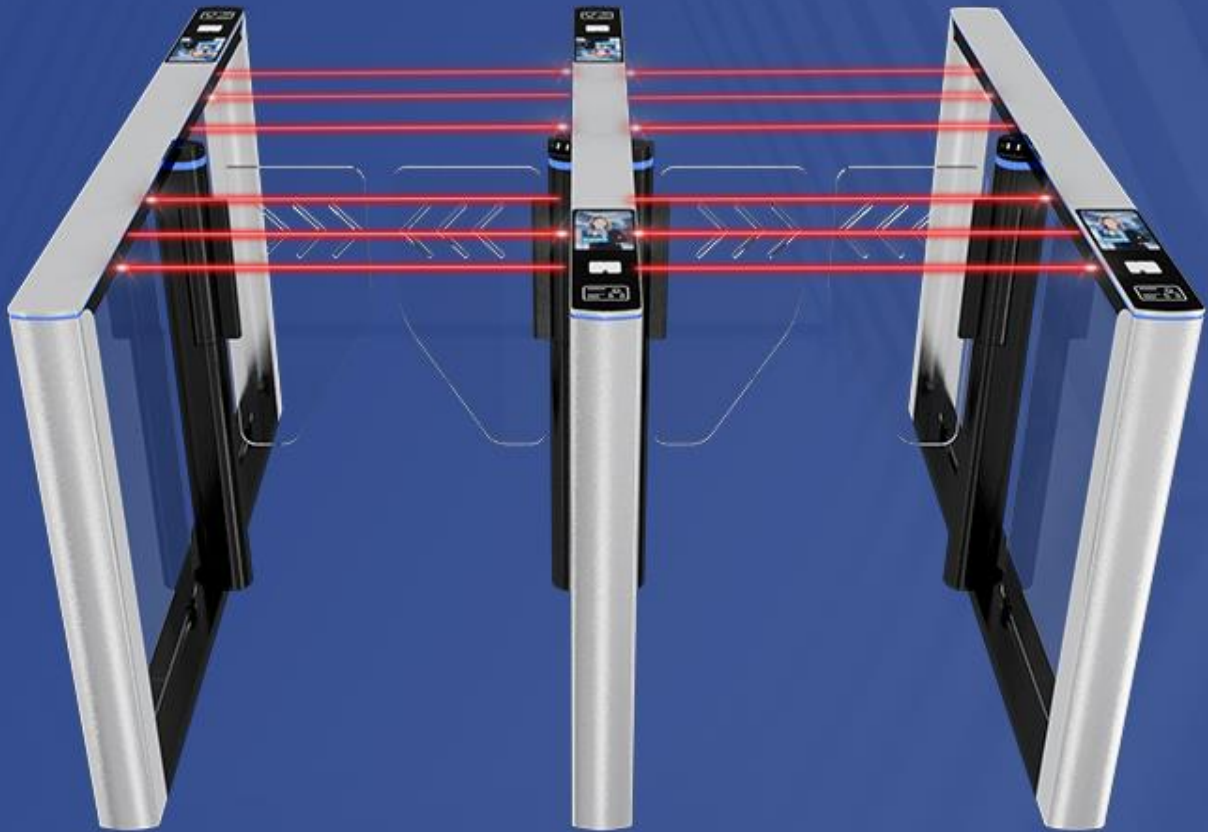
Ambience Light Instruction

01
Regular Blue

In non working state it shows blue light

02
Abnormal red

In abnormal state, such as someone tries to break in it shows red light

03
Traffic Green

In normal state, door opens with green light

Personalized Customization

Support Customized Equipment Case Color

Standardizes Interfaces

Support Protocols

- HTTP/HTTPS
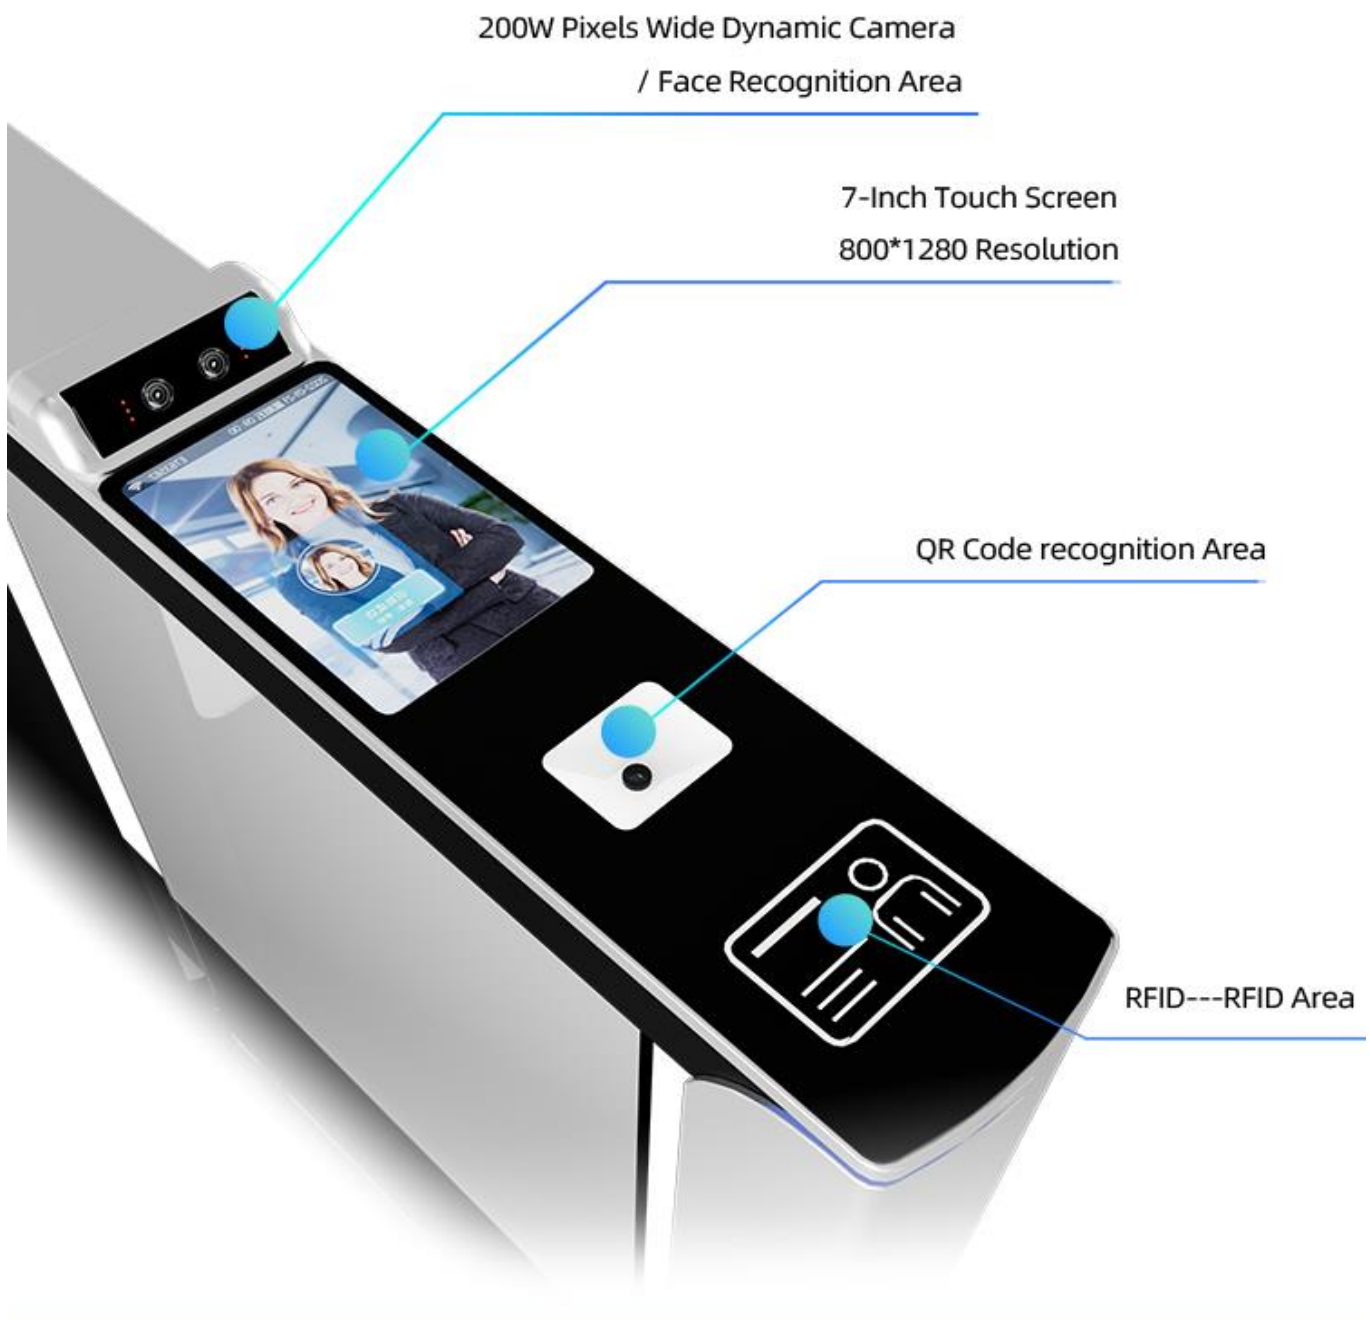- WebSocket(WS/WSS)
- MQTT

Hardware Interface

- 485 (Modbus)
- 232
- Wiegand

Independent R D

- Hardware SDK
- Device API

Adopting Aluminum Alloy anodization Process

The entire body is made of aluminum alloy material

200W Pixels Wide Dynamic Camera / Face Recognition Area

7-Inch Touch Screen 800*1280 Resolution

QR Code recognition Area

RFID---RFID Area

Because the product is perfect So it works in a variety of scenarios

Corporate Office

Multiple attendance rules can be divided to meet different attendance scenarios

- Attendance management
- Remote door opening
- Visitor Appointment
- WeCom

Smart Campus

Smart campus solves the informatization requirements based on campus

- Message Push
- Family call
- Data statistics
- Remote control

More application scenarios

- Sports
- Meetings

Park management

Able to conduct troubleshooting on entry and exit personnel to improve management efficiency and accuracy

- Visitor Appointment
- Live View
- Sentinel Mode
- Multiple combinations

Case

Logistics Information

Logistics transportation

Carton packaging

We package very carefully,

usually using both land and

air transportation.