


316L不锈钢系列接头

316L STAINLESS STEEL FITTINGS

特点 Features

- 除密封圈外所有零件都采用SUS316L材料制成，这种材料具有很强的抗腐蚀能力。
The materials ensure Anti-Corrosion highly, all of them are made from SUS316L except the seal ring.
- 密封圈采用氟橡胶 (FKM), 这种材料抗化学腐蚀性能力很强，而且耐酸、耐高温。
FKM is used as the seal ring, which can ensure anti-corrosion and acid resistant and extended life time.
- 这些零件都属于无油规格并符合食品卫生法，广泛应用于食品、化学、医疗等工业。
The accessories are oil-free and reach the Food Hygiene Law of People's Republic of China, which are applied widely in the range of industry such as food service industry, chemical industry and medical industry.

结构示意图 Structure Diagram

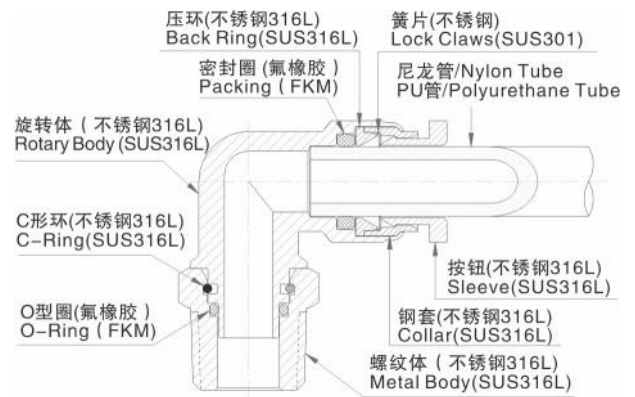

技术条件 Technical Specification

使用流体/Fluid	空气、水、蒸汽等/Air, Water, Steam
使用压力范围/Operating Pressure	0 ~ 1.5Mpa
耐压/Max Pressure	2 Mpa
工作温度范围/Operating Temperature	-20 ~ 140°C

订货型号(例) Ordering Model (Example)

SSL 08 - 02

① ② ③

① 型号 Model

② 管子尺寸 Tube Size

③ 螺纹规格
Thread Type/Size

管子尺寸 Tube Size	公制尺寸 Metric Size					
代号Code	4	6	8	10	12	16
尺寸Size(mm)	Φ4	Φ6	Φ8	Φ10	Φ12	Φ16

		55° 锥管螺纹 55° Taper Tube Thread				
代号Code		01	02	03	04	06
螺纹thread		R1/8	R1/4	R3/8	R1/2	R3/4

		公制螺纹 Metric Thread			55° 直管螺纹 55° Straight Tube Thread				
代号Code		M3	M5	M6	G01	G02	G03	G04	G06
螺纹thread		M3*0.5	M5*0.8	M6*1.0	G1/8	G1/4	G3/8	G1/2	G3/4