


## 型号表示方法

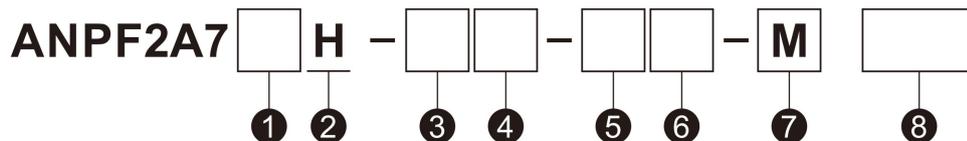

显示一体型

### ① 流量范围

03	150~3000L/min
06	300~6000L/min
12	600~12000L/min

### ② 大流量型

### ③ 接管规格

无记号	Rc
N	NPT
F	G

※ISO228-1标准

### ④ 配管口径

记号	口径	流量 (L/min)			适合型号
		3000	6000	12000	
10	1	●			ANPF2A703H
14	1½		●		ANPF2A706H
20	2			●	ANPF2A712H

### ⑤ 输出规格

28	NPN开路集电极1输出+模拟输出 (1~5V)
29	NPN开路集电极1输出+模拟输出 (4~20mA)
68	PNP开路集电极1输出+模拟输出 (1~5V)
69	PNP开路集电极1输出+模拟输出 (4~20mA)

NPN或PNP开路集电极输出、开关输出和累计脉冲输出可切换。

### ⑥ 导线

无记号	M12带插头导线3m
N	无导线

### ⑦ 单位规格


无记号	带单位切换功能
M	单位固定

注1) 固定单位 瞬时流量: L/min  
累计流量: L、m³、m³×10³

### ⑧ 定制规格

X795	广泛域规格
------	-------

## Model designation method

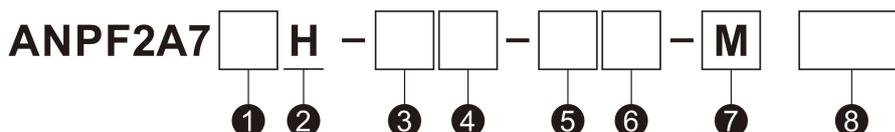

Integrated display

### ① Flow range

03	150~3000L/min
06	300~6000L/min
12	600~12000L/min

### ② High-volume type

### ③ Connector Specifications

Unmarked	Rc
N	NPT
F	G

### ④ Piping diameter

Mark	Caliber	Flow rate (L/min)			Suitable Model
		3000	6000	12000	
10	1	●			ANPF2A703H
14	1½		●		ANPF2A706H
20	2			●	ANPF2A712H

### ⑤ Output Specifications

28	NPN Open Collector, 1 Output + Analog Output (1~5V)
29	NPN Open Collector, 1 Output + Analog Output (4~20mA)
68	PNP Open Collector, 1 Output + Analog Output (1~5V)
69	PNP Open Collector, 1 Output + Analog Output (4~20mA)

NPN or PNP open collector output, switching output, and cumulative pulse output are switchable.

### ⑥ Wire

Unmarked	M12 cable with plug, 3m
N	No wire

### ⑦ Unit Specifications

Unmarked	With unit switching function
M	Unit fixed

Note 1) Fixed units: Instantaneous flow rate: L/min; Cumulative flow rate: L, m³, m³ × 10<sup>-6</sup>

### ⑧ Customized specifications

X795	Wide domain specification
------	---------------------------