



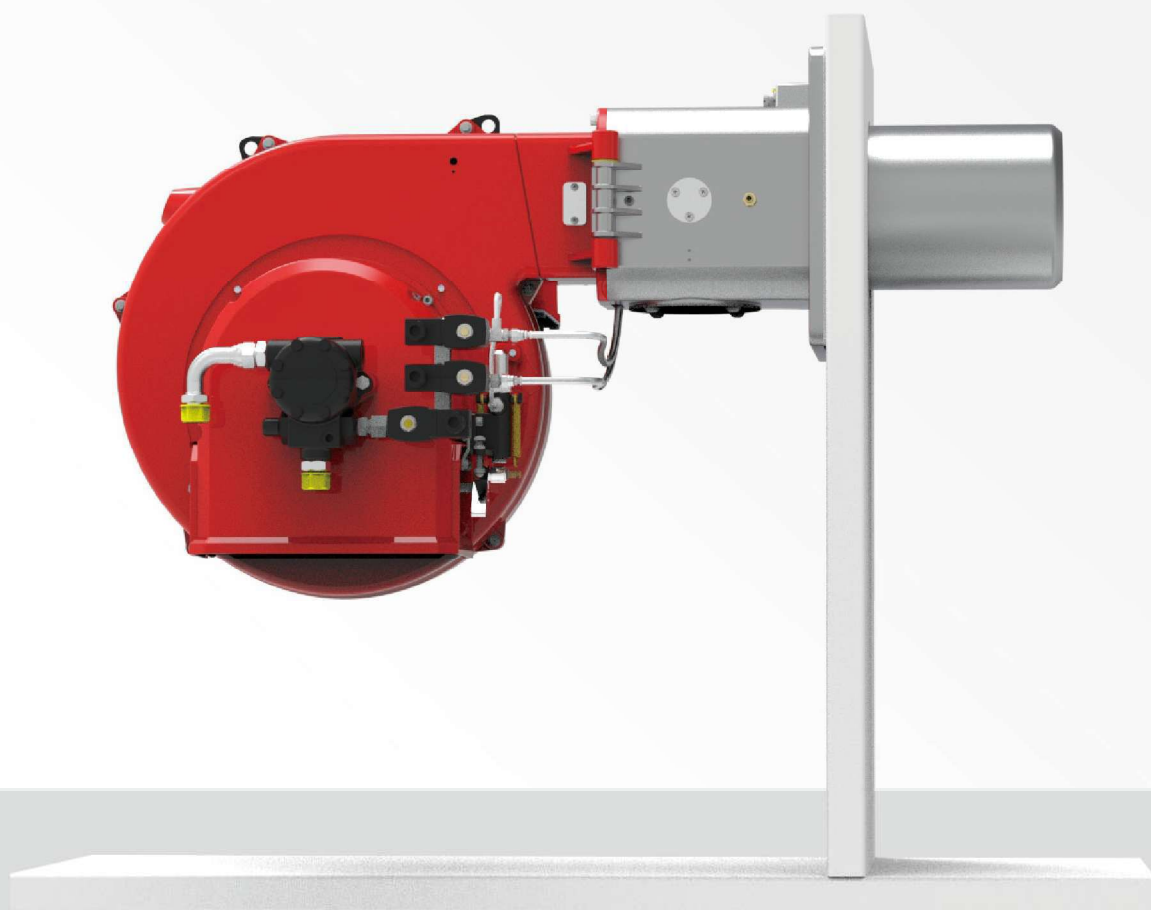

产品型号规格定义

Product Model Specification Definition

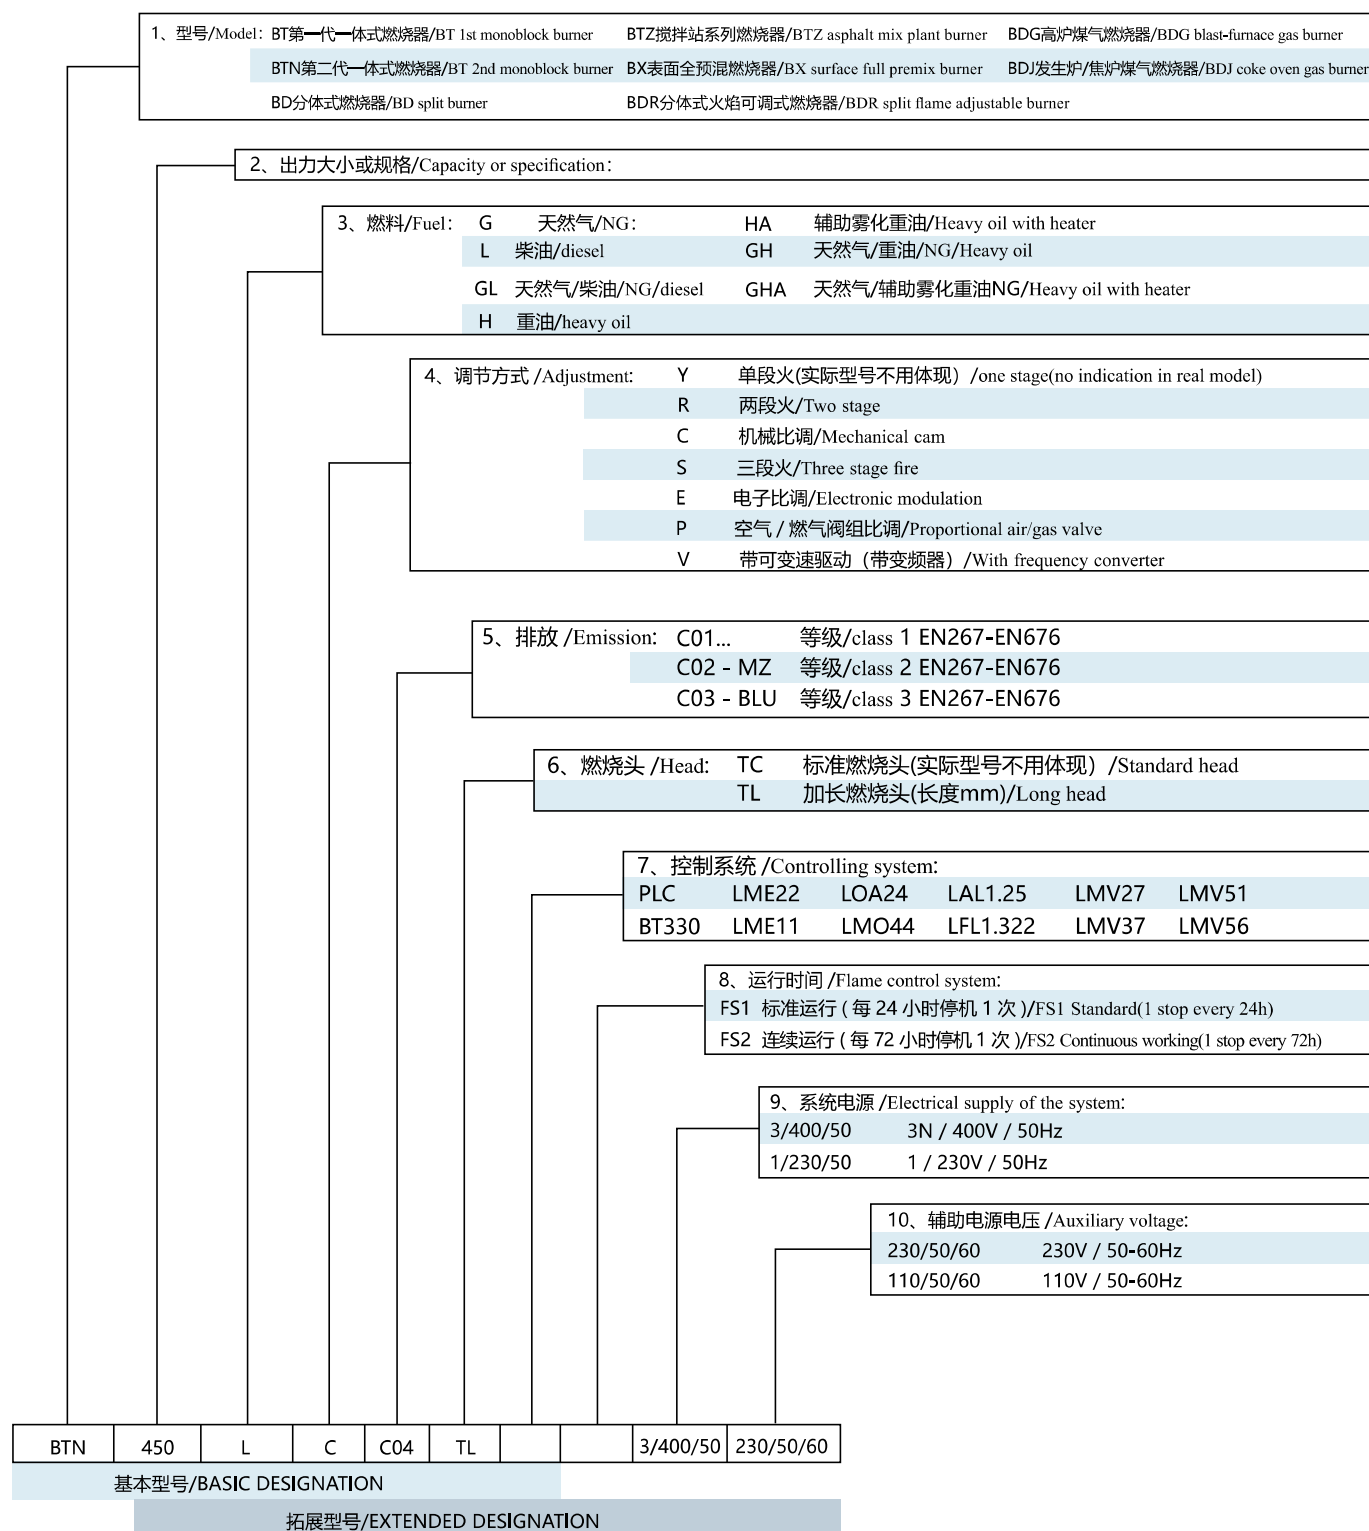

BTN210/250LR/LC/LE双段/渐进式 / 比例调节/ 电子比调轻油燃烧器

技术性能及结构特征

Technical performance and structural characteristics

1. 轻油燃烧器。

2. 双段/渐进式/比例式/电子式运行。

3. 机械式压力雾化。

4. 通过调节燃烧空气和燃烧头，可以获得最佳的燃烧参数。

5. 铰链式连接，可左右自然打开，维修保养方便。

6. 双段式用液压调节器来进行第一、二段空气流量调节。

7. 渐进式/比例式用伺服电机来进行第一、二段空气流量调节。

8. 电子比调式用两个伺服电机分别控制燃油和空气的比例调节。

9. 燃烧器暂停时，风门关闭以减少炉内热量损失。

10. 带有凸轮的伺服电机可以同时调节空气和燃料的供应。

11. 采用一个法兰和耐高温隔热垫与锅炉联接固定。

12. 耐高温的不锈钢燃烧头火焰盘。

13. 独立三相电机带动油泵。

14. 光敏电阻检测火焰。

15. 标准配置的电气防护等级IP40。
1. Light oil burner.

2. Two stage/sliding/modulation/electronic modulation operation.

3. Mechanical pressure atomization.

4. By adjusting the combustion air and combustion head, the best combustion parameters can be obtained.

5. Hinge joint ,open at both side ,easy for maintenance.

6. Two-stage hydraulic regulator is used for the first and second stage air flow regulation.

7. Progressive/proportional servo motor is used for the first and second stage air flow regulation.

8. The electronic ratio adjustment uses two servo motors to control the proportional adjustment of fuel and air respectively.

9. When the burner is suspended, the damper is closed to reduce the heat loss in the furnace.

10. Servo motor with CAM can adjust the supply of air and fuel at the same time.

11. A flange and high temperature insulation pad are used to connect and fix the boiler.

12. High temperature resistant stainless steel burner diffuse.

13. Independent three-phase motor drives the oil pump.


14. Photocell detects the flame.

15. Electrical plant protection rating IP40.

功率 Power (KW)	型号 Model	订货编号 Order number	电源 Power supply	电机功率 Motor power (KW)	包装尺寸 package size (LxPxHmm)	重量 weight (kg)
759~2443	BTN210LR	202 20 028	380V 50Hz	4.5	1010x905x760	97.5
	BTN210LC	202 20 050			1260x958x820	/
	BTN210LE	202 20 071			1260x958x820	/
600~2700	BTN250LR	202 20 029	380V 50Hz	7.5	1010x905x760	109.5
	BTN250LC	202 20 051			1260x958x820	155
	BTN250LE	202 20 080			1260x958x820	/

外观尺寸图

Exterior dimensional drawing

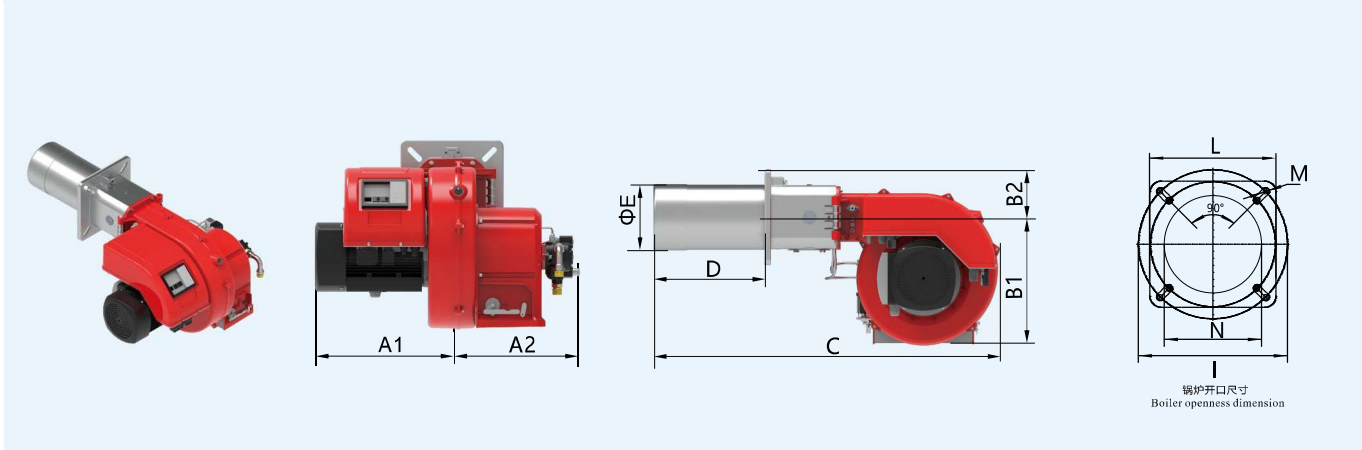

型 号 model	A1	A2	B1	B2	C	D	E	I	L	M	N
	mm	mm	mm	mm	mm	mm	Φmm	mm	Φmm	M	Φmm
BTN210LR	390	400	428	160	1162	370	222	290~370	320	4-M16	232
BTN210LC	390	431	428	160	1162	370	222	290~370	320	4-M16	232
BTN210LE	390	431	428	160	1162	370	222	290~370	320	4-M16	232
BTN250LR	445	400	428	160	1162	370	222	290~370	320	4-M16	232
BTN250LC	445	431	428	160	1162	370	222	290~370	320	4-M16	232
BTN250LE	445	431	428	160	1162	370	222	290~370	320	4-M16	232

BTN210/250LR/LC/LE Two stage/Sliding/Modulating/ Electronic modulation Light Oil Burner

baite

备选功能

Alternative function

加长的燃烧筒，可定制60Hz

Extended combustion cylinder, customizable 60Hz

标准配件


standard fittings

过滤器-软管-喷嘴-与锅炉配套的组件

Filter - Hose - Nozzle - assembly for boiler

曲线图

curve graph

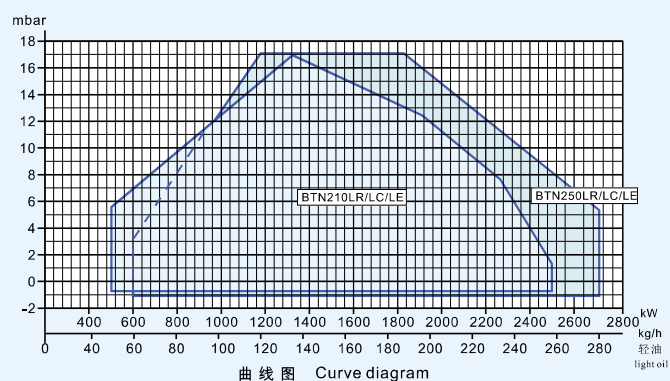



浙江百特燃烧器有限公司

ZHEJIANG BAITE BURNERS MANUFACTURE CO., LTD

地址/ADD: 浙江省乐清市象阳工业区百特路2号

NO.2 BAITE RD.XIANGYANG INDUSTRIAL PARK ,YUEQING CITY ,ZHEJIANG PROVINCE

电话/TEL: 0086-577-62655355 62652355

传真/FAX: 0086-577-62653955

服务热线/Hotline:

400 001 5556

网址/Web: www.baite.cn

邮箱/Mail: bt@baite.cn



请用微信扫一扫
进入公司官方网站

© 浙江百特燃烧器有限公司版权所有 2024 珍惜资源，善待环境

本目录所载产品尺寸、规格仅供参考，若有变更，恕不另行通知！以本公司提供的产品为准！

BAITE BURNERS KEEPS THE REVISION RIGHT WITHOUT INFORM IN ADVANCE.INCLUDING THE PRODUCT DIMENSION,SPECIFICATION!