




产品型号规格定义

Product Model Specification Definition

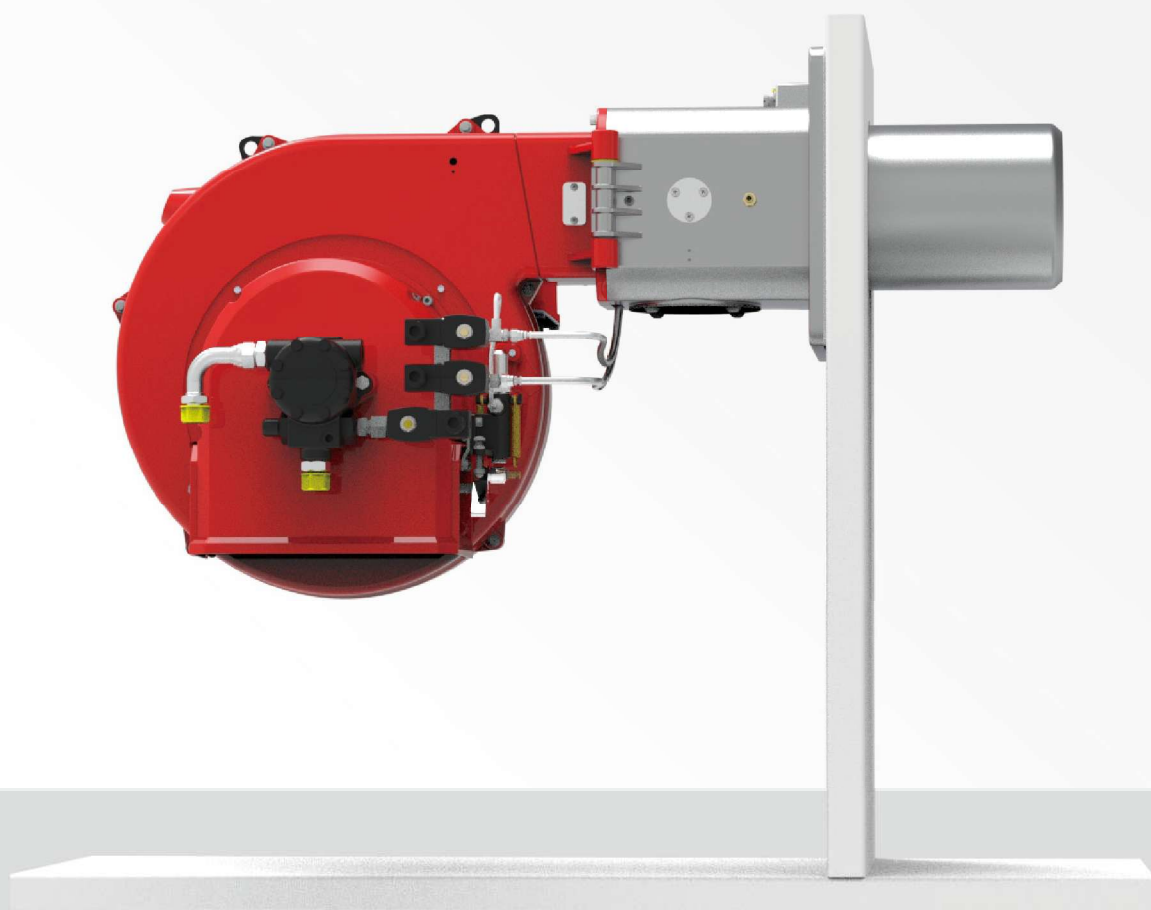

BT10/20HAE

电子式比例调节调重油燃烧器

技术性能及结构特征

Technical performance and structural characteristics

1. 重油燃烧器。

2. 电子比例式运行。

3. 空气或蒸汽进行雾化。

4. 通过调节燃烧空气和燃烧头，可以获得最佳的燃烧参数。

5. 铰链连接,可左右自然打开。

6. 无须把燃烧器从锅炉上拆下，就可直接取下雾化装置，维修保养方便。

7. 燃烧器暂停时，风门关闭以减少炉内热量损失。

8. 电子比例式用两个伺服电机分别控制燃油和空气的比例调节。

9. 带有调节阀和截止阀。

10. 带有温度计、进行最低温及温度调节的燃料电预热器。

11. 采用一个法兰和一个绝缘密封圈与锅炉联接固定。

12. 带流量调节装置的燃烧空气进口。

13. 带有钢质鼓风机管和火焰盘的可调节燃烧头。

14. 三相电机带动风机。

15. 光敏电阻检测火焰。

16. 标准配置的电气防护等级IP40。
1. Heavy oil burner.

2. Electronic modulation operation.

3. Air or steam atomization.

4. Ability to obtain optimal combustion values by regulating combustion air and blast-pipe.

5. Hinge joint,open at both side.

6. Maintenance facilitated by the fact that the atomisation unit can be removed without having to remove the burner from the boiler.

7. The burner is paused, close the throttle to reduce the loss of furnace heat.

8. The electronic modulation type uses two servo motors to control the proportional regulation of fuel and air respectively.

9. It is equipped with regulator and stop valve.

10. With the fuel pre-heater which installed with thermometer and adjustable temperature controller.

11. One flange and one insulating seal for boiler fastening.

12. Combustion air intake with air flow adjustment device.

13. Aadjustable burner head with steel gaspipe abd diffuser.

14. Three-phase electric motor to run fan.


15. Photocell detects the flame.

16. Electrical plant protection rating IP40.

功率 Power (kW)	型号 Model	订货编号 Order number	电源 Power supply	电机功率 Motor power (kW)	包装尺寸 package size (LxPxHmm)	重量 weight (kg)
558~1276	BT10HAE	201 21 208	380V 50Hz	1.5	986x756x947	132
	BT10HAE-A	202 21 218		1.5	986x756x787	121
670~2050	BT20HAE	201 21 207	380V 50Hz	3	1156x866x1017	162
	BT20HAE-A	201 21 217		3	1156x866x847	185

外观尺寸图

Exterior dimensional drawing

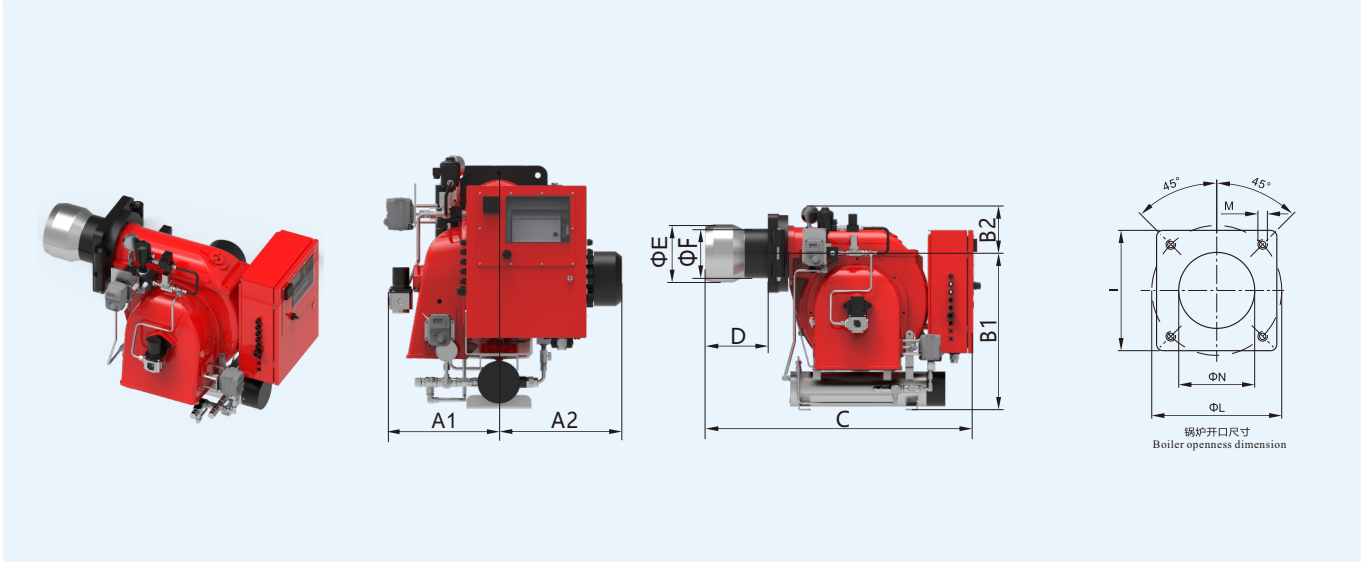

型 号 model	A1	A2	B1	B2	C	D	E	F	N	L	I	M
	mm	mm	mm	mm	mm	mm	Φmm	Φmm	Φmm	Φmm	Φmm	M
BT10HAE	341	313.8	520.5	181.8	865	162	190	147	200	325	280	4-M12
BT10HAE-A	341	313.8	520.5	181.8	865	162	190	147	200	325	280	4-M12
BT20HAE	341	379	520.5	181.8	1058	238	220	188	230	339	300	4-M16
BT20HAE-A	341	379	520.5	181.8	1058	238	220	188	230	339	300	4-M16

BT10/20HAE

Electronic modulation heavy oil burner



备选功能

Alternative function

加长的燃烧筒，可定制60Hz

Extended combustion cylinder, customizable 60Hz

标准配件


standard fittings

过滤器-软管-喷嘴-与锅炉配套的组件

Filter - Hose - Nozzle - assembly for boiler

曲线图

curve graph

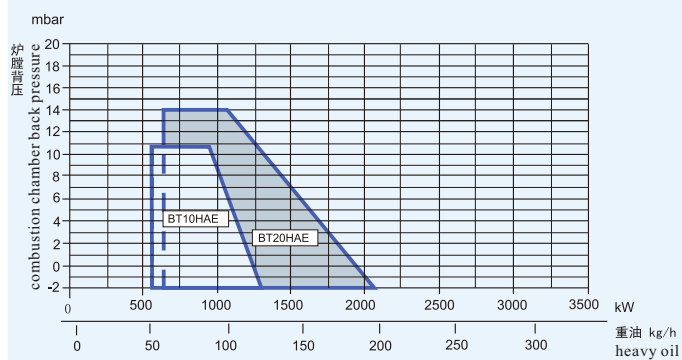

曲线图 Curve diagram



浙江百特燃烧器有限公司

ZHEJIANG BAITE BURNERS MANUFACTURE CO., LTD

地址/ADD: 浙江省乐清市象阳工业区百特路2号

NO.2 BAITE RD.XIANGYANG INDUSTRIAL PARK ,YUEQING CITY ,ZHEJIANG PROVINCE

电话/TEL: 0086-577-62655355 62652355

传真/FAX: 0086-577-62653955

服务热线/Hotline:

400 001 5556

网址/Web: www.baite.cn

邮箱/Mail: bt@baite.cn



请用微信扫一扫
进入公司官方网站

© 浙江百特燃烧器有限公司版权所有 2024 珍惜资源，善待环境

本目录所载产品尺寸、规格仅供参考，若有变更，恕不另行通知！以本公司提供的产品为准！

BAITE BURNERS KEEPS THE REVISION RIGHT WITHOUT INFORM IN ADVANCE.INCLUDING THE PRODUCT DIMENSION,SPECIFICATION!