



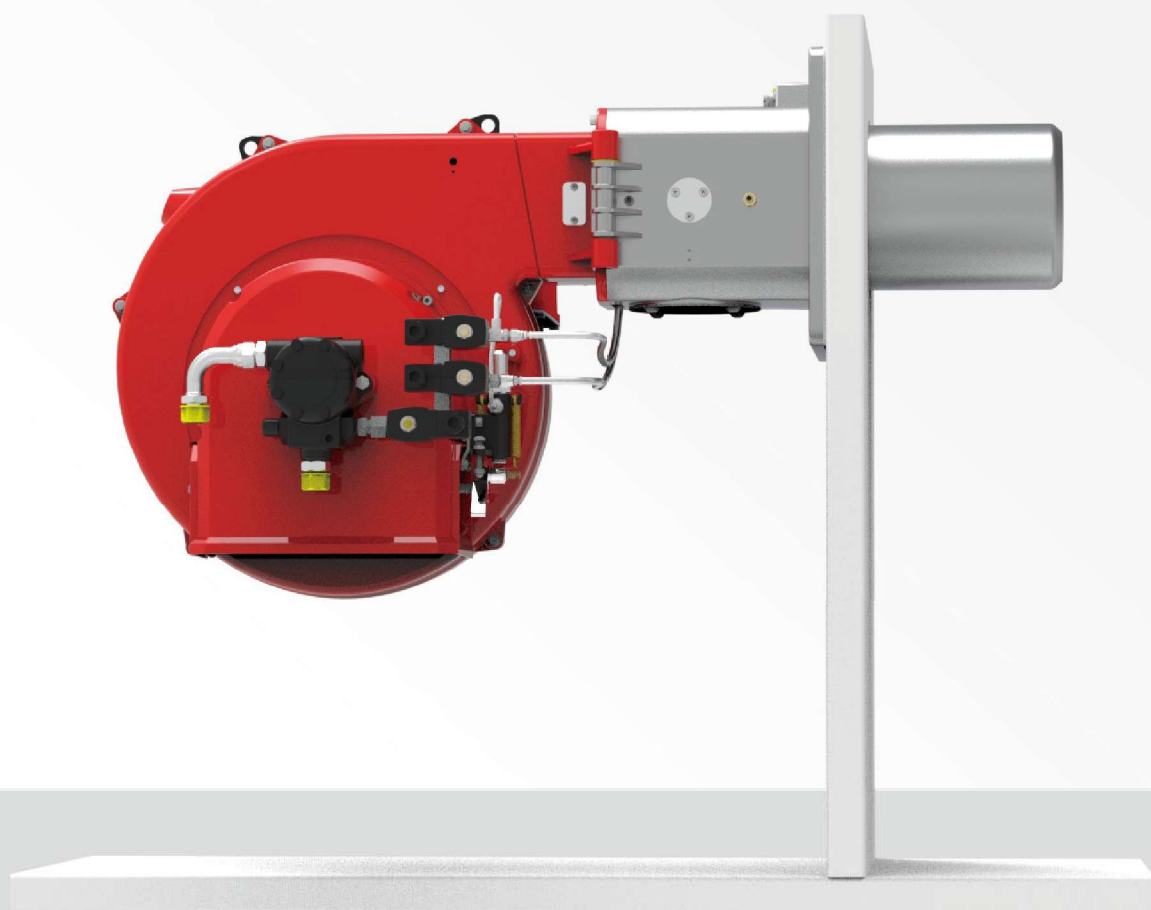

产品型号规格定义

Product Model Specification Definition

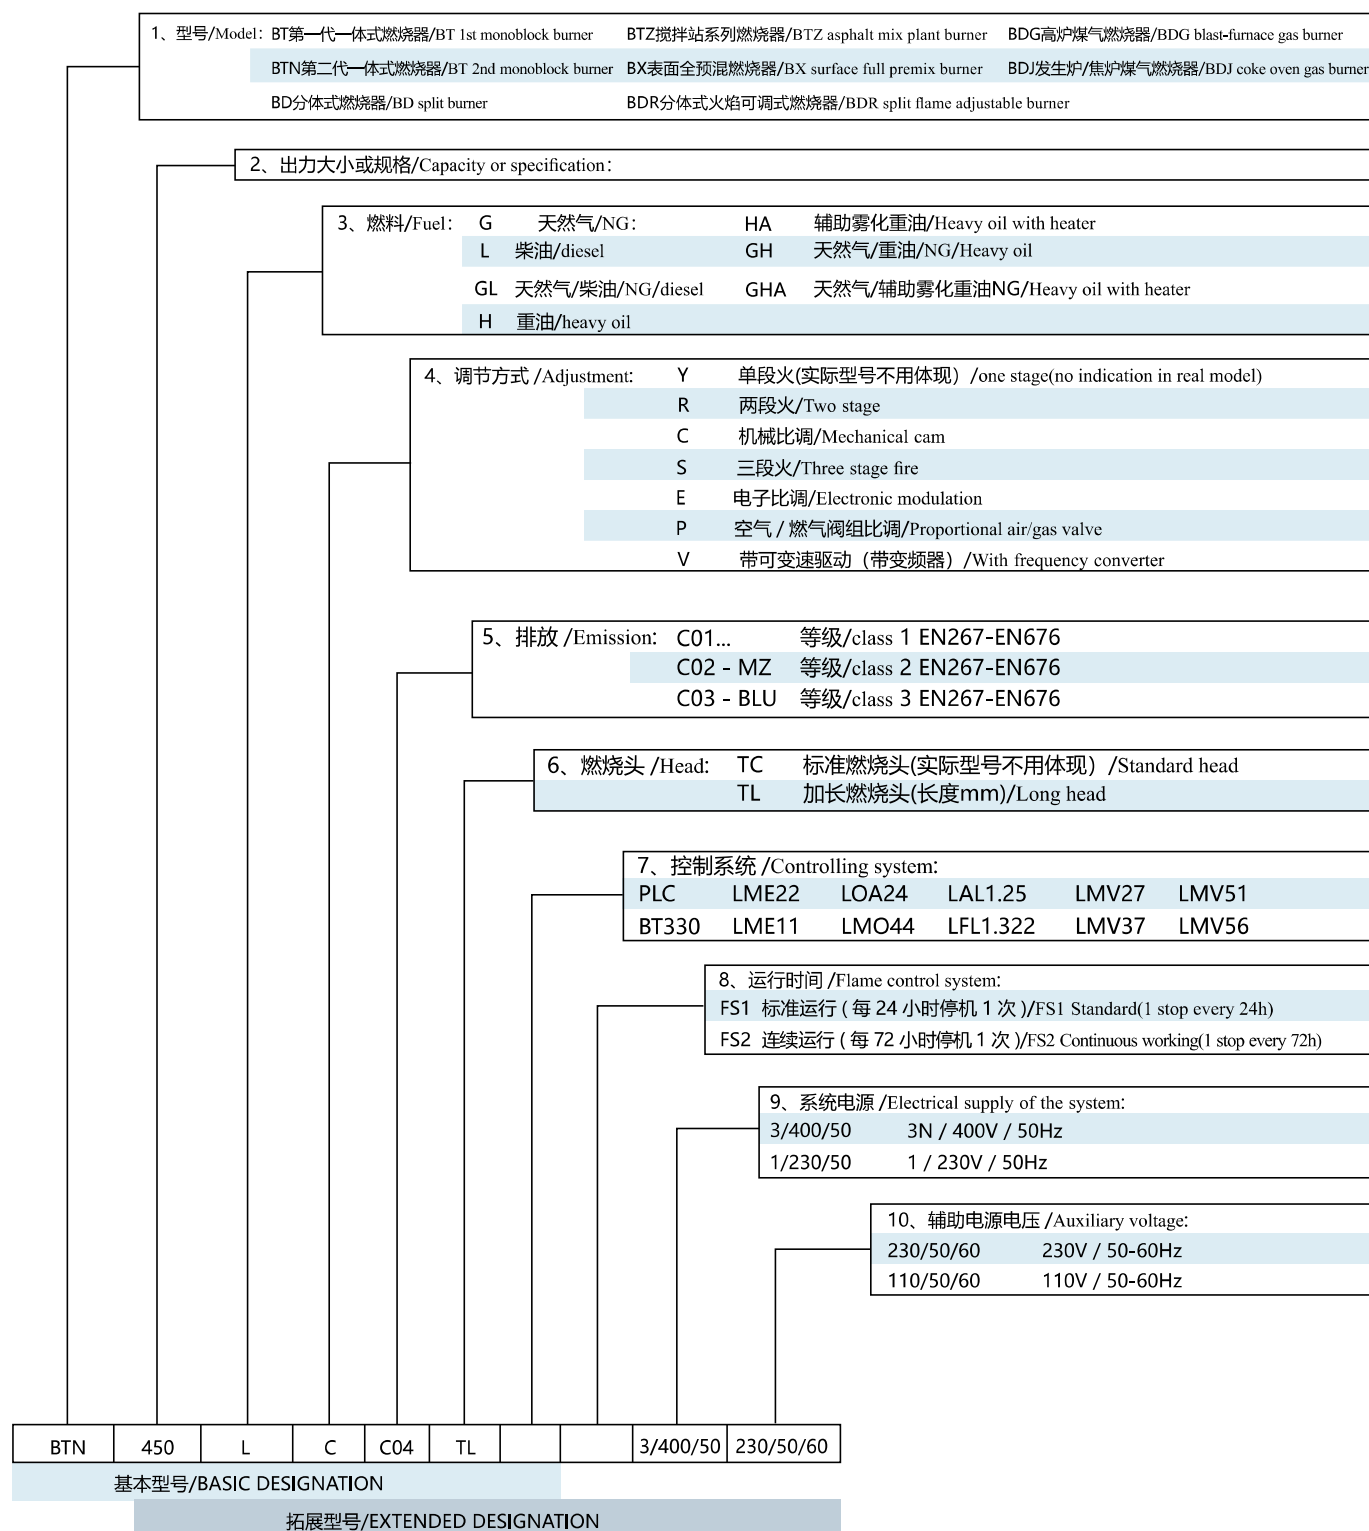

BT14L/LR/LW/LRW 单/双段火轻油燃烧器

技术性能及结构特征

Technical performance and structural characteristics

1. 轻油燃烧器。

2. 单/双段运行（开/关）。

3. 机械式压力雾化。

4. 通过调节燃烧空气和燃烧头，可以获得最佳的燃烧参数。

5. 无须把燃烧器从锅炉上拆下，就可直接取下雾化装置，维修保养方便。

6. 单段用手动调节空气流量

7. 二段火用液压调节器来进行第一、二段火空气流量调节。

8. 采用一个法兰和一个绝缘密封圈与锅炉链接固定。

9. 带流量调节装置的燃烧空气进口。

10.与各种锅炉法兰配对的滑动法兰，可以调整燃烧器伸入锅炉的位置。

11.带有钢制鼓风机和火焰盘的可调节燃烧头。

12.单相电机带动风机和油泵。

13.光敏电阻检测火焰。

14.标准配置的电气防护等级IP40。
1. Light oil burner.

2. Single/Two-stage operation (on/off).

3. High pressure mechanical atomisation of fuel using nozzle.

4. Ability to obtain optimal combustion values by regulating combustion air and blast-pipe.

5. No need to remove the burner from the boiler, you can directly remove the atomization device, easy maintenance.

6. Single-stage manual air flow regulation It is adjusted air flow manually at 1st fire.

7. Two-stage fire hydraulic regulator for the first and second stage fire air flow regulation.

8. A flange and an insulating sealing ring are used to link and fix the boiler.

9. Combustion air inlet with flow regulating device.

10.Sliding flanges paired with various boiler flanges can adjust the position of the burner into the boiler.

11.Adjustable combustion head with steel blast tube and flame disc

12.Single-phase motor drives fan and oil pump.


13.Photoresistor detects flame.

14.Electrical plant protection rating IP40.

功率 Power (kW)	型号 Model	订货编号 Order number	电源 Power supply	电机功率 Motor power (kW)	包装尺寸 package size (LxPxHmm)	重量 weight (kg)
89~172	BT14L	201 20 106	230V 50Hz	0.15	480x430x355mm	14.5
	BT14LR	201 20 200				16.5
89~172	BT14LW	201 20 107	230V 50Hz	0.15	480x430x355mm	15
	BT14LRW	201 20 201				18.5

外观尺寸图

Exterior dimensional drawing

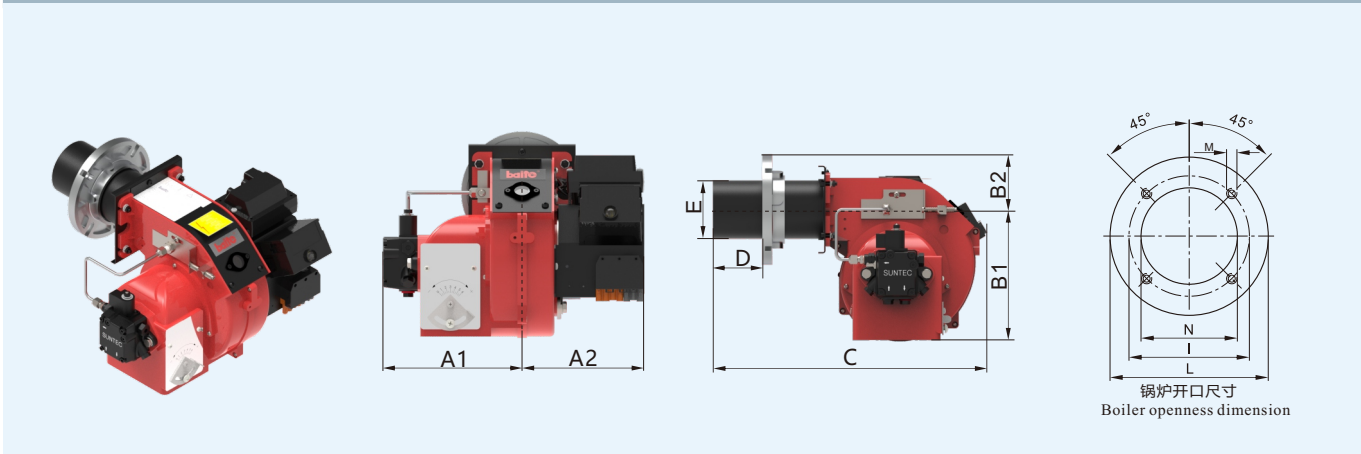

型 号 model	A1	A2	B1	B2	C	D	E	N	I	L	M
	mm	mm	mm	mm	mm	mm	Φmm	Φmm	mm	Φmm	M
BT14L	195	171	203	85	424	80~110	95	100	130-155	170	4-M8
BT14LR	195	171	203	85	424	80~110	95	100	130-155	170	4-M8
BT14LW	200	195	203	85	424	80~110	95	100	130-155	170	4-M8
BT14LRW	200	195	203	85	424	80~110	95	100	130-155	170	4-M8

BT14L/LR/LW/LRW One/Two stage Light Oil Burner



备选功能

Alternative function

加长的燃烧筒，可定制60Hz

Extended combustion cylinder, customizable 60Hz

标准配件


standard fittings

过滤器-软管-喷嘴-与锅炉配套的组件

Filter - Hose - Nozzle - assembly for boiler

曲线图

curve graph

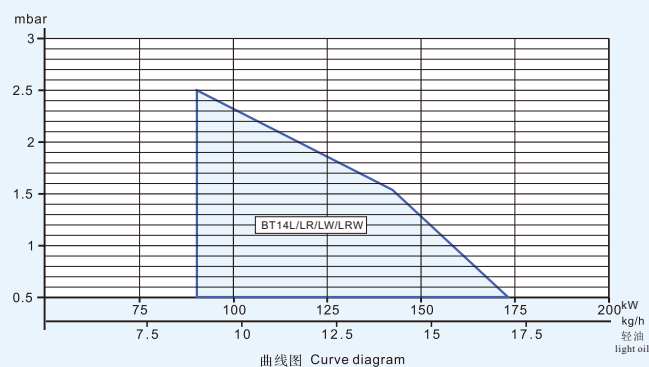



浙江百特燃烧器有限公司

ZHEJIANG BAITE BURNERS MANUFACTURE CO., LTD

地址/ADD: 浙江省乐清市象阳工业区百特路2号

NO.2 BAITE RD.XIANGYANG INDUSTRIAL PARK ,YUEQING CITY ,ZHEJIANG PROVINCE

电话/TEL: 0086-577-62655355 62652355

传真/FAX: 0086-577-62653955

服务热线/Hotline:

400 001 5556

网址/Web: www.baite.cn

邮箱/Mail: bt@baite.cn



请用微信扫一扫
进入公司官方网站

© 浙江百特燃烧器有限公司版权所有 2024 珍惜资源，善待环境

本目录所载产品尺寸、规格仅供参考，若有变更，恕不另行通知！以本公司提供的产品为准！

BAITE BURNERS KEEPS THE REVISION RIGHT WITHOUT INFORM IN ADVANCE.INCLUDING THE PRODUCT DIMENSION,SPECIFICATION!