

BEST GROUP

YOUR SATISFACTION OUR PRIDE

Dingzhou Office

Dingzhou City, Hebei Province, China
Email: info@chinabesthw.com
WhatsApp: +86 183 3106 1136
P: +86 312 2689 909
F: +86 312 2689 908

Shijiazhuang Office

No. 127, Guomao Building, Zhongshan
West Road, Shijiazhuang, Hebei,
China 050052
Email: tyne.liu@chinabesthw.com
WhatsApp: +86 183 3106 8342
P: +86 183 3106 8342

Ethiopia Office

Gelan Town, Addis Ababa, Ethiopia
P: +25 111 471 3342
T: +25 198 470 5322

Baoding Office

No. 1610, Huarui Science Park, Central
Swan Road, Baoding City, Hebei, China
Email: cherry.tang@chinabesthw.com
WhatsApp: +86 183 3106 1136
P: +86 312 5903 673
F: +86 312 5903 662

Yiwu Office


212 Wanglu Road, Yiwu City, Zhejiang, China
P: +86 579 8568 0726
T: +86 158 6894 9448

Future Office

Dubai City, UAE

Auckland City, New Zealand

NAIIL

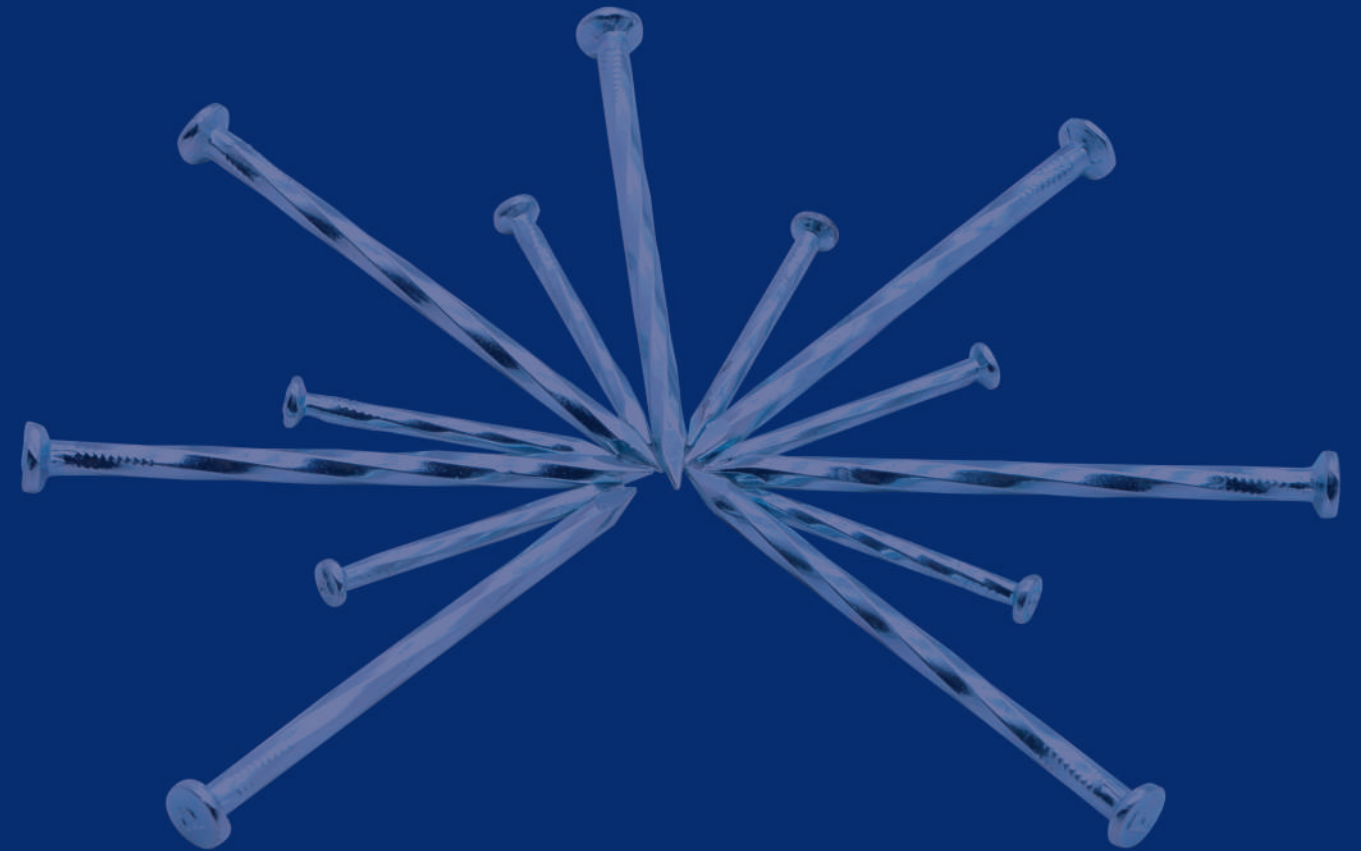

DINGZHOU BEST HARDWARE CO.,LTD

定州市百斯特金属制品有限公司

www.chinabesthw.com

BEST CORPORATE CULTURE

MISSION

To create product value, improve the quality of foreign trade services, and achieve the common development of customers, employees and enterprises.

VISION

To plan, target, organize, and speed up our organization to become the leader in the building materials industry and maximize its coverage of overseas markets.


VALUES

Diversity: Respecting the diversity and giving the best of composition.
Establishing an employee equity program. Respect: Treating others the way you want to be treated. Responsibility: Embrace opportunities to contribute.

COMPANY PROFILE

Dingzhou Best Hardware Co., Ltd. was established in 2004, is a professional production of nails, iron wire, wire mesh and other building metal products manufacturing enterprise. Our products are sold all over the world, enjoy a high reputation in the Middle East, Africa and Southeast Asia market especially. In order to better adapt to the current market development, our company had been forward-looking and successfully set up an office abroad in 2012, and had already invest in the local market with 5 factories at least till now.

We believe that we are an extension of our customer's business—a partner—willing to go above and beyond to help our customer's succeed. Because of this, our outstanding level of service is unmatched in the industry. That's a guarantee.

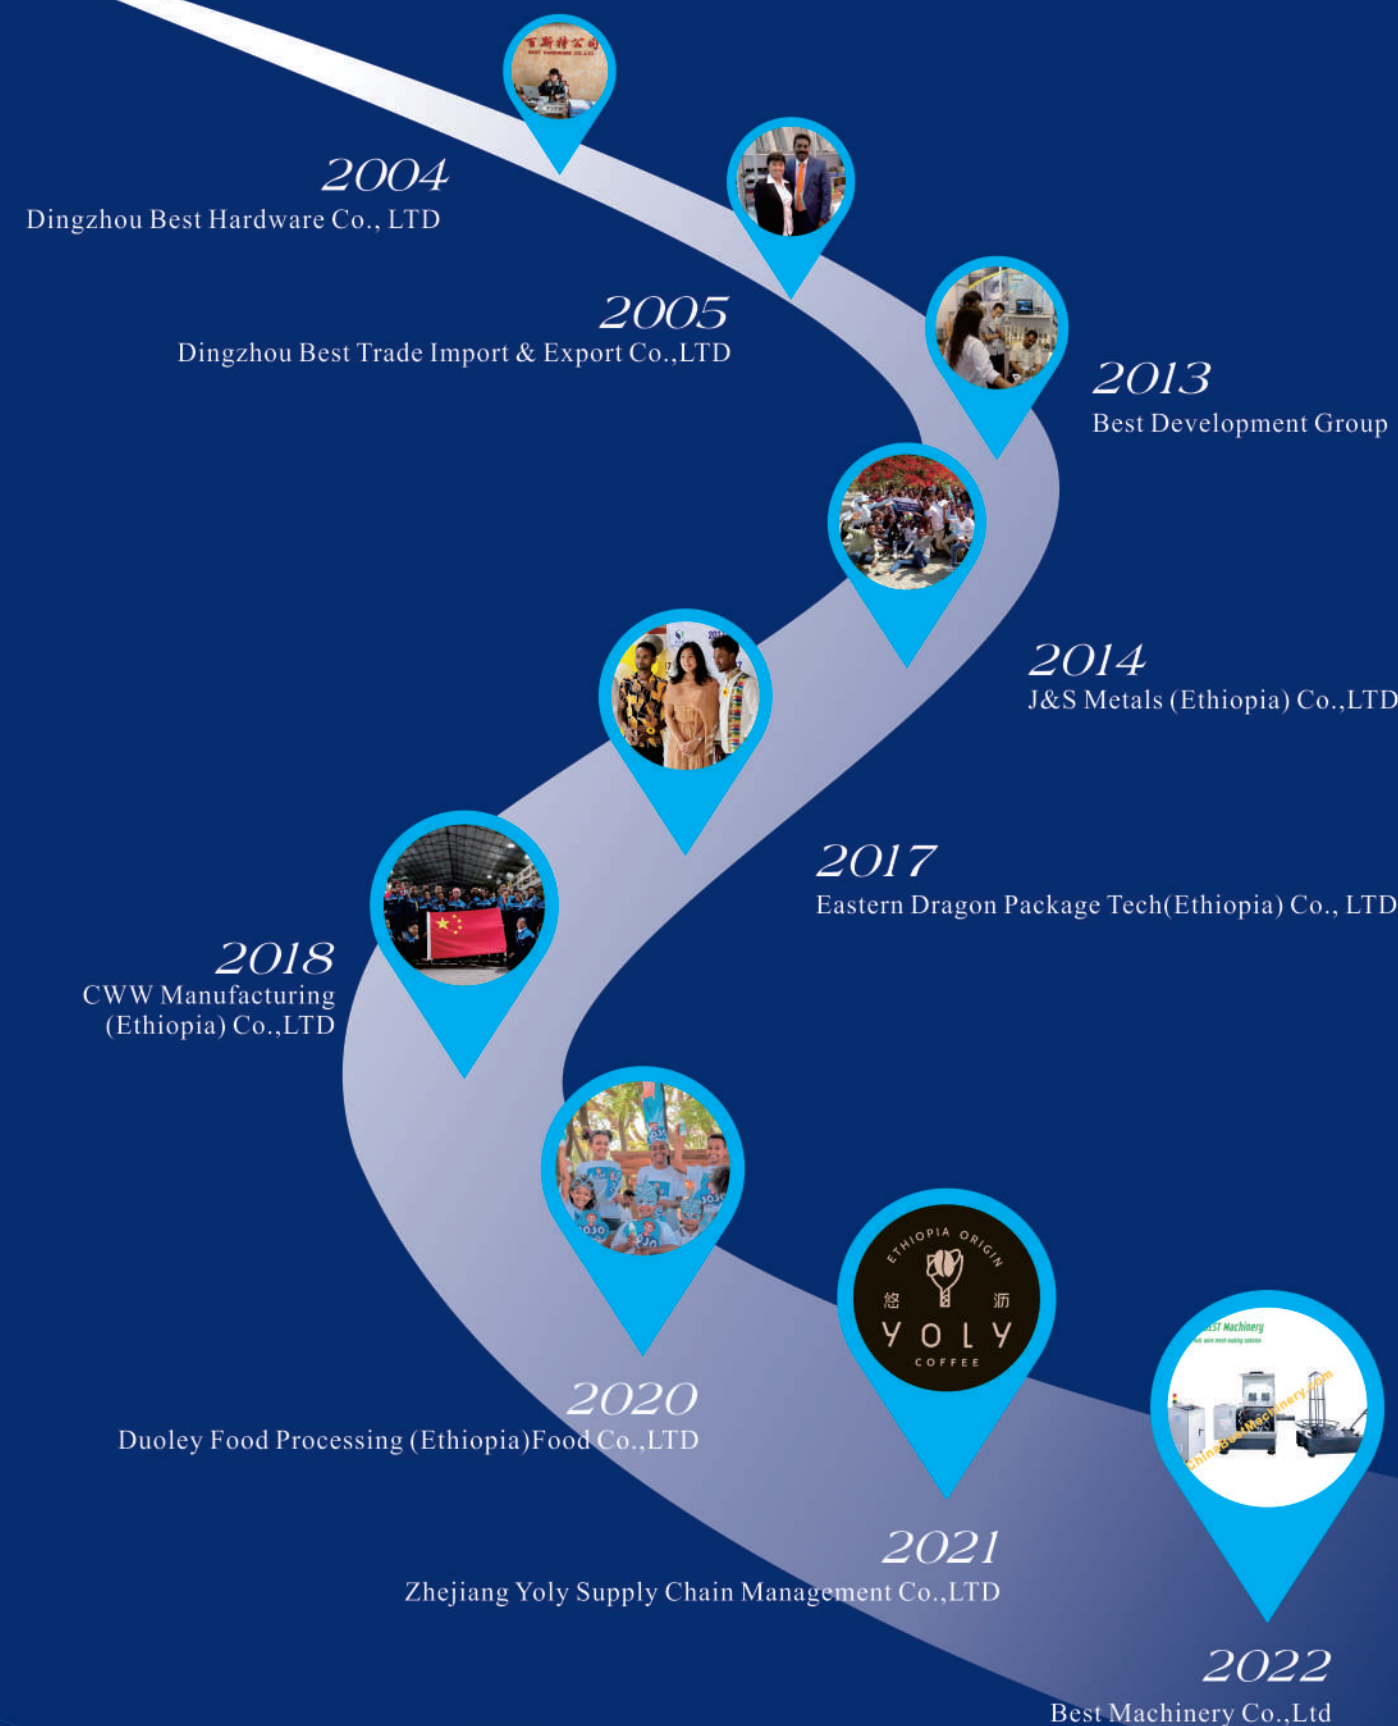

COMPANY DEVELOPMENT HISTORY

CONCRETE NAIL



- ▶ High quality carbon steel #55
- ▶ Smooth Shank, Spiral shank, Angular Spiral Shank, Straight Grooved Shank
- ▶ 1kg/box, 25boxes/ctn; 500g/box, 50boxes/ctn; 300g/box, 50boxes/ctn; 25kg/bag

Length(")	Length (mm)	Diameter(mm)
1"	25mm	3.0mm
1.5"	38mm	3.0mm
2"	50mm	3.8mm
2.5"	64mm	4.0mm
3"	75mm	4.5mm
4"	100mm	4.5mm
5"	125mm	4.5mm

BLACK STEEL NAIL



- ▶ High quality carbon steel #55
- ▶ Boil Black Surface
- ▶ Pan head, flat head, mushroom head

Length(")	Length (mm)	Diameter(mm)	Package
1"	25mm	2.5mm	40pcs/box 200box/ctn
1.5"	38mm	2.8mm	40pcs/box 120box/ctn
2"	50mm	2.8mm	40pcs/box 80box/ctn
2.5"	64mm	2.8mm	40pcs/box 70box/ctn
3"	75mm	2.8mm	40pcs/box 70box/ctn
4"	100mm	3.8mm	40pcs/box 40box/ctn

CABLE CLIP NAIL



- ▶ High quality carbon steel #55
- ▶ Flat head, smooth shank
- ▶ 25kg/woven bag, 25kg/ctn

Length (mm)	Diameter(mm)
16mm	1.4mm
16mm	1.6mm
18mm	1.8mm
20mm	2.2mm
38mm	2.7mm
44mm	2.8mm
52mm	3.1mm

COMMON NAIL



- ▶ High quality low carbon steel Q195 , Q235
- ▶ Flat head, round shank, diamond tip, polished surface, strongly anti-rusting
- ▶ 1kg/box, 25boxes/ctn; 1kg/bag, 20bags/ctn; 7kg/bag; 25kg/ctn

Length(")	Length (mm)	Diameter(mm)
1"	25 mm	1.6 mm
1 1/4"	30 mm	1.8 mm
1 1/2"	40 mm	2.2 mm
2"	50 mm	2.5 mm
2 1/2"	60 mm	2.8 mm
3"	70 mm	3.1 mm
4"	100 mm	4.1 mm


LOST HEAD NAIL



- ▶ High quality low carbon steel Q195 , Q235
- ▶ Headless, smooth and ring shank, sharp diamond point, polished surface
- ▶ 25kg/carton in bulk; 1kg/box, 25boxes/ctn; 500g/box, 50boxes/ctn

Size	Length (mm)	Diameter (mm)
1"16G	25.4	1.65
1-1/2"14G	38.1	2.11
2"12G	50.8	2.77
2-1/2"11G	63.5	3.06
3"10G	76.2	3.4
4"8G	101.6	4.11
5"6G	127	5.15
6"5G	150.4	5.58

SHOE TACKS NAIL

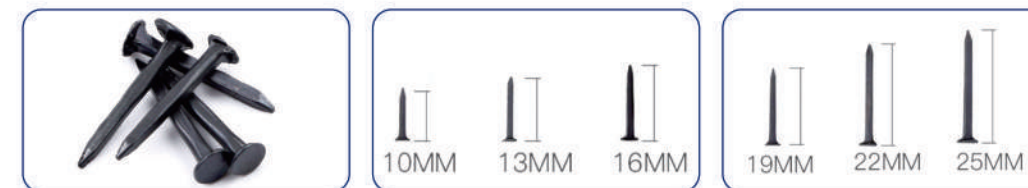

- ▶ low carbon steel Q195 , Q235
- ▶ Black square shank, good rust-preventing and fixing .
- ▶ 450g/box, 56boxes/ctn

Size (INCHXBWG)	Length (mm)	Shank Diameter (mm)
3/8x20	9.52	0.89
1/2x19	12.7	1.07
5/8x18	15.87	1.25
3/4x17	19.05	1.47
1x16	25.4	1.65

ROOFING NAIL



- Low Carbon Steel Q195/Q235
- Umbrella Head, all kinds of color head, galvanized surface, with rubber washer.
- 7lbs/box, 8boxes/ctn, 25kg/ctn, 50kg/gunny bag.

Specification	Length (mm)	Rod Diameter (mm)	Head Diameter (mm)
BWG8*2"	50.8	4.19	20
BWG8*2.5"	63.5	4.19	20
BWG9*2"	50.8	3.73	20
BWG9*2.5"	63.5	3.73	20
BWG9*3"	76.2	3.73	20
BWG10*1.75"	44.5	3.37	20
BWG10*2"	50.8	3.37	20
BWG10*2.5"	63.5	3.37	20

SCREW NAIL



ROOFING SCREW NAIL



- Low carbon steel Q195/Q235
- Galvanized Surface, screw shank
- 100pcs/bag, 10bags/ctn
- 100pcs/box, 10boxes/ctn

Length (mm)	Rod Diameter (mm)
65	4.0
75	4.0
75	4.5
90	4.5
90	5.0
120	5.0
120	6.0
150	6.0

COIL NAILS



- Q195, Q235, or according your request
- Yellow Paint or other colors, Polished, Galvanized.
- Smooth Shank, Ring Shank. Screw Shank. Diamond Point.

Length		Diameter	
(")	(mm)	(")	(mm)
1"-2"	25mm-50mm	0.083"	2.1mm
1.5"-2.25"	38mm-57mm	0.090"	2.3mm
1.77"-2.95"	45mm-75mm	0.099"	2.5mm
2.95"-3.54"	75mm-90mm	0.110"	2.8mm
3.94"	100mm	0.122"	3.1mm
5.12"	130mm	0.15"	3.8mm

CLOUT NAIL



- High quality low carbon steel Q195 , Q235
- Big round Head, Plain shank/spiral shank/ twisted shank/screw shank
- Polished Surface, electro/ hot dip galvanized, Yellow Paint or other colors.
- 1kg/box, 25boxes/ctn; 150g/plastic bucket, 40 bucket/ctn, 25kg/ctn

Size	Head Diameter	Head Thickness	Tip Length
20 x 2.80	8.25mm	0.80mm	4.5mm
25 x 2.80	8.25mm	0.80mm	4.5mm
30 x 2.80	8.25mm	0.80mm	4.5mm
40 x 2.80	8.25mm	0.80mm	4.5mm
50 x 2.80	8.25mm	0.80mm	4.5mm


SQUARE BOAT NAILS



- ▶ Low Carbon Steel Q195/Q235
- ▶ Polished/ Galvanized, Smooth Shank, Ring Shank.
Screw Shank. Diamond Point.
- ▶ 1kg/box, 25boxes/ctn;
25kg/bag; 25kg/ctn;
7lbs/box, 8 boxes/ctn

Diameter(mm)	Diameter(mm)
16 (1.65*1.65)	1
15 (1.83*1.83)	11/2
13 (2.41*2.41)	11/2
12 (2.77*2.77)	2
10 (3.40*3.40)	21/2
8 (4.19*4.19)	3
7 (4.57*4.57)	31/2
6 (5.16*5.16)	4
5 (5.59*5.59)	5
4 (6.05*6.05)	5

U TYPE NAILS

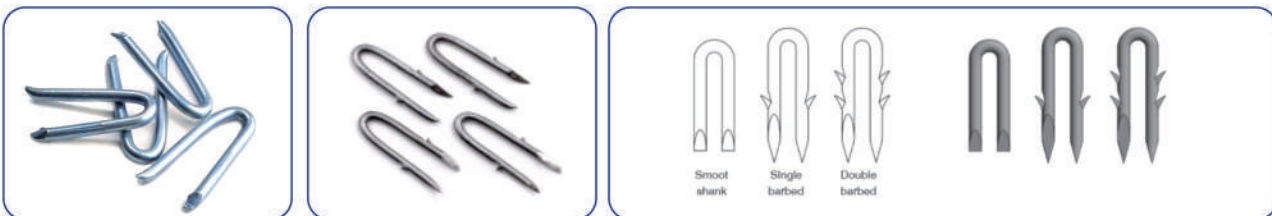

- ▶ Low Carbon Steel Q195/Q235
- ▶ Polished, EG, HDG, Black etc.
- ▶ Smooth, fluted, barbed, square, spiral,
twist Shank
- ▶ 500g/bag, 50bags/ctn;
20kg/ctn; 25kg/ctn
1kg/box, 25boxes/ctn

L (mm)	D (mm)	INCHXGAUGE
15	1.6	5/8x16
20	2	3/4x14
20	2.65	3/4x12
25	2.65	1x12
30	3.75	1-1/4x9
30	4	1-1/4x8
40	4	1-1/2x8
50	4	2x8
50	5	2x6


DRYWALL SCREW



- ▶ High quality carbon steel C1022A
- ▶ Flat head, fine thread, coarse thread
- ▶ Phosphate, galvanized
- ▶ Black, gray, yellow, zine
- ▶ Small box+carton, in bulk

Size	Pcs/Box	Weight/Pcs
3.5*13	1000	0.82
3.5*16	1000	0.95
3.5*19	1000	1.08
3.5*25	1000	1.3
3.5*32	700	1.64
3.5*38	600	1.88
3.5*45	500	2.15
3.5*50	400	2.43
3.5*63	350	2.97
3.5*75	300	3.49

HEX WASHER HEAD SELF DRILLING SCREW

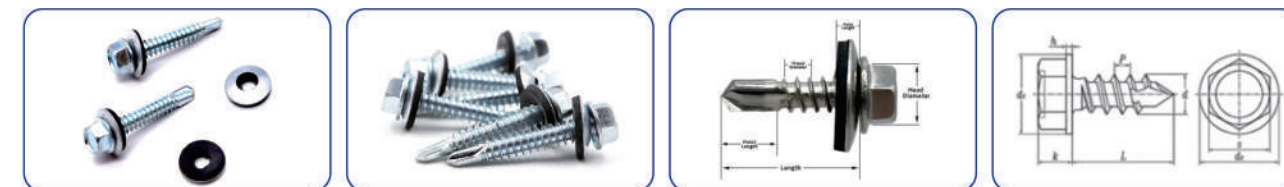

- ▶ Galvanized surface , high brightness,
strong corrosion resistance
- ▶ Carburize tempering treatment
- ▶ High locking performance


Thread\d		ST2.9	ST3.5	ST3.9	ST4.2	ST4.8	ST5.5	ST6.3
P	Pitch	1.1	1.3	1.3	1.4	1.6	1.8	1.8
h	Minimum	0.4	0.6	0.6	0.8	0.9	1	1
d _t	Max	6.3	8.3	8.3	8.8	10.5	11	13.5
	Minimum	5.8	7.6	7.6	8.1	9.8	10	12.2
k	Max	2.8	3.4	3.4	4.1	4.3	5.4	5.9
	Minimum	2.5	3	3	3.6	3.8	4.8	5.3
s	Max	4	5.5	5.5	7	8	8	10
	Minimum	3.82	5.32	5.32	6.78	7.78	7.78	9.78
d _p		2.3	2.8	3.1	3.6	4.1	4.8	5.8

TRUSS HEAD SELF DRILLING SCREW




- ▶ Galvanized surface , High brightness,
Strong corrosion resistance
- ▶ Carburize tempering treatment
- ▶ High locking performance

Length (mm)	Diameter(mm)
13mm	4.2mm
19mm	4.2mm
25mm	4.2mm
50mm	4.2mm
13mm	4.8mm
19mm	4.8mm
25mm	4.8mm



HEX NUT

- ▶ Standard: DIN934/UNC/BSW/ISO4032/GB55/DIN971
- ▶ Grade: 4/6/8/10/12
- ▶ Material: Q195/ML08AL/10B21/10B38/45#/40CR
- ▶ Surface: Electro/ Hot Dipped Galvanized/Black Oxide
- ▶ SIZE: M6-M60




HEX BOLT

- ▶ Standard: DIN933/DIN931/DIN960/DIN961/ISO4016
- ▶ Grade: 4.8/5.8/6.8
- ▶ Material: Q195/35CRMO/SCM435/45#/40CR
- ▶ Surface: Electro/ Hot Dipped Galvanized/Black Oxide
- ▶ SIZE: M6-M60



GI WASHER

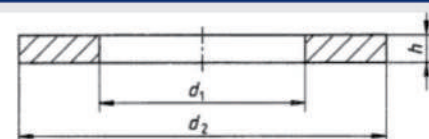

- ▶ Standard: DIN, DIN125, DIN9021, DIN440, USS, SAE
- ▶ Grade: 4.8/6.8/8.8/10.9/12.9
- ▶ Material: Brass, Stainless steel, Steel, Aluminium, alloy, Carbon
- ▶ Surface: White Zinc . Yellow Zinc. HDG
- ▶ SIZE: M3-M24

TEAM PHOTO



FACTORY PHOTO



CERTIFICATE

