

BEST GROUP
YOUR SATISFACTION OUR PRIDE

Dingzhou Office

Dingzhou City, Hebei Province, China
Email: info@chinabesthw.com
WhatsApp: +86 183 3106 1136
P: +86 312 2689 909
F: +86 312 2689 908

Shijiazhuang Office

No. 127, Guomao Building, Zhongshan
West Road, Shijiazhuang, Hebei,
China 050052
Email: tyne.liu@chinabesthw.com
WhatsApp: +86 183 3106 8342
P: +86 183 3106 8342

Ethiopia Office

Gelan Town, Addis Ababa, Ethiopia
P: +25 111 471 3342
T: +25 198 470 5322

Baoding Office

No. 1610, Huarui Science Park, Central
Swan Road, Baoding City, Hebei, China
Email: cherry.tang@chinabesthw.com
WhatsApp: +86 183 3106 1136
P: +86 312 5903 673
F: +86 312 5903 662

Yiwu Office

212 Wanglu Road, Yiwu City, Zhejiang, China
P: +86 579 8568 0726
T: +86 158 6894 9448

Future Office

Dubai City, UAE

Auckland City, New Zealand



WIRE

DINGZHOU BEST HARDWARE CO.,LTD

定州市百斯特金属制品有限公司

www.chinabesthw.com



「BEST CORPORATE CULTURE」

MISSION

To create product value, improve the quality of foreign trade services, and achieve the common development of customers, employees and enterprises.

VISION

To plan, target, organize, and speed up our organization to become the leader in the building materials industry and maximize its coverage of overseas markets.


VALUES

Diversity: Respecting the diversity and giving the best of composition.
Establishing an employee equity program. Respect: Treating others the way you want to be treated. Responsibility: Embrace opportunities to contribute.

COMPANY PROFILE

Dingzhou Best Hardware Co., Ltd. was established in 2004, is a professional production of nails, iron wire, wire mesh and other building metal products manufacturing enterprise. Our products are sold all over the world, enjoy a high reputation in the Middle East, Africa and Southeast Asia market especially. In order to better adapt to the current market development, our company had been forward-looking and successfully set up an office abroad in 2012, and had already invest in the local market with 5 factories at least till now.

We believe that we are an extension of our customer's business—a partner—willing to go above and beyond to help our customer's succeed. Because of this, our outstanding level of service is unmatched in the industry. That's a guarantee.

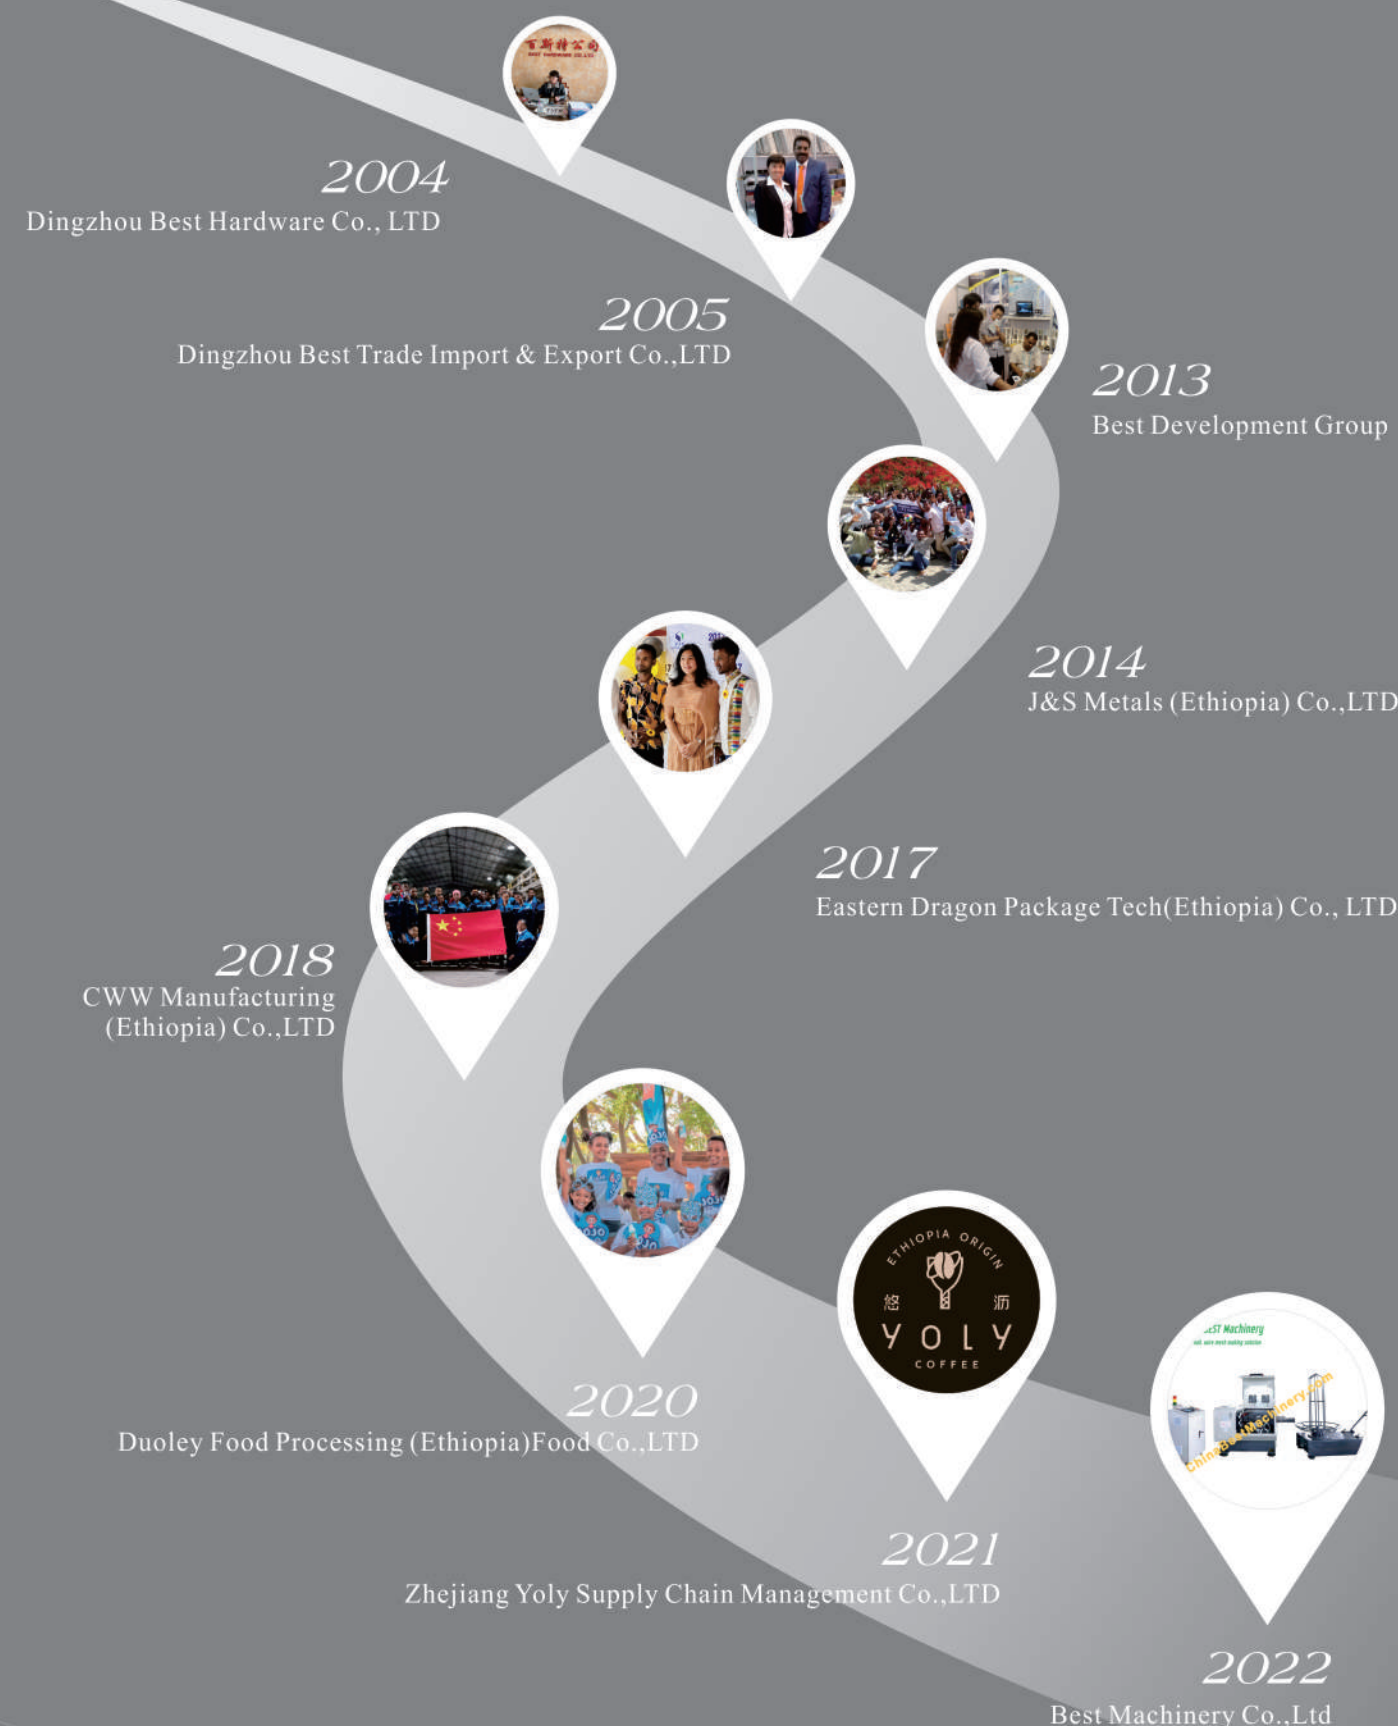

COMPANY DEVELOPMENT HISTORY



Electro Galvanized / Hot Dipped Galvanized Iron Wire

- **Material:**
High quality low carbon steel wire Q195
- **Wire diameter:** BWG26-BWG8
- **Tensile strength:** 350-550N/mm²
- **Packing:**
1kg/roll 10rolls/bundle,
10kg/roll,
25kg/roll,
1kg/roll, 20rolls/ctn,
25kg/spool
.....
Wrapped with PVC film inside, outside hessian cloth or woven cloth.



Galvanized Spool Wire



- **Feature and application:**
Widely used by landscapers, building, weaving the hardware cloth and mesh. Galvanized wire has good flexibility and toughness. With zinc coating thickness, corrosion resistance and other characteristics.



Black Annealed Soft Iron Wire

- **Material:**
High quality low carbon steel wire Q195
- **Wire diameter:** BWG25-BWG6 (0.5mm-5.0mm)
- **Tensile strength:** 35-70kg/mm²
- **Packing:**
10kg/roll, 25kg/roll,
1kg/roll, 10rolls/ctn,
20rolls/ctn
.....
Wrapped with PVC film inside, outside hessian cloth or woven cloth.



Twisted Black Annealed Wire



- **Feature and application:**
Softness and pliability, strong breaking strength, coated with anti-corrosion oil. Hard to rust. Mainly used for binding materials, daily use and used as binding wire for construction.

PVC Coated Iron Wire

- **Material :**
High quality low carbon steel wire Q195.
- **Colors available:**
Dark, green, black, white, blue, green or other colors.
- **Coil weight:**
4kg/coil,
10kg/coil,
25kg/coil,
.....
- **Packing:**
Plastic film inside, hessian /woven cloth outside.



Specification

Before coated (inside wire diameter)	After coated (outside wire diameter)
0.6MM	1.0MM
0.8MM	1.2MM
0.9MM	1.3MM
1.0MM	1.6MM
1.2MM	2.0MM
1.4MM	2.2MM
Note: Above-mentioned is the standard specification, special one can be customized.	

Razor Barbed Wire

- **Material:**
Galvanized wire, stainless steel.
- **Packing:** waterproof paper inside and woven bag outside.
- **Surface treatment:** Electro galvanized, Hot dipped galvanized, PVC coated.
- **Application:** protection in mines, gardens and apartments, frontier and sentry defence, and enclosure of prisons.



Specification

Reference	Blade style	Thicknese	Wire diameter	Barb length	Barb width	Barb spacing
number		(mm)	(mm)	(mm)	(mm)	(mm)
BTO-10		0.5±0.05	2.5±0.1	10±1	13±1	26±1
BTO-12		0.4±0.05	2.5±0.1	12±1	15±1	26±1
BTO-15		0.4±0.05	2.5±0.1	15±1	15±1	33±1
BTO-22		0.4±0.05	2.5±0.1	22±1	15±1	34±1
BTO-30		0.4±0.05	2.5±0.1	30±1	18±1	45±1
BTO-25		0.4±0.05	2.5±0.1	25±1	16±1	40±1
BTO-60/CBT-60		0.5±0.05	2.5±0.1	60±2	32±2	100±2
BTO-65/CBT-65		0.5±0.05	2.5±0.1	65±2	21±2	100±2

Barbed Wire


- **Material:**
High quality low carbon steel wire Q195
- **Surface treatment:** Electro galvanized, hot-dipped galvanized, PVC/PE coated.
- **Common packing:** Wooden pallet, wooden shaft, cardboard box, plastic woven bag
- **Application:** Grassland boundary, railway, highway isolation protection.



Specification				
Type	Wire Gauge (SWG)		Barb Distance (cm)	Barb Length (cm)
Electric Galvanized Barbed Wire; Hot-dip zinc plating barbed wire	10# x 12#		7.5-15	1.5-3
	12# x 12#			
	12# x 14#			
	14# x 14#			
	14# x 16#			
	16# x 16#			
	16# x 18#			
PVC coated barbed wire; PE barbed wire	before coating	after coating	7.5-15	1.5-3
	1.0mm-3.5mm	1.4mm-4.0mm		
	BWG11#-20#	BWG8#-17#		
	SWG11#-20#	SWG8#-17#		
PVC/PE coating thickness: 0.4mm-0.6mm; different colors or length are available at customers request.				

Galvanized Oval Wire

- Galvanized Oval Wire is divided into
Standard Zinc hot dipped galvanized oval wire and Super Zinc hot dipped galvanized oval wire.
- As high tensile strength structures, which is corrosion, rust resistance, widely used by landscapers, craft makers, building and constructions.

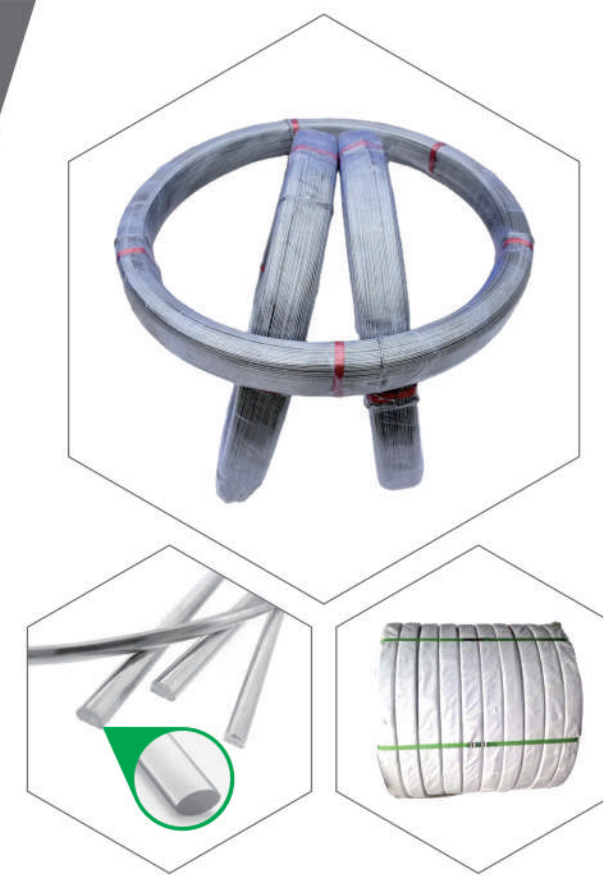


Specification							
	Item Size	Diameter	Min Breaking load	Zinc Coating	Diameter Tolerance	Coil Length	Coil Weight
Oval High Carbon Steel wire	19/17	3.9*3.0mm	1200KGF	Super 180-210g/m ²	±0.06mm	600M	36kg
	18/16	3.4*2.7mm	900KGF		±0.06mm	800M	
	17/15	3.0*2.4mm	800KGF	Standard 40-60g/m ²	±0.06mm	1000M/1250M	37kg
	17/15	3.0*2.4mm	725KGF		±0.06mm	1000M/1250M	43kg
	16/14	2.7*2.2mm	600KGF		±0.06mm	1000M/1250M	45kg
	15/13	2.4*2.2mm	500KGF		±0.06mm	1500M	50kg
	14/12	2.2*1.8mm	400KGF		±0.06mm	1800M/1900M	
Oval Low Carbon Iron Wire	N12	2.4*2.8mm	500Mpa	Min 50g/m ²	±0.06mm	465M/580M	25kg
	N6	4.55*5.25	500Mpa	Min 50g/m ²	±0.06mm	170M	25kg
Note: Other specifications also can be customized according to customer's requirements.							



Tomato Stent / Tomato growing spiral Wires

- **Product name:** Tomato Spiral Wire, Spiral tomato support, plant support wire
- **Material:** Steel Wire
- **Diameter:** 5.5mm-8.0mm
- **Length:** 1.5m-2.4m
- **Surface treatment:**
Galvanized, PVC coated
- **Packing:**
5 or 10pcs/bundle, then in pallet or carton

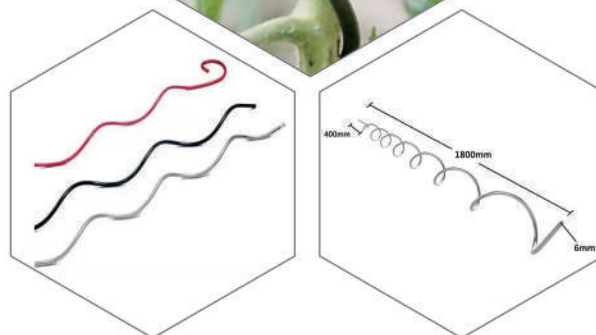

Specification

8mm x 1.8m	8mm x 1.6m	8mm x 1.5m	8mm x 1.1m
7mm x 1.8m	7mm x 1.6m	7mm x 1.5m	7mm x 1.1m
6mm x 1.8m	6mm x 1.6m	6mm x 1.5m	6mm x 1.1m
5.5mm x 1.8m	5.5mm x 1.6m	5.5mm x 1.5m	5.5mm x 1.1m



Team Photo



Factory Photo



Certificate

