


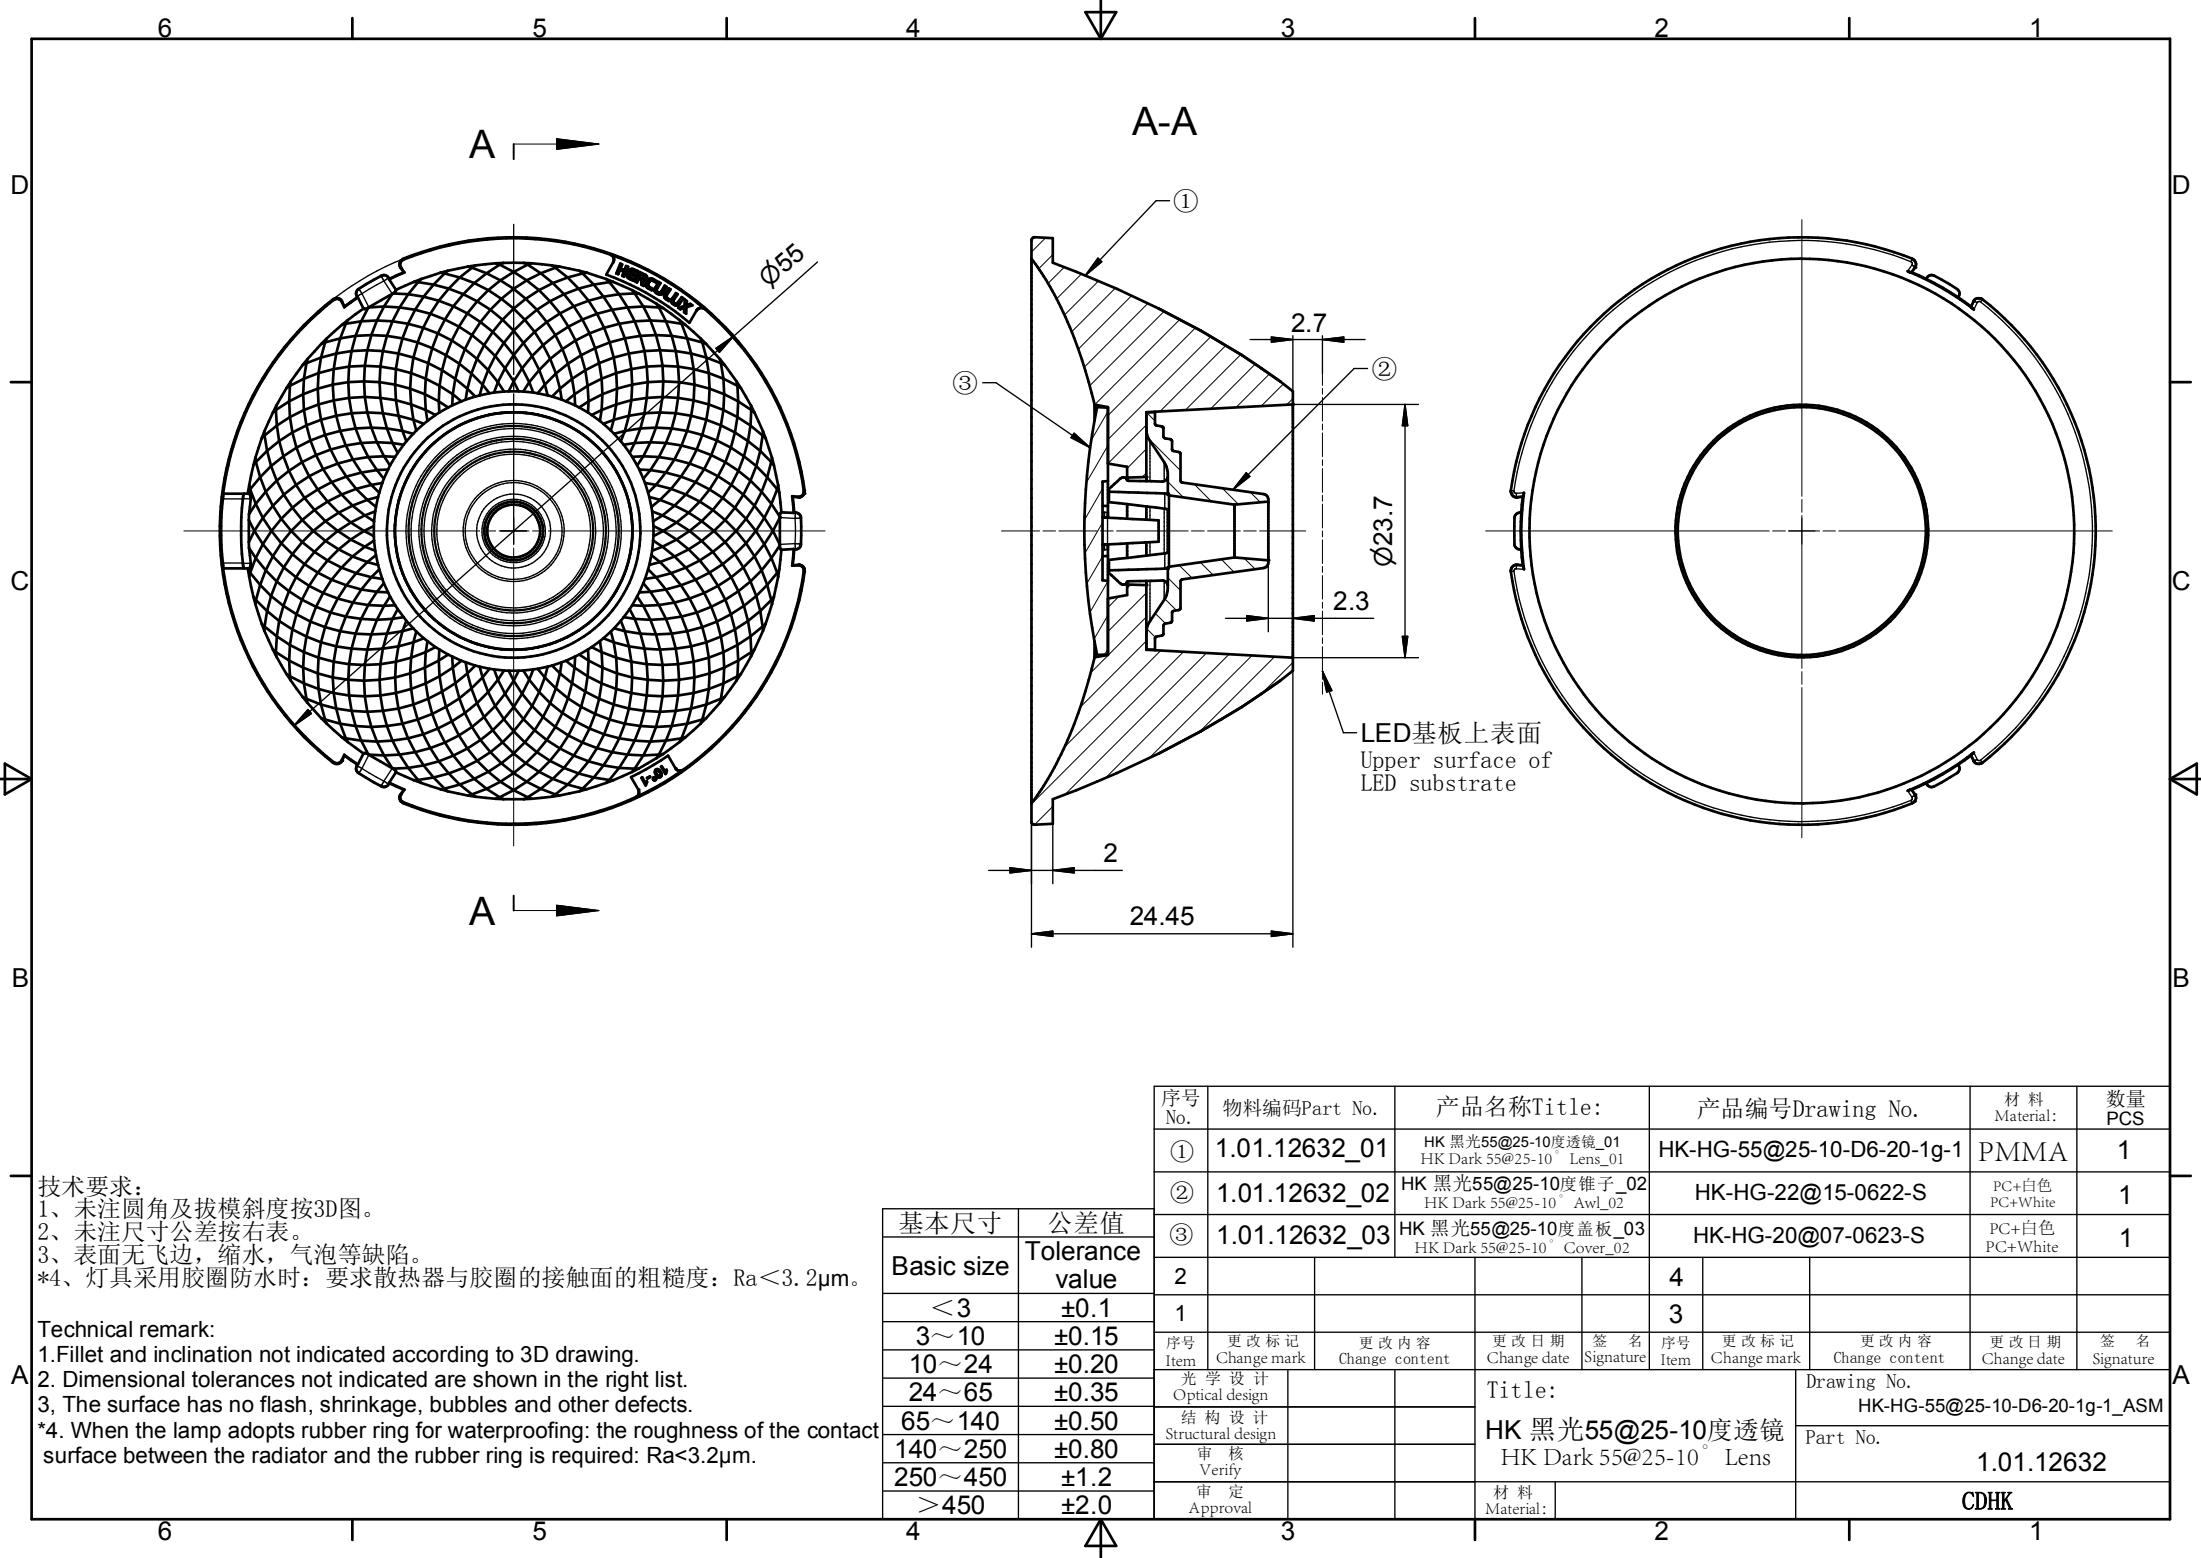

技术要求:
1、未注圆角及拔模斜度按3D图。
2、未注尺寸公差按右表。
3、表面无飞边, 缩水, 气泡等缺陷。
*4、灯具采用胶圈防水时: 要求散热器与胶圈的接触面的粗糙度: Ra<3.2μm。

Technical remark:
1.Fillet and inclination not indicated according to 3D drawing.
2. Dimensional tolerances not indicated are shown in the right list.
3. The surface has no flash, shrinkage, bubbles and other defects.
*4. When the lamp adopts rubber ring for waterproofing: the roughness of the contact surface between the radiator and the rubber ring is required: Ra<3.2μm.

基本尺寸	公差值
Basic size	Tolerance value
<3	±0.1
3~10	±0.15
10~24	±0.20
24~65	±0.35
65~140	±0.50
140~250	±0.80
250~450	±1.2
>450	±2.0

序号 No.	物料编码Part No.		产品名称Title:		产品编号Drawing No.			材料 Material:	数量 PCS
①	1.01.12632_01		HK 黑光55@25-10度透镜_01 HK Dark 55@25-10° Lens_01		HK-HG-55@25-10-D6-20-1g-1			PMMA	1
②	1.01.12632_02		HK 黑光55@25-10度锥子_02 HK Dark 55@25-10° Awl_02		HK-HG-22@15-0622-S			PC+白色 PC+White	1
③	1.01.12632_03		HK 黑光55@25-10度盖板_03 HK Dark 55@25-10° Cover_02		HK-HG-20@07-0623-S			PC+白色 PC+White	1
2					4				
1					3				
序号 Item	更改标记 Change mark	更改内容 Change content	更改日期 Change date	签 名 Signature	序号 Item	更改标记 Change mark	更改内容 Change content	更改日期 Change date	签 名 Signature
光 学 设 计 Optical design			Title: HK 黑光55@25-10度透镜 HK Dark 55@25-10° Lens			Drawing No. HK-HG-55@25-10-D6-20-1g-1_ASM			
结 构 设 计 Structural design						Part No. 1.01.12632			
审 核 Verify									
审 定 Approval			材料 Material:		CDHK				