


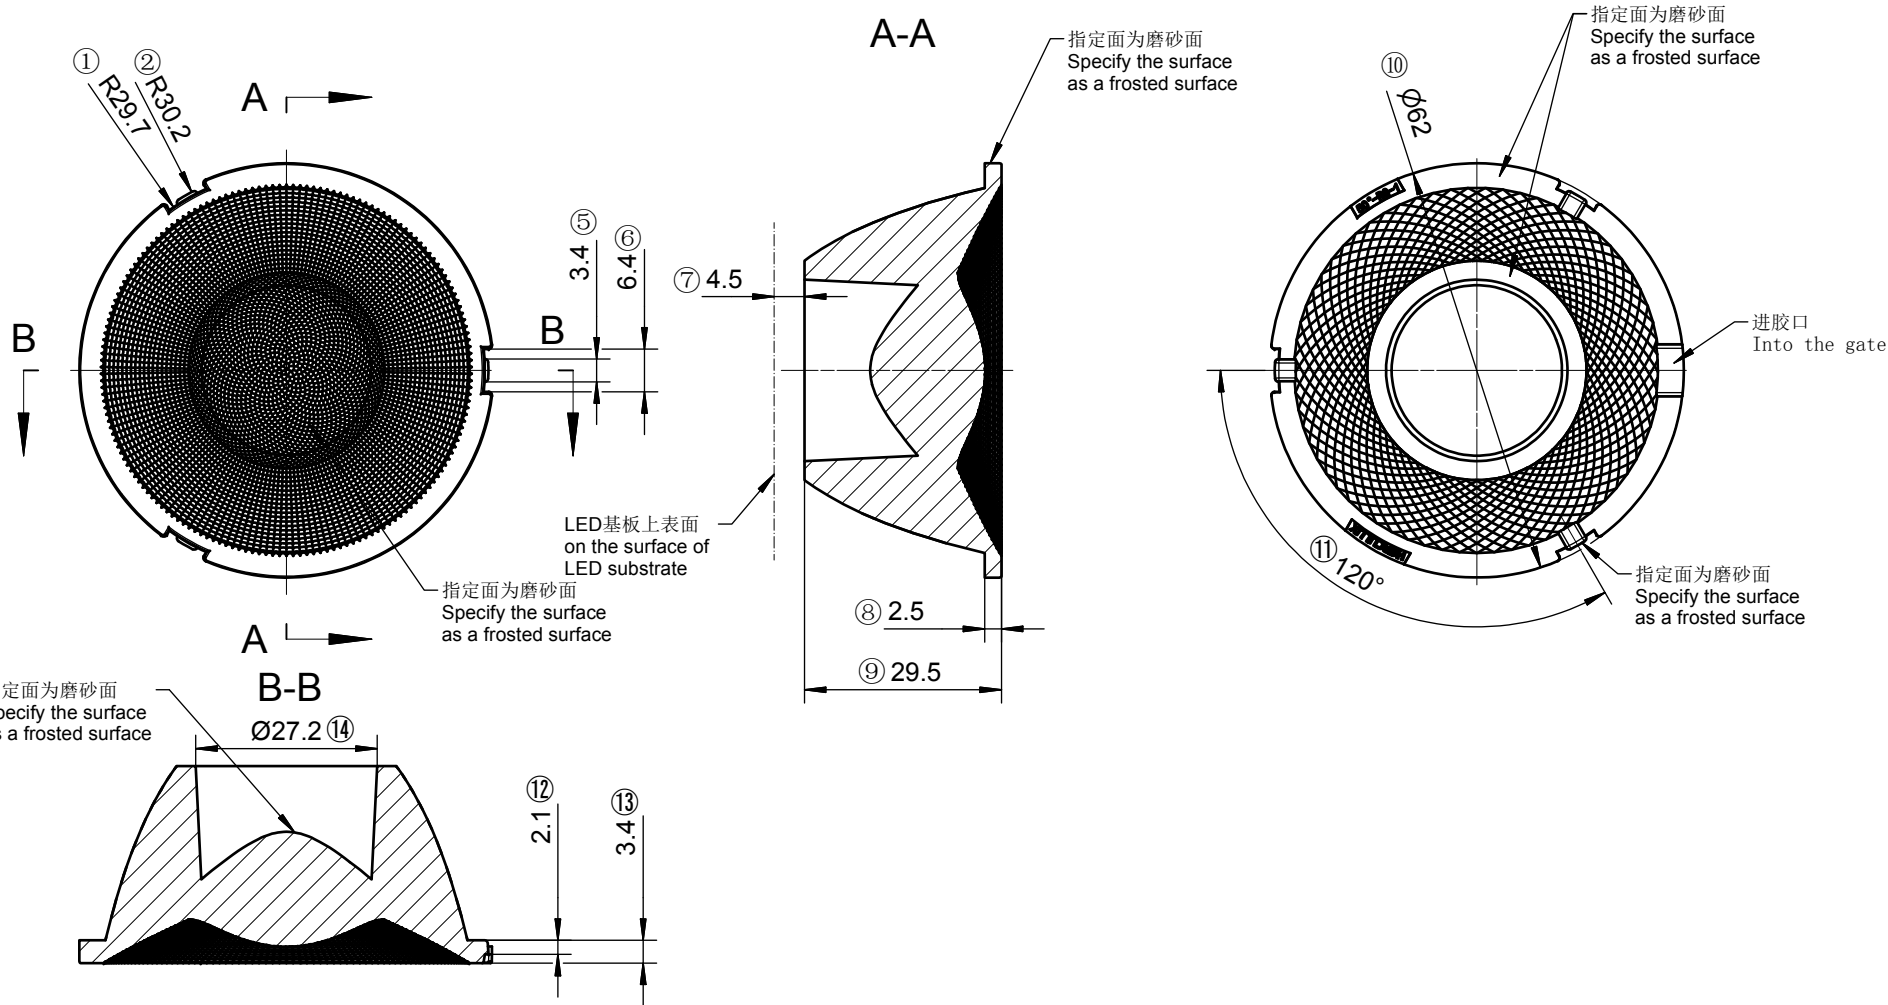

技术要求:
1、未注圆角及拔模斜度按3D图。
2、未注尺寸公差按右表。
3、表面无飞边，缩水，气泡等缺陷。
*4、灯具采用胶圈防水时：要求散热器与胶圈的接触面的粗糙度：Ra<3.2μm

Technical remark:
1.Fillet and inclination not indicated according to 3D drawing.
2. Dimensional tolerances not indicated are shown in the right list.
3. The surface has no flash, shrinkage, bubbles and other defects.
*4. When the lamp adopts rubber ring for waterproofing: the roughness of the contact surface between the radiator and the rubber ring is required: Ra<3.2μm

基本尺寸		公差值		2		4	
Basic size		Tolerance value		1		3	
<3		±0.1		序号		更改日期	
3~10		±0.15		Item		Change date	
10~24		±0.20		更改标记		签 名	
24~65		±0.35		更改内容		Item	
65~140		±0.50		光学设计		更改标记	
140~250		±0.80		结构设计		更改内容	
250~450		±1.2		审核		更改日期	
>450		±2.0		Verify		签 名	
				审定		更改日期	
				Approval		更改内容	
						Title:	
						HK 柔光62@30-50度透镜	
						HK Monny 62@30-50 degree lens	
						Drawing No.	
						HK-RG-62@30-50-D9-21-1g-1	
						Part No.	
						1.01.13056	
						CDHK	
						材料	
						PC	