


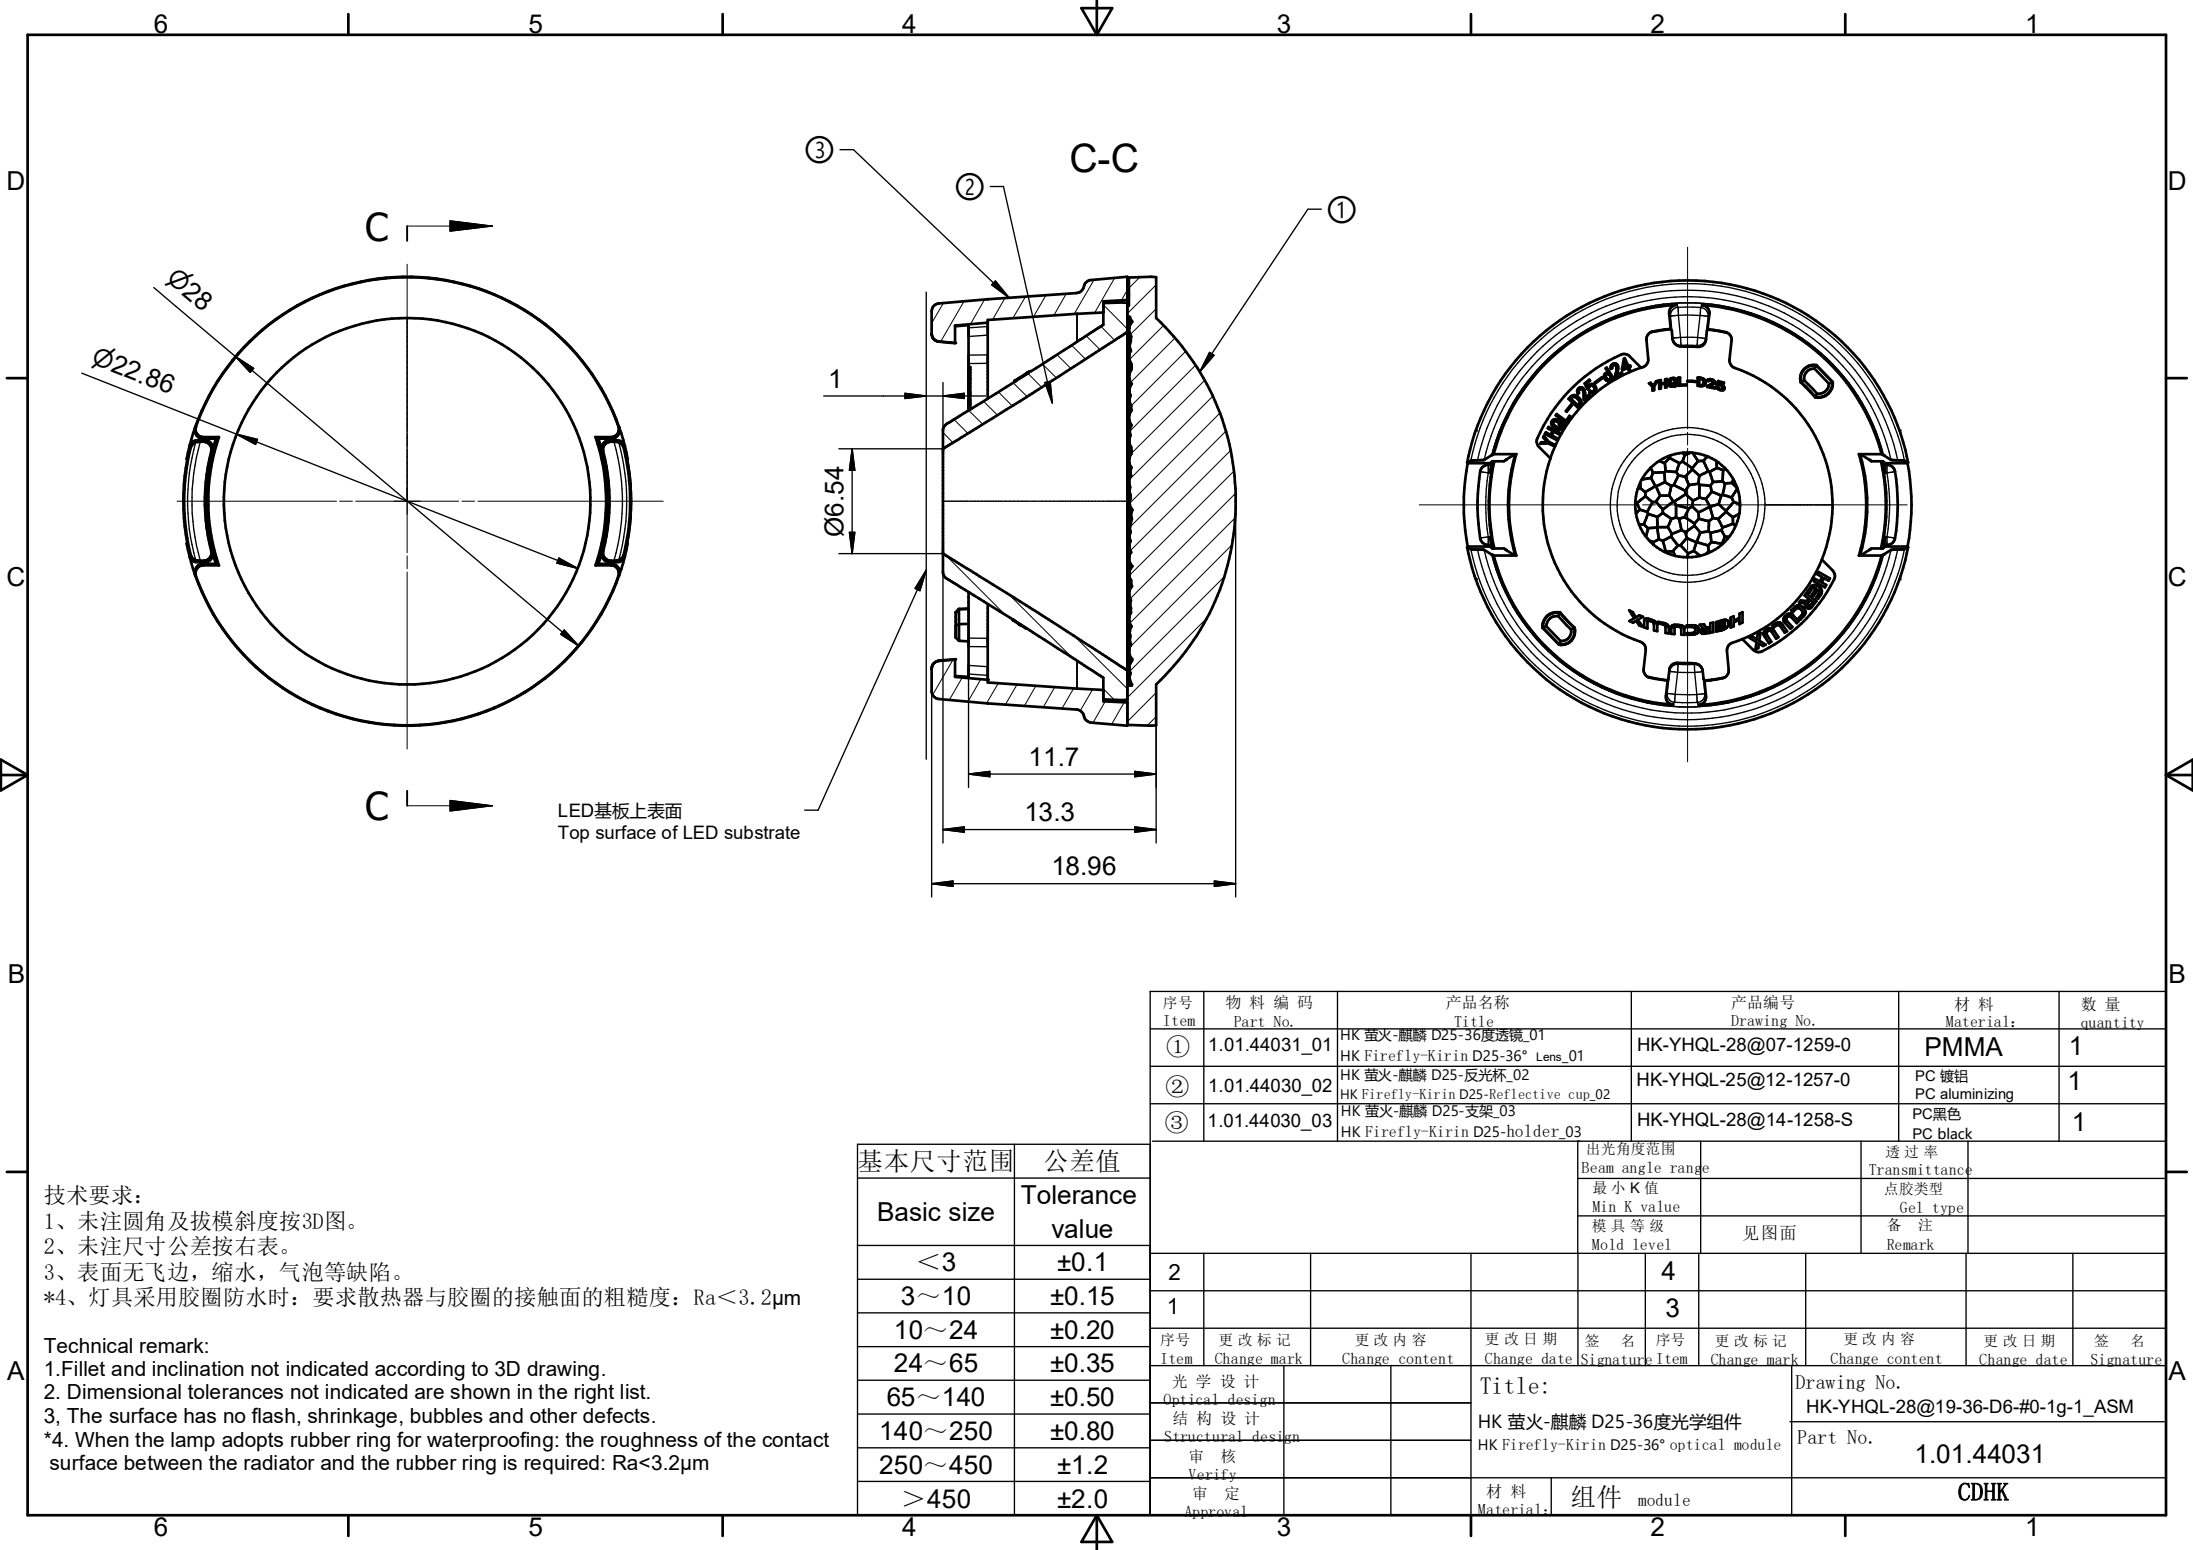

技术要求:
1、未注圆角及拔模斜度按3D图。
2、未注尺寸公差按右表。
3、表面无飞边, 缩水, 气泡等缺陷。
*4、灯具采用胶圈防水时: 要求散热器与胶圈的接触面的粗糙度: $Ra<3.2\mu m$

Technical remark:
1.Fillet and inclination not indicated according to 3D drawing.
2. Dimensional tolerances not indicated are shown in the right list.
3, The surface has no flash, shrinkage, bubbles and other defects.
*4. When the lamp adopts rubber ring for waterproofing: the roughness of the contact surface between the radiator and the rubber ring is required: $Ra<3.2\mu m$

基本尺寸范围		公差值
Basic size		Tolerance value
<3		± 0.1
3~10		± 0.15
10~24		± 0.20
24~65		± 0.35
65~140		± 0.50
140~250		± 0.80
250~450		± 1.2
>450		± 2.0

序号 Item	物料编码 Part No.	产品名称 Title		产品编号 Drawing No.		材料 Material:	数量 quantity			
①	1.01.44031_01	HK 萤火-麒麟 D25-36度透镜_01 HK Firefly-Kirin D25-36° Lens_01		HK-YHQL-28@07-1259-0		PMMA	1			
②	1.01.44030_02	HK 萤火-麒麟 D25-反光杯_02 HK Firefly-Kirin D25-Reflective cup_02		HK-YHQL-25@12-1257-0		PC 镀铝 PC aluminizing	1			
③	1.01.44030_03	HK 萤火-麒麟 D25-支架_03 HK Firefly-Kirin D25-holder_03		HK-YHQL-28@14-1258-S		PC黑色 PC black	1			
				出光角度范围 Beam angle range		透 过 率 Transmittance				
				最小 K 值 Min K value		点胶类型 Gel type				
				模 具 等 级 Mold level	见 图 面	备 注 Remark				
2				4						
1				3						
序号 Item	更改标记 Change mark	更改内容 Change content		更改日期 Change date	签 名 Signature	序号 Item	更改标记 Change mark	更改内容 Change content	更改日期 Change date	签 名 Signature
光 学 设 计 Optical design				Title: HK 萤火-麒麟 D25-36度光学组件 HK Firefly-Kirin D25-36° optical module		Drawing No. HK-YHQL-28@19-36-D6-#0-1g-1_ASM				
结 构 设 计 Structural design						Part No. 1.01.44031				
审 核 Verify										
审 定 Approval				材 料 Material:	组 件 module	CDHK				