


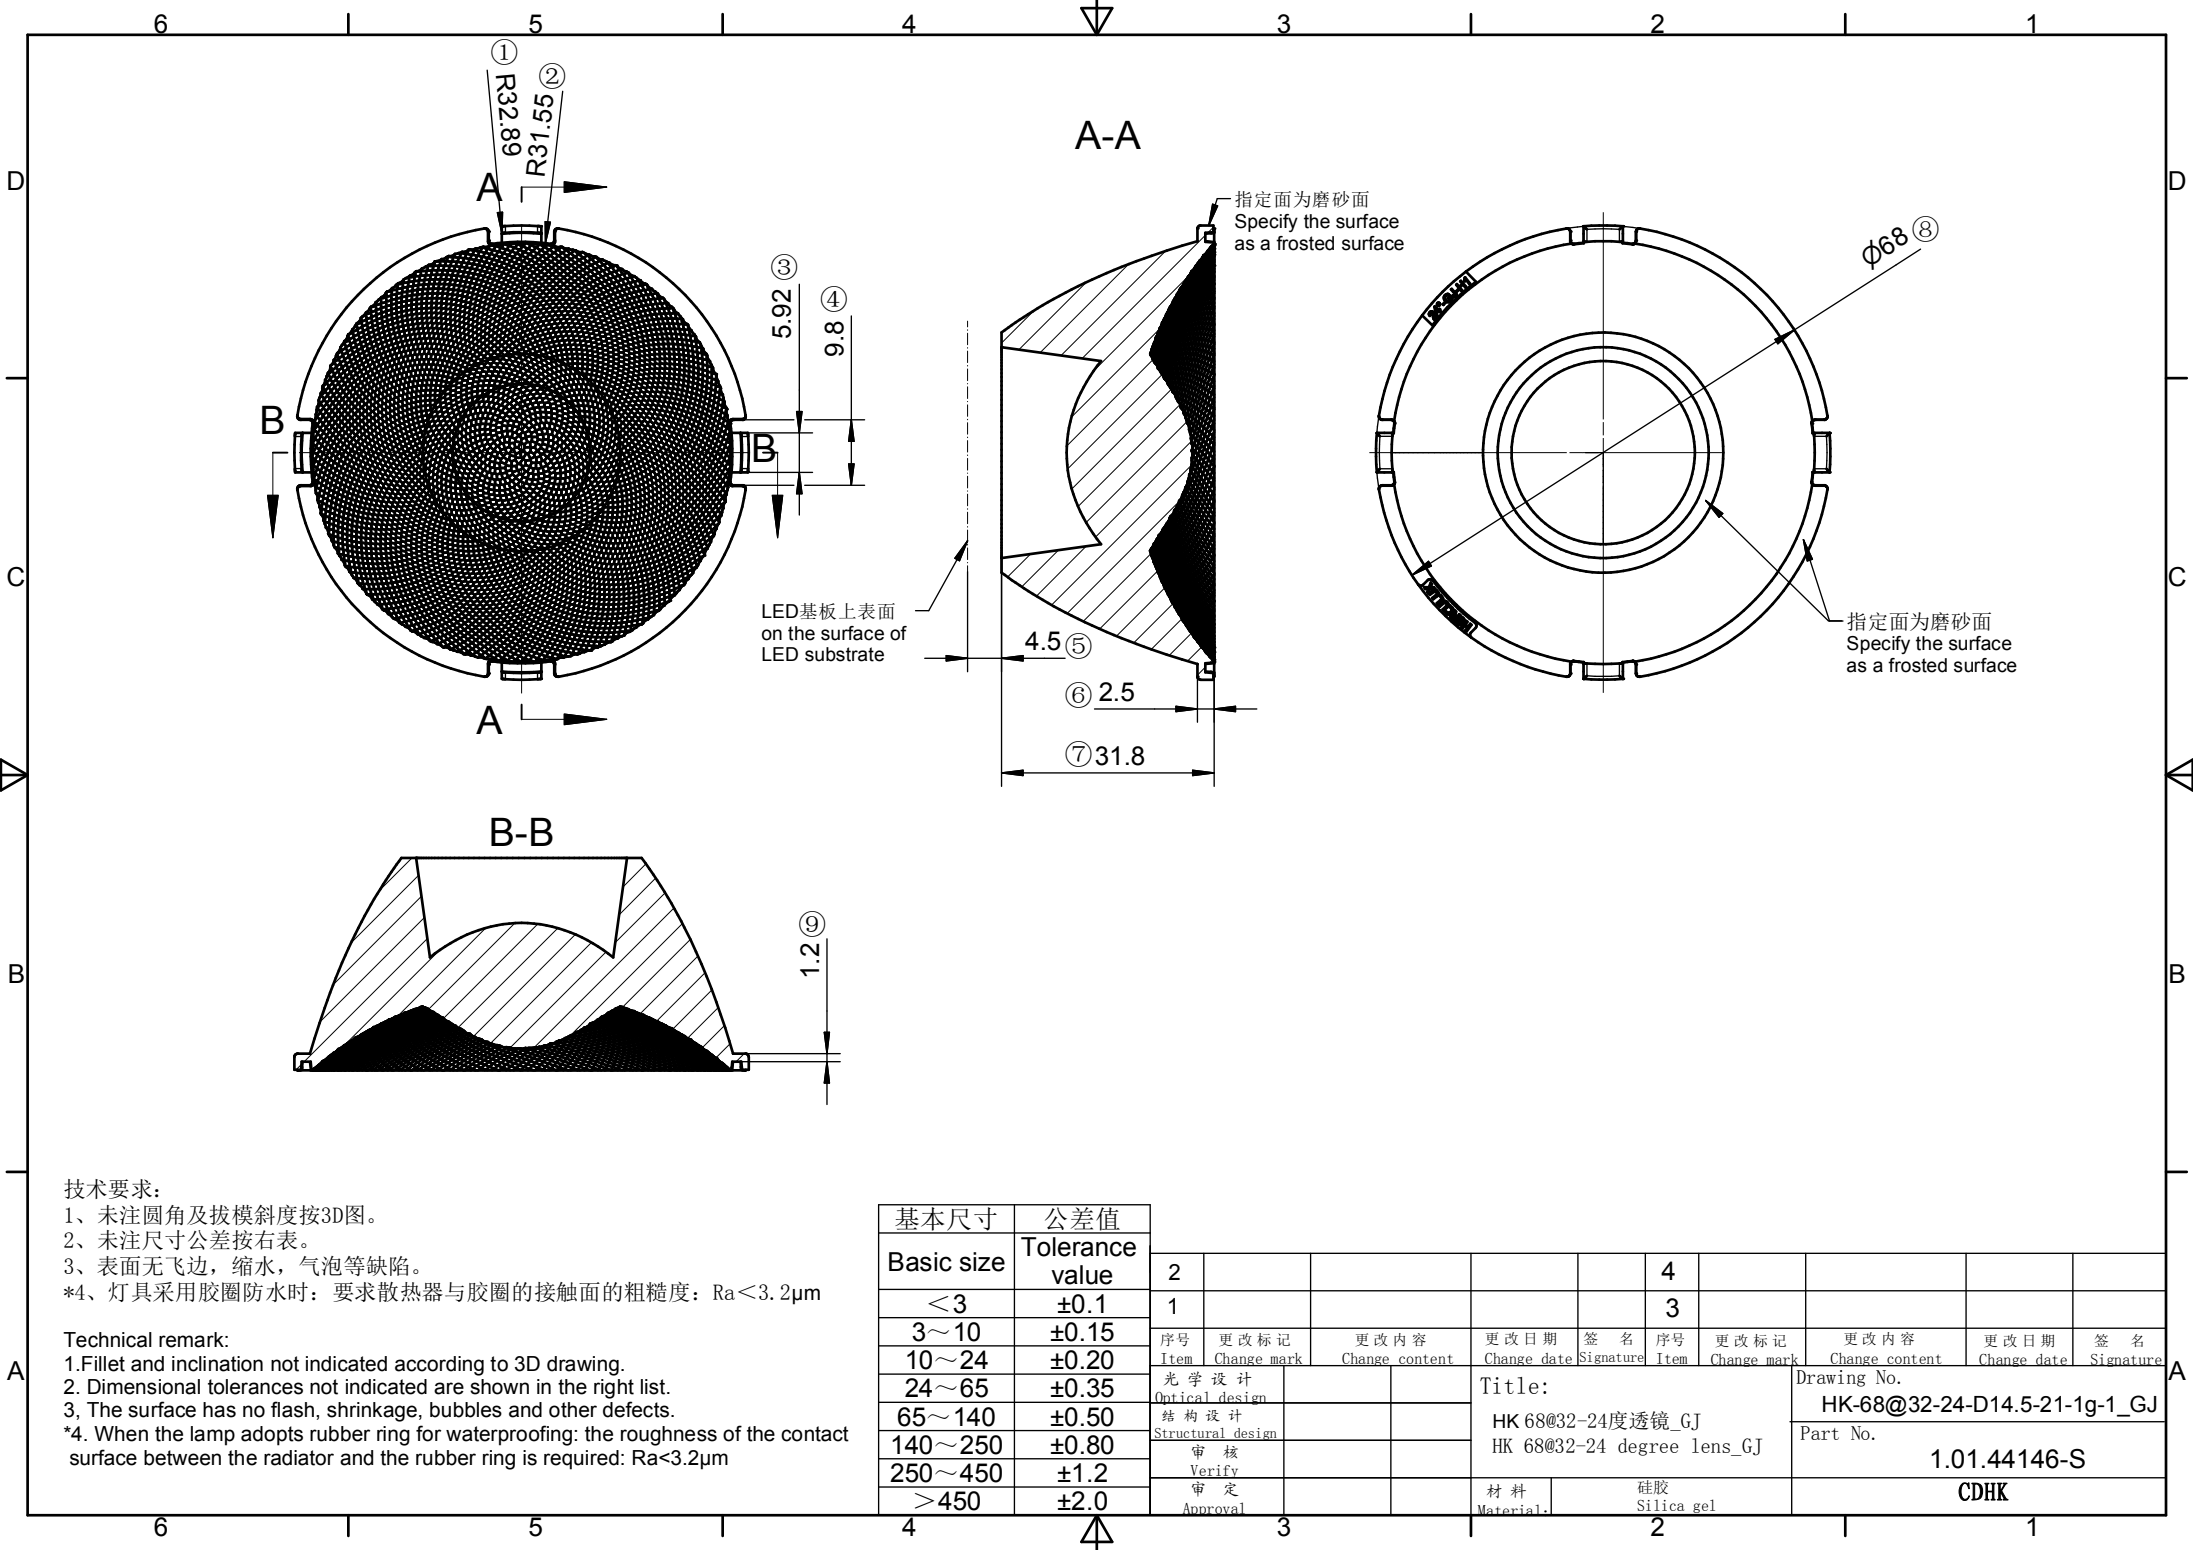

技术要求:
1、未注圆角及拔模斜度按3D图。
2、未注尺寸公差按右表。
3、表面无飞边，缩水，气泡等缺陷。
*4、灯具采用胶圈防水时：要求散热器与胶圈的接触面的粗糙度：Ra<3.2μm

Technical remark:
1.Fillet and inclination not indicated according to 3D drawing.
2. Dimensional tolerances not indicated are shown in the right list.
3, The surface has no flash, shrinkage, bubbles and other defects.
*4. When the lamp adopts rubber ring for waterproofing: the roughness of the contact surface between the radiator and the rubber ring is required: Ra<3.2μm

基本尺寸	公差值										
Basic size	Tolerance value	2					4				
<3	±0.1	1					3				
3~10	±0.15	序号 Item 更改标记 Change mark 更改内容 Change content 更改日期 Change date 签 名 Signature 序号 Item 更改标记 Change mark 更改内容 Change content 更改日期 Change date 签 名 Signature	光学设计 Optical design		Title: HK 68@32-24度透镜_GJ HK 68@32-24 degree lens_GJ			Drawing No. HK-68@32-24-D14.5-21-1g-1_GJ			
10~24	±0.20		结构设计 Structural design					Part No. 1.01.44146-S			
24~65	±0.35		审 核 Verify								
65~140	±0.50		审 定 Approval		材料 Material		硅胶 Silica gel		CDHK		
140~250	±0.80										
250~450	±1.2										
>450	±2.0										