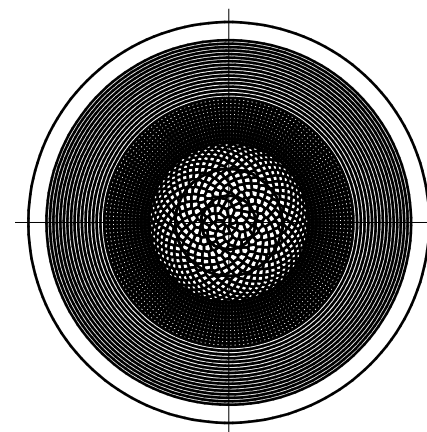


Technical remark:

1. Fillet and inclination not indicated according to 3D drawing.
2. Dimensional tolerances not indicated are shown in the right list.
3. The surface has no flash, shrinkage, bubbles and other defects.
- *4. When the lamp adopts rubber ring for waterproofing: the roughness of the contact surface between the radiator and the rubber ring is required: $Ra < 3.2\mu m$

基本尺寸	公差值										
Basic size	Tolerance value	2					4				
<3	±0.1	1					3				
3~10	±0.15	序号	更改标记	更改内容	更改日期	签 名	序号	更改标记	更改内容	更改日期	签 名
10~24	±0.20	Item	Change mark	Change content	Change date	Signature	Item	Change mark	Change content	Change date	Signature
24~65	±0.35	光 学 设 计 Optical design				Title: HK 黑光30@16-24度透镜 HK Dark 30@16-24° lens			Drawing No. HK-HG-30@16-24-D4-21-1g-1		
65~140	±0.50	结 构 设 计 Structural design							Part No.		
140~250	±0.80	审 核 Verify							1.01.92014		
250~450	±1.2	审 定 Approval									
>450	±2.0					材料 Material:	PMMA			CDHK	