


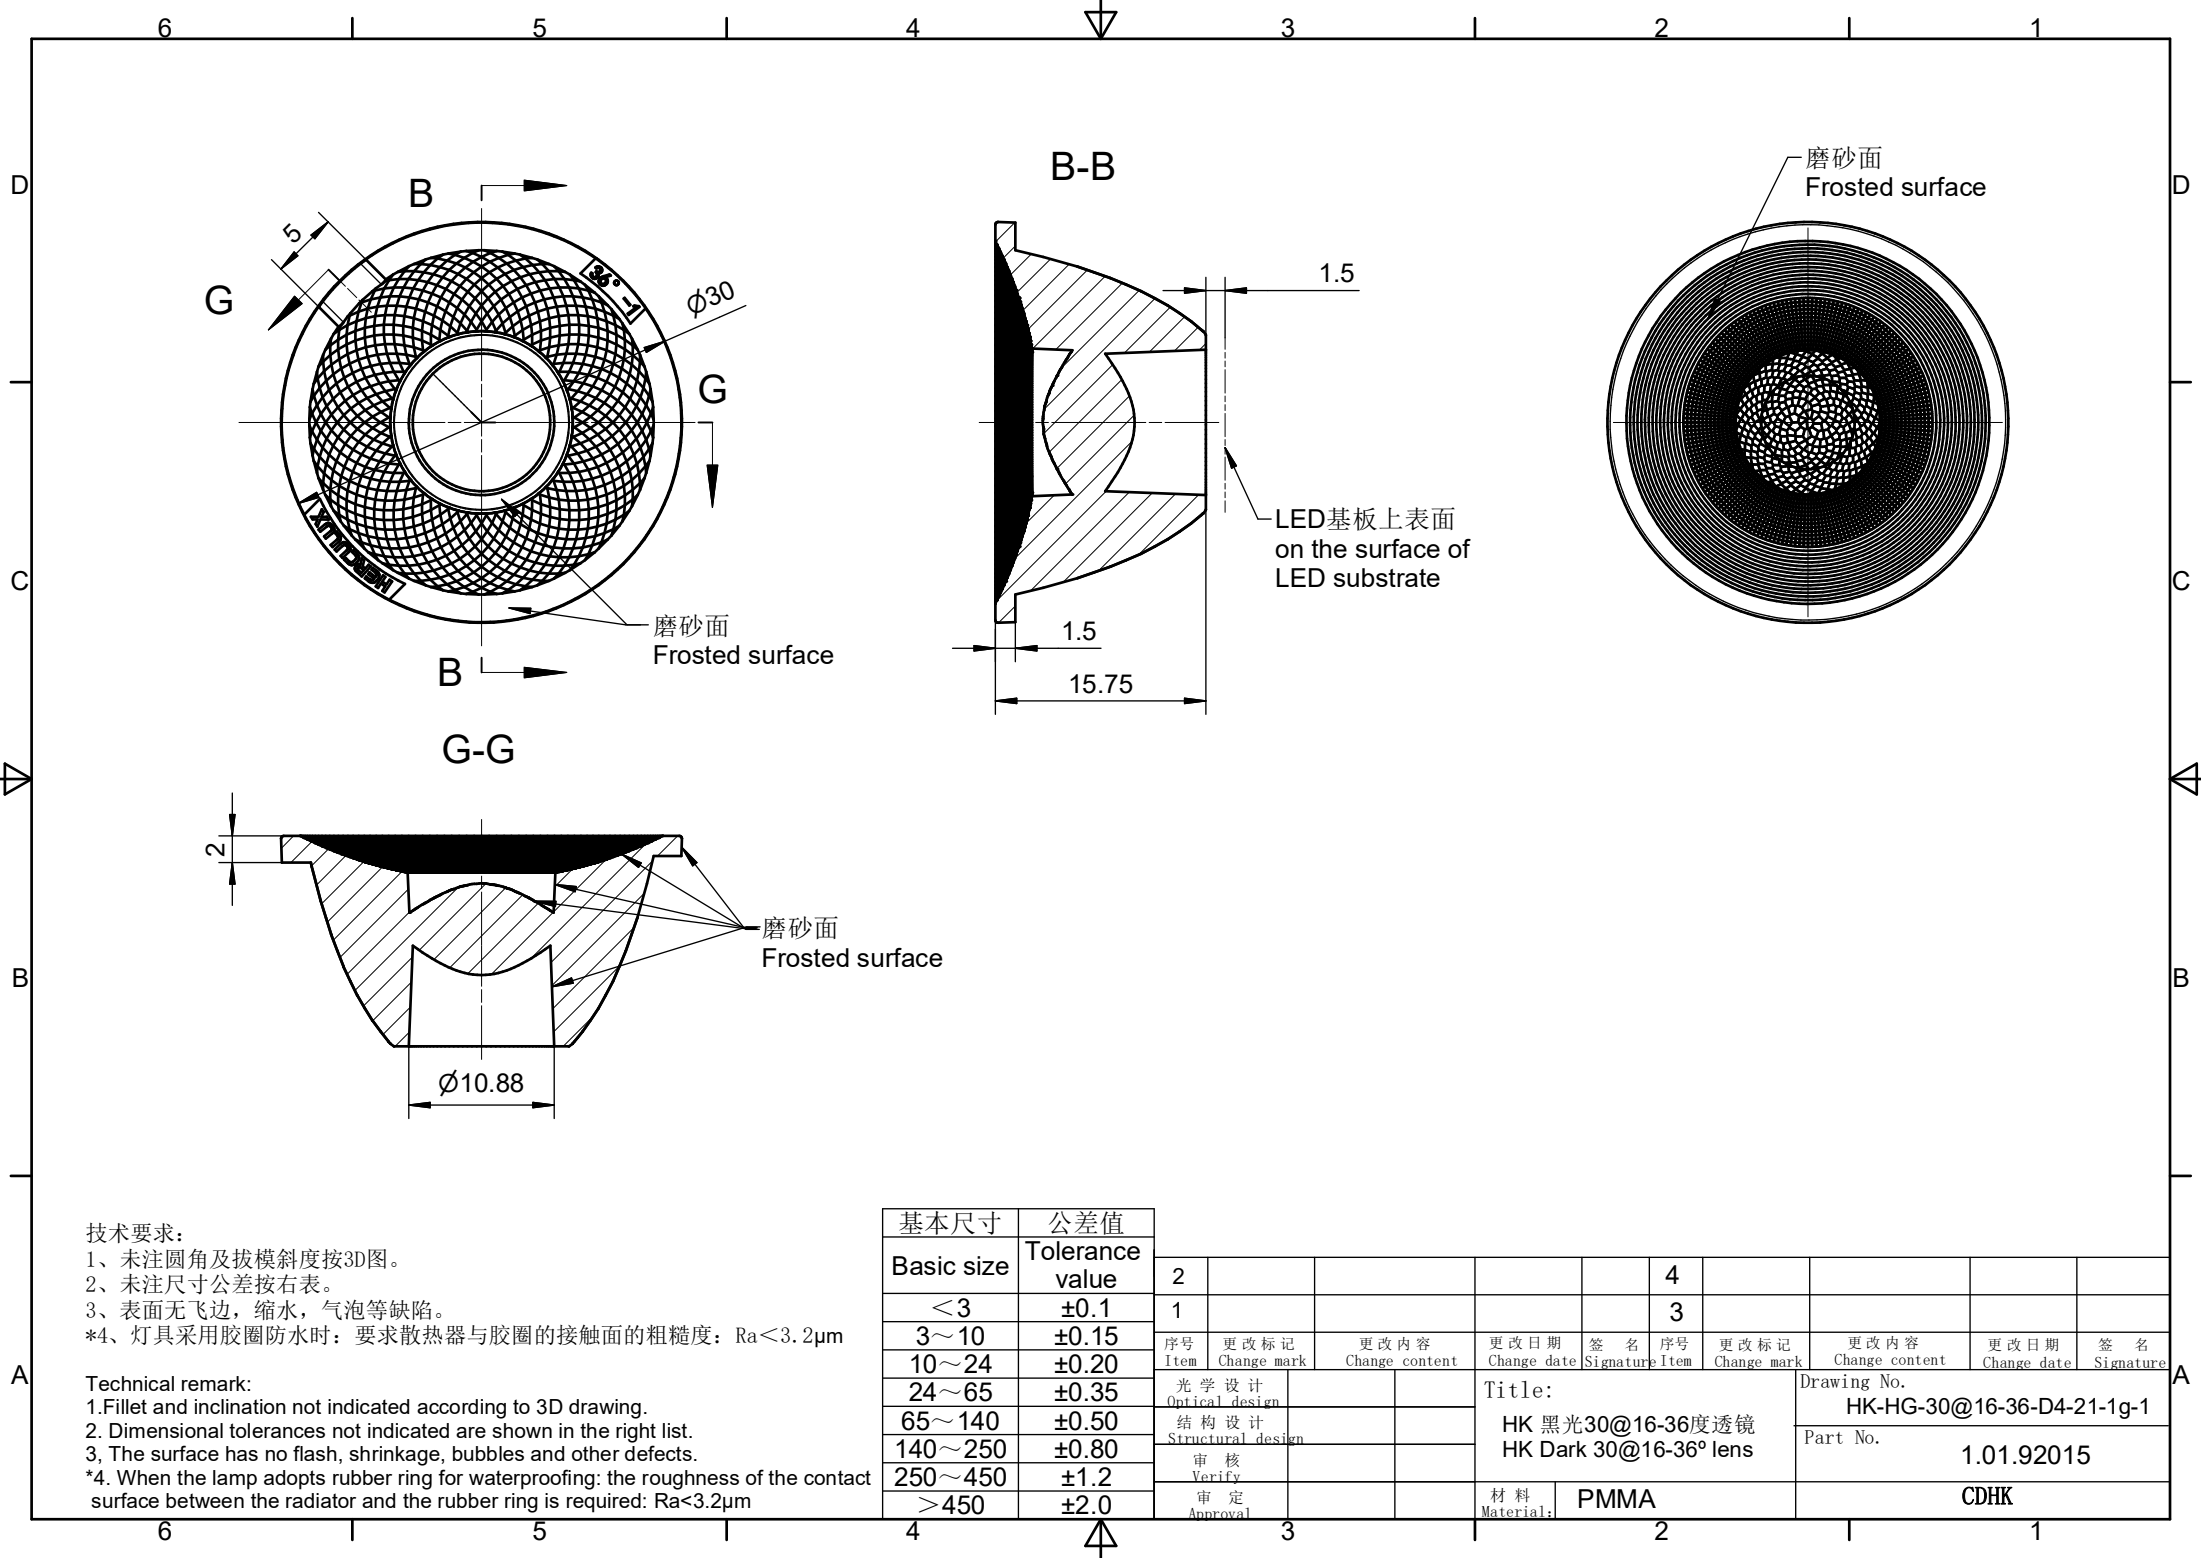

技术要求:

- 1、未注圆角及拔模斜度按3D图。
- 2、未注尺寸公差按右表。
- 3、表面无飞边，缩水，气泡等缺陷。
- *4、灯具采用胶圈防水时：要求散热器与胶圈的接触面的粗糙度：Ra<3.2μm

Technical remark:

- 1.Fillet and inclination not indicated according to 3D drawing.
- 2. Dimensional tolerances not indicated are shown in the right list.
- 3. The surface has no flash, shrinkage, bubbles and other defects.
- *4. When the lamp adopts rubber ring for waterproofing: the roughness of the contact surface between the radiator and the rubber ring is required: Ra<3.2μm

基本尺寸		公差值											
Basic size		Tolerance value											
<3		±0.1		2						4			
3~10		±0.15		1						3			
10~24		±0.20		序号	更改标记	更改内容	更改日期	签 名	序号	更改标记	更改内容	更改日期	签 名
24~65		±0.35		Item	Change mark	Change content	Change date	Signature	Item	Change mark	Change content	Change date	Signature
65~140		±0.50		光学设计			Title: HK 黑光30@16-36度透镜 HK Dark 30@16-36° lens				Drawing No.		
140~250		±0.80		结构设计							Part No.		
250~450		±1.2		审核							1.01.92015		
>450		±2.0		审定							CDHK		
				材料			PMMA						
				Approval									