

Approval number :


Customer :

Product : XD 45@24-24°Lens

Material Code : 1.01.6575

PN : HK-45@24-24-D6-20-1g-1

Manufacturer : Chengdu HercuLux Photoelectric Technology Co.,Ltd

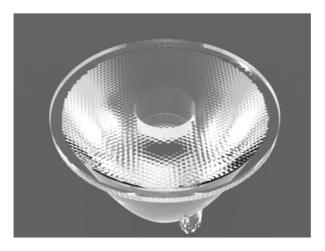

	Supplier co	onfirmation	Client confirmation			
Proposed		DATE	Qualified□		0.475	
Project manager		DATE	Unqualified□		DATE	
Audit		DATE	Audit		DATE	
Approved		DATE	Approved		DATE	
Stamp		DATE	Stamp		DATE	

(Confirmation of acceptance by both parties must be signed and sealed)

 Factory: Chengdu Shuangliu District, Iot industrial park 2 road HercuLux Photoelectric Park

 Phone:
 028-85887727 (801)
 028-85887990 (801)
 Fax: 028-85887730
 http://www.herculux.cn/

 Sales Dept:
 Shenzhen Nanshan
 District Nanshan Cloud Valley Innovation Industrial Park Comprehensive Service Building,

 TEL:
 0755-2937 1541
 FAX: 0755-2907 5140
 Fax: 0755-2907 5140


*Approval In duplicate, for both supplier and customer.



TEL: 0755-2937 1541	FAX: 0755-2907 5140	http://www.herculux.cn/	Date updated: 2021/4/27
Product Pictur	e:		
PI	4:	HK-45@24-24-D6-20-1c	g-1
Size(L*W*Η/Φ*Η	I):	Ф:45mm; Н:24.75mm	
1.07.81418_HK-166@03-0223-	.S	РС	
Effiency	r.	λ	
Temperature(Topi	·):	-40°C to +120°C	
FWHN	Л:	24°	
Matched LE	S:	Gen. 7 V4 HD	

第2页



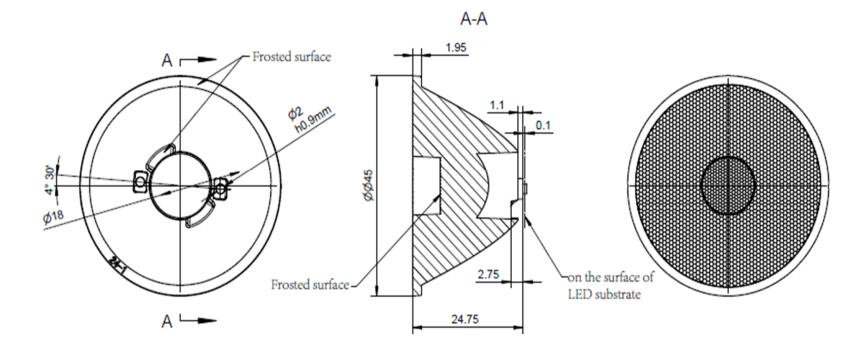


Technical Requirement:


- 1. The surface don't have any defects of flash, shrink and bubble.
- 2. The uncharted fillet and pattern draft subject to the 3D drawing.
- 3. The uncharted dimensional tolerance subject to the 3D drawing.


Optical Design			HK-45@24	l-24-D6-20-1g-1	1.01.6575
Structure Design		XD 45@24-24° Lens	Pages	Qty	Weight
Assess			2		
Authorized		Material: PC		CDHK	



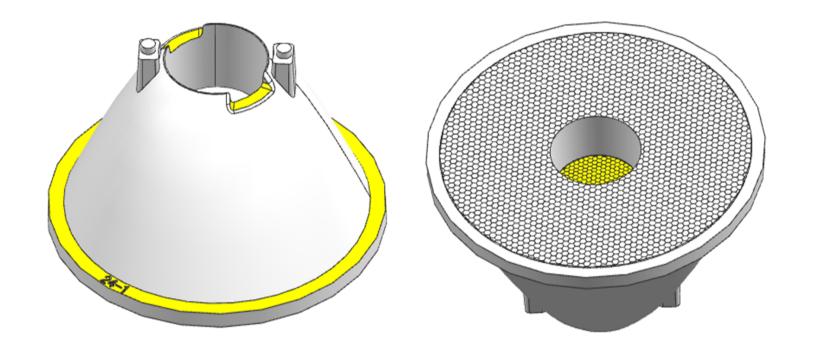







Intensity data:(deg , cd) C0-180

λ	I	A	I	A	I	Α	I	λ	I	Α	I
-90.0	0.3567	-58.5	4.194	-27.0	70.74	4.5	3225	36.0	22.63	67.5	2.411
-88.5	0.3692	-57.0	4.526	-25.5	89.37	6.0	2824	37.5	19.34	69.0	1.908
-87.0	0.3949	-55.5	4.875	-24.0	113.1	7.5	2368	39.0	16.69	70.5	1.533
-85.5	0.4334	-54.0	5.275	-22.5	145.4	9.0	1906	40.5	14.58	72.0	1.303
-84.0	0.4462	-52.5	5.748	-21.0	190.0	10.5	1483	42.0	12.86	73.5	1.138
-82.5	0.5232	-51.0	6.276	-19.5	247.1	12.0	1126	43.5	11.37	75.0	0.9620
-81.0	0.5866	-49.5	6.912	-18.0	323.4	13.5	840.2	45.0	10.07	76.5	0.7855
-79.5	0.6631	-48.0	7.679	-16.5	432.4	15.0	629.5	46.5	9.000	78.0	0.6959
-78.0	0.6902	-46.5	8.635	-15.0	578.6	16.5	471.6	48.0	8.030	79.5	0.6535
-76.5	0.7788	-45.0	9.754	-13.5	774.6	18.0	341.1	49.5	7.163	81.0	0.5732
-75.0	0.9602	-43.5	11.01	-12.0	1037	19.5	256.5	51.0	6.501	82.5	0.4968
-73.5	1.140	-42.0	12.46	-10.5	1382	21.0	194.7	52.5	5.932	84.0	0.4475
-72.0	1.318	-40.5	14.17	-9.0	1797	22.5	149.3	54.0	5.456	85.5	0.3949
-70.5	1.537	-39.0	16.29	-7.5	2255	24.0	116.1	55.5	5.028	87.0	0.3949
-69.0	1.928	-37.5	18.93	-6.0	2699	25.5	91.29	57.0	4.641	88.5	0.3694
-67.5	2.421	-36.0	22.13	-4.5	3114	27.0	72.05	58.5	4.293	90.0	0.3822
-66.0	2.778	-34.5	26.17	-3.0	3473	28.5	57.33	60.0	3.967		
-64.5	3.070	-33.0	31.15	-1.5	3735	30.0	46.49	61.5	3.667		
-63.0	3.338	-31.5	37.52	0.0	3854	31.5	38.10	63.0	3.393		
-61.5	3.630	-30.0	45.89	1.5	3784	33.0	31.64	64.5	3.109		
-60.0	3.900	-28.5	56.65	3.0	3551	34.5	26.62	66.0	2.784		

Electricity Parameter:

Current I	:	0.1000A	Power:	3.680W
Voltage V	7:	36.79V	PF:	0.000

Optical Parameter(Distance=2.559m):

Equivalent Luminous flux: #eff = 501.91m Efficiency: Eff=136.411m/W Diffuse angle: @(25%): 25.1deg@(50%): 17.4deg@(75%): 11.0deg@(50%): 17.4deg Diffuse angle: @(25%): 25.1deg@(50%): 17.4deg@(75%): 11.0deg@(50%): 17.4deg Imax=3854cd (C=0.0deg,G=0.0deg) C0-180Plane Imax= 3854cd(G=0.0deg) C0-180Plane I0= 3854cd

Sample size test report XD 45@24-24°Lens

HERCULUX ^{恒坤光电}

			Standard size	Upper Size limit	Lowe size lin		Test result1	Test result2	Test result3	Test result4	Jud gme nt	Remarks	
	diamet	er	45	45. 15	44.8	5	44.96	44. 99	45.05	45.1	ок	Test	
1.Size	heigh	t	24. 75	24.95	24. 5	5	24.9	24.89	24.85	24.9	ок	environment: In 20 ℃ -25 ℃ environment	
1.0120	Location column		18	18.1	17.9)	18.05	18	18.05	18.04	ок	to achieve thermal equilibrium	
	Registra mast		2	2.05	1.85	5	1.9	1.92	1. 92	1.9	ок	after the test.	
	Gate shear can not affect the appearance of the lamp												
	See attachment "Appearance Inspection Standards"												
2.Appear	ance	ance se		E		Nc	burr	No burr	No burr	No bu	rr	- ок	
Quality	In		pearance spection andards"	L		No	stains	No stains	No stains	No sta	ins	ÖK	
3.Materia	al PC					Color	Tra	nsparent		ОК			
	Testing I	LED					Ge	n. 7 V4 HD					
	FWH	N				5	See light	distribution	curve				
4.Optica	angle	9					17.4	16.7	16.3	16.8		ОК	
l index	K-val	K-value					7.68	8.63	7.78	8.44		ОК	
	Efficie	ency					74.28%	74.03%	85.41%	75.34%		ОК	
	Facula	See t	he signatu	re sample			`						
	hensive ment							Q	ualified				
Caliper 2 Height G Microsco Thick Ga Gauge E 2、 Ambi the size o	Number: V D-Quadra auge M-To pe P-Neeo uge R-Ra	tic H- ool dle T- dius erature luct re	e on	changes (mm) 0. 0. 0.	1 8 6 4		ct size ch	anges wit	h tempera		Size: Size: Size: Size: Size:	50mm 100mm 150mm 200mm 250mm 300mm	

 Wear clean gloves during lens assembly to prevent contamination of the lens surface.
 Take the lens try to avoid touching the total reflection surface.
 When the lens surface contamination, you can only gently wipe with soft cotton sticky neat neutral solvent, not allowed to wipe with industrial solvents.

Packaging Information




P	N	HK-45@24-24-D6-20-	1g-1	Product Name	XD 45@24-	-24°Lens	6
Product	material	PC		Customer			
Package	diagram	Image: Single Vacuum package Box package					
Product	packing	18	A/ Box	4	Box/Layer		
		11	Layer/Box	792	A/ Carton		
	NO.	Part No	Part name	Size	Dosage	Unit	Remarks
	1	2.07.0062	Blister box	23cm*21cm	44	BAG	
Deekeein	2	2.08.0001	PE film	30cm*30cm	44	PCS	
Packagin g	3	2.06.0005	Reel label paper	6.2cm*8cm	1	PCS	
Materials	4	2.06.0005	Box label paper	6.2cm*9.2cm	1	PCS	
	5	2.06.0003	big plate	46.8cm*42.8cm	12	PCS	
	6	2.06.0001	big carton	46.8cm*42.8cm*36c m	1	PCS	
Remarks		packing is not subject to this spe 4 bags for each layer and 5 bag			shall prevail(The	re are th	iree

Special notice

When gule pass through holes, columns and other structures, or part of the thin structure, will form a weld line. The product which uses multi-point injection welding line will appear because of the combination of sol, as shown below:

Syntneti

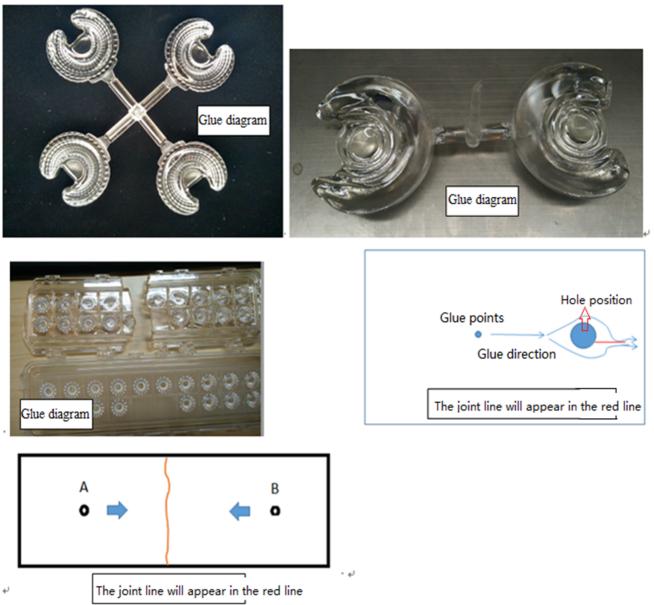

Please note :

The appearance of lines in the structure of the product as well as at the screw hole is a normal phenomenon, will not affect the actual use of the product, and can not be avoided at this stage.



Appearance inspection standards

1 Operating procedures

1.1.1Sampling standards, sampling plan and AQL

Test level : GB/T2828.1-2012The first part is according to the acceptance quality limit (AQL) retrieval batch inspection sampling plan, general inspection level Π level, CR class defect coefficient 0, MA defect rejection level AQL = 0.65, MI class defect rejection level AQL = 1.0; defect level please see 5.4.

2 Code table

Code	Code description	Unit	Code	Code description	Unit
N	Amount/pcs	pcs	D	Diameter	mm
L	Length	mm	Н	Depth	mm
W	Width	mm	DS	Distance	mm
S	Proportion	mm²	SS	Offset	mm

3 Test conditions

3.1 Sight distance and working hours: Sight distance should be 30-35cm, each side of the inspection time does not exceed 12s, the visual angle of 45-135 degrees;

3.2 Light: 2x40w cool white fluorescent lamp, the light source is 500-550mm away from the lens surface; in order to make the appearance defect can be correctly recognized, the illumination should be 500-1000Lux, and the observation time is 10 seconds.3.3 Visual inspection staff should be 1.0 (including corrected visual acuity) above, no color blindness, color weakness.

4 Appearance inspection standards

Test items	ludging stondard	Inspection equipment	Defec	t level	
restitents	Judging standard	Testing method	МІ	MA	CR
	When start the machine and process, all products have to check the appearance of the sample, the appearance of the sample is divided into qualified samples and limited samples.				
Check the sample	1: Qualified sample refers to the appearance and structure standard of the product which recognized by the client, the sample size should be confirmed before mass production;	Sample comparison , visual			V

	2: The limited sample refers to the limit of a particular exceptionally developed sample. Limit the sample only for its specific point of exception to confirm; The priority is higher than the other criteria in this table. When there is a limited sample, the limit sample shall prevail.			
Raw edge	Not allowed to affect the size and assembly	Visual, point card	~	
Scratch	1: Non-optical surface and non-exposed surface scratches should be visually insignificant and the length is less than 1/10 of the maximum surface size.	Visual, point card, calipers	V	
Fingerprint	Fingerprints are not allowed on all products	Visual	V	
Foreign objects, black spots, white spots	The product may not be attached to foreign objects, including oil, fiber, dregs of water gap and so on			V
Deformation	Insufficient filling shall not affect the appearance of the assembly and the exposed surfaces.	Visual, feeler		V
Poor ejection	Products may not appear bad ejection, including no convex top, thimble printed on the assembly surface shall not be higher than the product surface, non-assembled surface thimble height should not exceed the product size tolerances; thimble printing should be less than the product surface and no more than 0.3; thimble surface treatment should be consistent with the product side. Ejection strain: the optical surface and the appearance of the exposed surface after assembly are not allowed to have a strain, and the structural surface does not allow visual obvious strain.	Visual, point card	V	
Insufficient filling	Insufficient filling shall not affect the appearance of the assembly and the exposed surfaces, The signature sample shall prevail.	Visual, point card	V	
Shrink	When the entire surface of the product shrinks, the optical properties and dimensions must meet the requirements, and the visual will not significantly affect the appearance.Part shrink reference point defects	Visual, point card	V	
Flow marks、Welding line	 Product does not allow the presence of flow marks and welding lines unless the structure can not be avoided; The remaining flow marks shall not appear in the optical surface, a single L ≤ 10mm, no more than two 	Visual	V	

Bubble	No bubbles are allowed	Visual		\checkmark	
Foreign objects, black spots, white spots	Not obvious or D ≤ 0.3mm black spots and foreign bodies in the area of 100x100mm not more than 1; Exceeded foreign matter black spots is judged bad.	Visual, point card	V		
Damaged	No damage is allowed	Visual			\checkmark
Cold glue	Optical surface may not have cold glue, non- optical surface cold glue should meet the visual is not obvious.	Visual	\checkmark		
	1: Do not affect the product size, shall not penetrate the optical surface, the cut should be smooth;				
Bad incision	2: Laser cutting products, the optical surface burns shall not occur after the processing is completed. Beading must not affect product installation	Visual			V
	3: Three molds and hot runner gate shall not appear residue.				
Scrub	Scrub surface should be uniform, off the scrub phenomenon should not be obvious , A single off scrub imprint requires $D \le 1$ mm and no more than 1 area within a 50x50 mm area	Visual		V	