


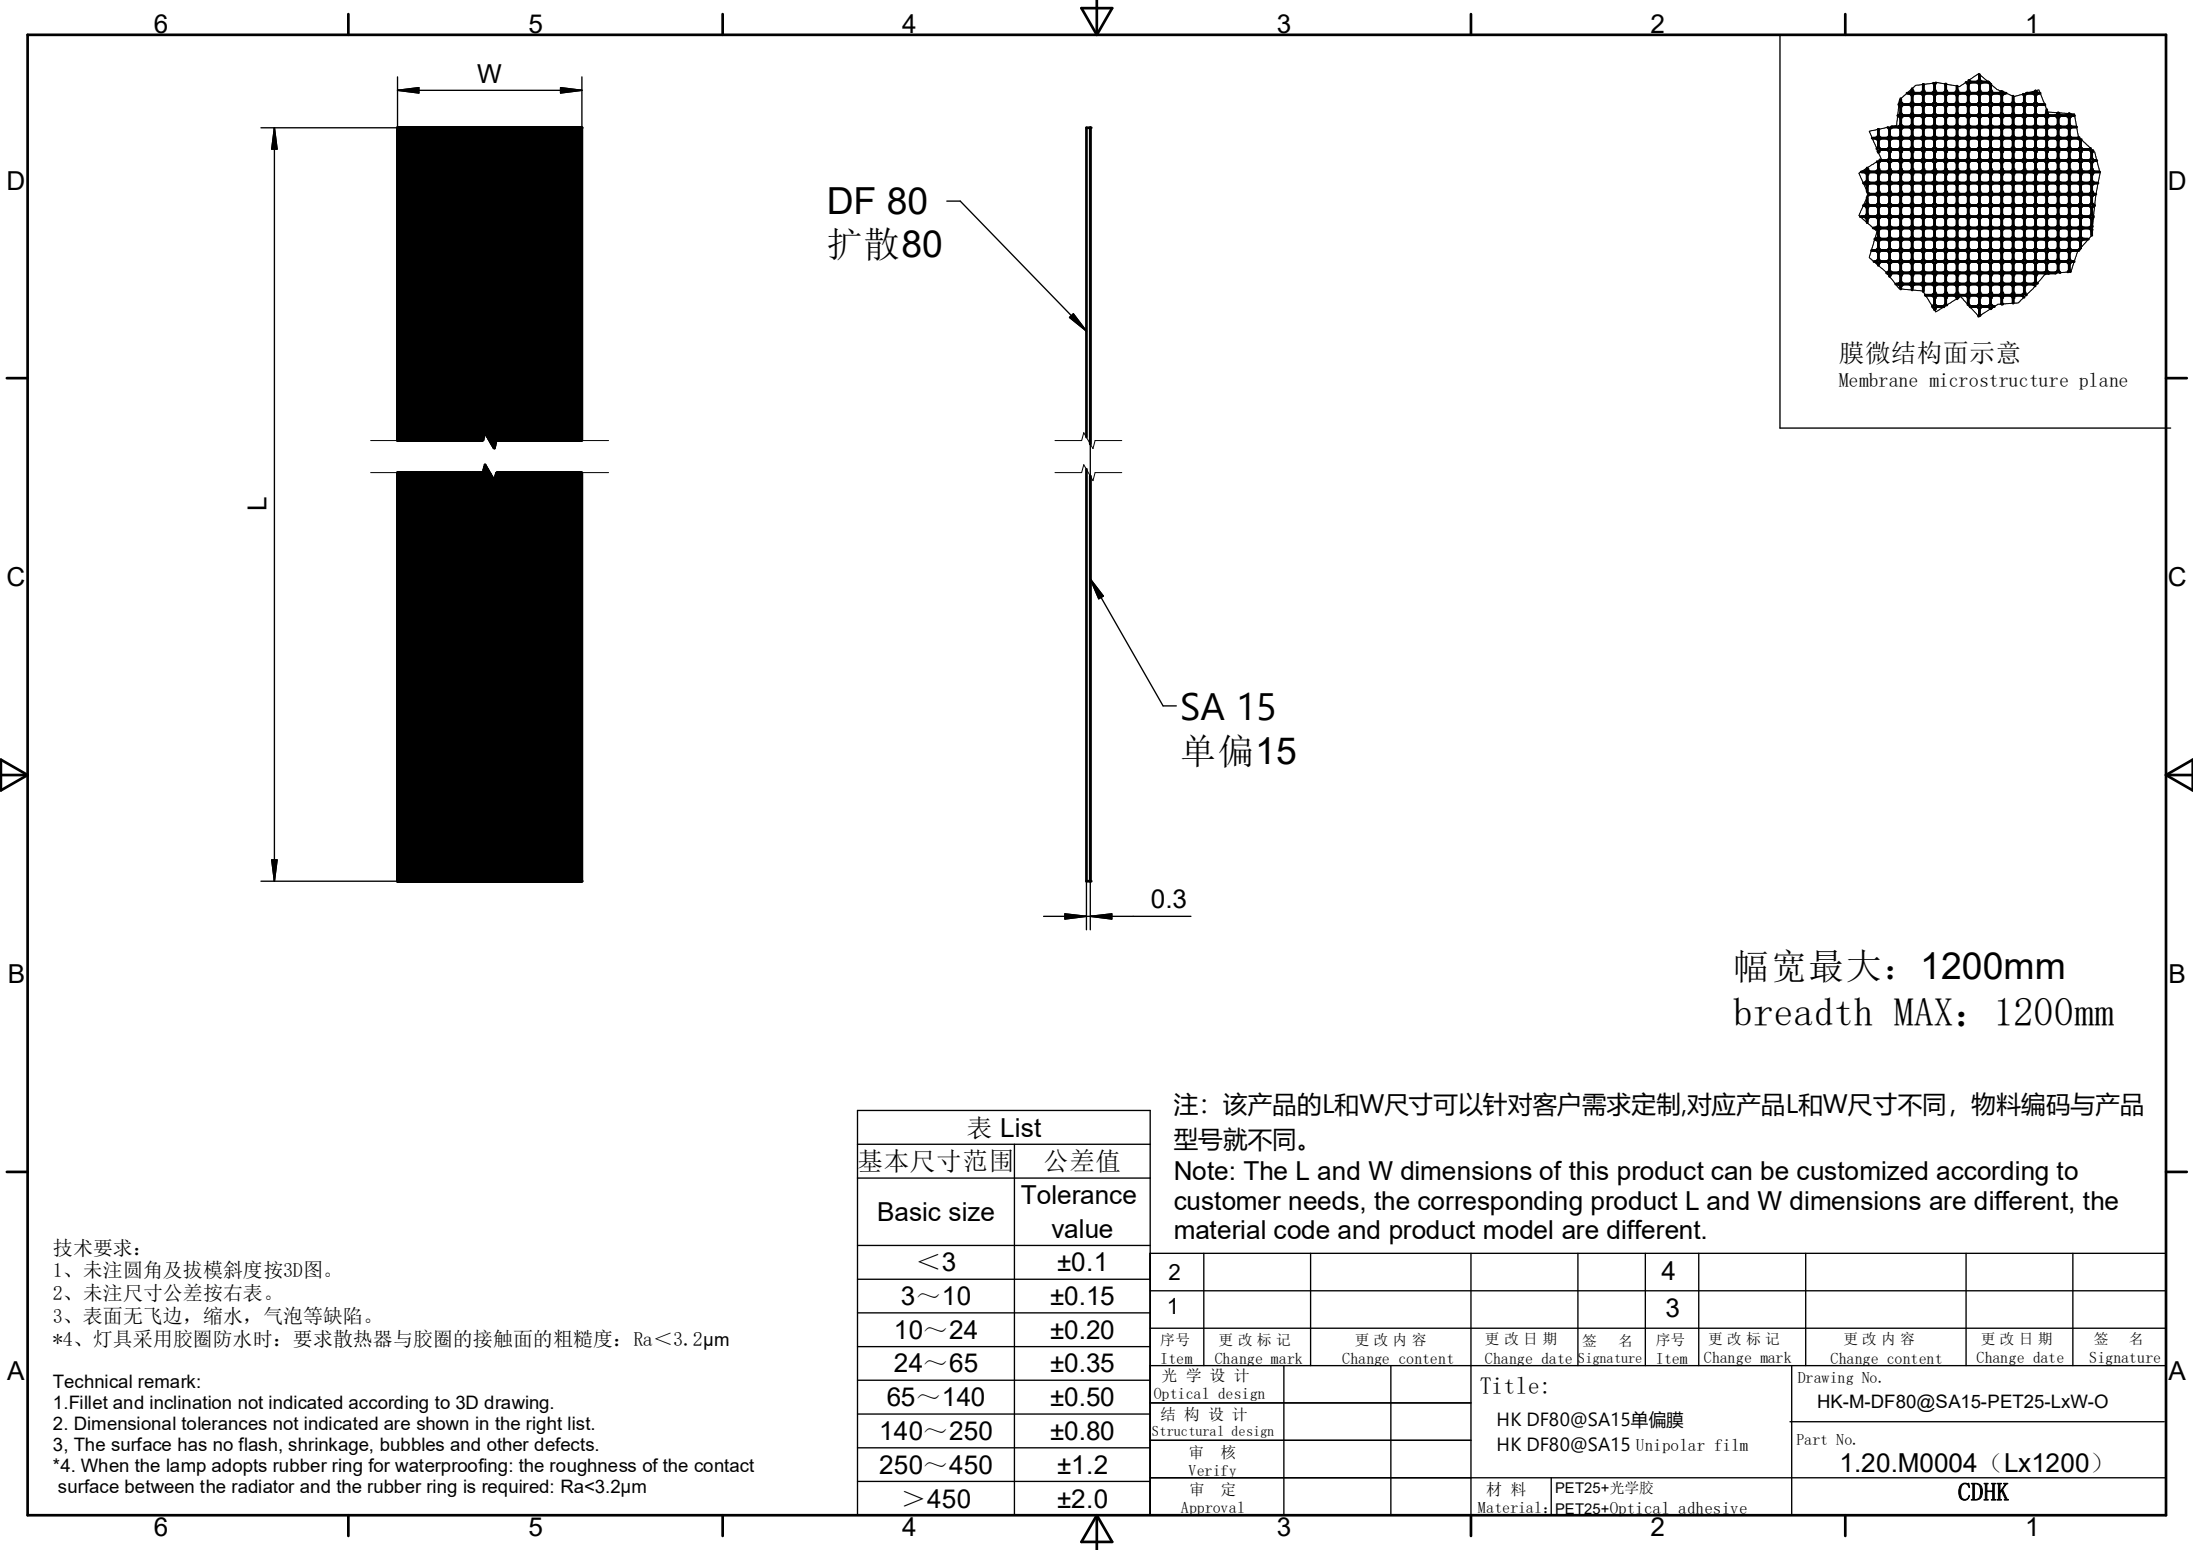

技术要求:
1、未注圆角及拔模斜度按3D图。
2、未注尺寸公差按右表。
3、表面无飞边, 缩水, 气泡等缺陷。
*4、灯具采用胶圈防水时: 要求散热器与胶圈的接触面的粗糙度: Ra<3.2μm

Technical remark:
1.Fillet and inclination not indicated according to 3D drawing.
2. Dimensional tolerances not indicated are shown in the right list.
3. The surface has no flash, shrinkage, bubbles and other defects.
*4. When the lamp adopts rubber ring for waterproofing: the roughness of the contact surface between the radiator and the rubber ring is required: Ra<3.2μm

表 List	
基本尺寸范围	公差值
Basic size	Tolerance value
<3	±0.1
3~10	±0.15
10~24	±0.20
24~65	±0.35
65~140	±0.50
140~250	±0.80
250~450	±1.2
>450	±2.0

注: 该产品的L和W尺寸可以针对客户需求定制,对应产品L和W尺寸不同, 物料编码与产品型号就不同。
Note: The L and W dimensions of this product can be customized according to customer needs, the corresponding product L and W dimensions are different, the material code and product model are different.

2					4					
1					3					
序号 Item	更改标记 Change mark	更改内容 Change content		更改日期 Change date	签 名 Signature	序号 Item	更改标记 Change mark	更改内容 Change content	更改日期 Change date	签 名 Signature
光学设计 Optical design				Title: HK DF80@SA15单偏膜 HK DF80@SA15 Unipolar film			Drawing No. HK-M-DF80@SA15-PET25-LxW-O			
结构设计 Structural design			Part No. 1.20.M0004 (Lx1200)							
审 核 Verify			CDHK							
审 定 Approval						材 料 Material:	PET25+光学胶 PET25+Optical adhesive			