
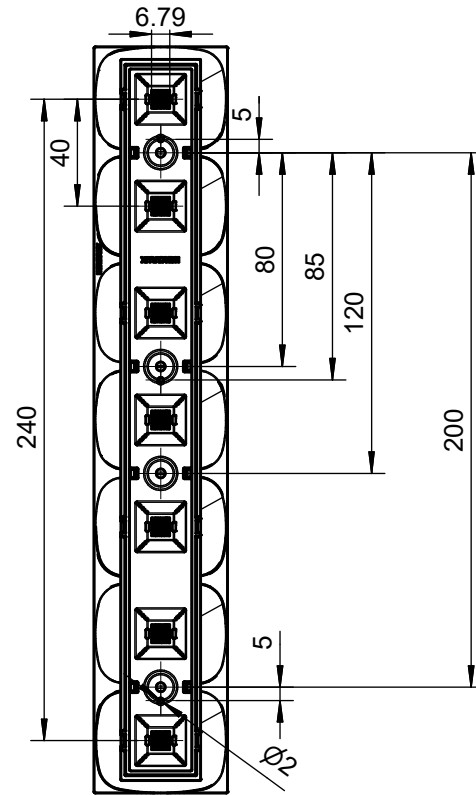


LED基板上表面
Top surface of LED substrate

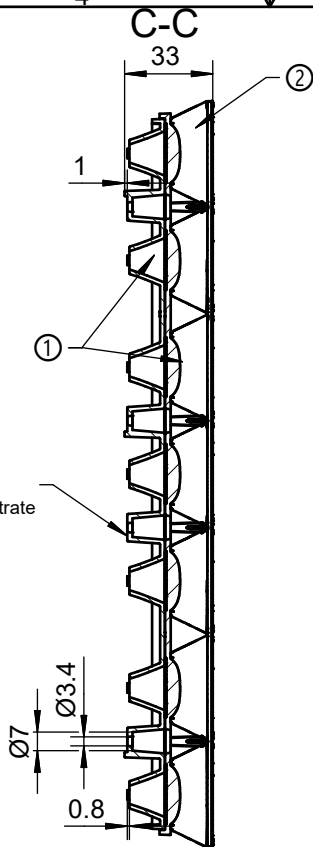

D-D
1:2

技术要求:

- 1、未注圆角及拔模斜度按3D图。
- 2、未注尺寸公差按右表。
- 3、表面无飞边，缩水，气泡等缺陷。
- *4、灯具采用胶圈防水时：要求散热器与胶圈的接触面的粗糙度：Ra<3.2μm

Technical remark:

- 1.Fillet and inclination not indicated according to 3D drawing.
2. Dimensional tolerances not indicated are shown in the right list.
- 3, The surface has no flash, shrinkage, bubbles and other defects.
- *4. When the lamp adopts rubber ring for waterproofing: the roughness of the contact surface between the radiator and the rubber ring is required: Ra<3.2μm

基本尺寸范围	公差值
Basic size	Tolerance value
<3	±0.1
3~10	±0.15
10~24	±0.20
24~65	±0.35
65~140	±0.50
140~250	±0.80
250~450	±1.2
>450	±2.0

序号 Item	物料编码 Part No.	产品名称 Title	产品编号 Drawing No.			材料 Material:	数量 quantity		
①		HK 萤火·星空-50G-7合1-度线性灯光学组件 HK Firefly-Starry-50G-7in1- Linear lamp optical module				组件 component	1		
②		HK 萤火·星空-50G-7合1-线性灯格栅 HK Firefly-Starry-50G-7in1-Linear lamp grille					1		
③									
			出光角度范围 Beam angle range		透 过 率 Transmittance				
			最小 K 值 Min K value		点胶类型 Gel type				
			模 具 等 级 Mold level		备 注 Remark				
2				4					
1				3					
序号 Item	更改标记 Change mark	更改内容 Change content	更改日期 Change date	签 名 Signature	序号 Item	更改标记 Change mark	更改内容 Change content	更改日期 Change date	签 名 Signature
光 学 设 计 Optical design			Title: HK 萤火·星空-50G-7合1-线性灯光学组件 HK Firefly-Starry-50G-7in1- Linear lamp optical module			Drawing No.			
结 构 设 计 Structural design						Part No.			
审 核 Verify									
审 定 Approval						CDHK			
			材 料 Material:	组 件 component					