


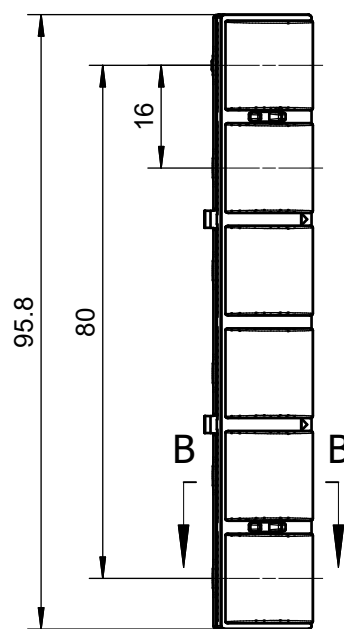


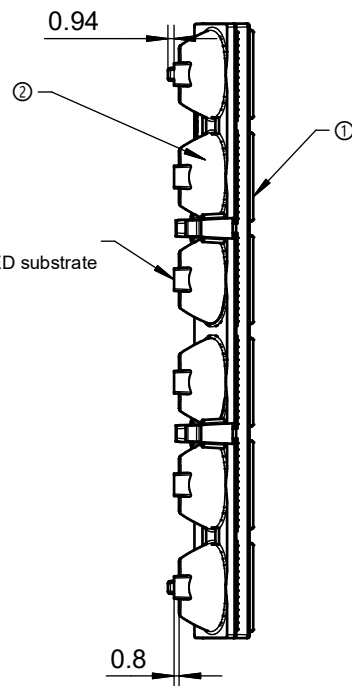

LED基板上表面
Top surface of LED substrate

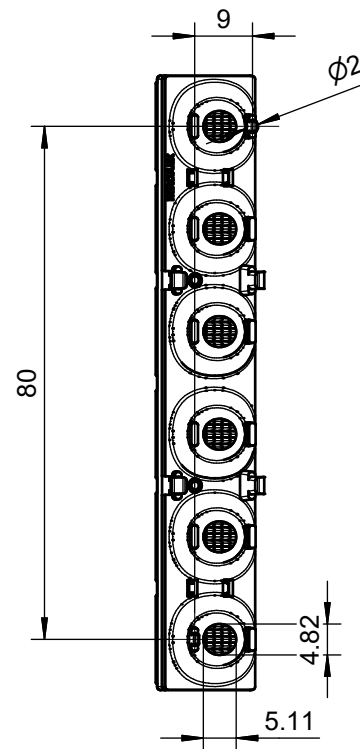

B-B



技术要求:
1、未注圆角及拔模斜度按3D图。
2、未注尺寸公差按右表。
3、表面无飞边，缩水，气泡等缺陷。
*4、灯具采用胶圈防水时：要求散热器与胶圈的接触面的粗糙度：Ra<3.2μm

Technical remark:
1.Fillet and inclination not indicated according to 3D drawing.
2. Dimensional tolerances not indicated are shown in the right list.
3. The surface has no flash, shrinkage, bubbles and other defects.
*4. When the lamp adopts rubber ring for waterproofing: the roughness of the contact surface between the radiator and the rubber ring is required: Ra<3.2μm

基本尺寸范围	公差值
Basic size	Tolerance value
<3	±0.1
3~10	±0.15
10~24	±0.20
24~65	±0.35
65~140	±0.50
140~250	±0.80
250~450	±1.2
>450	±2.0

序号 Item	物料 编码 Part No.	产品名称 Title	产品编号 Drawing No.	材料 Material:	数量 quantity				
①	1.01.44138_01	HK 萤火·星空-15-6合1-斜放洗墙线性灯透镜-A.01 HK Firefly·Starry-15-6in1-catty-cornered Wall Washer Light Linear lamp lens-A.01	HK-YHXC-96@07-1324-0	PMMA	1				
②	1.01.44138_02	HK 萤火·星空-15-6合1-斜放洗墙线性灯反光杯-A.02 HK Firefly·Starry-15-6in1-catty-cornered Wall Washer Linear lamp reflector cup-A.02	HK-YHXC-96@12-1325-0	PC 镀铝 PC aluminizing	1				
③									
			出光角度范围 Beam angle range	透 过 率 Transmittance					
			最小 K 值 Min K value	点胶类型 Gel type					
			模 具 等 级 Mold level	备 注 Remark					
2			4						
1			3						
序号 Item	更改 标记 Change mark	更改 内容 Change content	更改 日期 Change date	签 名 Signature	序号 Item	更改 标记 Change mark	更改 内容 Change content	更改 日期 Change date	签 名 Signature
光 学 设计 Optical design			Title:		Drawing No.				
结 构 设计 Structural design			HK 萤火·星空-15-6合1-斜放洗墙线性灯光学组件 HK Firefly·Starry-15-6in1-catty-cornered Wall Washer Light Linear lamp optical module		HK-YHXC-96@13-XQ-3030-#0-1g-6_ASM				
审 核 Verify					Part No. 1.01.44138				
审 定 Approval			材 料 Material	组 件 component	CDHK				