


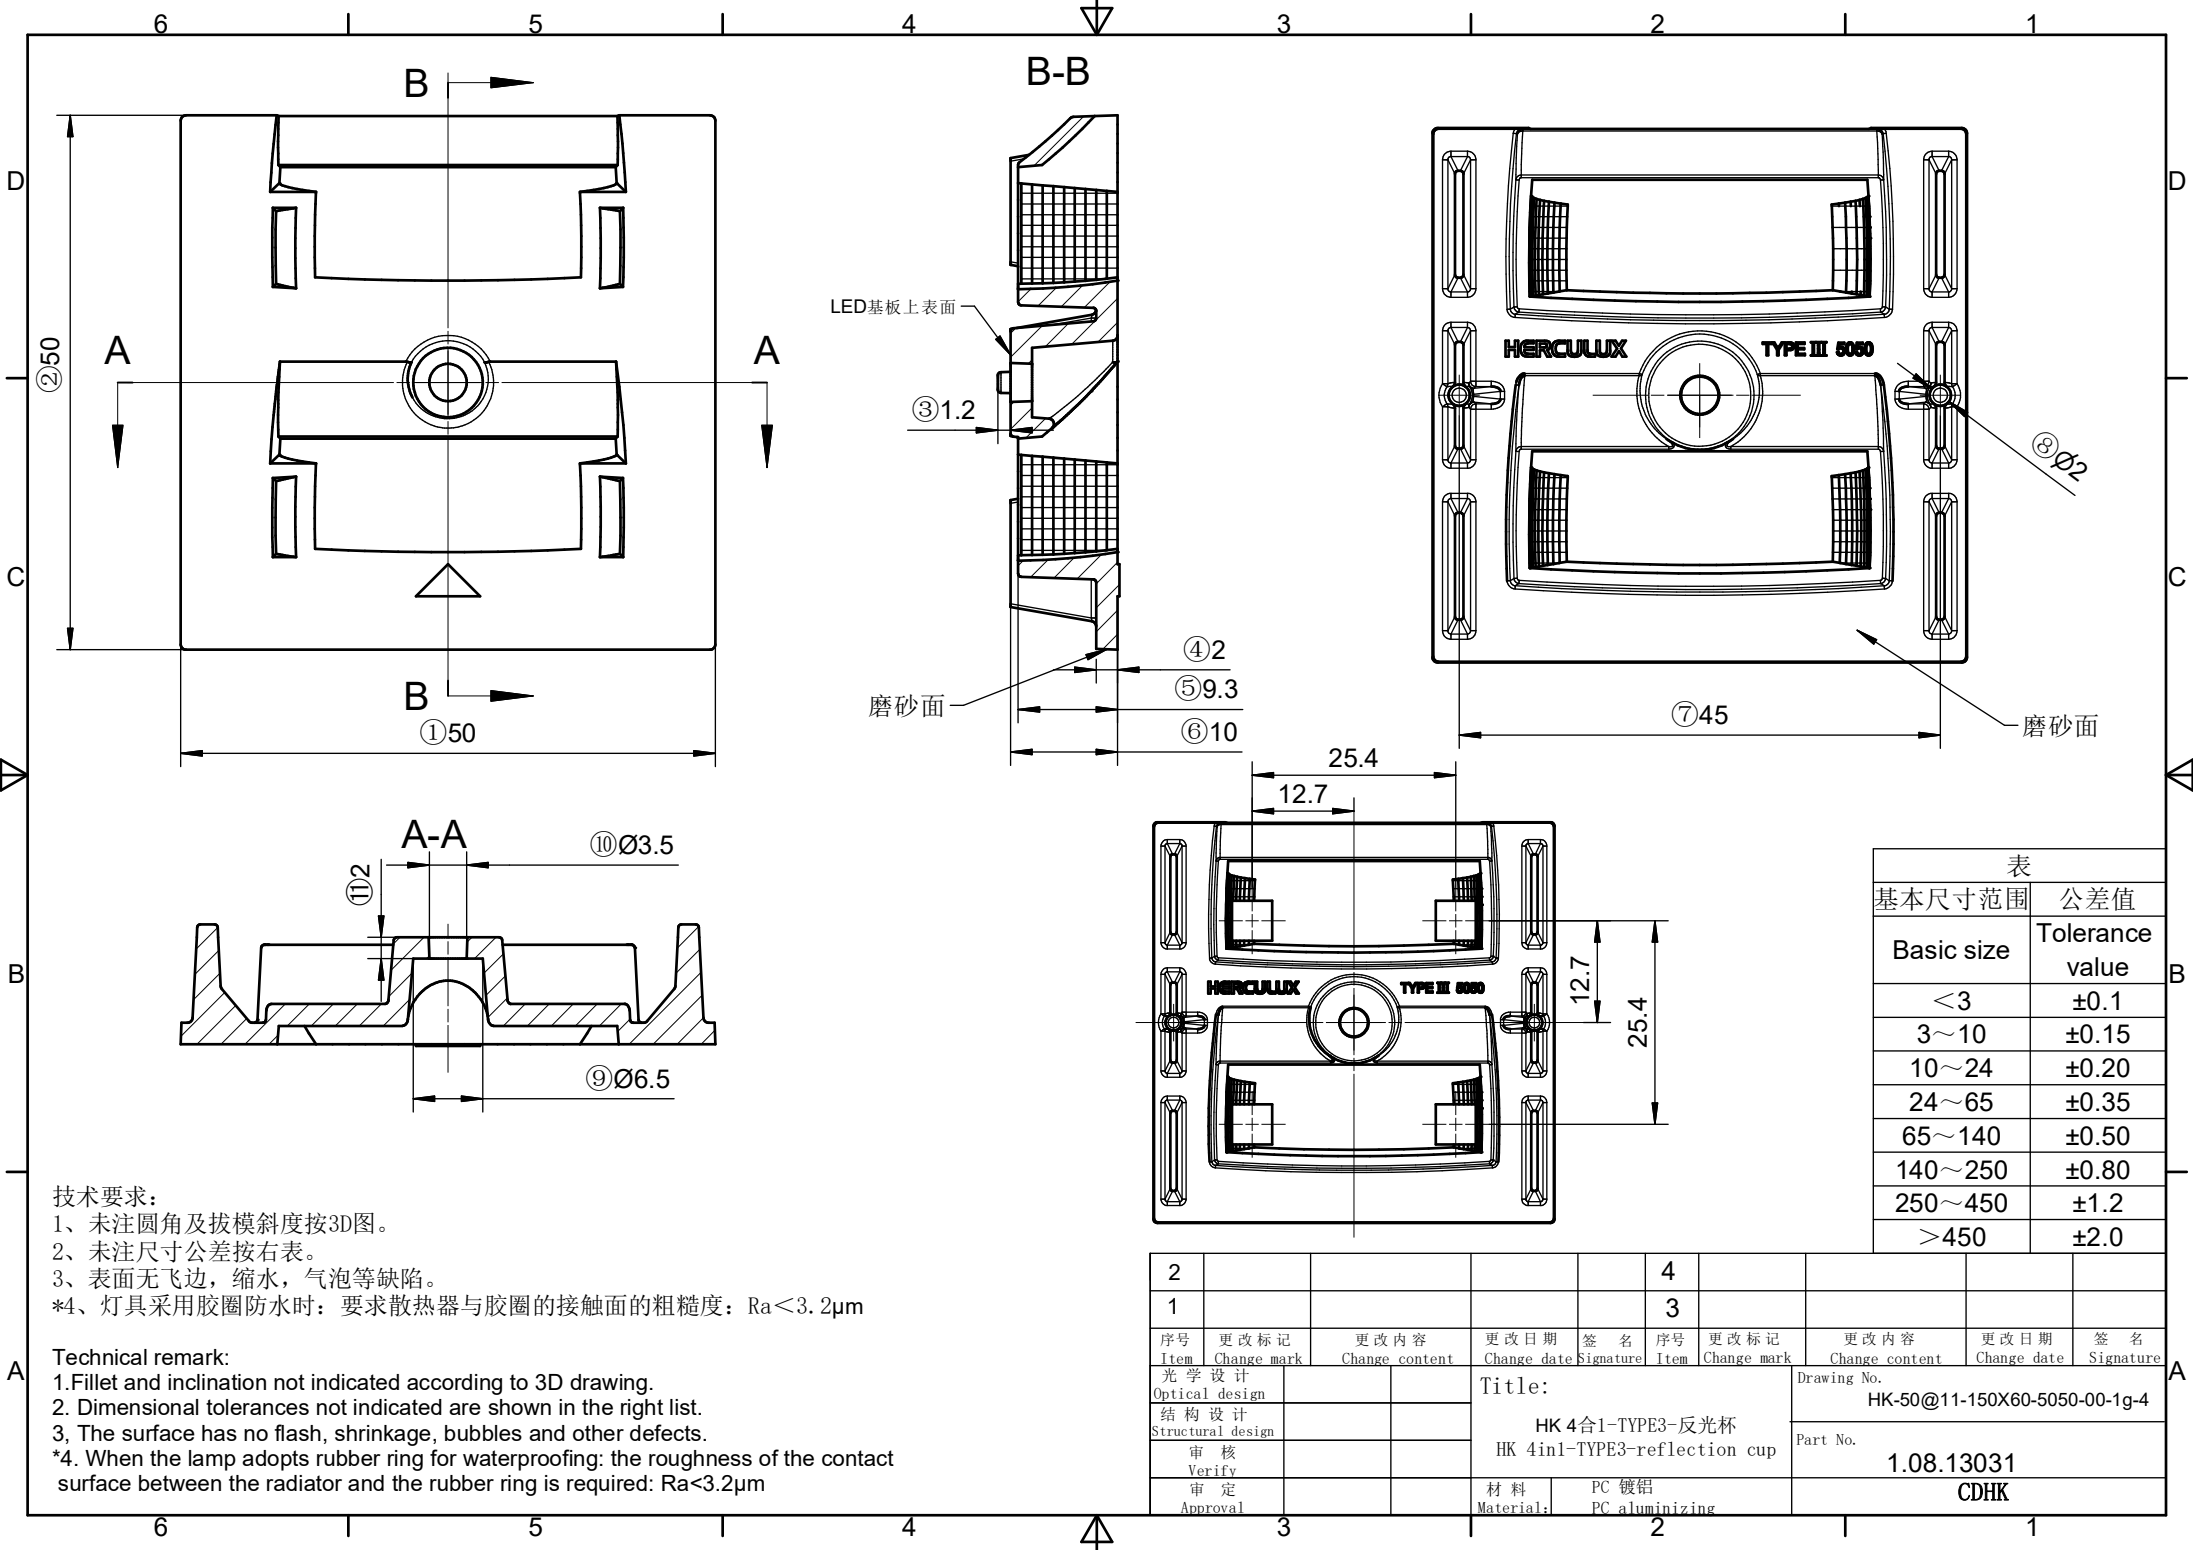

技术要求:

- 未注圆角及拔模斜度按3D图。
- 未注尺寸公差按右表。
- 表面无飞边，缩水，气泡等缺陷。
- 灯具采用胶圈防水时：要求散热器与胶圈的接触面的粗糙度： $Ra < 3.2\mu m$

Technical remark:

- Fillet and inclination not indicated according to 3D drawing.
- Dimensional tolerances not indicated are shown in the right list.
- The surface has no flash, shrinkage, bubbles and other defects.
- When the lamp adopts rubber ring for waterproofing: the roughness of the contact surface between the radiator and the rubber ring is required: $Ra < 3.2\mu m$

2					4				
1					3				
序号 Item	更改标记 Change mark	更改内容 Change content	更改日期 Change date	签 名 Signature	序号 Item	更改标记 Change mark	更改内容 Change content	更改日期 Change date	签 名 Signature
光 学 设 计 Optical design			Title: HK 4合1-TYPE3-反光杯 HK 4in1-TYPE3-reflection cup			Drawing No. HK-50@11-150X60-5050-00-1g-4			
结 构 设 计 Structural design						Part No. 1.08.13031			
审 核 Verify									
审 定 Approval			材 料 Material:	PC 镀铝 PC aluminizing	CDHK				