

Approval number :

Customer :

Product : HK matrix 6 in 1-TYPEII Street lamp lens

Material Code : 1.02.33514

PN: HK-JZ-50@08-50X142-5050-#0-1g-6

Manufacturer : Chengdu HercuLux Photoelectric Technology Co.,Ltd



	Supplier co	onfirmation	Client confirmation				
Proposed		DATE	Qualified□				
Project manager		DATE	Unqualified□		DATE		
Audit		DATE	Audit		DATE		
Approved		DATE	Approved		DATE		
Stamp		DATE	Stamp		DATE		

(Confirmation of acceptance by both parties must be signed and sealed)

Factory: Chengdu Shuangliu District, Iot industrial park 2 road HercuLux Photoelectric ParkPhone : 028-85887727 ( 801 )028-85887990 ( 801 )Fax : 028-85887730http://www.herculux.com/Sales Dept: Shenzhen NanshanDistrict Nanshan Cloud Valley Innovation Industrial Park Comprehensive Service Building,TEL: 0755-2937 1541FAX: 0755-2907 5140

\*Approval In duplicate, for both supplier and customer.

# Disclaimer



Please use this product within the permitted range and environment according to the structure and material of the product. If the usage exceeds the recommended value, please test and verify by yourself. If the product is damaged due to out-of-range use, our company will not be responsible for the warranty.

# Product material:

Customized products: The specifications and models of materials used are subject to the agreement between the two parties.

Conventional products: As a product that we continuously research and improve, under the premise of ensuring the quality and availability of the product, our company reserves the right to change the material. If the material specification and model change, without prior notice.

# product data:

The measurement data and dimensional tolerances of the 2D drawings in the product data sheet of this acknowledgement are for reference only, and the final size shall prevail in kind.

The measurement data presented in this acknowledgment is a performance test of the product based on our company's internal test conditions and quality requirements, and the reported data is a typical value of the average results of multiple measurements. Therefore, in some cases, the actual product may deviate from the data provided. We reserve the right to notify you in advance of this data.

Product changes and improvements:

Changes and improvements of customized products are subject to the agreement between the two parties in the contract or technical documents.

As the conventional products that we continue to research and improve, our company reserves the right to make technical changes to its products, and reserves the right to make changes to data resulting from improvements withou t prior notice.

# **Operation cautions:**

1. Please wear clean gloves during product assembly to prevent product surface contamination.

2. Try to avoid touching the optical surface of the lens when taking the lens.

3. When the surface of the product is polluted, please wipe it gently with a soft cotton cloth dipped in analytically pure neutral solvent. It is forbidden to use industrial solvents (alcohol, isopropanol, acetone, ether, toluene, xylene, carbon tetrachloride, MMA monomerm, etc.) wipe.

4.The lens made of PC should not be exposed to direct sunlight in the storage and use environment. If the lens turns yellow or cracks due to long-term sunlight exposure, our company will not be responsible for the warranty.





# HERCULUX Basic product information


TEL: 0755-2937 1541	FAX: 0755-2907 5140 http://www.herculux.com/ Date updated: 2024/5/23
Product Pictu	
Size(L*W*Η/Φ*	*H): L:50mm*W:50mm*H:08mm
Mater	rial: PC
Effien	cy:
Temperature(To	pr): Material extreme temperature resistance : -40°C to +120°C long-term use temperature : -40°C to +100°C
and the second	
FWH	HM: 50°X142°
FWH Matched L	


#### 2D drawing



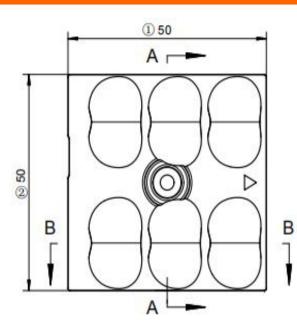

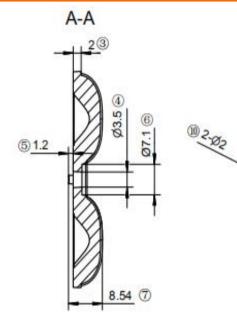

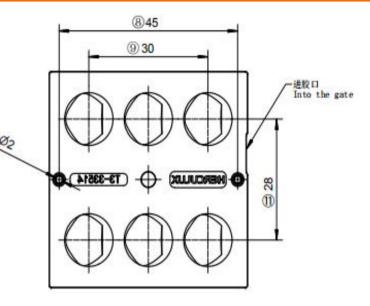



**Technical remark:** 

MT5

Tolerance

table

Basic size

lerance val

1. The 3D map is not indicated for rounded corners and draft angle.

2. The dimensional tolerances are not specified according to GB/T 14486 2008 M

3, The surface has no flash, shrinkage, bubbles and other defects.

<3

±0.1

\*4. When the lamp adopts rubber ring for waterproofing: the roughness of the o surface between the radiator and the rubber ring is required: Ra<3.2 $\mu m$ 

3~10

±0.15

10~24


±0.2

2008 MT5. of the contact		ptical desig ructure desi Review						HK-JZ-50@08-50X142-5050-#0-1g-6					
							HK matri Stree	1.02.33514					
										of drawi	qty	wei	ght
Validation		ation				Material:	PC			CDHK			
65~140	140~	~250	250~	~450	>	450							
±0.50	±0	.80	±1	l.2	±2	2.0							

 $65\sim$ 

24~65

±0.35

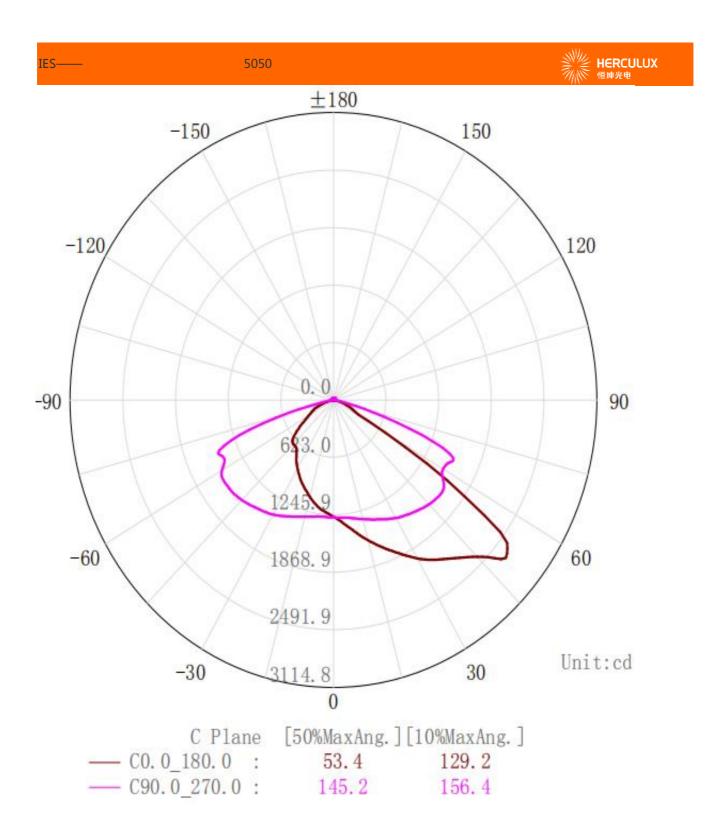

#### Sample size test report HK matrix 6 in 1-TYPEIII Street lamp lens

## HERCULUX 恒坤光电

			Standard size	Upper Size limit	Lower size limit	Test result1	Test result2	Test result3	Test result4	Jud gme nt	Remarks	
	OW		50			49.92	49.85	50.05	50.06	$\backslash$	Test environment:	
1.Size	S of loca	ating	45	$\square$		44.98	45	45.02	44.99		In 20 °C -25 °C environment to	
1.5126	D of loca	ating	2	$\square$		1.98	1.99	2	1.98		achieve thermal	
	TH		2	$\square$		2.11	2.03	2.15	2.08		equilibrium after the test.	
	Gate shear can not affect the appearance of the lamp											
				See atta	chment "A	ppearance	Inspection	Standards"	1			
2.Appear	rance		See achment pearance	E		No burr	No burr	No burr	No bu	rr	ОК	
Quality			spection andards"		N	lo stains	No stains	No stains	No stai	ns		
3.Material				PC	•		Color	Tra	insparent		ОК	
	Testing	LED					5050					
	confo	The size and rated power of the light-emitting surface (LES) of the COB recommended by this lens should conform to the parameters in the product basic information table. if it is required to be out of range. According to the heat dissipation capability of the lamp and the actual conditions of the use environment, the lens should be fully tested and tested to prevent the lens life.										
4.Optica I index	FWHM			See light distribution curve								
	angle (5	angle (50%)					$\searrow$					
	angle (1	0%)				129.2°X 156.4°				/		
	K-val	ue						$\sum$				
	Efficie											
	Facula	See	e the signature sample									
	ehensive ment					Qı	ualified					
Remarks: 1. Tool Number: V-Vernier Caliper 2D-Quadratic H- Height Gauge M-Tool Microscope P-Needle T- Thick Gauge R-Radius Gauge E-Visual. 2. Ambient temperature on the size of the product refer to the table on the right			e on	PC product size changes with temperature table Length (mm) 1 0.6 0.4 0.4 0.4 0.2 0 0 0 0 0 0 0 0 0 0 0 0 0						n n n		
2. Try to 3. The le gently. D tetrachlo 4. The we Exceeding	e wear clea avoid touc ns surface o not wipe ride, MMA orking tem ng the tem	ching e is co e with Body perat	the total re ontaminate industrial s (, etc.). ture of the ure resista	eflection sur d. Only use solvents (al lens should nce limit wi	face when a soft cott cohol, isop be within Il cause th	rocess to pr taking the ton cloth dij propanol, ac the tempera e lens to cra f the LED c	lens. oped in ana cetone, ethe ature resist ack or melt	lytically purer, toluene, ance limit c and affect	re neutral s xylene, ca of the lens the service	solver rbon mater e life o	it to wipe ial. of the lens.	

Packaging Information




PI	N HK-JZ-50@08-50X142-5050-#0-1g-6			Product Name	K matrix 6 in 1-TYPEIII Street lamp ler			
Product	material			PC				
Package diagram		Single Vacuu	im package	Boxp	Dackage	>		
Product	packing	12	A/ Box	4	PCS/Layer			
		14	Layer/Box	672	A/ Carton			
	NO.	Part No	Part name	Size	Dosage	Unit	Remarks	
	1	2.07.0049	Blister box	23cm*21cm	56	BAG		
Deekegin	2	2.08.0001	PE film	25cm*27cm	56	PCS		
Packagin g	3	2.06.0005	Reel label paper	62mm*42mm	56	PCS		
Materials	4	2.06.0005	Box label paper	62mm*70mm	1	PCS		
	5	2.06.0003	big plate	46cm*42cm	15	PCS		
	6	2.06.0011	big carton	48cm*44cm*37	em 1	PCS		
Remarks		The loose packing is not subjec	t to this specif	ication. Customer	's requirements shall	prevail		

# Annex I

### Special notice

When gule pass through holes, columns and other structures, or part of the thin structure, will form a weld line. The product which uses multi-point injection welding line will appear because of the combination of sol, as shown below:

Syntheti

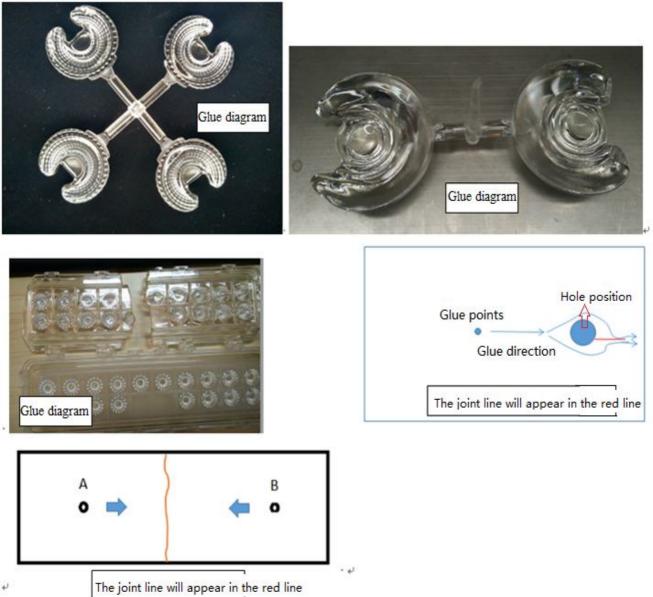

Please note :

The appearance of lines in the structure of the product as well as at the screw hole is a normal phenomenon, will not affect the actual use of the product, and can not be avoided at this stage.



#### Appearance inspection standards

#### 1 Operating procedures

1.1.1Sampling standards, sampling plan and AQL

Test level : GB/T2828.1-2012The first part is according to the acceptance quality limit (AQL) retrieval batch inspection sampling plan, general inspection level  $\Pi$  level, CR class defect coefficient 0, MA defect rejection level AQL = 0.65, MI class defect rejection level AQL = 1.0; defect level please see 5.4.

2 Code table

Code	Code description	Unit	Code	Code description	Unit
N	Amount/pcs	pcs	D	Diameter	mm
L	Length	mm	Н	Depth	mm
W	Width	mm	DS	Distance	mm
S	Proportion	mm²	SS	Offset	mm

3 Test conditions

3.1 Sight distance and working hours: Sight distance should be 30-35cm, each side of the inspection time does not exceed 12s, the visual angle of 45-135 degrees;

3.2 Light: 2x40w cool white fluorescent lamp, the light source is 500-550mm away from the lens surface; in order to make the appearance defect can be correctly recognized, the illumination should be 500-1000Lux, and the observation time is 10 seconds. 3.3 Visual inspection staff should be 1.0 (including corrected visual acuity) above, no color blindness, color weakness.

#### 4 Appearance inspection standards

Test items	ludeine standard	Inspection equipment	Defec	Defect level		
Test tients	Judging standard	Testing method	МІ	MA	CR	
	When start the machine and process, all products have to check the appearance of the sample, the appearance of the sample is divided into qualified samples and limited samples.					
Check the sample	1: Qualified sample refers to the appearance and structure standard of the product which recognized by the client, the sample size should be confirmed before mass production;	Sample comparison , visual			V	
	2: The limited sample refers to the limit of a particular exceptionally developed sample. Limit the sample only for its specific point of exception to confirm; The priority is higher than the other criteria in this table. When there is a limited sample, the limit sample shall prevail.					
Raw edge	Not allowed to affect the size and assembly	Visual, point card		~		
Scratch	1: Non-optical surface and non-exposed surface scratches should be visually insignificant and the length is less than 1/10 of the maximum surface size.	Visual, point card, calipers		~		
Fingerprint	Fingerprints are not allowed on all products	Visual		~		

Foreign objects, black spots, white spots	The product may not be attached to foreign objects, including oil, fiber, dregs of water gap and so on				V
Deformation	Insufficient filling shall not affect the appearance of the assembly and the exposed surfaces.	Visual, feeler			V
Poor ejection	Products may not appear bad ejection, including no convex top, thimble printed on the assembly surface shall not be higher than the product surface, non-assembled surface thimble height should not exceed the product size tolerances; thimble printing should be less than the product surface and no more than 0.3; thimble surface treatment should be consistent with the product side.	Visual, point card		v	
	Ejection strain: the optical surface and the appearance of the exposed surface after assembly are not allowed to have a strain, and the structural surface does not allow visual obvious strain.				
Insufficient filling	Insufficient filling shall not affect the appearance of the assembly and the exposed surfaces, The signature sample shall prevail.	Visual, point card		V	
Shrink	When the entire surface of the product shrinks, the optical properties and dimensions must meet the requirements, and the visual will not significantly affect the appearance.Part shrink reference point defects	Visual, point card		v	
Flow marks、Welding line	<ol> <li>Product does not allow the presence of flow marks and welding lines unless the structure can not be avoided;</li> <li>The remaining flow marks shall not appear in the optical surface, a single L ≤ 10mm, no more than two</li> </ol>	Visual		V	
Bubble	No bubbles are allowed	Visual			
Foreign objects, black spots, white spots	Not obvious or D ≤ 0.3mm black spots and foreign bodies in the area of 100x100mm not more than 1; Exceeded foreign matter black spots is judged bad.		V	•	
Damaged	No damage is allowed	Visual			√
Cold glue	Optical surface may not have cold glue, non- optical surface cold glue should meet the visual is not obvious.	Visual	V		
	1: Do not affect the product size, shall not penetrate the optical surface, the cut should be smooth;				
Bad incision	2: Laser cutting products, the optical surface burns shall not occur after the processing is completed. Beading must not affect product installation	Visual			v
	3: Three molds and hot runner gate shall not appear residue.				
Scrub	Scrub surface should be uniform, off the scrub phenomenon should not be obvious , A single off scrub imprint requires $D \le 1$ mm and no more than 1 area within a 50x50 mm area	Visual		v	