


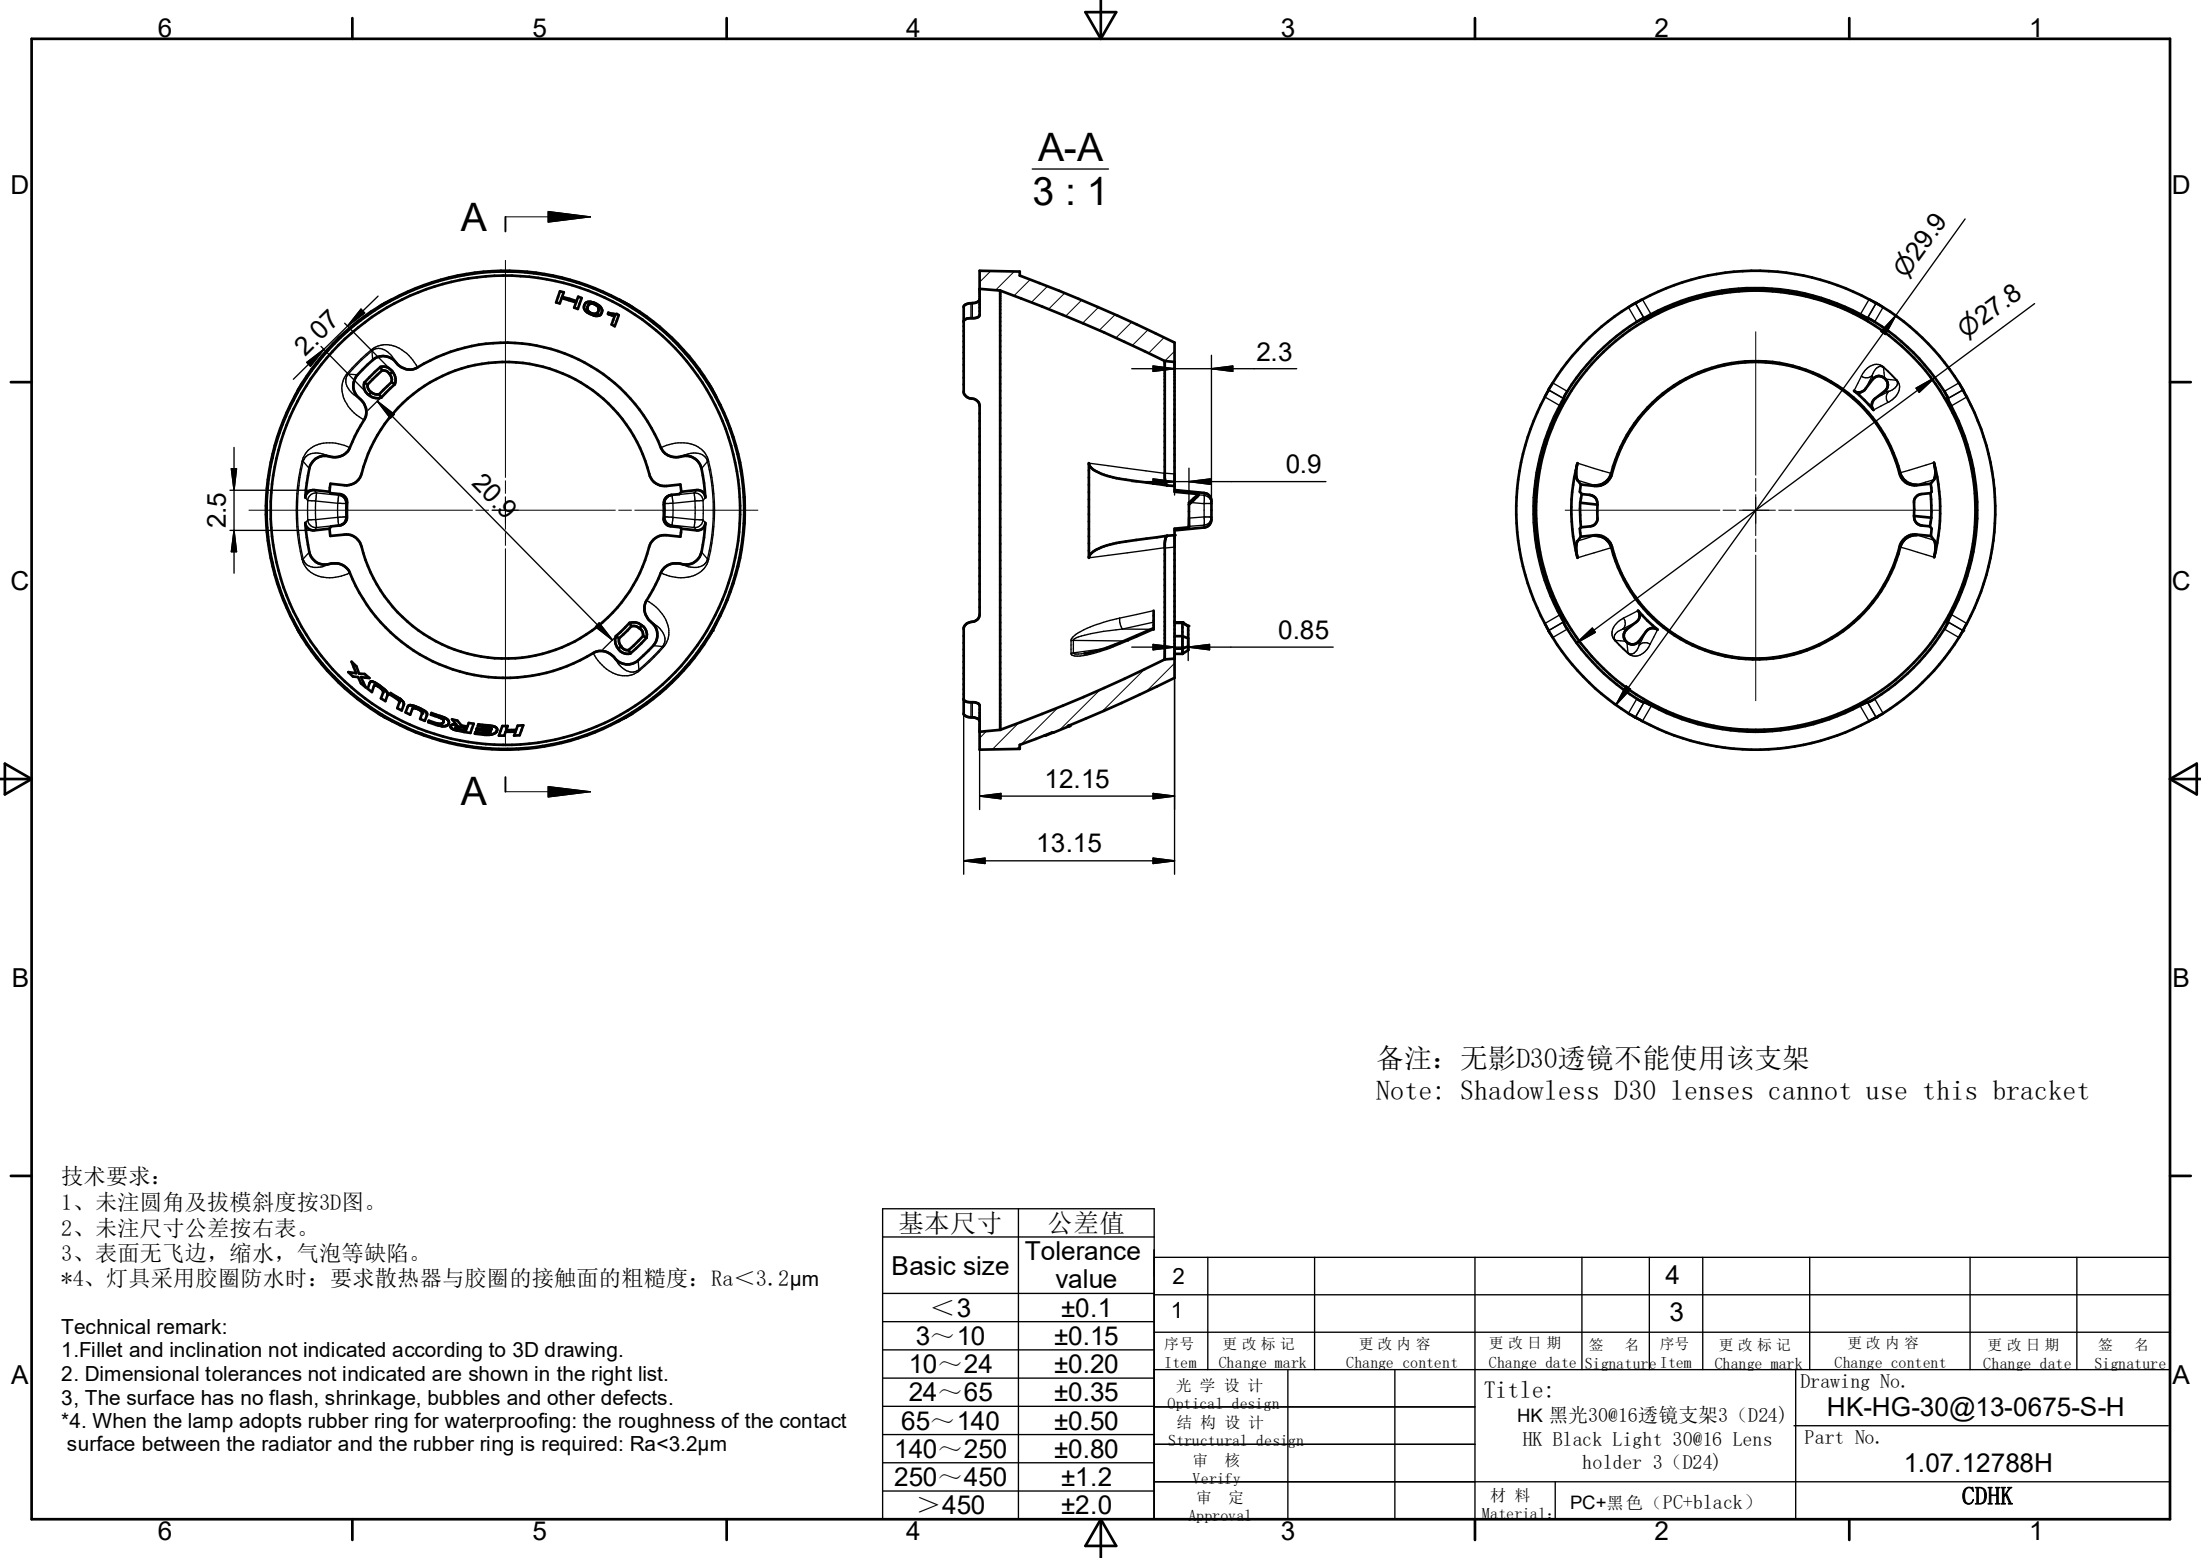

备注：无影D30透镜不能使用该支架
Note: Shadowless D30 lenses cannot use this bracket

技术要求：
1、未注圆角及拔模斜度按3D图。
2、未注尺寸公差按右表。
3、表面无飞边，缩水，气泡等缺陷。
*4、灯具采用胶圈防水时：要求散热器与胶圈的接触面的粗糙度：Ra<3.2μm

Technical remark:
1.Fillet and inclination not indicated according to 3D drawing.
2. Dimensional tolerances not indicated are shown in the right list.
3. The surface has no flash, shrinkage, bubbles and other defects.
*4. When the lamp adopts rubber ring for waterproofing: the roughness of the contact surface between the radiator and the rubber ring is required: Ra<3.2μm

基本尺寸		公差值														
Basic size		Tolerance value														
<3		±0.1		2						4						
3~10		±0.15		1						3						
10~24		±0.20		序号	更改标记	更改内容		更改日期	签 名	序号	更改标记	更改内容		更改日期	签 名	
24~65		±0.35		Item	Change mark	Change content		Change date	Signature	Item	Change mark	Change content		Change date	Signature	
65~140		±0.50		光 学 设 计				Title: HK 黑光30@16透镜支架3 (D24) HK Black Light 30@16 Lens holder 3 (D24)				Drawing No.				
140~250		±0.80		结 构 设 计								HK-HG-30@13-0675-S-H				
250~450		±1.2		审 核								Part No.				
>450		±2.0		审 定								1.07.12788H				
				Approval				材料	PC+黑色 (PC+black)				CDHK			
								Material:								