

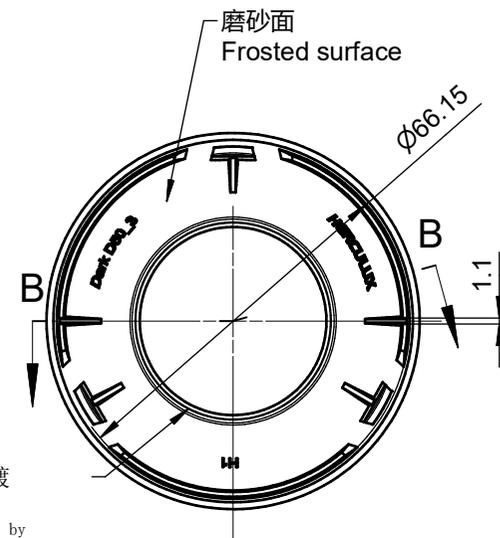


透镜上表面
Upper surface
of lens

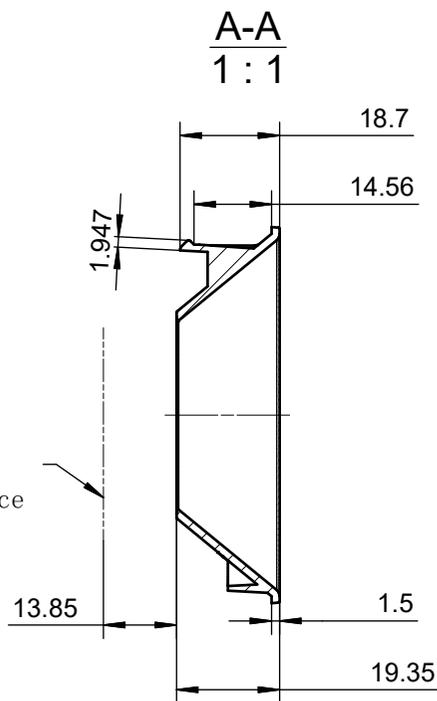

箭头所指面不电镀
保持素胚原色
The surface indicated by
the arrow is not electroplated
Maintain the original
color of the embryo

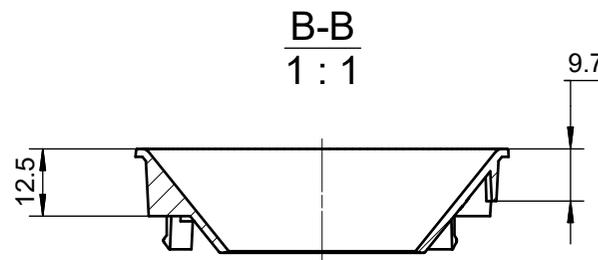

技术要求:
1、未注圆角及拔模斜度按3D图。
2、未注尺寸公差按右表。
3、表面无飞边，缩水，气泡等缺陷。
*4、灯具采用胶圈防水时：要求散热器与胶圈的接触面的粗糙度：Ra<3.2μm

Technical remark:
1.Fillet and inclination not indicated according to 3D drawing.
2. Dimensional tolerances not indicated are shown in the right list.
3. The surface has no flash, shrinkage, bubbles and other defects.
*4. When the lamp adopts rubber ring for waterproofing; the roughness of the contact surface between the radiator and the rubber ring is required: Ra<3.2μm

| 基本尺寸范围 Basic size | 公差值 Tolerance value |
|----------------------|------------------------|
| <3 | ±0.1 |
| 3~10 | ±0.15 |
| 10~24 | ±0.20 |
| 24~65 | ±0.35 |
| 65~140 | ±0.50 |
| 140~250 | ±0.80 |
| 250~450 | ±1.2 |
| >450 | ±2.0 |

| 出光角度范围 Beam angle range | 透过率 Transmittance |
|----------------------------|----------------------|
| 最小K值 Min K value | 点胶类型 Gel type |
| 模具等级 Mold level | 备注 Remark |

| 序号 Item | 更改标记 Change mark | 更改内容 Change content | 更改日期 Change date | 签名 Signature | 序号 Item | 更改标记 Change mark | 更改内容 Change content | 更改日期 Change date | 签名 Signature |
|------------|---------------------|------------------------|---------------------|-----------------|------------|---------------------|------------------------|---------------------|-----------------|
| | | | | | 4 | | | | |
| | | | | | 3 | | | | |

Title:
HK 黑光D50防眩罩3
HK Dark D50 Anti Glare Mask 3
Drawing No.
HK-HG-70@19-0786-S
Part No.
1.07.23079
材料
Material: PC 镀铝
PC aluminum plating
CDHK